

```
In [1]: # import libraries
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
```

```
In [2]: x=pd.read_csv(r"C:\Users\user\Downloads\15_Horse Racing Results - 15_Horse Rac
```

Out[2]:

	Date	Track	Race Number	Distance	Surface	Prize money	Starting position	Jockey	Jockey weight	Cou
0	03.09.2017	Sha Tin	10	1400	Gress	1310000	6	K C Leung	52	Sve
1	16.09.2017	Sha Tin	10	1400	Gress	1310000	14	C Y Ho	52	Sve
2	14.10.2017	Sha Tin	10	1400	Gress	1310000	8	C Y Ho	52	Sve
3	11.11.2017	Sha Tin	9	1600	Gress	1310000	13	Brett Prebble	54	Sve
4	26.11.2017	Sha Tin	9	1600	Gress	1310000	9	C Y Ho	52	Sve
...	...	...	...	...	...	...	...	...	...	...
27003	14.06.2020	Sha Tin	11	1200	Gress	1450000	6	A Hamelin	59	Austr
27004	21.06.2020	Sha Tin	2	1200	Gress	967000	7	K C Leung	57	Austr
27005	21.06.2020	Sha Tin	4	1200	Gress	967000	6	Blake Shinn	57	Austr
27006	21.06.2020	Sha Tin	5	1200	Gress	967000	14	Joao Moreira	57	↑ Zeal
27007	21.06.2020	Sha Tin	11	1200	Gress	1450000	7	C Schofield	55	↑ Zeal

27008 rows × 21 columns

```
In [3]: x=x.head(10)
```

```
Out[3]:
```

	Dato	Track	Race Number	Distance	Surface	Prize money	Starting position	Jockey	Jockey weight	Country
0	03.09.2017	Sha Tin	10	1400	Gress	1310000	6	K C Leung	52	Sverige
1	16.09.2017	Sha Tin	10	1400	Gress	1310000	14	C Y Ho	52	Sverige
2	14.10.2017	Sha Tin	10	1400	Gress	1310000	8	C Y Ho	52	Sverige
3	11.11.2017	Sha Tin	9	1600	Gress	1310000	13	Brett Prebble	54	Sverige
4	26.11.2017	Sha Tin	9	1600	Gress	1310000	9	C Y Ho	52	Sverige
5	10.12.2017	Sha Tin	1	1800	Gress	1310000	4	C Y Ho	52	Sverige
6	01.01.2018	Sha Tin	9	1800	Gress	1310000	9	C Schofield	54	Sverige
7	04.02.2018	Sha Tin	5	1800	Gress	1310000	6	Joao Moreira	57	Sverige
8	03.03.2018	Sha Tin	8	1800	Gress	1310000	3	C Y Ho	56	Sverige
9	11.03.2018	Sha Tin	10	1600	Gress	1310000	8	C Y Ho	57	Sverige

10 rows × 11 columns

In [4]:

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 10 entries, 0 to 9
Data columns (total 21 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Dato                   10 non-null    object
1   Track                  10 non-null    object
2   Race Number            10 non-null    int64
3   Distance                10 non-null    int64
4   Surface                 10 non-null    object
5   Prize money             10 non-null    int64
6   Starting position      10 non-null    int64
7   Jockey                  10 non-null    object
8   Jockey weight           10 non-null    int64
9   Country                 10 non-null    object
10  Horse age               10 non-null    int64
11  TrainerName             10 non-null    object
12  Race time                10 non-null    object
13  Path                     10 non-null    int64
14  Final place              10 non-null    int64
15  FGrating                 10 non-null    int64
16  Odds                     10 non-null    object
17  RaceType                 10 non-null    object
18  HorseId                  10 non-null    int64
19  JockeyId                 10 non-null    int64
20  TrainerID                10 non-null    int64
dtypes: int64(12), object(9)
memory usage: 1.8+ KB
```

In [5]:

```
Out[5]: Index(['Dato', 'Track', 'Race Number', 'Distance', 'Surface', 'Prize money',
              'Starting position', 'Jockey', 'Jockey weight', 'Country', 'Horse age',
              'TrainerName', 'Race time', 'Path', 'Final place', 'FGrating', 'Odds',
              'RaceType', 'HorseId', 'JockeyId', 'TrainerID'],
              dtype='object')
```

In [6]: `d=x[['Dato', 'Track', 'Race Number', 'Distance', 'Surface', 'Prize money']]`

Out[6]:

	Dato	Track	Race Number	Distance	Surface	Prize money
0	03.09.2017	Sha Tin	10	1400	Gress	1310000
1	16.09.2017	Sha Tin	10	1400	Gress	1310000
2	14.10.2017	Sha Tin	10	1400	Gress	1310000
3	11.11.2017	Sha Tin	9	1600	Gress	1310000
4	26.11.2017	Sha Tin	9	1600	Gress	1310000
5	10.12.2017	Sha Tin	1	1800	Gress	1310000
6	01.01.2018	Sha Tin	9	1800	Gress	1310000
7	04.02.2018	Sha Tin	5	1800	Gress	1310000
8	03.03.2018	Sha Tin	8	1800	Gress	1310000
9	11.03.2018	Sha Tin	10	1600	Gress	1310000


In [7]:

Out[7]:

	Race Number	Distance	Prize money	Starting position	Jockey weight	Horse age	Path	Final place
count	10.000000	10.000000	10.0	10.000000	10.000000	10.000000	10.000000	10.000000
mean	8.100000	1620.000000	1310000.0	8.000000	53.800000	7.400000	1.500000	4.700000
std	2.923088	175.119007	0.0	3.527668	2.149935	0.516398	1.581139	2.496664
min	1.000000	1400.000000	1310000.0	3.000000	52.000000	7.000000	0.000000	1.000000
25%	8.250000	1450.000000	1310000.0	6.000000	52.000000	7.000000	0.250000	3.000000
50%	9.000000	1600.000000	1310000.0	8.000000	53.000000	7.000000	1.000000	4.000000
75%	10.000000	1800.000000	1310000.0	9.000000	55.500000	8.000000	2.000000	6.000000
max	10.000000	1800.000000	1310000.0	14.000000	57.000000	8.000000	5.000000	9.000000

In [8]:


Out[8]: <seaborn.axisgrid.PairGrid at 0x2747f2e3d00>

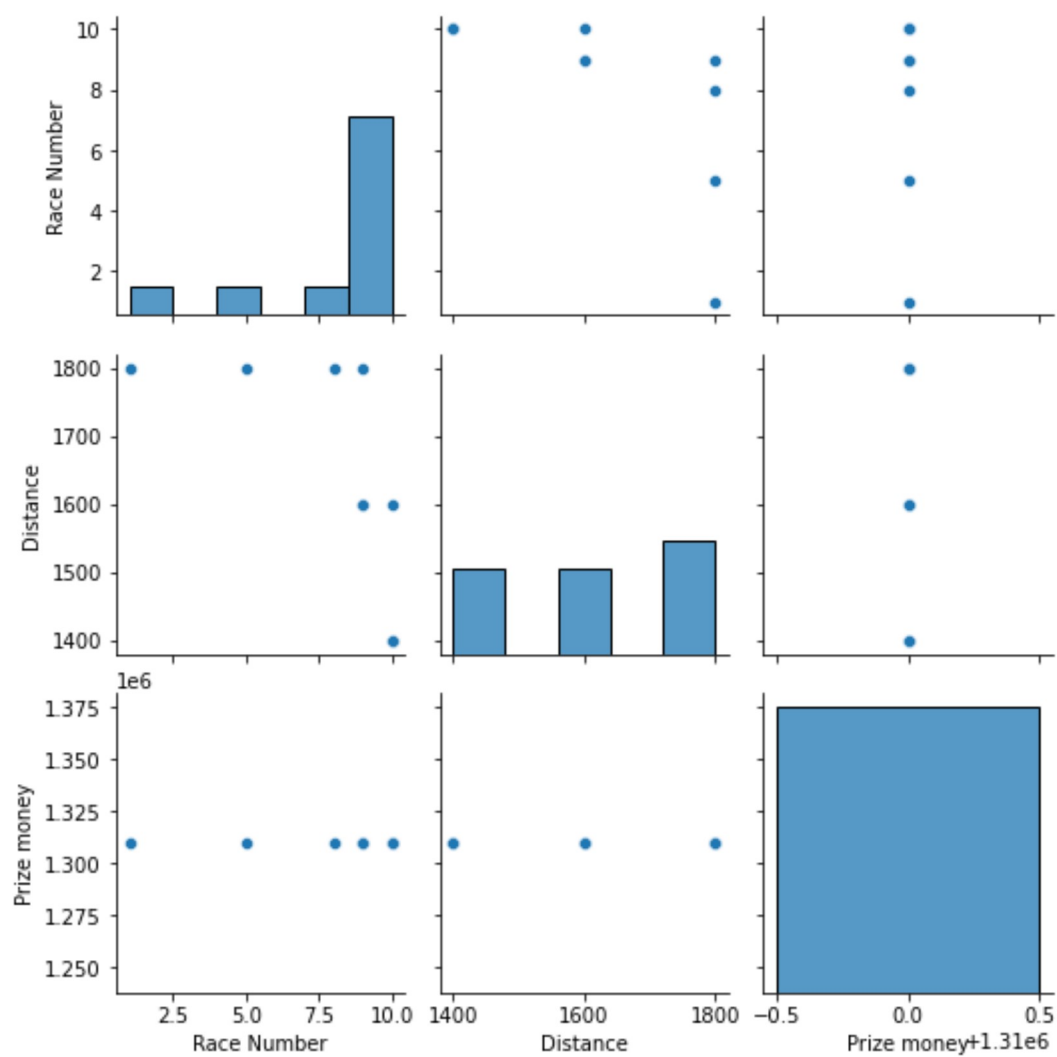

In [9]:

```
C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).
  warnings.warn(msg, FutureWarning)
```

Out[9]: &lt;AxesSubplot:xlabel='Race Number', ylabel='Density'&gt;

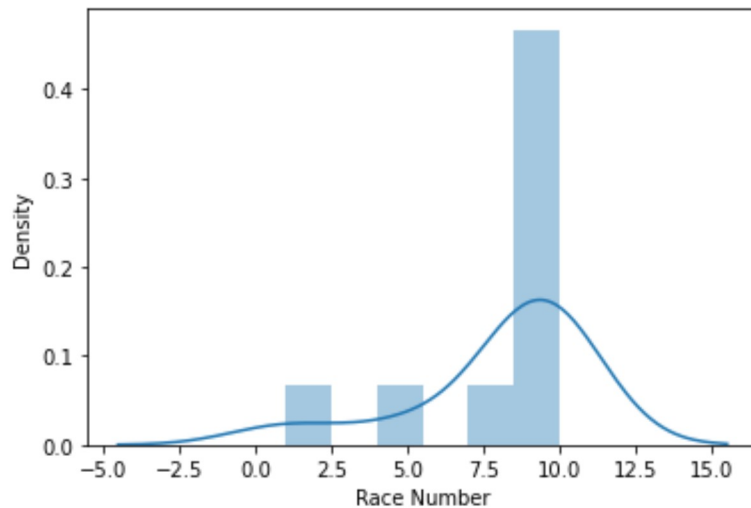

In [16]:

In [17]:

Out[17]: &lt;AxesSubplot:&gt;

In [21]: `x=x1[['Race Number', 'Distance', 'Prize money']]`

In [22]: *# to split my dataset into training and test data*

```
from sklearn.model_selection import train_test_split
```

In [23]: **from** sklearn.linear\_model **import** LinearRegression

```
lr=LinearRegression()
```

Out[23]: LinearRegression()

In [24]:

```
9.094947017729282e-13
```


In [25]: `coeff=pd.DataFrame(lr.coef_,x.columns,columns=['Co-efficient'])`

Out[25]:

	Co-efficient
Race Number	-4.601188e-14
Distance	1.000000e+00
Prize money	0.000000e+00

In [26]: `prediction=lr.predict(x_test)`

Out[26]: <matplotlib.collections.PathCollection at 0x2740615b220>

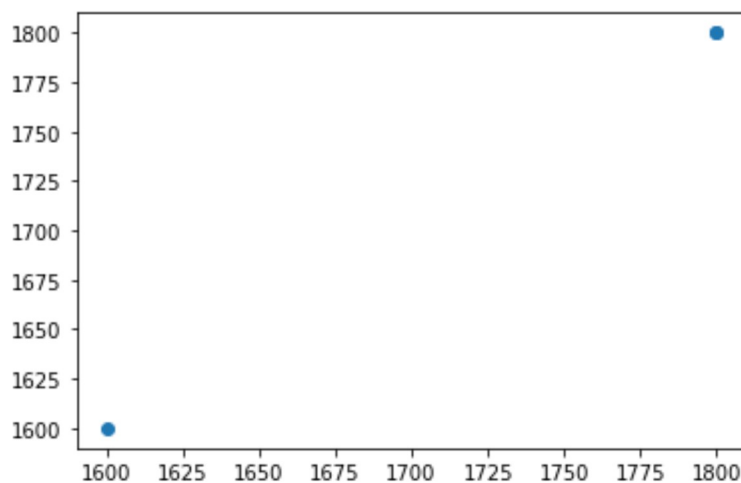

In [27]:

Out[27]: 1.0

In [28]:

Out[28]: 1.0

In [29]: **from** sklearn.linear\_model **import** Ridge,Lasso

```
In [30]: rr=Ridge(alpha=10)
         rr.fit(x_train,y_train)
```

```
Out[30]: 0.9999999707080707
```

```
In [31]: la=Lasso(alpha=10)
```

```
Out[31]: Lasso(alpha=10)
```

```
In [32]:
```

```
Out[32]: 0.9999994873756488
```

```
In [ ]:
```