




PuTTY (inactive)


```
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#acc
R1(config)#access-list 10 permit 10.0.0.10 0.0.0.0
R1(config)#int e0/0
R1(config-if)#ip acc
R1(config-if)#ip access
R1(config-if)#ip access-group 10 in
R1(config-if)#
*Aug  4 17:10:50.814: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1#
*Aug  4 17:15:38.212: %SYS-5-CONFIG_I: Configured from console by console
R1#sh acc
R1#sh access-list
Standard IP access list 10
    10 permit 10.0.0.10 (235 matches)
R1#
R1#sh access-list 10
Standard IP access list 10
```

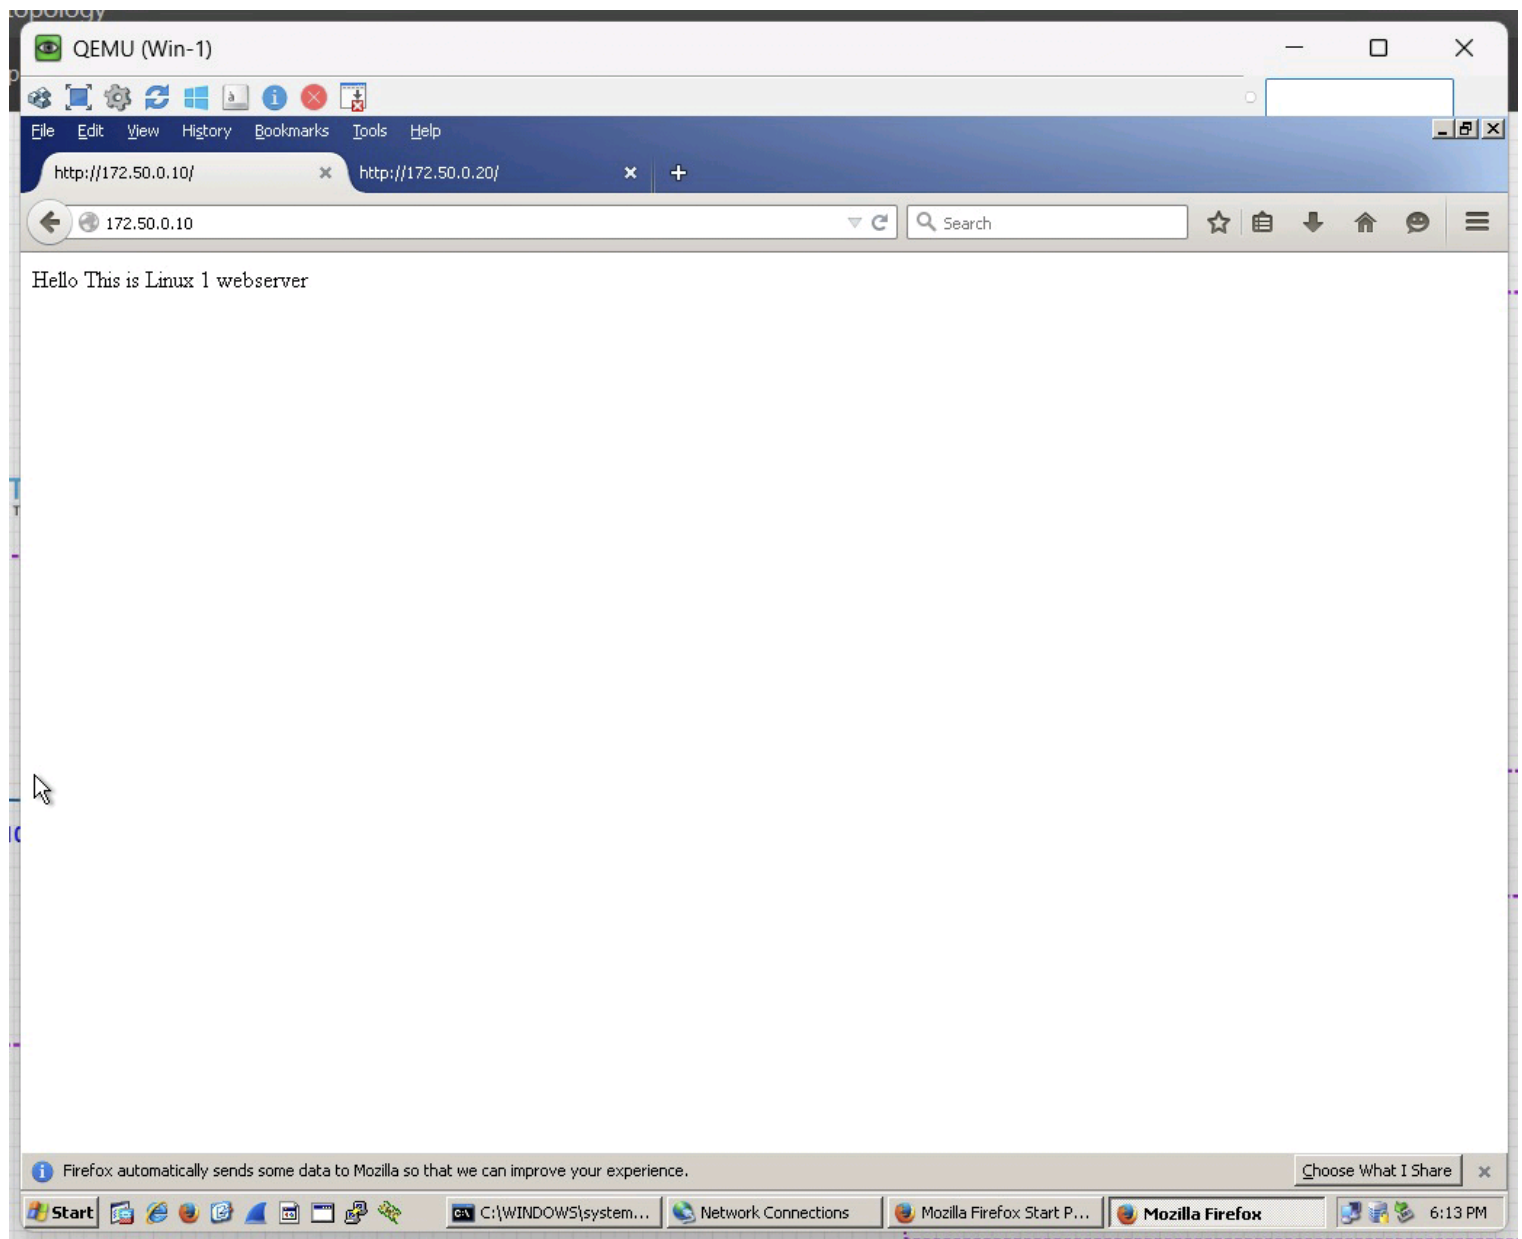

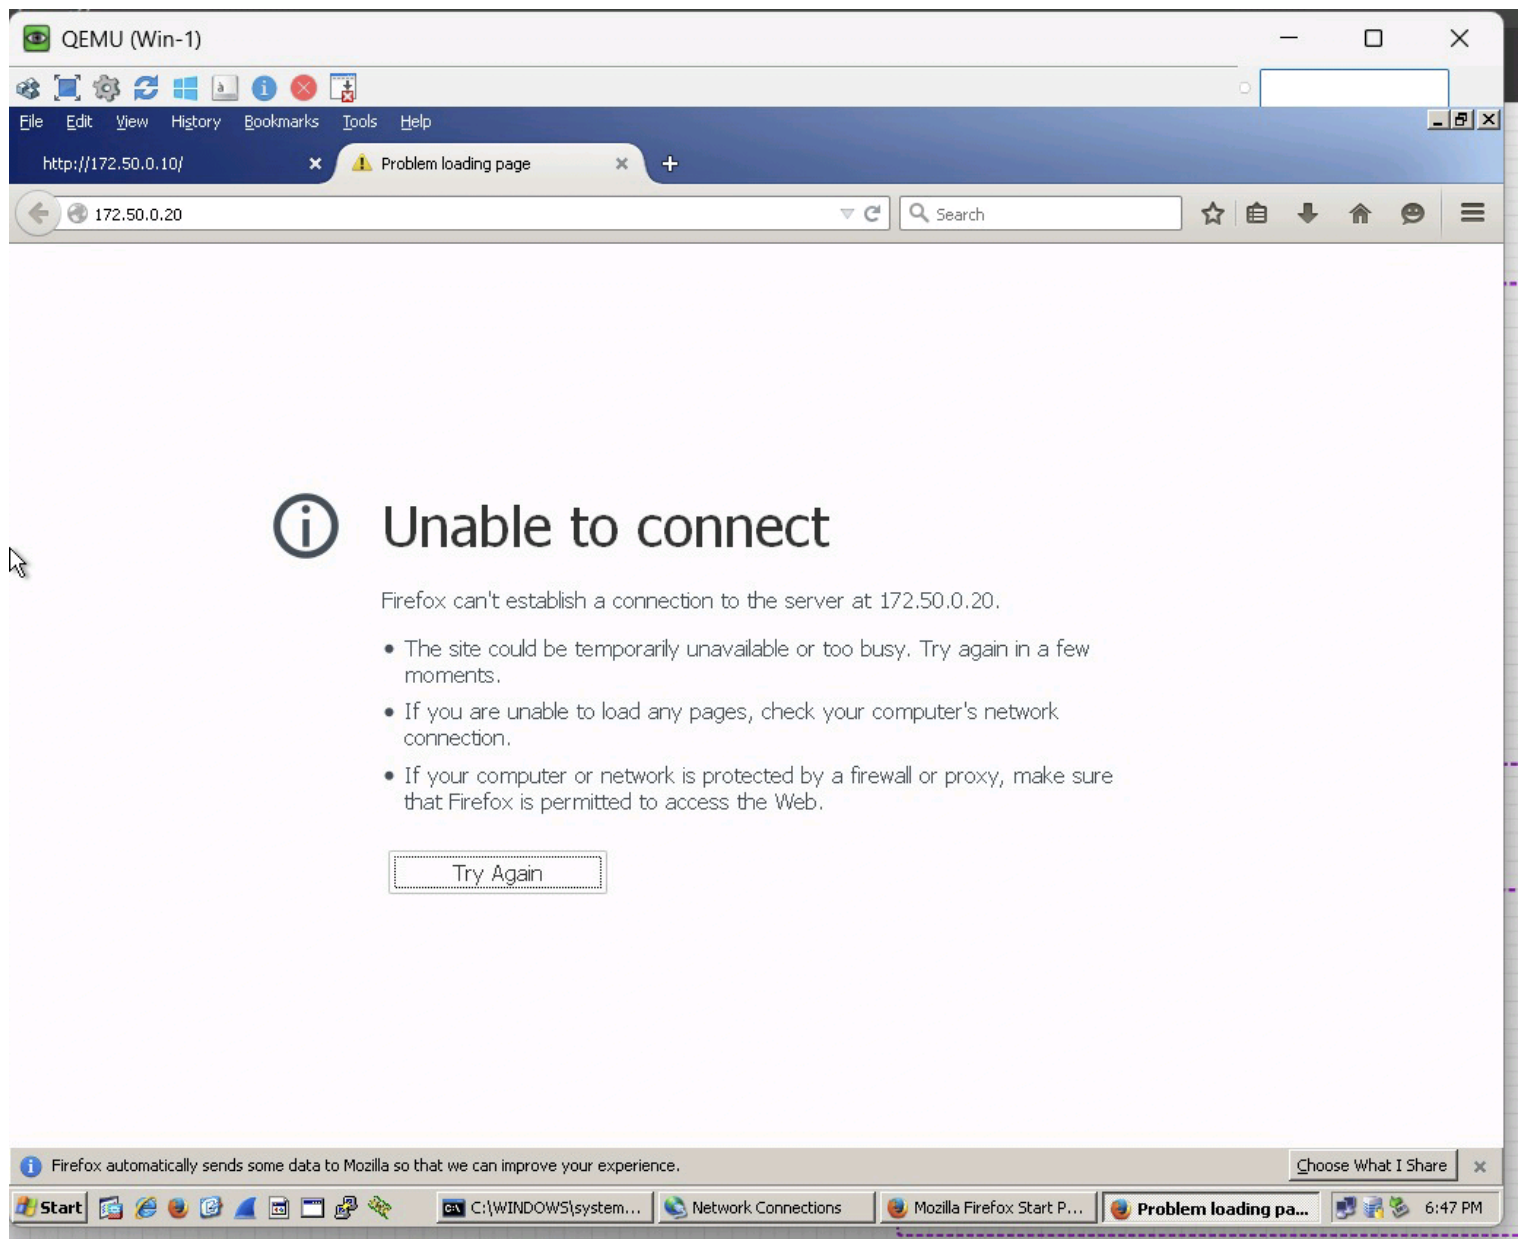

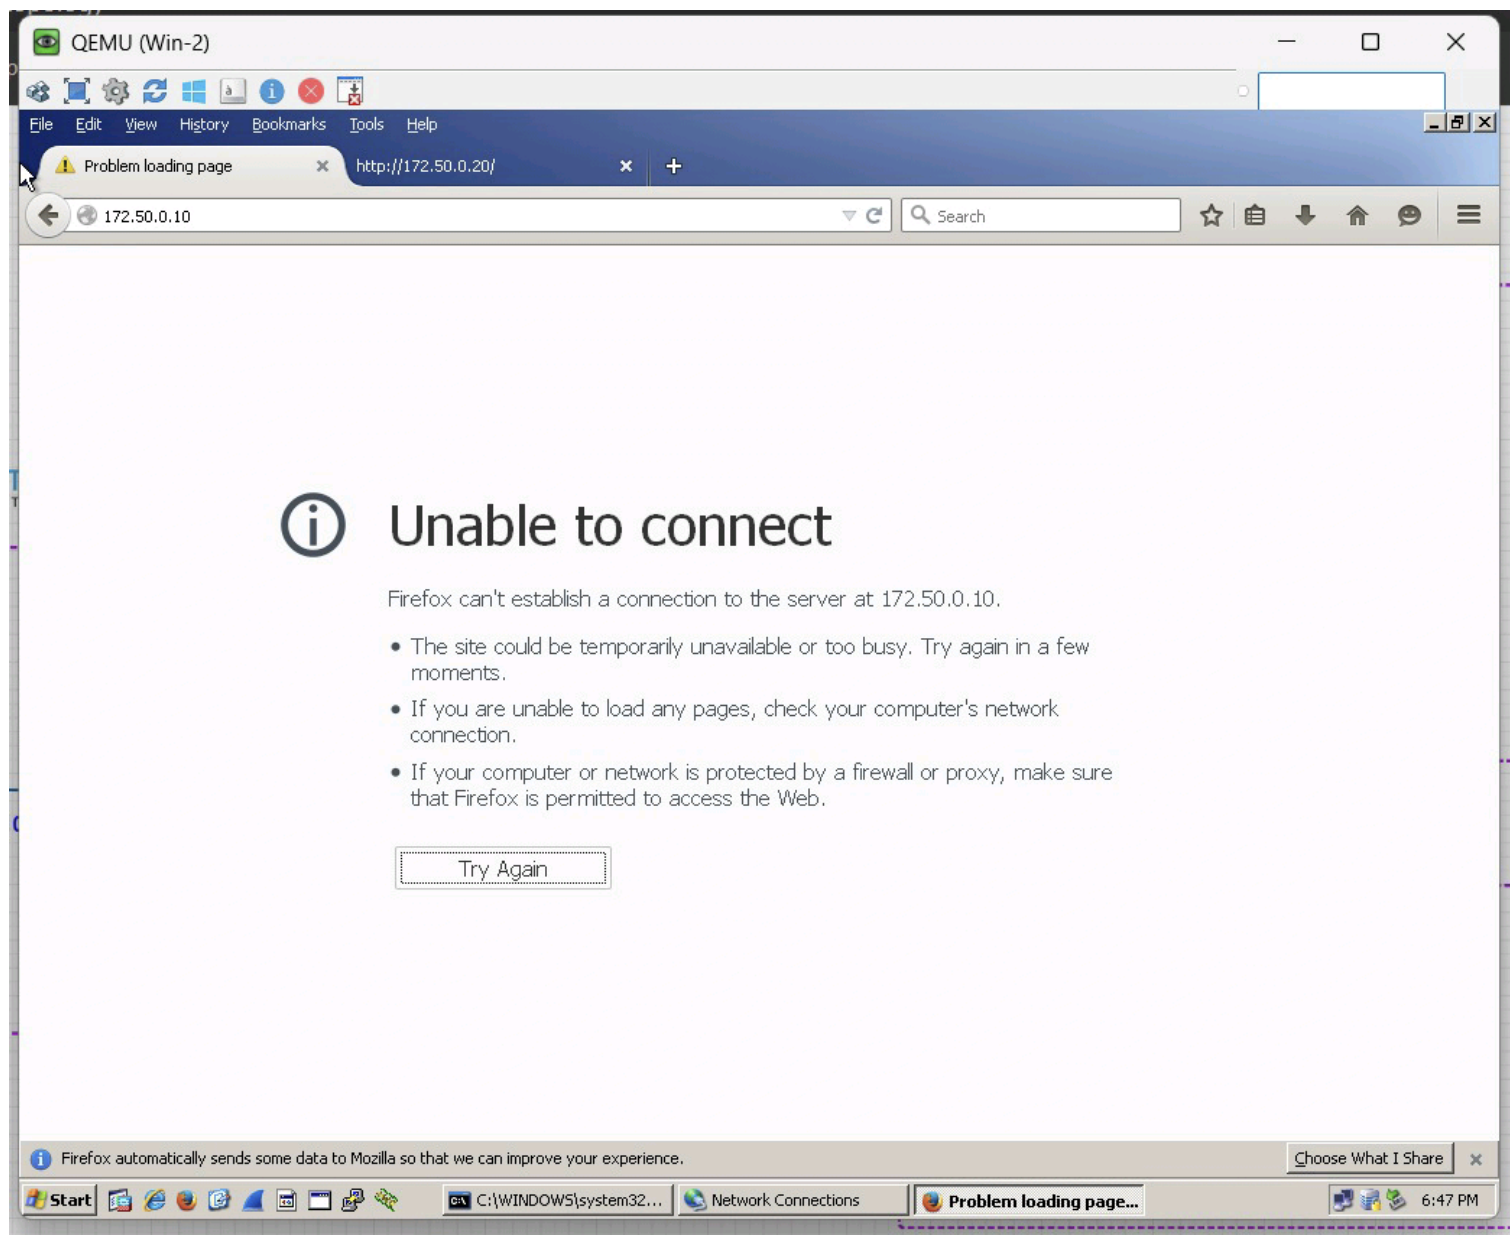

```
PNETLab | Topology
R1
R1#
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#no access-list 10
R1(config)#int e0/0
R1(config-if)#no ip access-
R1(config-if)#no ip access-group 10 in
R1(config-if)#
```

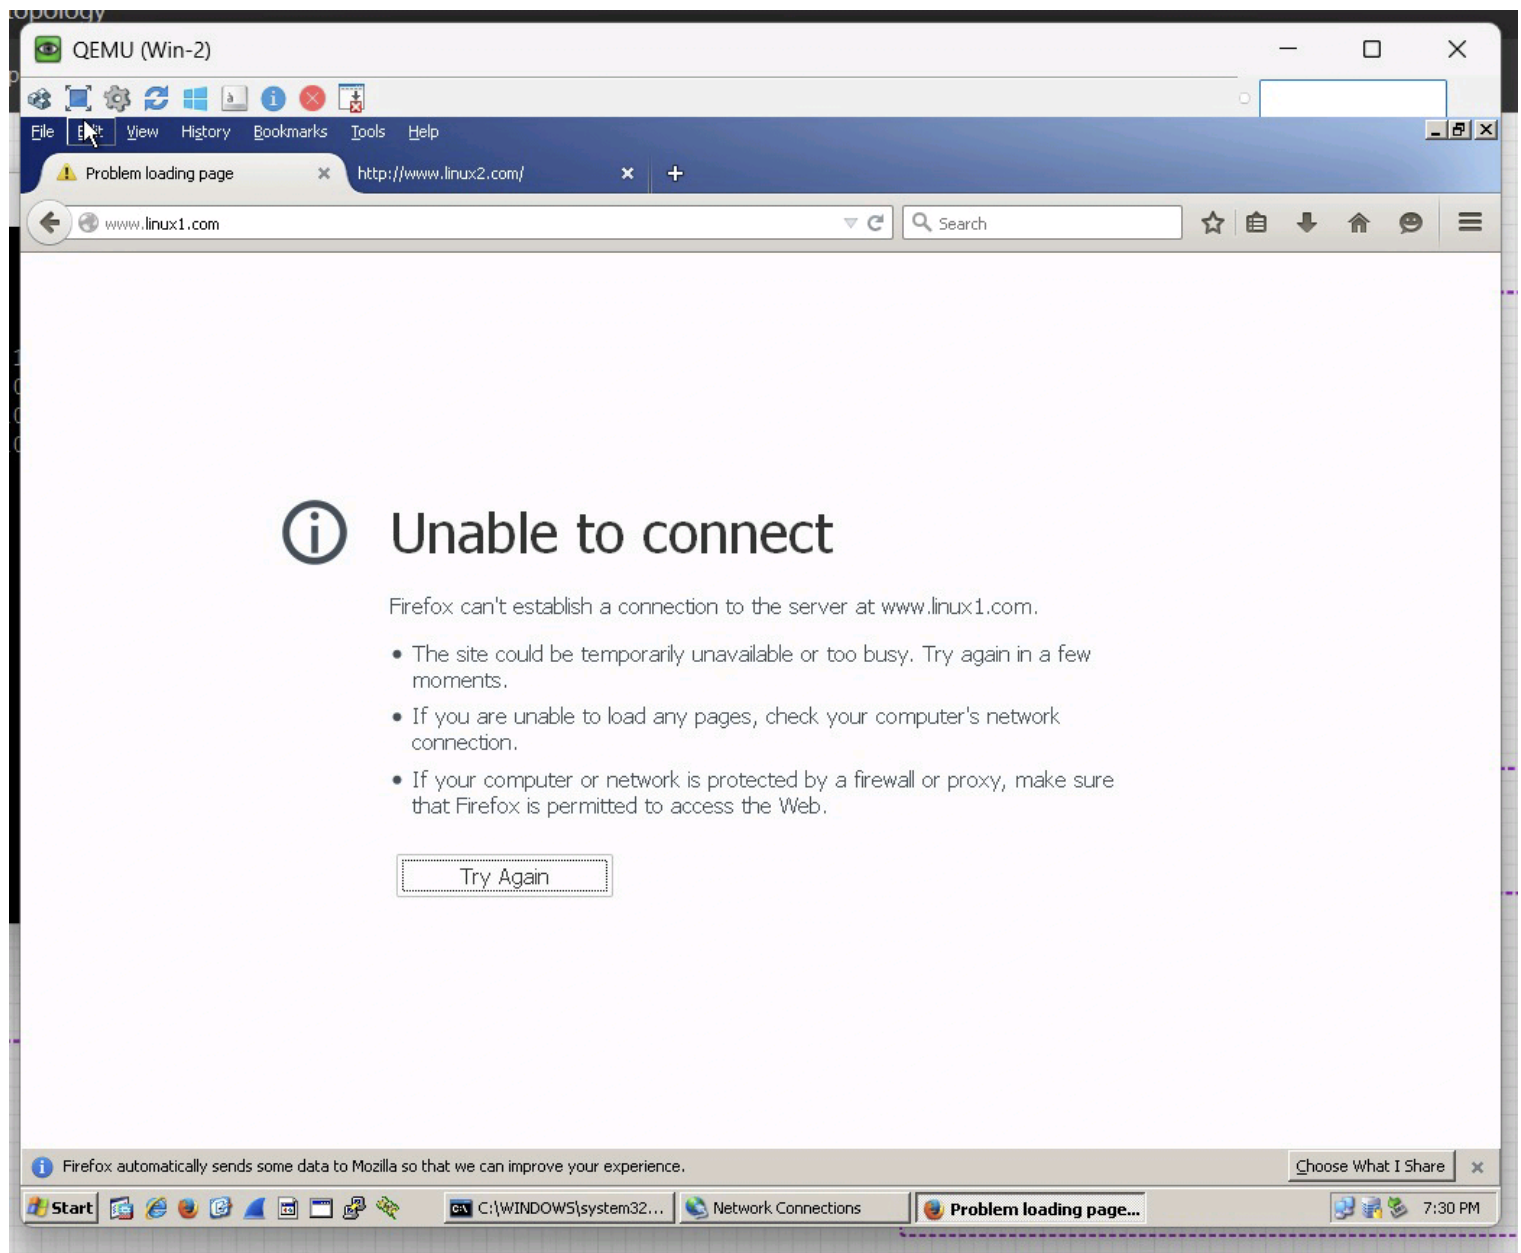



R1



```
R1#  
R1#  
R1#sh access-list  
Extended IP access list 100  
 10 permit ip 10.0.0.0 0.255.255.255 host 200.12.56.10 (6 matches)  
 20 permit tcp host 10.0.0.20 host 172.50.0.20 eq www  
 30 permit tcp host 10.0.0.10 host 172.50.0.10 eq www (5 matches)  
R1#
```