Enumeration

Este é uma das máquinas de introdução a conceitos básicos de cybersec, começamos rodando um nmap:

```
# Nmap 7.95 scan initiated Mon Apr  6 22:05:49 2026 as: /usr/lib/nmap/nmap -sV -sC -p- -oN nmap -v -mi
n-rate 5000 10.129.20.200
Nmap scan report for 10.129.20.200
Host is up (0.15s latency).
Not shown: 65521 closed tcp ports (reset)
PORT      STATE SERVICE       VERSION
135/tcp   open  msrpc         Microsoft Windows RPC
139/tcp   open  netbios-ssn   Microsoft Windows netbios-ssn
445/tcp   open  microsoft-ds?
3389/tcp  open  ms-wbt-server Microsoft Terminal Services
| ssl-cert: Subject: commonName=Explosion
| Issuer: commonName=Explosion
| Public Key type: rsa
| Public Key bits: 2048
| Signature Algorithm: sha256WithRSAEncryption
| Not valid before: 2026-04-06T01:56:26
| Not valid after:  2026-10-06T01:56:26
| MD5:   404f:1a37:e680:fb0a:eebb:54d1:c4a9:3f6e
|_SHA-1: a03d:3cc8:2147:feb2:9046:1859:5180:aba2:b6b2:b873
| rdp-ntlm-info:
|   Target_Name: EXPLOSION
|   NetBIOS_Domain_Name: EXPLOSION
|   NetBIOS_Computer_Name: EXPLOSION
|   DNS_Domain_Name: Explosion
|   DNS_Computer_Name: Explosion
|   Product_Version: 10.0.17763
|_  System_Time: 2026-04-07T02:07:11+00:00
|_ssl-date: 2026-04-07T02:07:19+00:00; +9s from scanner time.
5985/tcp  open  http          Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
```

Como podemos ver, esta máquina esta rodando um serviço (ms-wbt-server)
Logo após isso devemos responder algumas perguntas:

1. What does the 3-letter acronym RDP stand for?
    1. *Remote Desktop Protocol*
2. What is a 3-letter acronym that refers to interaction with the host through a command line interface?
    1. *CLI*
3. What about graphical user interface interactions?
    1. *GUI*
4. What is the name of an old remote access tool that came without encryption by default and listens on TCP port 23?
    1. *Telnet*
5. What is the name of the service running on port 3389 TCP?
    1. *ms-wbt-server*
6. What is the switch used to specify the target host's IP address when using xfreerdp?
    1. **/v:**

7. What username successfully returns a desktop projection to us with a blank password?
    1. Administrator

Agora podemos começar nosso exploit, ele vai funcionar de uma forma bem simples, vamos simplesmente acessar a máquina que esta rodando este serviço:

root@kali: /home/kali/Downloads/Hack the Box/explosion

Session Actions Edit View Help

rede | root@kali: /home/kali/Downloads/Hack the Box/explosion

```
┌──(root㉿kali)-[/home/kali/Downloads/Hack the Box/explosion]
└─# xfreerdp /v:10.129.20.200 /u:Administrator
```

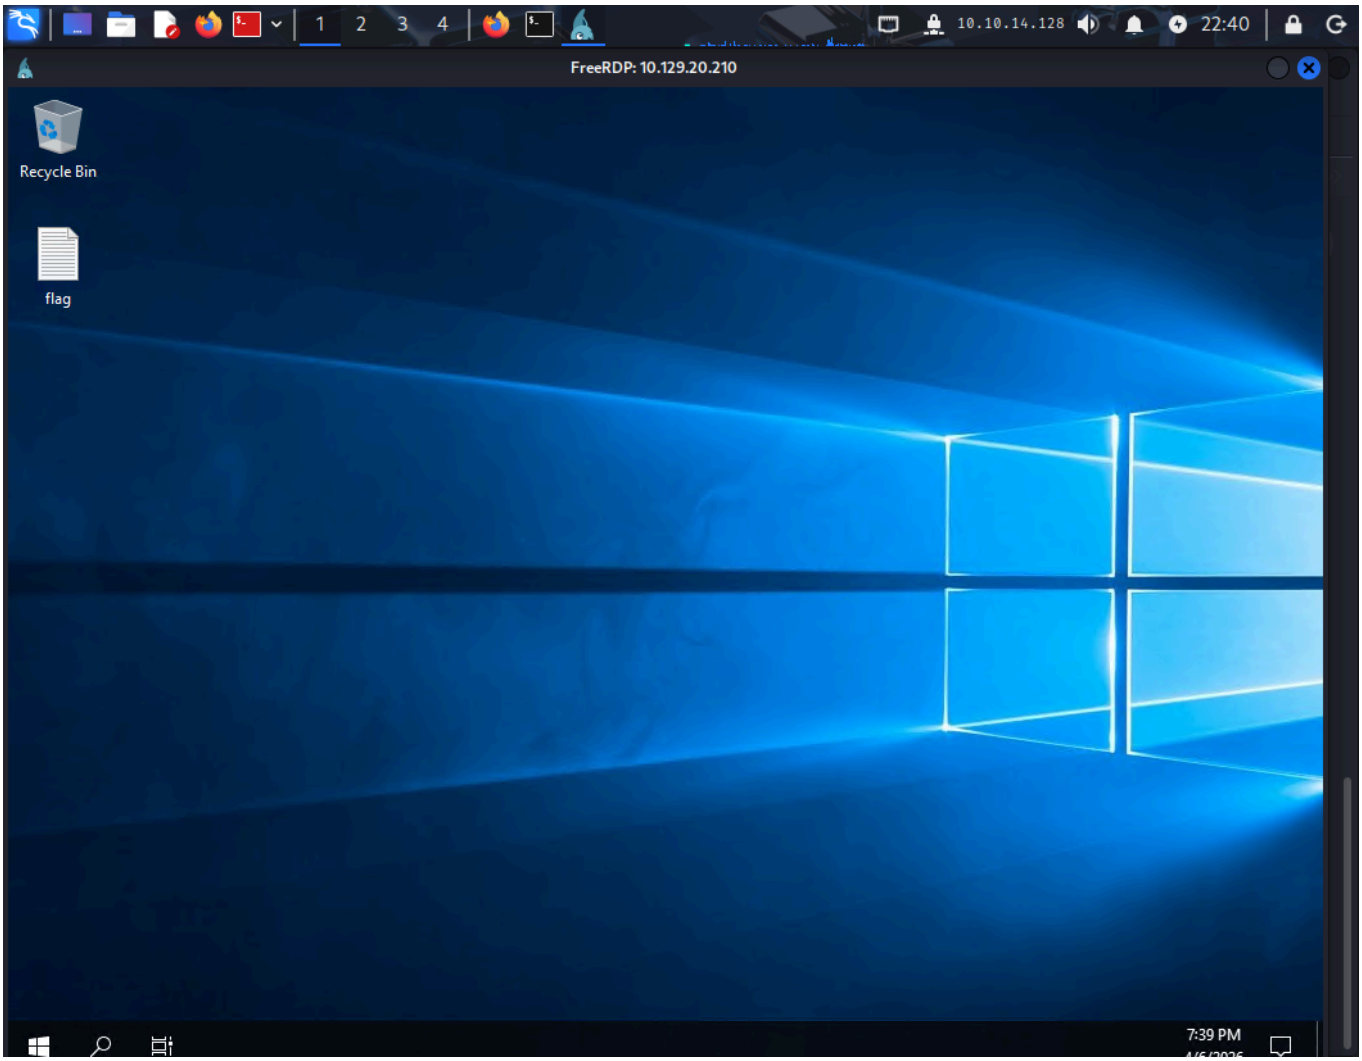
1 2 3 4
10.10.14.128
22:40
FreeRDP: 10.129.20.210
Recycle Bin
flag
7:39 PM

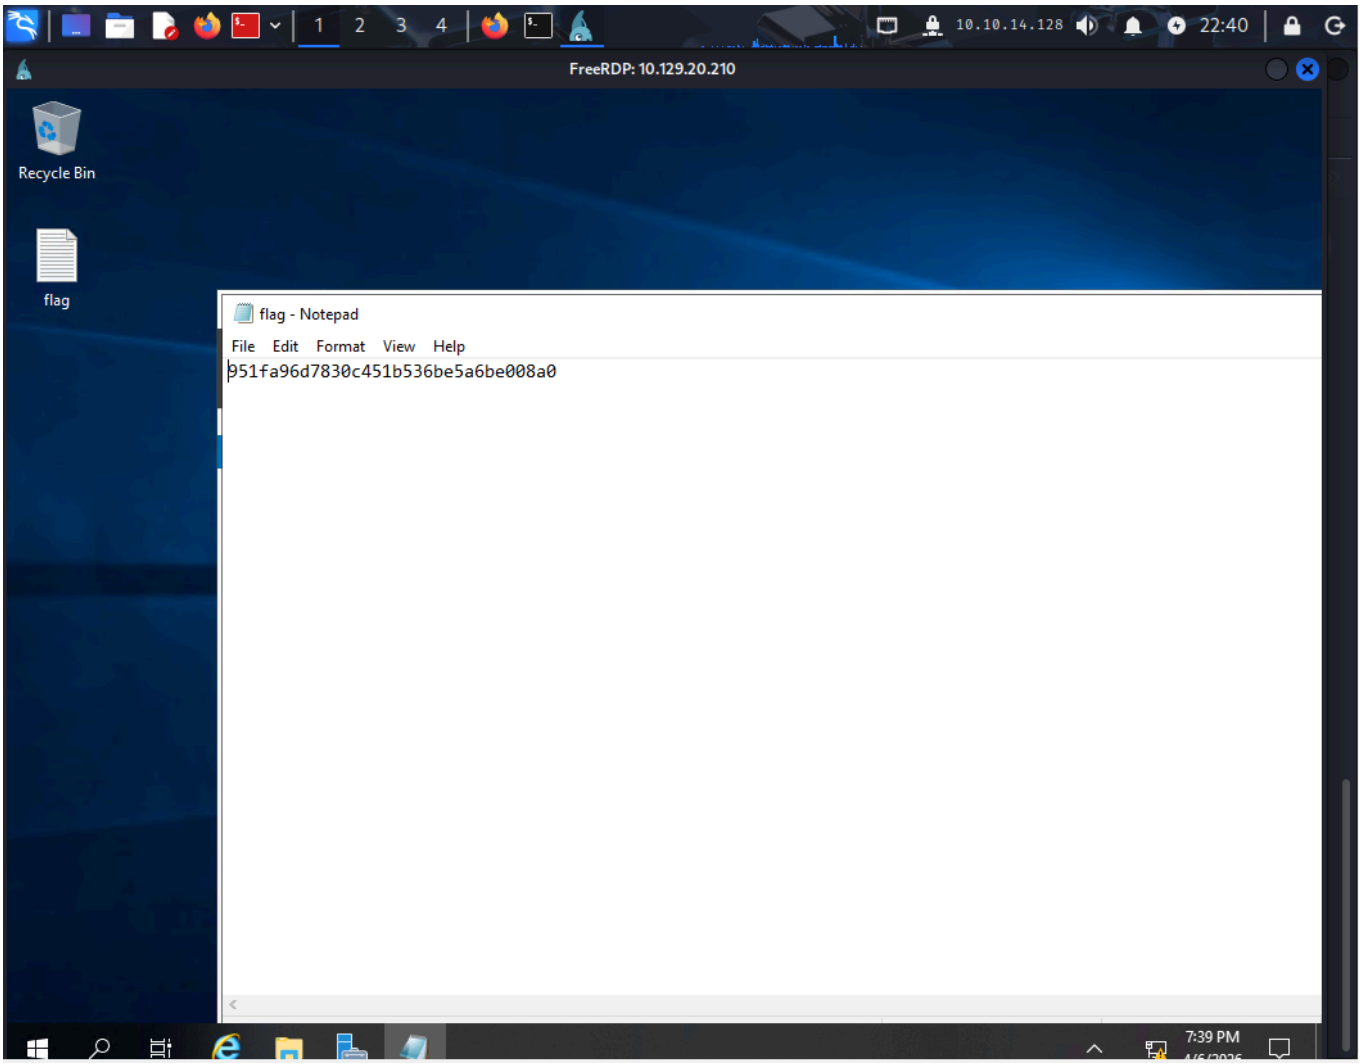
1 2 3 4
10.10.14.128
22:40
FreeRDP: 10.129.20.210
Recycle Bin
flag
flag - Notepad
File Edit Format View Help
951fa96d7830c451b536be5a6be008a0
7:39 PM

Obrigado.