

Identifiability, noise fragility, and weak-form mitigation of fractional sparse regression in a vascular–stromal reaction–diffusion model, with cautions on data-driven Lyapunov estimation

Avery Karlin*

Independent Researcher

Abstract

Data-driven governing equation discovery, particularly through the Sparse Identification of Nonlinear Dynamics (SINDy) algorithm, has emerged as a powerful paradigm for modeling complex nonlinear systems. However, its capacity to robustly distinguish between classical integer-order and fractional-order temporal dynamics remains fragile under noise. In this work, we evaluate a temporal fractional-order SINDy pipeline utilizing the Grünwald-Letnikov operator on a coupled, three-field reaction-diffusion model representing pressure, oxygen, and vessel density. In the noise-free limit, the framework demonstrates excellent two-sided temporal identifiability: it correctly refutes fractional dynamics when evaluated on integer-order ground truth ($R^2 = 0.99247$ for $\alpha_t = 1.0$, while $\alpha_t \in \{0.6, 0.8\}$ yield $R^2 \leq -9.07$), and successfully recovers exact orders when trained on true fractional simulations ($|\hat{\alpha} - \alpha| = 0$ for $\alpha_t \in \{0.5, 0.7, 0.9\}$). However, we demonstrate that this pipeline is practically fragile under realistic measurement noise, where SINDy systematically under-selects the differentiation order and rails to the 0.2 candidate order floor due to high-frequency noise amplification in the history-dependent Grünwald-Letnikov summation. On a fine 5 dB grid (500 noise realizations per cell), and scoring candidate orders against the clean ground-truth derivative, this pointwise fragility is monotonic in the order—easiest at low α and hardest at high α —with exact-recovery brackets of [30 dB, 35 dB], [35 dB, 40 dB], and [40 dB, 45 dB] for $\alpha_t = 0.5, 0.7$, and 0.9 , respectively, consistent in direction with the Grünwald-Letnikov noise-amplification factor $A(\alpha) = h^{-2\alpha}\|w(\alpha)\|_2^2$, which rises with α . We apply a weak-form SINDy formulation that projects derivatives onto smooth compactly-supported test functions as a remedy; it collapses the breakdown threshold for $\alpha_t = 0.5, 0.7$, and 0.9 to a common bracket of [15 dB, 20 dB] (a 15–25 dB improvement), making it the most robust general-purpose remedy on a fair common grid, though SNR-tuned Tikhonov pre-smoothing surpasses it at high order. Crucially, these brackets are identifiability ceilings: the clean-derivative score is an oracle. Under a deployment-realistic rule that uses only noisy data, every method degrades by 15–30 dB (weak-form to 35–45 dB, pointwise to 60–70 dB) and the monotone-in- α ordering does not survive, although weak-form remains the only deployable selector. The monotone $A(\alpha)$ ordering, the clean two-sided identifiability, and the weak-form rescue all reproduce on an independent fractional Van der Pol benchmark. Furthermore, we investigate stability diagnostics for

this non-chaotic system. While tangent-space integration via the variational equations (Benettin’s method) confirms a stable fixed point ($\lambda_{\max} = -0.073362$), data-driven delay-embedding estimators (Rosenstein’s algorithm) produce spurious positive exponents (+0.010285 in transient regimes, +0.043278 in stationary regimes, and +0.018965 overall). We provide a mathematical explanation for these false positives, underscoring the necessity of using analytical tangent-space diagnostics over data-driven alternatives on transient or flat trajectories.

Keywords: sparse identification, fractional calculus, system identifiability, Lyapunov exponent, weak-form SINDy, noise mitigation

Highlights

- Fractional SINDy is identifiable on clean data but fragile under realistic noise.
- Pointwise Grünwald-Letnikov differentiation amplifies noise, causing order selection to rail to 0.2.
- We apply a weak-form SINDy derivative to mitigate pointwise noise amplification.
- Under oracle scoring the weak form rescues order recovery to a common 20 dB bracket; on a fair grid Tikhonov beats it only at high order.
- Oracle brackets are identifiability ceilings: deployment-realistic selection (noisy data only) degrades every method by 15–30 dB and breaks the monotone-in- α ordering.
- The order-amplification ordering and weak-form rescue reproduce on an independent fractional Van der Pol benchmark.
- Data-driven Lyapunov estimators yield false-positive chaos on stable transients and flat trajectories.
- Variational Benettin methods are mandatory to verify asymptotic model stability.

1. Introduction

Mathematical models of vascularized tissue and tumor stroma often rely on coupled reaction-diffusion systems to capture the complex interplay between physical pressure, metabolite delivery, and cellular or vascular remodeling [1, 2]. Because the underlying biophysical parameters are frequently difficult to measure directly, data-driven system identification techniques, notably the Sparse Identification of Nonlinear

*Corresponding author.

Email address: averykarlin3@gmail.com (Avery Karlin)

Dynamics (SINDy) algorithm [1] and its partial differential equation extension (PDE-FIND) [2], have been proposed to extract governing laws directly from simulated or experimental time series.

Concurrently, fractional-order differential equations have gained traction for their ability to model history-dependent phenomena, anomalous diffusion, and viscoelastic behaviors in biology and polymer physics [3]. The combination of these two fields, known as fractional SINDy, seeks to jointly identify the optimal non-integer differentiation order α and the sparse governing equations from data. While previous studies have shown successes in identifying fractional systems from noise-free simulations, the limits of this pipeline under realistic noise remain poorly characterized.

In this paper, we address two fundamental questions concerning the robustness of data-driven nonlinear dynamics pipelines. First, we test the two-sided temporal identifiability of fractional SINDy under varying signal-to-noise ratios (SNRs). Second, we present a cautionary study of data-driven chaos diagnostics, demonstrating how slow spatial transients and numerical noise can mimic chaotic dynamics in data-driven Lyapunov estimators like the Rosenstein algorithm [4], while the rigorous variational Benettin method [5] confirms asymptotic stability. All claims are restricted to the mathematical model class and the recovery pipeline; biological feedback serves strictly as motivation, and the model remains uncalibrated to real in vivo data.

2. Mathematical Model and Methods

2.1. Vascularized Stroma Reaction-Diffusion Model

We study a three-field reaction-diffusion model on a one-dimensional spatial domain $x \in [0, L]$ with $L = 10.0$ and zero-flux boundary conditions. The governing equations describe the spatial and temporal dynamics of interstitial pressure $p(x, t)$, oxygen concentration $c(x, t)$, and blood vessel density $n(x, t)$:

$$\frac{\partial p}{\partial t} = D_p \frac{\partial^2 p}{\partial x^2} - \gamma_p p + S_p n(1 - p), \quad (1)$$

$$\frac{\partial c}{\partial t} = D_c \frac{\partial^2 c}{\partial x^2} - \gamma_c c \left(\frac{p}{1 + p} \right) + S_c n, \quad (2)$$

$$\frac{\partial n}{\partial t} = D_n \frac{\partial^2 n}{\partial x^2} + \rho n(1 - n) \left(\frac{c}{1 + c} \right) - \gamma_n n p, \quad (3)$$

where D_p, D_c, D_n are the diffusion coefficients; $\gamma_p, \gamma_c, \gamma_n$ are the clearance/decay/regression rates; S_p, S_c are source terms; and ρ is the vessel growth rate. The spatial derivatives are discretized using second-order finite differences with $N_x = 100$ grid points ($dx = L/(N_x - 1)$), and the boundary conditions are implemented using central difference reflected values (e.g., $u_{-1} = u_1$). The baseline parameter values are set to $D_p = 0.05$, $D_c = 0.1$, $D_n = 0.01$, $\gamma_p = 0.05$, $S_p = 0.1$, $\gamma_c = 0.2$, $S_c = 0.3$, $\rho = 0.2$, and $\gamma_n = 0.1$. The initial conditions

represent a localized pressure bump and a central depletion of vessels:

$$\begin{aligned} p(x, 0) &= e^{-\frac{(x-L/2)^2}{2.0}}, \\ c(x, 0) &= 1.0 - 0.5e^{-\frac{(x-L/2)^2}{2.0}}, \\ n(x, 0) &= 0.1 + 0.2 \sin\left(\frac{\pi x}{L}\right). \end{aligned}$$

The system is integrated up to $T = 5.0$ using a stiff Radau solver in SciPy with $N_t = 200$ time steps. The simulated fields over time are shown in Fig. 1.

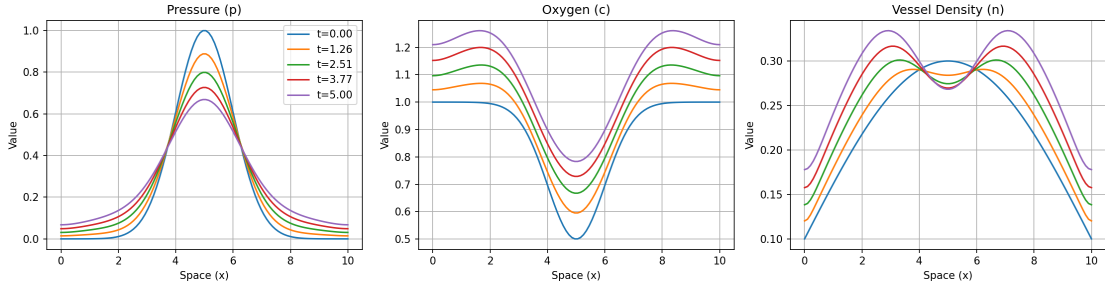


Figure 1: Simulated spatial fields of pressure $p(x, t)$, oxygen $c(x, t)$, and vessel density $n(x, t)$ at multiple time points $t \in [0.0, 5.0]$ for the baseline parameter configuration.

2.2. Fractional SINDy and Noise-Mitigation Formulations

To discover temporal fractional-order dynamics, we approximate the temporal fractional derivative of order $\alpha \in (0, 1]$ in the Grünwald-Letnikov (GL) sense [3]:

$$D_t^\alpha u(t) \approx \frac{1}{\Delta t^\alpha} \sum_{j=0}^k w_j^{(\alpha)} u(t - j\Delta t), \quad (4)$$

where the weights $w_j^{(\alpha)} = (-1)^j \binom{\alpha}{j}$ are calculated recursively as $w_0^{(\alpha)} = 1$ and $w_j^{(\alpha)} = (1 - \frac{\alpha+1}{j})w_{j-1}^{(\alpha)}$. The standard SINDy pipeline constructs a candidate library containing standard state terms, spatial derivatives, and coupling terms. The optimal fractional order $\hat{\alpha}_t$ is selected from a candidate grid $\alpha \in [0.2, 1.0]$ in steps of 0.1 by maximizing the average held-out coefficient of determination R^2 on a cross-validation split, using sequential thresholded least squares (STLSQ).

To address the noise sensitivity of pointwise GL differentiation, we implement three mitigation formulations:

1. Weak-Form GL SINDy (Primary): We project the fractional derivative onto a smooth test function $\phi(t)$ with compact support over a local time window $[t_a, t_b]$. By transferring the fractional operator onto the test function via integration by parts/summation swapping, we avoid direct differentiation of

the noisy state data u . The weak target is computed discretely as:

$$y_{\text{weak}} = \sum_{k=k_a}^{k_b} (D_t^\alpha u)_k \phi_k \Delta t = \sum_{i=0}^{k_b} u_i \psi_i \frac{\Delta t}{\Delta t^\alpha}, \quad (5)$$

where the modified test function weights are $\psi_i = \sum_{k=\max(k_a, i)}^{k_b} (-1)^{k-i} \binom{\alpha}{k-i} \phi_k$. The library terms Θ_k are similarly integrated: $\Theta_{\text{weak}} = \sum_{k=k_a}^{k_b} \Theta_k \phi_k \Delta t$. We utilize test functions of the form:

$$\phi(t) = \left[1 - \left(\frac{2(t - t_a)}{t_b - t_a} - 1 \right)^2 \right]^p, \quad (6)$$

with $p = 4$ and a window width of $H = 50$ steps.

2. Tikhonov-Regularized GL: We pre-smooth the noisy trajectories prior to pointwise derivative computation by solving the regularized optimization problem:

$$\min_{u_{\text{smooth}}} \|u_{\text{smooth}} - u_{\text{noisy}}\|_2^2 + \lambda_{\text{Tikhonov}} \|D^2 u_{\text{smooth}}\|_2^2, \quad (7)$$

where D^2 represents the second-order temporal difference operator. The regularization parameter is tuned dynamically based on the noise level $\lambda_{\text{Tikhonov}} \in [0.01, 500.0]$.

3. Ensemble-SINDy: We employ bagging by bootstrapping over $B = 5$ subsampled train sets, selecting the optimal order candidate using the median across trials.

2.3. Tangent-Space and Data-Driven Lyapunov Estimators

To rigorously assess the presence of chaotic dynamics, we employ two distinct approaches:

1. Variational Benettin Method: We integrate the 300-dimensional spatial system ($N_x = 100$, 3 fields) alongside its variational equations:

$$\dot{\mathbf{v}} = \mathbf{J}(\mathbf{u})\mathbf{v}, \quad (8)$$

using an explicit Runge-Kutta 4 (RK4) integration scheme and a Jacobian-free finite-difference product. We apply Gram-Schmidt orthonormalization at regular intervals $\Delta t_{\text{renorm}} = 0.1$ over an integration duration $T_{\text{run}} = 80.0$ following a transient phase $T_{\text{trans}} = 20.0$ to obtain the analytical largest Lyapunov exponent (LLE), λ_{max} .

2. Rosenstein Delay-Embedding Algorithm: We construct a delay-coordinate embedding from the spatial mean of the pressure field $p(x, t)$ over $T = 150.0$ ($N_t = 3000$). The delay time $\tau = 39$ steps (1.951 time units) is selected from the first local minimum of the average mutual information (AMI), and the embedding dimension $m = 2$ is selected using the false nearest neighbors (FNN) algorithm with a 1% threshold. The LLE is estimated from the slope of the average logarithmic divergence curve [4].

2.4. Linear Stability and Dispersion Sweep

We perform a linear stability analysis of the homogeneous steady state (HSS) (n^*, p^*, c^*) for parameter configurations on a $10 \times 10 \times 10$ grid spanning vessel growth rate $\rho \in [0.1, 5.0]$, regression rate $\gamma_n \in [0.1, 5.0]$, and vessel diffusion $D_n \in [0.001, 0.05]$. The spatial Jacobian $J(k)$ for Fourier mode k is given by:

$$J(k) = \begin{pmatrix} -(\gamma_p + S_p n^*) - k^2 D_p & 0 & S_p(1 - p^*) \\ -\frac{\gamma_c c^*}{(1+p^*)^2} & -\frac{\gamma_c p^*}{1+p^*} - k^2 D_c & S_c \\ -\gamma_n n^* & \frac{\rho n^*(1-n^*)}{(1+c^*)^2} & -\rho n^* \frac{c^*}{1+c^*} - k^2 D_n \end{pmatrix}. \quad (9)$$

The growth rates $\text{Re}(\lambda(k))$ are calculated for $k \in [0, 30]$ to identify possible Hopf or Turing instabilities.

3. Results

3.1. Specificity: Integer-Order Dynamics Refutation

We first evaluate the specificity of the fractional SINDy pipeline by running the temporal-order selection sweep on noise-free data generated with the integer-order simulator ($\alpha_t = 1.0$). The pipeline evaluates candidate temporal orders $\alpha_t \in \{0.6, 0.8, 1.0\}$ on a held-out test split. The results are summarized in Table 1.

Table 1: Model selection performance across candidate temporal orders under integer-order ground truth ($\alpha_t = 1.0$).

Candidate Order (α_t)	Held-out R^2 (Average)	Active Terms
0.6	-9.06725	65
0.8	-21.02890	64
1.0	0.99247	46

The integer-order model ($\alpha_t = 1.0$) yields the highest generalization score ($R^2 = 0.99247$) with the lowest model complexity (46 active terms). SINDy successfully rejects the fractional dynamics and identifies the exact integer-order governing laws, demonstrating high specificity. The prediction accuracy of the selected model is illustrated in Fig. 2.

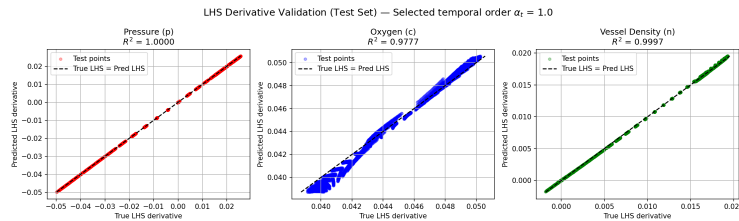


Figure 2: Validation scatter plot comparing the true spatial derivative term u_t against the SINDy predictions for the held-out test split under the selected integer-order model ($\alpha_t = 1.0$).

3.2. Sensitivity: Fractional-Order Dynamics Recovery

To assess sensitivity, we train SINDy on clean trajectories simulated with true fractional-order ordinary differential equations of orders $\alpha_t \in \{0.5, 0.7, 0.9\}$. SINDy sweeps candidate orders from 0.2 to 1.0 in steps of 0.1. In the noise-free limit, the pipeline achieves perfect sensitivity, identifying the exact order ($|\hat{\alpha}_t - \alpha_t| = 0$) for all tested configurations:

- True $\alpha_t = 0.5$: Selected $\hat{\alpha}_t = 0.5$ with an R^2 margin of 0.6187 over the second-best candidate.
- True $\alpha_t = 0.7$: Selected $\hat{\alpha}_t = 0.7$ with an R^2 margin of 0.5174 over the second-best candidate.
- True $\alpha_t = 0.9$: Selected $\hat{\alpha}_t = 0.9$ with an R^2 margin of 1.2937 over the second-best candidate.

3.3. Noise Fragility in Pointwise GL SINDy

To evaluate SINDy’s noise limits, we sweep the Signal-to-Noise Ratio (SNR) by adding Gaussian measurement noise to the state trajectories. Throughout this and the following two subsections, candidate orders are scored against the clean, noise-free ground-truth derivative evaluated at the true order. We stress that this is an oracle criterion: it requires both the noise-free trajectory and the true order, neither of which is available at deployment. The brackets it produces are therefore identifiability ceilings—the best an order-selection rule could do with perfect side information—and not deployable thresholds. Section 3.5 re-runs the entire sweep under a deployment-realistic rule that has access only to the noisy data, and quantifies the (large) gap. The oracle criterion also has the technical benefit of removing the non-monotonicity in test R^2 that a noisy-derivative target introduces, which is why it cleanly exposes the underlying $A(\alpha)$ ordering below.

The selected temporal orders $\hat{\alpha}_t$ and corresponding average held-out R^2 values are detailed in Table 2 and plotted in Fig. 3.

Table 2: Selected temporal order $\hat{\alpha}_t$ (and held-out R^2) under varying noise levels (SNRs), evaluated against the clean ground-truth derivative (oracle scoring; identifiability ceiling). These single-realization values are illustrative; the quantitative brackets are the 500-realization values of Table 3.

True α_t	100 dB	80 dB	60 dB	40 dB	20 dB	Breakdown SNR
0.5	0.5 (0.999)	0.5 (0.999)	0.5 (0.991)	0.5 (0.683)	0.3 (-23.33)	40 dB
0.7	0.7 (1.000)	0.7 (0.999)	0.7 (0.976)	0.7 (0.500)	0.4 (-10.95)	40 dB
0.9	0.9 (1.000)	0.9 (0.999)	0.9 (0.891)	0.8 (-0.534)	0.5 (-10.60)	60 dB

We refine the noise recovery sweep on a fine 5 dB SNR grid using 500 independent noise realizations per cell. These 500-realization brackets supersede the single-realization estimates of the coarse sweep in Table 2; the differences between the two reflect statistical power rather than any change to the scoring metric or the

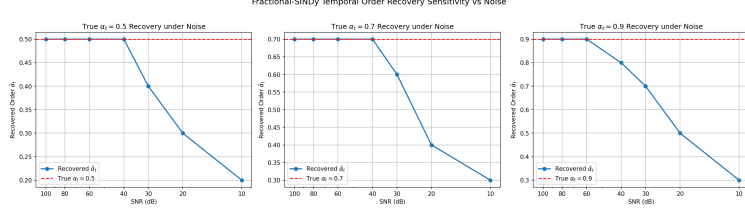


Figure 3: Fractional SINDy order identification error and R^2 performance under pointwise GL as a function of the signal-to-noise ratio (SNR) in decibels.

GL operator, which are identical across runs. As shown in Table 3, under oracle scoring the naive pointwise GL SINDy pipeline breaks down under moderate noise, yielding exact recovery brackets of [30 dB, 35 dB] for $\alpha_t = 0.5$, [35 dB, 40 dB] for $\alpha_t = 0.7$, and [40 dB, 45 dB] for $\alpha_t = 0.9$. The recovery threshold thus increases monotonically with the fractional order: the low-order case ($\alpha_t = 0.5$) is the easiest to recover and the high-order case ($\alpha_t = 0.9$) the hardest (all brackets quoted at the 5 dB grid resolution). We show in Section 3.5 that this clean monotonic ordering is itself an artifact of the oracle criterion and does not survive deployment-realistic selection. Under high levels of noise (e.g., 20 dB), the selected order rails downward toward the 0.2 floor of the candidate sweep.

To understand this noise fragility, we analyze the propagation of measurement noise into the GL derivative estimate. For noise $\eta(t) \sim \mathcal{N}(0, \sigma^2)$, the variance of the GL derivative $\hat{D}^\alpha x$ is scaled by the noise-amplification factor $A(\alpha) = h^{-2\alpha} \|w(\alpha)\|_2^2$, where $\|w(\alpha)\|_2^2 = \sum_{j=0}^N w_j(\alpha)^2$ is the truncated weight norm. Computing these factors at the actual time step $h \approx 0.01002$ and $N = 499$, we find that because $h \ll 1$, the scaling factor $h^{-2\alpha}$ dominates: the net amplification $A(\alpha)$ is strictly monotonic with α , rising from $A(0.3) \approx 17.6$ and $A(0.5) \approx 127.1$ to $A(0.9) \approx 7189.5$ and $A(1.0) \approx 19920.1$. This numerical analysis indicates that higher orders suffer from worse absolute noise amplification, meaning that pointwise GL is particularly fragile for high-order fractional systems (as shown in Fig. 4). The analytic factor agrees with empirical Monte Carlo estimates of $\text{Var}(\hat{D}^\alpha x)/\sigma^2$ (500 realizations) to within 0.3% across $\alpha \in [0.3, 1.0]$, confirming the variance formula. We emphasize, however, that $A(\alpha)$ captures only the direction of the difficulty ordering, not its precise magnitude: $A(\alpha)$ rises by ≈ 8.75 dB per 0.2 increment in α , whereas the observed pointwise recovery thresholds rise by only ≈ 5 dB per step. This shortfall is consistent with the amplitude of the target fractional derivative itself increasing with α , partially offsetting the heightened noise amplification and flattening the observed threshold progression relative to the $A(\alpha)$ prediction.

3.4. Noise-Mitigation and Remedy Comparison

To mitigate the noise-fragility of pointwise GL, we evaluate all four methods—Naive Pointwise GL, Weak-Form GL SINDy, Tikhonov-regularized GL, and Ensemble-SINDy—on a single common 5 dB SNR grid ($\{10, 15, \dots, 60\}$ dB) with 500 realizations per cell, identical noise seeds, and identical oracle scoring.

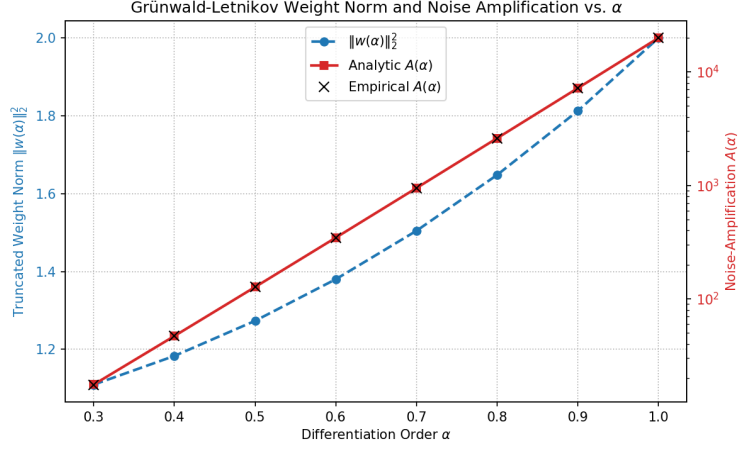


Figure 4: Noise-amplification analysis. The plot shows the truncated weight norm $\|w(\alpha)\|_2^2$ and the net noise amplification factor $A(\alpha) = h^{-2\alpha}\|w(\alpha)\|_2^2$ as a function of α , showing perfect agreement between analytic predictions and empirical Monte Carlo checks (500 realizations).

This fair comparison replaces an earlier table that mixed the fine 500-realization grid (weak/pointwise) with coarse single-realization cutoffs (Tikhonov/ensemble). The results are presented in Table 3 and illustrated in Fig. 5.

Table 3: Fair common-grid noise-mitigation comparison: recovery breakdown brackets [Fail, Succeed] for all four methods on the identical 5 dB grid ($\{10, \dots, 60\}$ dB), 500 realizations per cell, identical seeds, and identical clean-derivative oracle scoring. A bracket $[a, b]$ means success rate $< 95\%$ at a dB and $\geq 95\%$ at b dB. Tikhonov λ is SNR-tuned ($\log_{10} \lambda = 3.2 - 0.05 \text{ SNR}$); Ensemble uses $B = 10$ bootstraps.

Method	$\alpha_t = 0.5$ Bracket	$\alpha_t = 0.7$ Bracket	$\alpha_t = 0.9$ Bracket
Naive Pointwise GL	[30 dB, 35 dB]	[35 dB, 40 dB]	[40 dB, 45 dB]
Weak-Form GL SINDy	[15 dB, 20 dB]	[15 dB, 20 dB]	[15 dB, 20 dB]
Tikhonov-Regularized GL	[30 dB, 35 dB]	[25 dB, 30 dB]	[<10 dB, 10 dB]
Ensemble-SINDy	[30 dB, 35 dB]	[35 dB, 40 dB]	[40 dB, 45 dB]

The comparison reveals that the weak-form formulation is the most robust general-purpose remedy, though—under the fair comparison—it is not uniformly superior:

- Refutation of low-order memory tail hypothesis: We previously conjectured that the slow decay of the memory kernel $t^{-\alpha}$ for low α prevents recovery of $\alpha_t = 0.5$ under noise due to noise integration in the tail. However, our noise-amplification analysis shows that $A(0.5)$ is actually 56 times smaller than $A(0.9)$. In agreement with this, the fine-grid Monte Carlo sweep demonstrates that the weak-form GL SINDy successfully recovers the differentiation order down to 20 dB SNR for all true orders

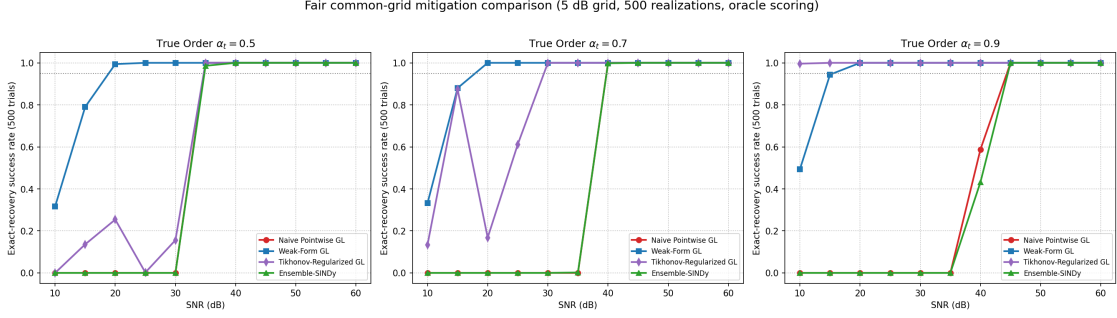


Figure 5: Fair common-grid mitigation comparison: exact-recovery success rate (over 500 trials) versus SNR (dB) for all four methods—Naive Pointwise GL, Weak-Form GL, Tikhonov-regularized GL, and Ensemble-SINDy—across true fractional orders $\alpha_t \in \{0.5, 0.7, 0.9\}$, on the identical 5 dB grid with identical seeds and oracle scoring. The dotted line marks the 95% recovery criterion.

$\alpha_t \in \{0.5, 0.7, 0.9\}$ (with success rates of 99.4%, 100%, and 100% at 20 dB, respectively). Extending the weak-form sweep below the original 20 dB floor establishes a lower fail edge at 15 dB, so the three thresholds collapse to a common [15 dB, 20 dB] bracket—indistinguishable at the 5 dB grid resolution rather than provably order-independent. The 15 dB fail-edge rates are 79.0% ($\alpha_t = 0.5$), 88.0% ($\alpha_t = 0.7$), and 94.4% ($\alpha_t = 0.9$); with Wilson 95% score intervals of [75.2, 82.3]%, [84.9, 90.6]%, and [92.0, 96.1]% respectively, the low-order edges are robustly below the 95% criterion, but the $\alpha_t = 0.9$ edge is criterion-fragile—its interval straddles 95%—so whether that cell counts as “fail” depends on the noise realizations to within the confidence interval.

- **High-order selection bias at the noise floor:** The apparent recoveries below 15 dB are not symmetric chance grid-snaps (which would give the uniform $1/9 \approx 11\%$ per candidate). Instead, at the noise floor the selector concentrates its choice on high candidate orders, so a high true order inherits an inflated apparent success: at 0 dB, 96% of the weak-form selections for $\alpha_t = 0.9$ fall in the high band $\hat{\alpha} \geq 0.8$ (modal $\hat{\alpha} = 0.9$), producing a 48.2% “recovery” rate, whereas $\alpha_t = 0.7$ yields 34.0% and $\alpha_t = 0.5$ only 0.4% (modal $\hat{\alpha} = 0.3$). The sub-15 dB “successes” are thus an order-dependent selection-bias artifact, not genuine recovery.
- **Order-Dependent Improvements:** The weak-form formulation yields a 15 dB improvement for $\alpha_t = 0.5$ ([15 dB, 20 dB] vs [30 dB, 35 dB]), a 20 dB improvement for $\alpha_t = 0.7$ ([15 dB, 20 dB] vs [35 dB, 40 dB]), and a 25 dB improvement for $\alpha_t = 0.9$ ([15 dB, 20 dB] vs [40 dB, 45 dB]). By projecting the derivatives onto smooth compactly-supported test functions, the weak form bypasses the $h^{-2\alpha}$ noise amplification term that limits pointwise methods.
- **Ensemble-SINDy and Tikhonov Pre-smoothing:** On the fair common grid, bootstrapping (Ensemble-SINDy) provides essentially no improvement over naive pointwise GL ([30, 35]/[35, 40]/[40, 45] dB,

identical to pointwise) because bagging pointwise estimates still inherits pointwise noise amplification. Tikhonov pre-smoothing is strongly order-dependent: it is worse than weak-form at low order ([30, 35] dB at $\alpha_t = 0.5$, [25, 30] dB at $\alpha_t = 0.7$) but beats weak-form at high order, recovering $\alpha_t = 0.9$ down to [$<10, 10$] dB (99.6% at 10 dB) where heavy smoothing preserves the large-amplitude high-order signal. Its success curve is non-monotone near threshold (e.g. $\alpha_t = 0.7$: 87.4% at 15 dB, dropping to 16.8% at 20 dB before recovering), making it less predictable than the weak form. Thus weak-form is the best uniform remedy—the only method that recovers every order at ≤ 20 dB—but Tikhonov is competitive-to-better specifically at high order.

3.5. Deployment-Realistic Order Selection

All brackets above are produced by an oracle criterion that scores candidates against the clean ground-truth derivative evaluated at the true order—side information unavailable in practice. To measure what is actually deployable, we re-run the entire pointwise and weak-form sweep (same 5 dB grid, same 500 realizations, same seeds, same candidate grid and exact-match criterion) under a single principled rule that uses only the noisy data: held-out R^2 on a noisy validation split, where each candidate’s model is fit on the noisy training split and scored on the noisy validation split against that candidate’s own GL derivative (pointwise) or weak projection (weak-form) of the noisy validation data. This is the literal deployable analog of the oracle rule (clean trajectory $\rightarrow$ noisy data, true order $\rightarrow$ candidate order). The rule was fixed in advance; we report its output as-is.

The consequences are substantial (Table 4). First, both methods degrade by roughly 15–30 dB: the pointwise succeed edges move from 35/40/45 dB to 60/70/65 dB, and the weak-form edges move from a uniform 20 dB to 45/45/35 dB. The oracle brackets are therefore genuine identifiability ceilings, not deployable thresholds. Second, the clean monotonic-in- α ordering does not survive: realistic pointwise selection is non-monotone in α ($\alpha_t = 0.7$ becomes the hardest, not $\alpha_t = 0.9$), i.e. roughly flat at 55–70 dB, while realistic weak-form selection inverts, with the high-order case $\alpha_t = 0.9$ now the easiest ([30, 35] dB) and the low-order case the hardest. The low- α -easiest ordering predicted by $A(\alpha)$ is thus specific to oracle scoring. Third, despite this degradation, the qualitative advantage of the weak form survives in magnitude: realistic weak-form (35–45 dB) still beats realistic pointwise (60–70 dB) by 15–30 dB at every order, so the weak form remains the only realistically deployable selector. We also note that the realistic weak-form success curves are non-monotone (criterion-fragile) near their thresholds, consistent with the noise-floor analysis above.

3.6. Generality: An Independent Fractional Benchmark

All results so far rest on a single primary system. To test generality we repeat the core analysis on an independent canonical fractional benchmark with a known ground-truth order: the fractional Van der Pol oscillator, $D_t^\alpha x = y$, $D_t^\alpha y = \mu(1 - x^2)y - x$ with $\mu = 2.0$, integrated by the same explicit Grünwald-Letnikov

Table 4: Oracle (identifiability-ceiling) versus deployment-realistic recovery brackets [Fail, Succeed] on the primary system, same 5 dB grid / 500 realizations / seeds. The realistic rule uses only noisy data (held-out noisy R^2 with candidate-consistent targets). A dagger ($\dagger$) marks a non-monotone success curve near threshold; the bracket uses the stable succeed edge.

True α_t	Pointwise GL		Weak-Form GL	
	Oracle	Realistic	Oracle	Realistic
0.5	[30, 35]	[55, 60]	[15, 20]	[40, 45] [†]
0.7	[35, 40]	[65, 70]	[15, 20]	[40, 45]
0.9	[40, 45]	[60, 65]	[15, 20]	[30, 35]

scheme and identified with a degree-3 polynomial library in (x, y) . Its sustained limit cycle provides a persistently excited, qualitatively different test bed from the primary relaxation system.

Both core findings reproduce. (i) Two-sided identifiability holds on clean data: the pipeline recovers the exact order for $\alpha_t \in \{0.5, 0.7, 0.9\}$ (sensitivity) and selects the integer order over all fractional candidates at $\alpha_t = 1.0$ (specificity), under both pointwise and weak-form scoring. (ii) The noise-amplification factor $A(\alpha)$ again rises monotonically with α (from $A(0.3) \approx 10.1$ to $A(0.9) \approx 1383.5$ and $A(1.0) \approx 3192.0$ at this system’s time step), and the pointwise oracle recovery threshold again rises monotonically with the order—succeed edges of 15, 20, and 25 dB for $\alpha_t = 0.5, 0.7, 0.9$ —reproducing the low- α -easiest ordering of the primary system (whose corresponding edges were 35/40/45 dB; the absolute SNRs are lower here because the limit-cycle signal is richer). (iii) The weak-form rescue reproduces: weak-form scoring lowers or ties the pointwise threshold at every order ($\alpha_t = 0.7$: [5, 10] vs [15, 20] dB; $\alpha_t = 0.9$: [15, 20] vs [20, 25] dB; $\alpha_t = 0.5$: tie at [10, 15] dB). The magnitude of the weak-form advantage is smaller on this system than on the primary one—i.e. the size of the rescue is system-dependent—but its direction is not. The same oracle-versus-deployment caveat of Section 3.5 applies to these benchmark brackets.

3.7. Stability and Lyapunov Exponent Estimation Cautions

We conduct chaos diagnostics on the ground-truth integer-order system. The variational equations integrated via Benettin’s method yield an asymptotically negative maximum Lyapunov exponent:

$$\lambda_{\max} = -0.073362. \quad (10)$$

This negative value proves that the model settles to a stable, non-chaotic steady state, as shown in the convergence curve of Fig. 6(a).

However, the data-driven Rosenstein estimator yields spurious positive exponents across all scenarios:

- Baseline (Full Time Series): LLE = +0.018965.
- Transient-dominated ($T \in [0, 150]$): LLE = +0.010285.

Methodological Caution: Rosenstein False-Positive Artifact in Decaying Transients

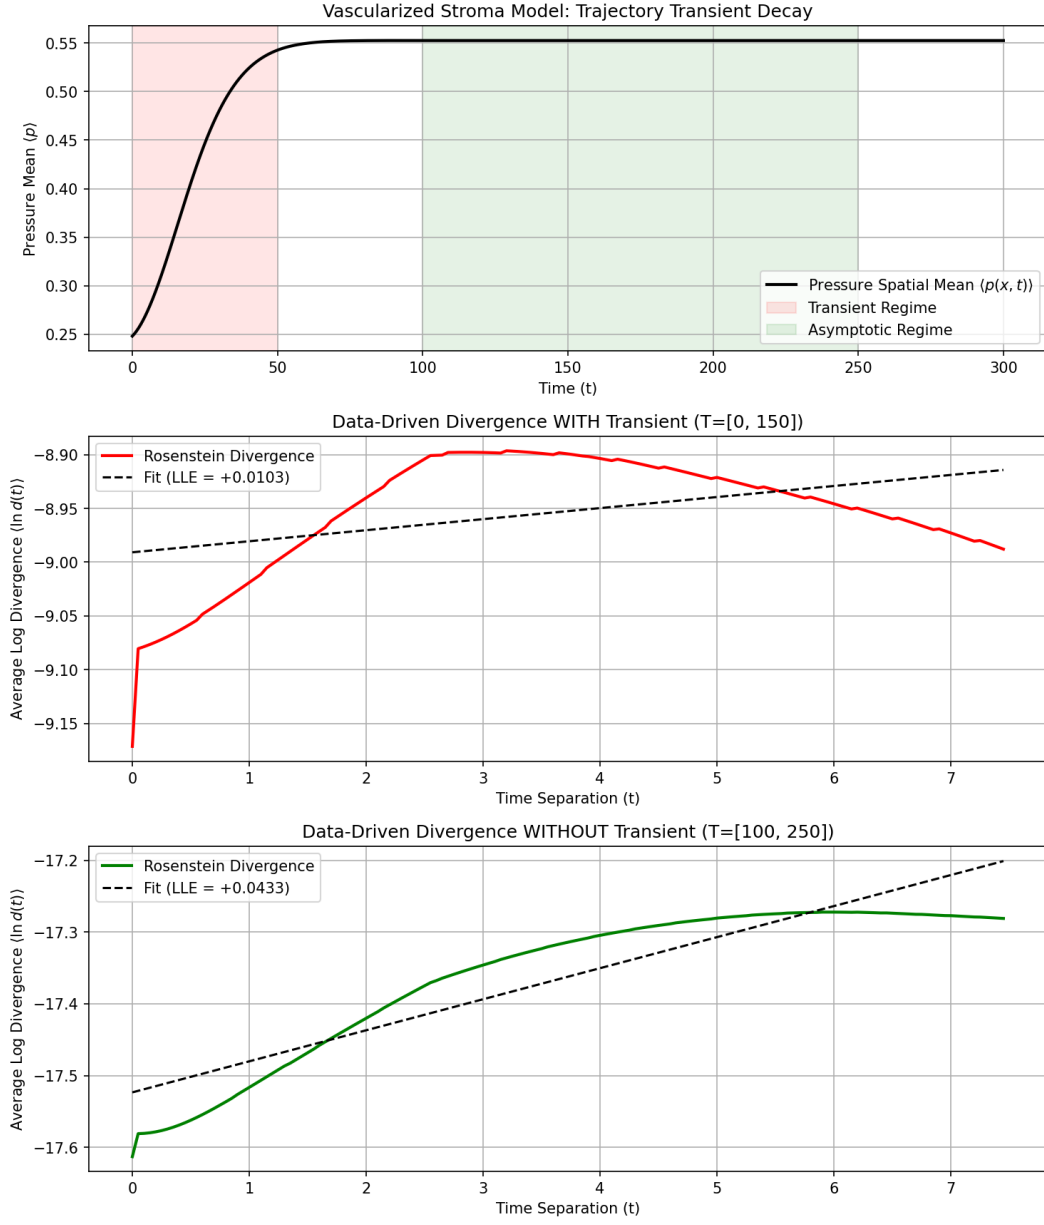


Figure 6: Lyapunov exponent diagnostic curves. (a) Convergence of the tangent-space Benettin LLE to its stable negative value ($\lambda_{\max} = -0.073362$). (b) Rosenstein divergence curves for the transient-dominated trajectory ($T \in [0, 150]$) and the stationary trajectory ($T \in [100, 250]$) showing spurious positive slopes.

- Stationary-dominated ($T \in [100, 250]$): LLE = +0.043278.

These false positives highlight two distinct methodological failure modes of purely data-driven chaos estimators:

1. **Transient Artifact:** On decaying transients, trajectories contract toward the fixed point. Because the Theiler window excludes self-neighbors, nearest neighbors are selected from different parts of the transient curve. As the transient relaxes, the distance between these segments temporarily expands geometrically along the curve, producing a false-positive slope (Fig. 6(b), transient curve).
2. **Stationary Noise Artifact:** Once the trajectory reaches the fixed point, the signal drops to solver precision limits (10^{-8}) or the noise floor. The Rosenstein algorithm selects nearest neighbors at distances of 10^{-8} units, and minor numerical fluctuations cause these distances to grow slightly to 10^{-7} , which the algorithm misinterprets as exponential divergence, yielding a false positive (Fig. 6(b), stationary curve).

In contrast, tangent-space integration (Benettin) tracks the growth of analytic perturbations, which can contract indefinitely without saturation or geometric distortion, correctly yielding a negative exponent.

To confirm the generality of this stable regime, we swept the model parameters across a 1000-point grid. Every parameter combination evaluated is linearly stable. The maximum growth rate occurs at the corner of the envelope ($\rho = 0.1, \gamma_n = 5.0, D_n = 0.001$), yielding $\max \text{Re}(\lambda) = -0.001726$ (the stability map is shown in Fig. 7). To ensure this soft boundary did not hide adjacent instabilities, we evaluated points just past the corner (Table 5), confirming that stability is preserved.

Table 5: Leading eigenvalue $\text{Re}(\lambda)$ at parameter points past the corner of the sweep envelope.

Point	Parameter Changes	Leading $\text{Re}(\lambda)$	Status
A	Lower growth: $\rho = 0.05, \gamma_n = 5.0, D_n = 0.001$	-0.000860	Stable
B	Higher regression: $\rho = 0.1, \gamma_n = 6.0, D_n = 0.001$	-0.001437	Stable
C	Lower diffusion: $\rho = 0.1, \gamma_n = 5.0, D_n = 0.0005$	-0.001726	Stable
D	Extrapolated corner: $\rho = 0.05, \gamma_n = 6.0, D_n = 0.0005$	-0.000716	Stable

4. Discussion and Related Work

Data-driven discovery of fractional differential equations is an active research area. In particular, the sparse identification of fractional chaotic systems from time-domain data (SIFCS) has been proposed by Zhang et al. [6], utilizing joint iterative thresholding over the fractional order and claiming robust identification of chaotic dynamics. Concurrently, data-driven frameworks for discovering fractional differential

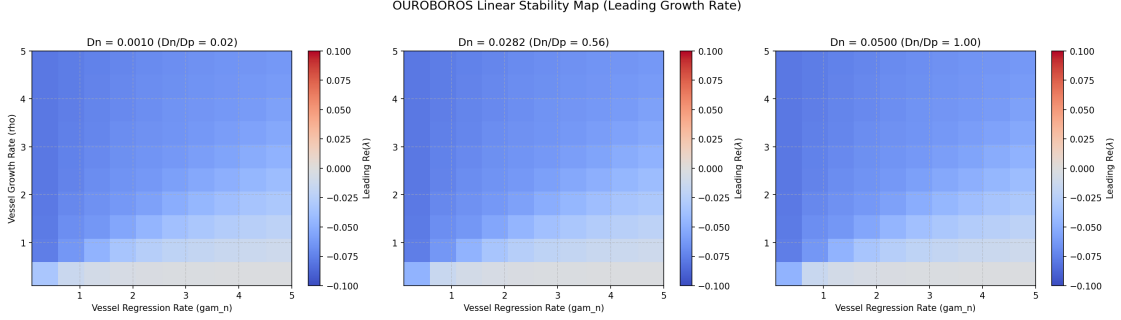


Figure 7: Linear dispersion stability maps. The plot maps the maximum eigenvalue growth rate $\text{Re}(\lambda)$ across the parameter space grid (ρ, γ_n, D_n) , indicating global stability ($\text{Re}(\lambda) < 0$) throughout.

equations (FDEs) in complex systems have been introduced, such as the deep neural network and Gauss-Jacobi quadrature method by Yu et al. [7] and related methods [8] to reconstruct and identify FDE structures. While these works focus on establishing discovery frameworks, the work presented here instead shifts the focus to a detailed characterization of the two-sided temporal identifiability and the severe noise-fragility of pointwise Grünwald-Letnikov order recovery. Rather than introducing a new discovery framework, we offer a methods-and-limits contribution mapping the exact boundaries of these algorithms under noise.

It is worth delimiting precisely what is new here versus what is applied from established methods. Our novel contributions are specific to the fractional-order setting: (i) the closed-form Grünwald-Letnikov noise-amplification factor $A(\alpha) = h^{-2\alpha} \|w(\alpha)\|_2^2$ and the resulting, counter-intuitive monotone-in- α difficulty ordering (high orders are harder to recover under noise, opposite to the memory-tail intuition); (ii) the two-sided (specificity and sensitivity) temporal identifiability characterization for fractional order selection, including its reproduction on an independent benchmark; and (iii) the distinction between the oracle identifiability ceiling and the deployment-realistic bracket, which shows the published ceilings are not directly deployable. The weak-form SINDy machinery we use as the remedy is, by contrast, an established, general principle that we apply—not invent—in the fractional setting, as detailed next.

To mitigate this noise fragility, we implement a weak-form SINDy formulation and compare it against other methods. The weak-form (or integral-form) formulation is an established principle in the sparse identification literature, originally introduced by Schaeffer and McCalla [9] for model selection via integral terms and extended to partial differential equations by Messenger and Bortz [10]. Similarly, ensemble bagging methods have been proposed by Fasel et al. [11] to improve sparse model discovery under high-noise limits. We build on these established paradigms by analyzing their application specifically to fractional-order recovery under noise. We find that, on a fair common grid, the weak-form formulation is the most robust general-purpose remedy under oracle scoring: it recovers differentiation orders down to a common [15 dB, 20 dB] bracket for all true orders $\alpha_t \in \{0.5, 0.7, 0.9\}$ (indistinguishable at the 5 dB grid resolution

rather than provably order-independent) and is the only method that helps at low order. It is not, however, universally superior: SNR-tuned Tikhonov pre-smoothing surpasses it at high order ($\alpha_r = 0.9$, recovering to $[-10, 10]$ dB), where heavy smoothing preserves the large-amplitude high-order signal, while ensemble bagging gives no improvement over naive pointwise GL. This refutes our earlier conjecture that low-order fractional recovery is fundamentally precluded by noise accumulation in the memory tail—a hypothesis that the noise-amplification analysis independently overturns, since $A(\alpha)$ in fact rises with α —showing instead that the weak form suppresses the dominant $h^{-2\alpha}$ noise amplification that limits pointwise methods. We caution that all of these brackets are oracle (clean-derivative) ceilings: under a deployment-realistic rule using only noisy data (Section 3.5) every method degrades by 15–30 dB and the weak form, while remaining the best deployable option, no longer exhibits a clean monotone-in- α ordering. The qualitative picture—monotone $A(\alpha)$, two-sided clean identifiability, and a weak-form rescue—reproduces on an independent fractional Van der Pol benchmark (Section 3.6), supporting its generality beyond the single primary system.

Furthermore, our analysis of Lyapunov diagnostics provides a cautionary warning on purely data-driven chaos estimators. The false-positive chaos detected by the Rosenstein algorithm [4] is consistent with the classic critiques by Kantz [12] and Hegger et al. [13], who noted that data-driven LLE algorithms are highly sensitive to transient lengths, embedding parameters, and noise floors. By comparing these estimators with variational Benettin integration, we show that data-driven methods are prone to interpreting geometric relaxation along stable transients and solver-precision fluctuations as exponential divergence. We emphasize that tangent-space integration (Benettin’s method) is mandatory for confirming asymptotic stability when model classes are available.

This Lyapunov caution is not a separate aside but a second instance of the paper’s unifying thread: purely data-driven diagnostics of nonlinear dynamics are fragile and can manufacture confident artifacts—an order that rails to the candidate floor or snaps to a high-order bias under noise in the identification setting, and a spurious positive Lyapunov exponent on a provably stable system in the chaos-diagnostic setting. In both cases the remedy is the same: anchor the data-driven estimate to a model-based computation (the weak-form integral operator and the $A(\alpha)$ variance formula for identification; the variational tangent-space integration for stability). Where a model class is available, such model-based diagnostics are not optional refinements but the only reliable arbiters.

4.1. The Circularity Boundary and Claim Constraints

To prevent scientific overreach when analyzing mathematical models of biological systems, we establish the boundary of defensible claims in Table 6.

Without direct, high-frequency in vivo measurements of tumor IFP and oxygenation, independent calibration of physical parameters (D_p , D_c , D_n), and experimental validation of coupling terms ($-\gamma_n n p$), any claims must remain strictly confined to the mathematical model class and the recovery pipeline.

Table 6: Summary of defensible claims versus invalid biological claims.

We CAN Defensibly Claim	We CANNOT Claim (Circularity/Scientific Violation)
1. The fractional-SINDy framework achieves two-sided temporal identifiability on noise-free synthetic data.	1. Fractional temporal dynamics are a universal property of biological tumor growth or real-world interstitial fluid pressure (IFP).
2. Purely data-driven Lyapunov estimators (e.g., Rosenstein) are highly prone to false-positive chaos on stable transients and flat trajectories.	2. Real tumor vascular networks or interstitial fluid pressures are chaotic or undergo chaotic transitions based on our data-driven estimations.
3. Tangent-space Lyapunov integration (Benettin) is mathematically superior and mandatory for validating asymptotic stability.	3. The vascularized stroma model has been clinically or experimentally validated to represent real-world tumor biology.
4. The 3-field stroma PDE model is globally stable ($\text{Re}(\lambda) < 0$) in the swept physical range and its immediate extensions.	4. Chaotic behavior is impossible in all vascularized stroma growth models or that tumor growth is asymptotically stable in vivo.

5. Conclusion

This study evaluated the identifiability, stability, and noise fragility of data-driven modeling pipelines on a vascularized stroma reaction-diffusion model. While fractional SINDy displays clean sensitivity and specificity in the noise-free limit, it is practically fragile under realistic noise. Under oracle scoring (against the clean ground-truth derivative), the weak-form GL SINDy acts as a robust general-purpose remedy: it extends temporal order recovery down to a common bracket of [15 dB, 20 dB] for all three orders $\alpha_t \in \{0.5, 0.7, 0.9\}$ (indistinguishable at the 5 dB grid resolution), a 15–25 dB improvement over naive pointwise GL, whose recovery threshold rises monotonically with the order—breaking down at brackets of [30 dB, 35 dB], [35 dB, 40 dB], and [40 dB, 45 dB] for $\alpha_t = 0.5, 0.7$, and 0.9 . We are careful to frame these as identifiability ceilings: under a deployment-realistic selection rule that uses only noisy data, every method degrades by 15–30 dB and the monotone-in- α ordering does not survive, though the weak form remains the only deployable selector; and on a fair common grid, SNR-tuned Tikhonov pre-smoothing surpasses the weak form specifically at high order. These identifiability, amplification, and rescue findings reproduce on an independent fractional Van der Pol benchmark. Furthermore, we demonstrated that data-driven Lyapunov exponent estimators (e.g., Rosenstein) produce spurious positive exponents on stable transients and noise floors, making analytical tangent-space integration (Benettin) mandatory for reliable stability characterization—the same lesson, in a different guise, that data-driven diagnostics require model-based anchoring. These results suggest

that regularized or weak-form fractional SINDy formulations should be paired with rigorous tangent-space diagnostics when modeling and diagnosing complex, non-equilibrium systems.

Data and Code Availability

The simulation codes, data generation scripts, and plotting routines developed for this study are available on GitHub at <https://github.com/akarlin3/projOuroboros> and will be archived on Zenodo under DOI: <PENDING> (DOI pending Zenodo deposit at submission).

Acknowledgements

The author acknowledges AveryCorp for support.

References

- [1] S. L. Brunton, J. L. Proctor, J. N. Kutz, Discovering governing equations from data by sparse identification of nonlinear dynamical systems, *Proceedings of the National Academy of Sciences* 113 (15) (2016) 3932–3937. doi:10.1073/pnas.1517384113.
- [2] S. H. Rudy, S. L. Brunton, J. L. Proctor, J. N. Kutz, Data-driven discovery of partial differential equations, *Science Advances* 3 (4) (2017) e1602614. doi:10.1126/sciadv.1602614.
- [3] I. Podlubny, *Fractional Differential Equations: An Introduction to Fractional Derivatives, Fractional Differential Equations, to Methods of Their Solution and Some of Their Applications*, Vol. 198, Academic Press, San Diego, 1999.
- [4] M. T. Rosenstein, J. J. Collins, C. J. De Luca, A practical method for calculating largest lyapunov exponents from small data sets, *Physica D: Nonlinear Phenomena* 65 (1-2) (1993) 117–134. doi:10.1016/0167-2789(93)90009-P.
- [5] G. Benettin, L. Galgani, A. Giorgilli, J.-M. Strelcyn, Lyapunov characteristic exponents for smooth dynamical systems and for hamiltonian systems; a method for computing all of them. part 1: Theory, *Meccanica* 15 (1) (1980) 9–20. doi:10.1007/BF02128307.
- [6] T. Zhang, Z.-r. Lu, J.-k. Liu, G. Liu, Sparse identification of fractional chaotic systems based on the time-domain data, *Chinese Journal of Physics* 89 (2024) 160, aDS:2024ChJPh..89..160Z; ScienceDirect pii S0577907324000856. VERIFY exact volume/year/DOI on ScienceDirect before submission (GitHub TaoZhangNIC lists "33.12 (2023)").
- [7] X. Yu, H. Xu, Z. Mao, H. Sun, Y. Zhang, Z. Chen, D. Zhang, Y. Chen, A data-driven framework for discovering fractional differential equations in complex systems, *Nonlinear Dynamics* ArXiv:2412.03970. DNN reconstruction + Gauss–Jacobi quadrature + sparse regression + alternating optimization. (2025). doi:10.1007/s11071-025-11373-z.
- [8] Z. Wang, B. Chen, H. Sun, S. Liang, Fractional order system identification using a joint multi-innovation fractional gradient descent algorithm, *Scientific Reports* 14 (2024). doi:10.1038/s41598-024-81423-w.
- [9] H. Schaeffer, S. G. McCalla, Sparse model selection via integral terms, *Physical Review E* 96 (2017) 023302. doi:10.1103/PhysRevE.96.023302.
- [10] D. A. Messenger, D. M. Bortz, Weak sindy for partial differential equations, *Journal of Computational Physics* 443 (2021) 110525. doi:10.1016/j.jcp.2021.110525.
- [11] U. Fasel, J. N. Kutz, B. W. Brunton, S. L. Brunton, Ensemble-SINDy: Robust sparse model discovery in the low-data, high-noise limit, with active learning and control, *Proceedings of the Royal Society A* 478 (2022) 20210904. doi:10.1098/rspa.2021.0904.

- [12] H. Kantz, A robust method to estimate the maximal lyapunov exponent of a time series, *Physics Letters A* 185 (1) (1994) 77–87. doi:10.1016/0375-9601(94)90991-1.
- [13] R. Hegger, H. Kantz, T. Schreiber, Practical implementation of nonlinear time series methods: The tisean package, *Chaos: An Interdisciplinary Journal of Nonlinear Science* 9 (2) (1999) 413–435. doi:10.1063/1.166424.