



**RAJALAKSHMI**  
**ENGINEERING COLLEGE**  
An AUTONOMOUS Institution  
Affiliated to ANNA UNIVERSITY, Chennai

**DEPARTMENT OF**  
**ARTIFICIAL INTELLIGENCE AND DATA SCIENCE**  
**LAB MANUAL**

**CS23431 – OPERATING SYSTEMS**

**(REGULATION 2023)**

**RAJALAKSHMI ENGINEERING COLLEGE Thandalam,**  
**Chennai-602015**

Name: AKASH V

Register No: 231801006

Year / Branch / Section: 2<sup>nd</sup> / AI&DS / FA

Semester: IV

Academic Year: 2024 - 2025

## INDEX

Exp.No	Title	Page No
1a	Installation and Configuration of Linux.	4
1b	Basic Linux Commands.	9
2a	Shell script - Arithmetic Operation -using expr command Basic Calculator.	27
2b	Shell script - Check leap year using if-else.	31
3a	Shell script - Reverse the number using while loop.	32
3b	Shell script - Fibonacci series using for loop.	33
4a	Text processing using Awk script - Employee average pay.	34
4b	Text processing using Awk script - Results of an examination.	36
5	System calls –fork(), exec(), getpid(),opendir(), readdir().	38
6a	FCFS	41
6b	SJF	43
6c	Priority	46
6d	Round Robin	48
7	Inter-process Communication using Shared Memory.	51
8	Producer Consumer using Semaphores.	55
9	Bankers Deadlock Avoidance algorithms.	58
10a	Best Fit	61

10b	First Fit	63
11a	FIFO	65

11b	LRU	67
11c	Optimal	70
12	File Organization Technique- single and Two level directory.	73

**Ex No: 1a**

**Date: 28/1/25**

## **INSTALLATION AND CONFIGURATION OF LINUX**


### **AIM:**



To install and configure Linux operating system in a Virtual Machine.


### **INSTALLATION/CONFIGURATION STEPS:**



1. Install the required packages for virtualization `dnf install xen virt-manager qemu libvirt`
2. Configure xen to start up on boot `systemctl enable virt-manager. service`
3. Reboot the machine  
Reboot
4. Create a Virtual machine by first running `virt-manager virt-manager &`
5. Click on File and then click to connect to localhost
6. In the base menu, right-click on the localhost (QEMU) to create a new VM
7. Select Linux ISO image
8. Choose puppy-linux.iso then the kernel version
9. Select CPU and RAM limits
10. Create default disk image to 8 GB
11. Click finish to create the new VM with PuppyLinux.

### **OUTPUT:**

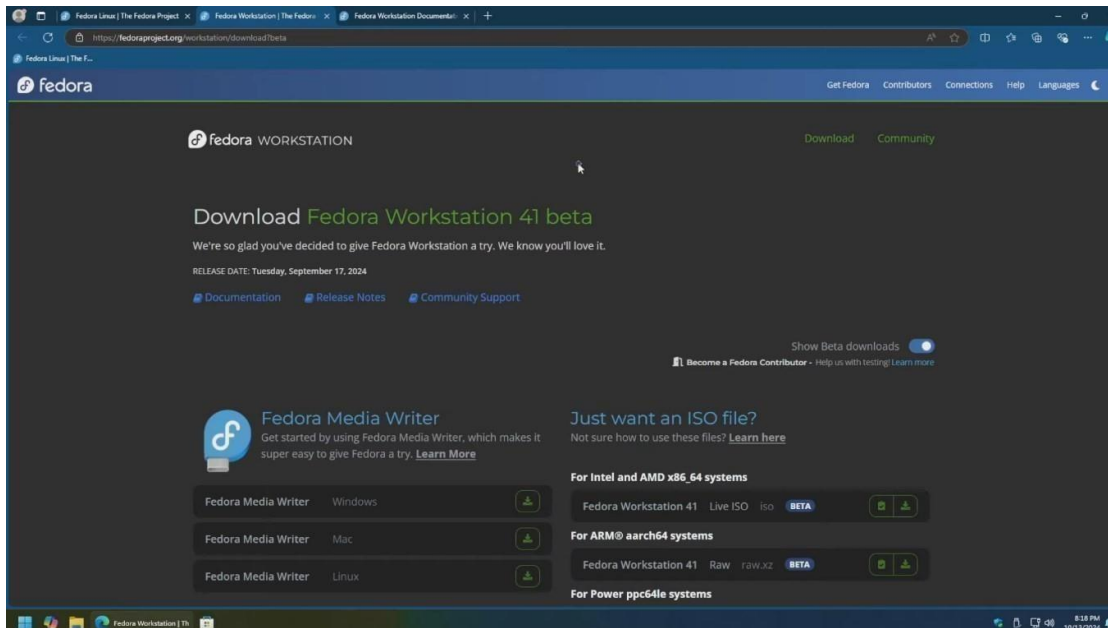


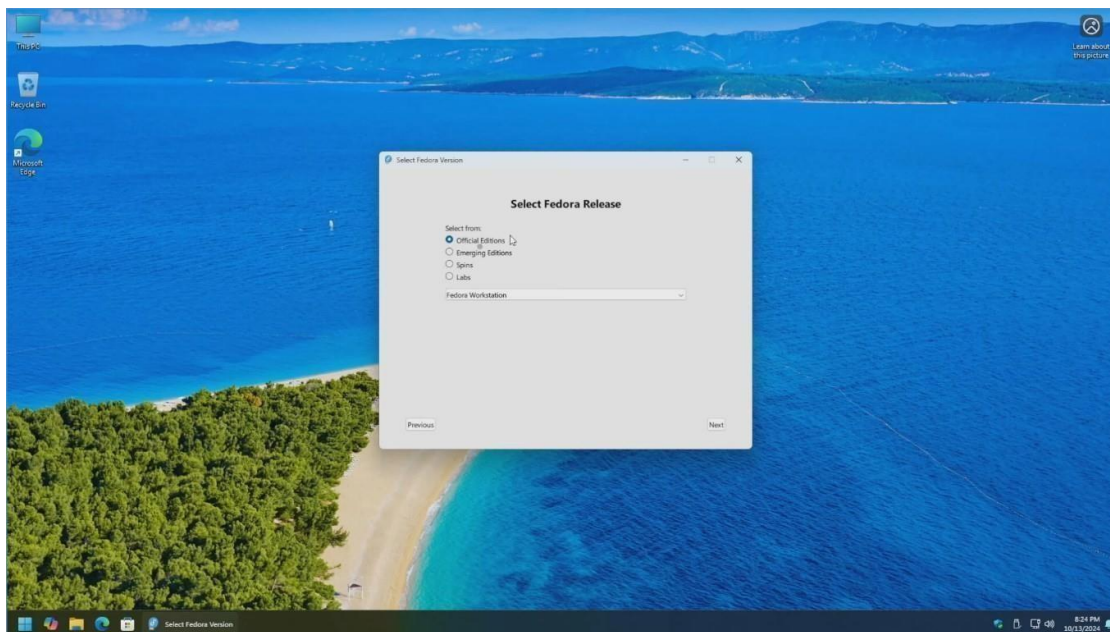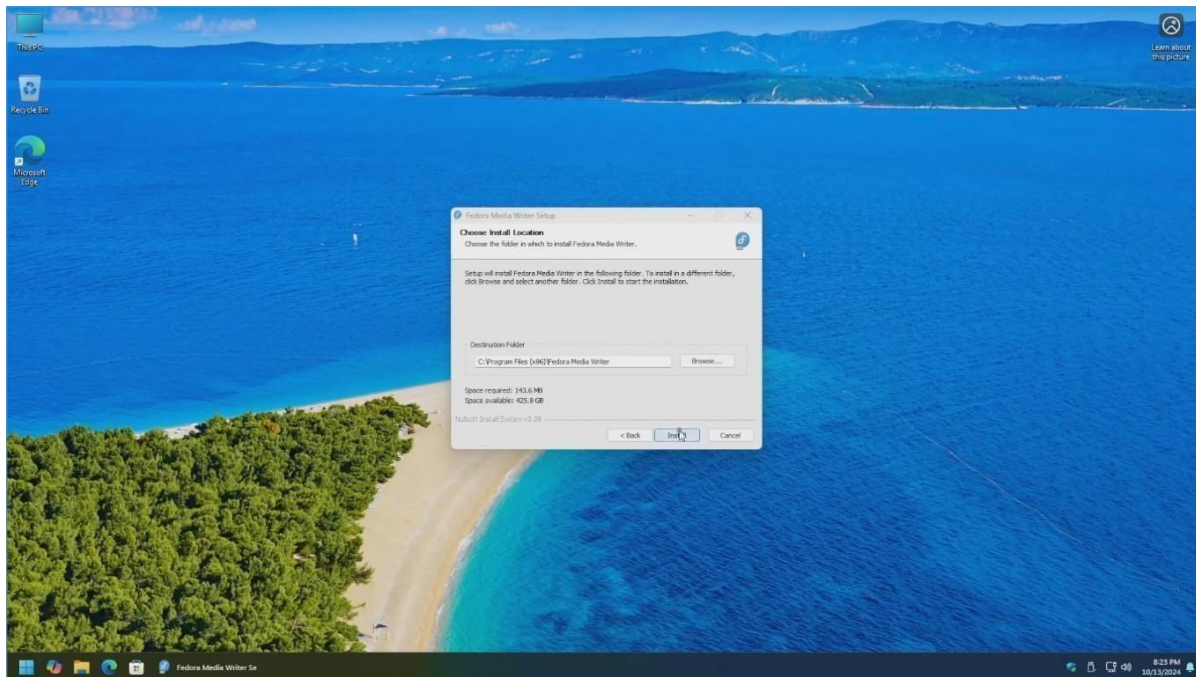

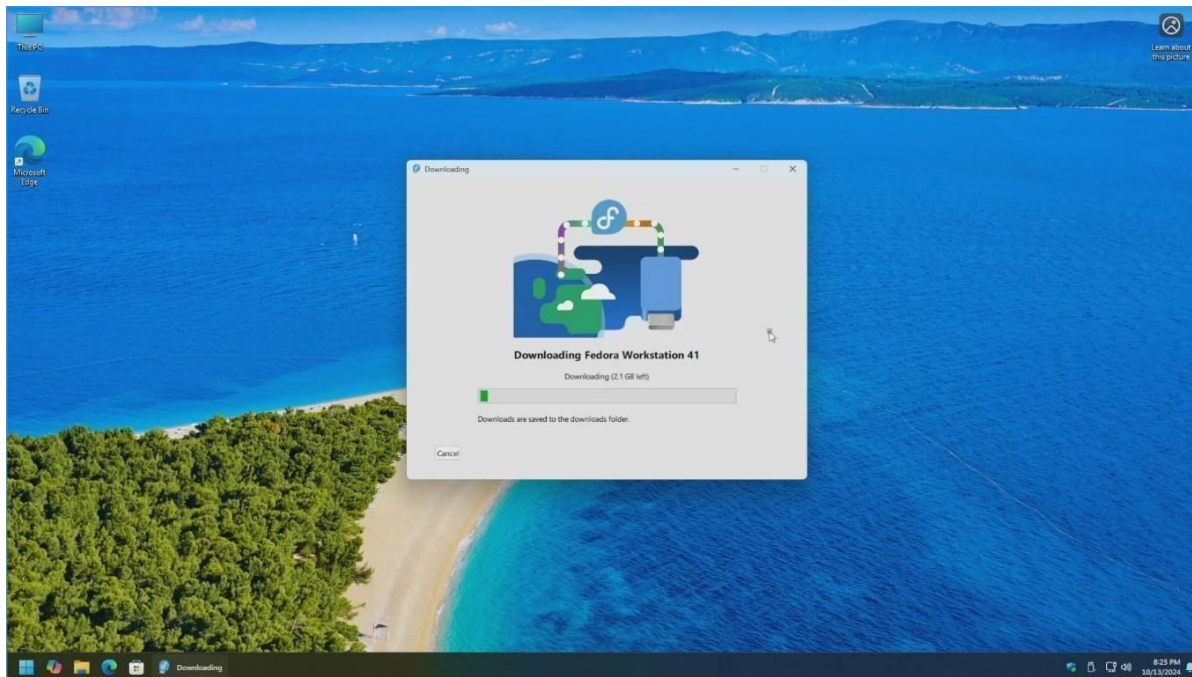

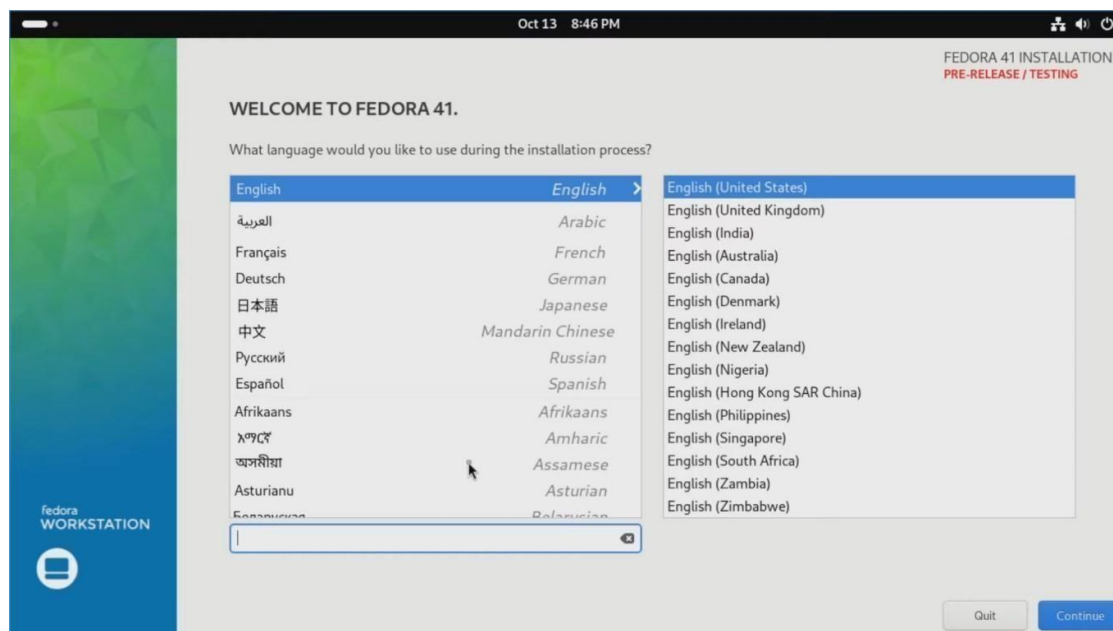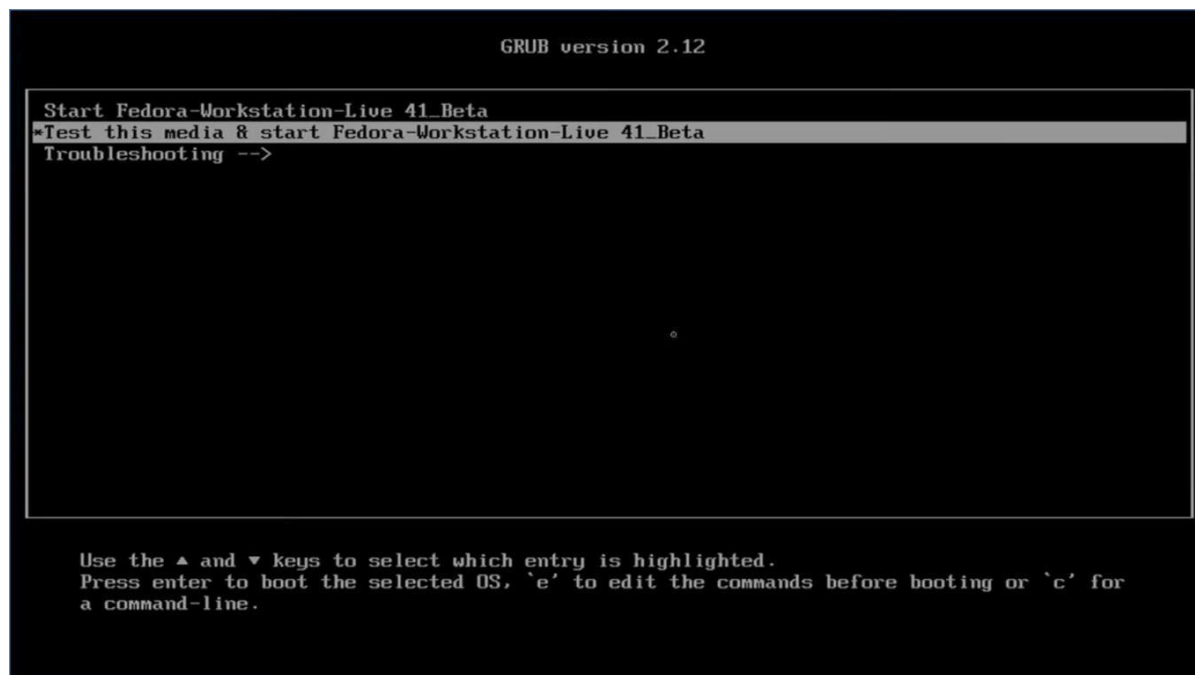



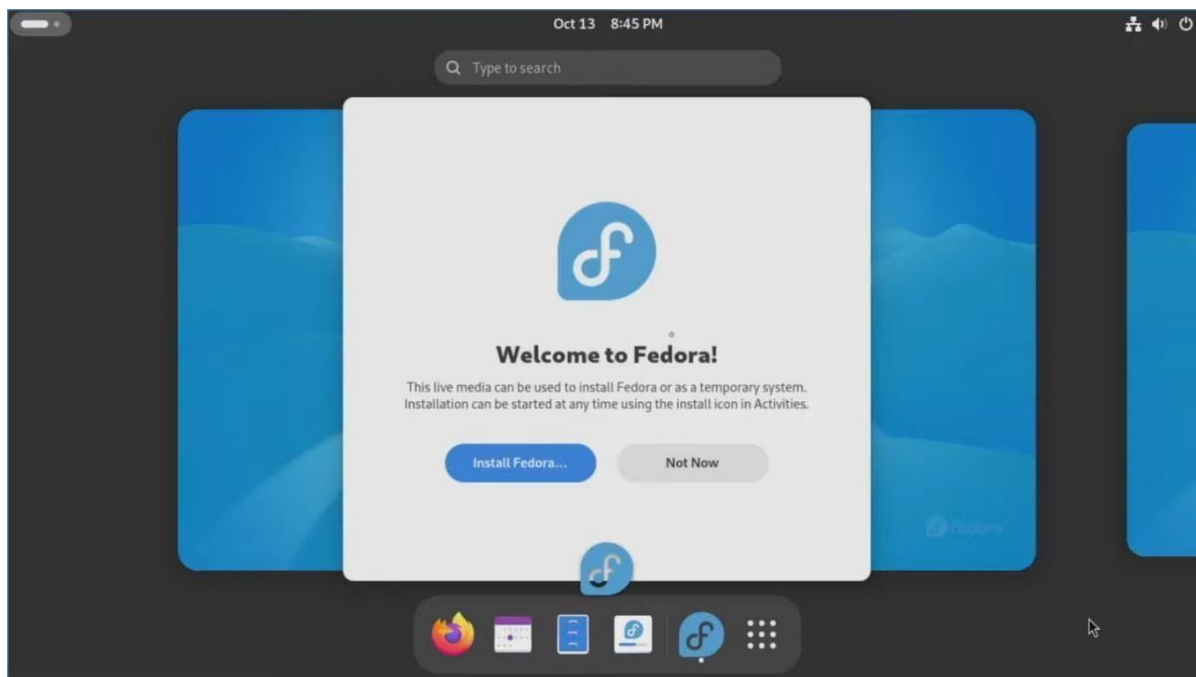

**RESULT:**

The Linux OS is Installed and Configured.

**Ex No: 1b**

**Date: 1/2/2025**



# BASIC LINUX COMMANDS

## 1.1 GENERAL PURPOSE COMMANDS

### 1. The 'date' command:

The date command displays the current date with day of week, month, day, time (24 hours clock) and the year.

SYNTAX: \$ date

The date command can also be used with following format.

Format	Purpose	Example
+ %m	To display only month	\$ date + %m
+ %h	To display month name	\$ date + %h
+ %d	To display day of month	\$ date + %d
+ %y	To display last two digits of the year	\$ date + %y
+ %H	To display Hours	\$ date + %H
+ %M	To display Minutes	\$ date + %M
+ %S	To display Seconds	\$ date + %S

### 2. The echo'command:

The echo command is used to print the message on the screen.

SYNTAX: \$ echo

EXAMPLE: \$ echo "God is Great" 3.

### The 'cal' command:

The cal command displays the specified month or year calendar.

SYNTAX: \$ cal [month] [year]

EXAMPLE: \$ cal Jan 2012 4.

The 'bc' command:

Unix offers an online calculator and can be invoked by the command bc.

SYNTAX: \$ bc

EXAMPLE: bc -l

16/4

5/2

#### 5. The 'who' command

The who command is used to display the data about all the users who are currently logged into the system. SYNTAX:

\$ who

#### 6. The 'who am i' command

The who am i command displays data about login details of the user. SYNTAX:

\$ who am i

#### 7. The 'id' command

The id command displays the numerical value corresponding to your login. SYNTAX:

\$ id

#### 8. The 'tty' command

The tty (teletype) command is used to know the terminal name that we are using. SYNTAX:

\$ tty

#### 9. The 'clear' command

The clear command is used to clear the screen of your terminal. SYNTAX:

\$ clear

#### 10. The 'man' command

The man command gives you complete access to the Unix commands. SYNTAX:

\$ man [command]

#### 11. The 'ps' command

The ps command is used to the process currently alive in the machine with the 'ps' (process status) command, which displays information about process that are alive when you run the command. 'ps;' produces a snapshot of machine activity.

SYNTAX: \$ ps

EXAMPLE: \$ ps

\$ ps -e

\$ps -aux

#### 12. The 'uname' command

The uname command is used to display relevant details about the operating system on the standard output.

-m -> Displays the machine id (i.e., name of the system hardware) -

n -> Displays the name of the network node. (host name) -r ->

Displays the release number of the operating system.

-s -> Displays the name of the operating system (i.e.. system name)  
-v -> Displays the version of the operating system.  
-a -> Displays the details of all the above five options.  
SYNTAX: \$ uname [option]  
EXAMPLE: \$ uname -a

## 1.2 DIRECTORY COMMANDS

### 1. The 'pwd' command:

The pwd (print working directory) command displays the current working directory. SYNTAX: \$ pwd

### 2. The 'mkdir' command:

The mkdir is used to create an empty directory in a disk.

SYNTAX: \$ mkdir dirname

EXAMPLE: \$ mkdir receee

### 3. The 'rmdir' command:

The rmdir is used to remove a directory from the disk. Before removing a directory, the directory must be empty (no files and directories).

SYNTAX: \$ rmdir dirname

EXAMPLE: \$ rmdir receee

### 4. The 'cd' command:

The cd command is used to move from one directory to another.

SYNTAX: \$ cd dirname

EXAMPLE: \$ cd receee

### 5. The 'ls' command:

The ls command displays the list of files in the current working directory.

SYNTAX: \$ ls

EXAMPLE: \$ ls

\$ ls -l

\$ ls -a

## 1.3 FILE HANDLING COMMANDS

### 1. The 'cat' command:

The cat command is used to create a file.

SYNTAX: \$ cat > filename

EXAMPLE: \$ cat > rec

### 2. The 'Display contents of a file' command:

The cat command is also used to view the contents of a specified file. SYNTAX:

\$ cat filename

### 3. The 'cp' command:

The cp command is used to copy the contents of one file to another and copies the file from one place to another.

SYNTAX: \$ cp oldfile newfile

EXAMPLE: \$ cp cse ece

4. The 'rm' command:

The rm command is used to remove or erase an existing file

SYNTAX: \$ rm filename

EXAMPLE: \$ rm rec

\$ rm -f rec

Use option -fr to delete recursively the contents of the directory and its subdirectories.

5. The 'mv' command:

The mv command is used to move a file from one place to another. It removes a specified file from its original location and places it in specified location.

SYNTAX: \$ mv oldfile newfile

EXAMPLE: \$ mv cse eee

6. The 'file' command:

The file command is used to determine the type of file.

SYNTAX: \$ file filename

EXAMPLE: \$ file receee

7. The 'wc' command:

The wc command is used to count the number of words, lines and characters in a file. SYNTAX: \$ wc filename

EXAMPLE: \$ wc receee

8. The 'Directing output to a file' command:

The ls command lists the files on the terminal (screen). Using the redirection operator '>' we can send the output to file instead of showing it on the screen.

SYNTAX: \$ ls > filename

EXAMPLE: \$ ls > cseeee

9. The 'pipes' command:

The Unix allows us to connect two commands together using these pipes. A pipe ( | ) is an mechanism by which the output of one command can be channeled into the input of another command. SYNTAX:

\$ command1 | command2

EXAMPLE: \$ who | wc -l

10. The 'tee' command:

While using pipes, we have not seen any output from a command that gets piped into another command. To save the output, which is produced in the middle of a pipe, the tee command is very useful. SYNTAX: \$ command | tee filename

EXAMPLE: \$ who | tee sample | wc -l

11. The 'Metacharacters of unix' command:

Metacharacters are special characters that are at higher and abstract level compared to most of other characters in Unix. The shell understands and interprets these metacharacters in a special way. \* - Specifies number of characters

?- Specifies a single character

[ ]- used to match a whole set of file names at a command line.

! – Used to Specify Not

EXAMPLE:

\$ ls r\*\* - Displays all the files whose name begins with ‘r’

\$ ls ?kkk - Displays the files which are having ‘kkk’, from the second characters irrespective of the first character.

\$ ls [a-m] – Lists the files whose names begins alphabets from ‘a’ to ‘m’

\$ ls [!a-m] – Lists all files other than files whose names begins alphabets from ‘a’ to ‘m’

12. The ‘File permissions’ command:

File permission is the way of controlling the accessibility of file for each of three users namely Users, Groups and Others.

There are three types of file permissions are available, they are

r-read w-write x-execute

The permissions for each file can be divided into three parts of three bits each.

First three bits	Owner of the file
Next three bits	Group to which the owner of the file belongs
Last three bits	Others

EXAMPLE: \$ ls college

-rwxr-xr-- 1 Lak std 1525 jan10 12:10 college

Where,

-rwx The file is readable, writable and executable by the owner of the file.

Lak Specifies Owner of the file.

r-x Indicates the absence of the write permission by the Group owner of the file. Std Is the Group Owner of the file.

r-- Indicates read permissions for others.

13. The ‘chmod’ command:

The chmod command is used to set the read, write and execute permissions for all categories of users for file.

SYNTAX: \$ chmod category operation permission file

Category	Operation	permission
u-users	+ assign	r-read

g-group	-Remove	w-write
o-others	= assign absolutely	x-execute
a-all		

EXAMPLE:

```
$ chmod u -wx college
```

Removes write & execute permission for users for 'college' file.

```
$ chmod u +rw, g+rw college
```

Assigns read & write permission for users and groups for 'college' file.

```
$ chmod g=wx college
```

Assigns absolute permission for groups of all read, write and execute permissions for 'college' file.

14. The 'Octal Notations' command:

The file permissions can be changed using octal notations also. The octal notations for file permission are

Read permission	4
Write permission	2

EXAMPLE:

```
$ chmod 761 college
```

Execute permission	1
--------------------	---

Assigns all permission to the owner, read and write permissions to the group and only executable permission to the others for 'college' file.

#### 1.4 GROUPING COMMANDS

1. The 'semicolon' command:

The semicolon(;) command is used to separate multiple commands at the command line. SYNTAX:

```
$ command1;command2;command3 ..... ;commandn
```

EXAMPLE: \$ who;date

2. The '&&' operator:

The '&&' operator signifies the logical AND operation in between two or more valid Unix commands. It means that only if the first command is successfully executed, then the next command will be executed.

SYNTAX: \$ command1 && command && command3.....&&commandn EXAMPLE: \$ who && date.

### 3. The '||' operator:

The '||' operator signifies the logical OR operation in between two or more valid Unix commands. It means, that only if the first command will happen to be unsuccessful, it will continue to execute next commands.

SYNTAX: \$ command1 || command || command3... ..... ||commandn EXAMPLE:  
\$ who || date

## 1.5 FILTERS

### 1. The head filter

It displays the first ten lines of a file.

SYNTAX: \$ head filename

EXAMPLE: \$ head college Display the top ten lines.

\$ head -5 college Display the top five lines.

### 2. The tail filter

It displays ten lines of a file from the end of the file.

SYNTAX: \$ tail filename

EXAMPLE: \$ tail college Display the last ten lines. \$tail -

5 college Display the last five lines.

### 3. The more filter:

The pg command shows the file page by page.

SYNTAX: \$ ls -l | more

### 4. The 'grep' command:

This command is used to search for a particular pattern from a file or from the standard input and display those lines on the standard output. "Grep" stands for "global search for regular expression."

SYNTAX: \$ grep [pattern] [file\_name]

EXAMPLE: \$ cat> student

Arun cse Ram

ece

Kani cse

\$ grep "cse" student

Arun cse

Kani cse

### 5. The 'sort' command:

The sort command is used to sort the contents of a file. The sort command reports only to the screen, the actual file remains unchanged.

SYNTAX: \$ sort filename

EXAMPLE: \$ sort college

OPTIONS:

Command	Purpose



Sort -r college	Sorts and displays the file contents in reverse order
Sort -c college	Check if the file is sorted
Sort -n college	Sorts numerically
Sort -m college	Sorts numerically in reverse order

Sort -u college	Remove duplicate records
Sort -l college	Skip the column with +1 (one) option. Sorts according to second column

#### 6. The 'nl' command:

The nl filter adds line numbers to a file and it displays the file and not provides access to edit but simply displays the contents on the screen.

SYNTAX: \$ nl filename

EXAMPLE: \$ nl college

#### 7. The 'cut' command:

We can select specified fields from a line of text using cut command.

SYNTAX: \$ cut -c filename

EXAMPLE: \$ cut -c college

OPTION: -c – Option cut on the specified character position from each line.

#### 1.5 OTHER ESSENTIAL COMMANDS

##### 1. free

Display amount of free and used physical and swapped memory system. synopsis- free [options] example  
[root@localhost ~]# free -t total used free shared buff/cache available Mem: 4044380 605464 2045080 148820  
1393836 3226708 Swap: 2621436 0 2621436  
Total: 6665816 605464 4666516

##### 2. top

It provides a dynamic real-time view of processes in the system.

synopsis- top [options] example

```
[root@localhost ~]# top
top - 08:07:28 up 24 min, 2 users, load
average: 0.01, 0.06, 0.23 Tasks: 211 total, 1 running, 210
sleeping, 0 stopped, 0 zombie
```

```
%Cpu(s): 0.8 us, 0.3 sy, 0.0 ni, 98.9 id, 0.0 wa, 0.0 hi, 0.0 si, 0.0 st
```

```
KiB Mem : 4044380 total, 2052960 free, 600452 used, 1390968 buff/cache
KiB Swap: 2621436 total, 2621436 free, 0 used. 3234820 avail Mem
PID USER PR NI VIRT RES SHR S %CPU %MEM TIME+
COMMAND
```

```
1105 root 20 0 175008 75700 51264 S 1.7 1.9 0:20.46 Xorg
2529 root 20 0 80444 32640 24796 S 1.0 0.8 0:02.47
gnome-term
```

### 3. ps

It reports the snapshot of current processes

synopsis- ps [options]

example

```
[root@localhost ~]# ps -e
```

```
PID TTY TIME CMD
```

```
1 ? 00:00:03 systemd
```

```
2 ? 00:00:00 kthreadd
```

```
3 ? 00:00:00 ksoftirqd/0
```

### 4. vmstat

It reports virtual memory

statistics synopsis- vmstat

[options] example

```
[root@localhost ~]# vmstat
```

```
procs -----memory----- ---swap-- -----io---- -system-- -----cpu ----- r b swpd free buff cache si so bi bo
in cs us sy id wa st 0 0 0 1879368 1604 1487116 0 0 64 7 72 140 1 0 97 1 0
```

### 5. df

It displays the amount of disk space available in file-system.

Synopsis- df [options]

example

```
[root@localhost ~]# df
```

```
Filesystem 1K-blocks Used Available Use% Mounted on
```

```
devtmpfs 2010800 0 2010800 0% /dev tmpfs 2022188 148 2022040 1% /dev/shm tmpfs 2022188 1404 2020784
1% /run /dev/sda6 487652 168276 289680 37% /boot
```

### 6. ping

It is used verify that a device can communicate with another on network. PING stands for Packet Internet Groper. synopsis- ping [options]

```
[root@localhost ~]# ping 172.16.4.1
```

```
PING 172.16.4.1 (172.16.4.1) 56(84) bytes of data.
```

```
64 bytes from 172.16.4.1: icmp_seq=1 ttl=64 time=0.328 ms
```

```
64 bytes from 172.16.4.1: icmp_seq=2 ttl=64 time=0.228 ms
```

64 bytes from 172.16.4.1: icmp\_seq=3 ttl=64 time=0.264 ms 64 bytes from 172.16.4.1: icmp\_seq=4 ttl=64 time=0.312 ms

--- 172.16.4.1 ping statistics ---

4 packets transmitted, 4 received, 0% packet loss, time 3000ms rtt min/avg/max/mdev = 0.228/0.283/0.328/0.039 ms

## 7. ifconfig

It is used to configure network interface.

synopsis- ifconfig [options]

### example

```
root@localhost ~]# ifconfig
```

```
enp2s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500 inet 172.16.6.102 netmask 255.255.252.0 broadcast 172.16.7.255 inet6 fe80::4a0f:cfff:fe6d:6057 prefixlen 64 scopeid 0x20<link> ether 48:0f:cf:6d:60:57 txqueuelen 1000 (Ethernet)
```

```
RX packets 23216 bytes 2483338 (2.3 MiB)
```

```
RX errors 0 dropped 5 overruns 0 frame 0
```

```
TX packets 1077 bytes 107740 (105.2 KiB)
```

```
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0 8.
```

traceroute

It tracks the route the packet takes to reach the destination. synopsis- traceroute [options] [example](#)

```
[root@localhost ~]# traceroute www.rajalakshmi.org
```

```
traceroute to www.rajalakshmi.org (220.227.30.51), 30 hops max, 60 byte packets 1 gateway (172.16.4.1) 0.299 ms 0.297 ms 0.327 ms 2
```

```
220.225.219.38 (220.225.219.38) 6.185 ms 6.203 ms 6.189 ms
```

## OUTPUT:

```
[student@localhost ~]$ date +%m
01
[student@localhost ~]$ date +%h
Jan
[student@localhost ~]$ date +%d
25
[student@localhost ~]$ date +%y
25
[student@localhost ~]$ date +%H
09
[student@localhost ~]$ date +%M
21
[student@localhost ~]$ date +%S
26
[student@localhost ~]$ echo "Hello World"
Hello World
[student@localhost ~]$ echo "Hi"
Hi
[student@localhost ~]$ bc
bc 1.06.95
Copyright 1991-1994, 1997, 1998, 2000, 2004, 2006 Free Software Foundation, Inc.
This is free software with ABSOLUTELY NO WARRANTY.
For details type 'warranty'.
15*25
375
524*905
505660
quit
[student@localhost ~]$ who
student pts/0      2025-01-25 08:12 (:0)
student pts/1      2025-01-25 09:20 (:0)
[student@localhost ~]$ who am i
student pts/1      2025-01-25 09:20 (:0)
[student@localhost ~]$ id
uid=1000(student) gid=1000(student) groups=1000(student) context=unconfined_u:unconfined_r:unconfined_t:s0-s0:c0.c1023
[student@localhost ~]$ tty
/dev/pts/1
[student@localhost ~]$ man
What manual page do you want?
[student@localhost ~]$ ps
  PID TTY          TIME CMD
 2125 pts/1    00:00:00 bash
 2161 pts/1    00:00:00 ps
```

```

[student@localhost ~]$ ps
PID TTY          TIME CMD
2125 pts/1      00:00:00 bash
2161 pts/1      00:00:00 ps
[student@localhost ~]$ ps -e
PID TTY          TIME CMD
1 ?            00:00:01 systemd
2 ?            00:00:00 kthreadd
4 ?            00:00:00 kworker/0:0H
6 ?            00:00:00 mm_percpu_wq
7 ?            00:00:00 ksoftirqd/0
8 ?            00:00:00 rcu_sched
9 ?            00:00:00 rcu_bh
10 ?           00:00:00 migration/0
11 ?           00:00:00 watchdog/0
12 ?           00:00:00 cpuhp/0
13 ?           00:00:00 cpuhp/1
14 ?           00:00:00 watchdog/1
15 ?           00:00:00 migration/1
16 ?           00:00:00 ksoftirqd/1
18 ?           00:00:00 kworker/1:0H
19 ?           00:00:00 cpuhp/2
20 ?           00:00:00 watchdog/2
21 ?           00:00:00 migration/2
22 ?           00:00:00 ksoftirqd/2
24 ?           00:00:00 kworker/2:0H
25 ?           00:00:00 cpuhp/3
26 ?           00:00:00 watchdog/3
27 ?           00:00:00 migration/3
28 ?           00:00:00 ksoftirqd/3
30 ?           00:00:00 kworker/3:0H
31 ?           00:00:00 kdevtmpfs
32 ?           00:00:00 netns
34 ?           00:00:01 kworker/2:1
35 ?           00:00:00 oom_reaper
36 ?           00:00:00 writeback
37 ?           00:00:00 kcompactd0
38 ?           00:00:00 ksm
39 ?           00:00:00 crypto
40 ?           00:00:00 kintegrityd
41 ?           00:00:00 bioset
42 ?           00:00:00 kblockd
44 ?           00:00:01 kworker/0:1
46 ?           00:00:00 ata_sff

```

```

44 ?           00:00:01 kworker/0:1
45 ?           00:00:00 ata_sff
46 ?           00:00:00 md
47 ?           00:00:00 devfreq_wq
48 ?           00:00:00 watchdogd
50 ?           00:00:00 kauditd
51 ?           00:00:00 kswapd0
52 ?           00:00:00 bioset
90 ?           00:00:00 kthreadd
100 ?          00:00:00 acpi_thermal_pm
101 ?          00:00:00 scsi_eh_0
102 ?          00:00:00 scsi_tmf_0
103 ?          00:00:00 scsi_eh_1
104 ?          00:00:00 scsi_tmf_1
105 ?          00:00:00 scsi_eh_2
106 ?          00:00:00 scsi_tmf_2
107 ?          00:00:00 scsi_eh_3
108 ?          00:00:00 scsi_tmf_3
109 ?          00:00:00 scsi_eh_4
110 ?          00:00:00 scsi_tmf_4
115 ?          00:00:00 dm_bufio_cache
116 ?          00:00:00 ipvs_addrconf
150 ?          00:00:00 bioset
151 ?          00:00:00 bioset
209 ?          00:00:01 kworker/1:2
355 ?          00:00:00 kworker/0:1H
357 ?          00:00:00 kworker/1:1H
363 ?          00:00:00 kworker/3:1H
366 ?          00:00:00 i915/signal:0
367 ?          00:00:00 i915/signal:1
368 ?          00:00:00 i915/signal:2
369 ?          00:00:00 i915/signal:4
391 ?          00:00:00 kworker/2:1H
428 ?          00:00:00 kdmflush
429 ?          00:00:00 bioset
441 ?          00:00:00 kdmflush
442 ?          00:00:00 bioset
450 ?          00:00:00 jbd2/dm-0-8
460 ?          00:00:00 ext4-rsv-conver
544 ?          00:00:00 systemd-journal
573 ?          00:00:00 systemd-udev
612 ?          00:00:00 irq/32-mei_me
652 ?          00:00:00 jbd2/sda6-0

```

```

460 ? 00:00:00 ext4-rsv-conver
544 ? 00:00:00 systemd-journal
573 ? 00:00:00 systemd-udev
612 ? 00:00:00 irq/32-wel-ne
652 ? 00:00:00 jbd2/sda6-8
653 ? 00:00:00 ext4-rsv-conver
656 ? 00:00:00 kdmflush
658 ? 00:00:00 bioset
668 ? 00:00:00 jbd2/dm-2-8
669 ? 00:00:00 ext4-rsv-conver
692 ? 00:00:00 rpciod
693 ? 00:00:00 xprtiod
695 ? 00:00:00 auditd
714 ? 00:00:00 alsactl
715 ? 00:00:00 mcelog
716 ? 00:00:00 ModemManager
718 ? 00:00:00 sssd
719 ? 00:03:15 avahi-daemon
720 ? 00:00:00 irqbalance
721 ? 00:00:00 dbus-daemon
723 ? 00:00:00 avahi-daemon
727 ? 00:00:00 gssproxy
735 ? 00:00:00 rsyslogd
736 ? 00:00:00 smartd
738 ? 00:00:00 firewalld
743 ? 00:00:00 rtkit-daemon
748 ? 00:00:00 abrt-d
753 ? 00:00:00 chronyd
764 ? 00:00:00 sssd-be
768 ? 00:00:00 abrt-dump-journ
769 ? 00:00:00 abrt-dump-journ
770 ? 00:00:00 abrt-dump-journ
771 ? 00:00:00 sssd-nss
772 ? 00:00:00 accounts-daemon
773 ? 00:00:00 systemd-logind
788 ? 00:00:00 NetworkManager
789 ? 00:00:00 polkitd
820 ? 00:00:00 crond
821 ? 00:00:00 atd
822 ? 00:00:00 sddm
864 tty1 00:00:13 korg
1013 ? 00:00:01 udiskd
1019 ? 00:00:00 upowerd
1064 ? 00:00:00 sddm-helper
1067 ? 00:00:00 systemd
1064 ? 00:00:00 (sd-pam)
1075 ? 00:00:00 kwalletd5
1078 ? 00:00:00 startkde
1097 ? 00:00:00 dbus-daemon
1102 ? 00:00:00 ssh-agent
1143 ? 00:00:00 start_kdeinit
1144 ? 00:00:00 kdeinit5
1145 ? 00:00:00 klauncher
1148 ? 00:00:01 kded5
1161 ? 00:00:00 kaccess
1166 ? 00:00:00 kwrappr5
1171 ? 00:00:00 dconf-service
1173 ? 00:00:00 ksmserver
1178 ? 00:00:00 kglobalaccel5
1183 ? 00:00:00 mission-control
1185 ? 00:00:00 colord
1191 ? 00:00:13 kwin_x11
1205 ? 00:00:00 kscreen_backend
1210 ? 00:00:00 baloo_file
1212 ? 00:00:00 kdeconnectd
1214 ? 00:00:01 krunner
1216 ? 00:00:15 plasmashell
1217 ? 00:00:00 polkit-kde-auth
1218 ? 00:00:00 xembedsniproxy
1260 ? 00:00:01 kworker/3:0
1279 ? 00:00:00 pulseaudio
1296 ? 00:00:00 abrt-applet
1298 ? 00:00:00 korgac
1299 ? 00:00:00 org_kde_powerde
1328 ? 00:00:00 kactivitymanage
1371 ? 00:00:00 at-spi-bus-laun
1381 ? 00:00:00 dbus-daemon
1386 ? 00:00:00 at-spi2-registr
1446 ? 00:00:00 abrt-dbus
1452 ? 00:00:00 akonadi-control
1456 ? 00:00:00 akonadiserver
1459 ? 00:00:02 mysqld
1499 ? 00:00:00 akonadi_akonote
1500 ? 00:00:00 akonadi_archive

```

```

1499 ? 00:00:00 akonadi_akonote
1500 ? 00:00:00 akonadi_archive
1501 ? 00:00:00 akonadi_birthday
1502 ? 00:00:00 akonadi_contact
1503 ? 00:00:00 akonadi_followu
1504 ? 00:00:00 akonadi_ical_re
1507 ? 00:00:00 akonadi_indexin
1510 ? 00:00:00 akonadi_maildir
1529 ? 00:00:00 akonadi_maildis
1530 ? 00:00:00 akonadi_mailfil
1531 ? 00:00:00 akonadi_migrati
1532 ? 00:00:00 akonadi_newmail
1533 ? 00:00:00 akonadi_sendlat
1601 ? 00:00:00 kuiserver5
1605 ? 00:00:00 cupsd
1607 ? 00:00:00 packagekitd
1838 ? 00:00:00 kworker/3:1
1845 ? 00:00:00 kworker/2:2
1939 ? 00:00:00 kworker/u8:0
1942 ? 00:00:00 kworker/u8:3
1952 ? 00:00:00 kworker/0:2
1968 ? 00:00:00 kworker/u8:1
2004 ? 00:00:13 amarok
2008 ? 00:00:00 kdeinit4
2010 ? 00:00:00 klauncher
2012 ? 00:00:00 kdedd4
2014 ? 00:00:00 gam_server
2057 ? 00:00:00 knotifyd
2067 ? 00:00:00 kio_http_cache_
2114 ? 00:00:00 kworker/1:0
2121 ? 00:00:00 konsole
2125 pts/1 00:00:00 bash
2158 ? 00:00:00 kworker/1:1
2162 pts/1 00:00:00 ps
[student@localhost ~]$ ps -aux
USER      PID %CPU %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root         1  0.0  0.1 32260 10376 ?        Ss   08:01   0:01 /usr/lib/systemd/systemd --switched-root --system --deserialize 24
root         2  0.0  0.0      0   0 ?        S    08:01   0:00 [kthreadd]
root         4  0.0  0.0      0   0 ?        S<   08:01   0:00 [kworker/0:0H]
root         6  0.0  0.0      0   0 ?        S<   08:01   0:00 [mm_percpu_wq]
root         7  0.0  0.0      0   0 ?        S    08:01   0:00 [ksoftirqd/0]
root         8  0.0  0.0      0   0 ?        S    08:01   0:00 [rcu_sched]
root         9  0.0  0.0      0   0 ?        S    08:01   0:00 [rcu_bh]
root        10  0.0  0.0      0   0 ?        S    08:01   0:00 [migration/0]
root        11  0.0  0.0      0   0 ?        S    08:01   0:00 [watchdog/0]
root        12  0.0  0.0      0   0 ?        S    08:01   0:00 [cpuhp/0]
root        13  0.0  0.0      0   0 ?        S    08:01   0:00 [cpuhp/1]
root        14  0.0  0.0      0   0 ?        S    08:01   0:00 [watchdog/1]
root        15  0.0  0.0      0   0 ?        S    08:01   0:00 [migration/1]
root        16  0.0  0.0      0   0 ?        S    08:01   0:00 [ksoftirqd/1]
root        18  0.0  0.0      0   0 ?        S<   08:01   0:00 [kworker/1:0H]
root        19  0.0  0.0      0   0 ?        S    08:01   0:00 [cpuhp/2]
root        20  0.0  0.0      0   0 ?        S    08:01   0:00 [watchdog/2]
root        21  0.0  0.0      0   0 ?        S    08:01   0:00 [migration/2]
root        22  0.0  0.0      0   0 ?        S    08:01   0:00 [ksoftirqd/2]
root        24  0.0  0.0      0   0 ?        S<   08:01   0:00 [kworker/2:0H]
root        25  0.0  0.0      0   0 ?        S    08:01   0:00 [cpuhp/3]
root        26  0.0  0.0      0   0 ?        S    08:01   0:00 [watchdog/3]
root        27  0.0  0.0      0   0 ?        S    08:01   0:00 [migration/3]
root        28  0.0  0.0      0   0 ?        S    08:01   0:00 [ksoftirqd/3]
root        30  0.0  0.0      0   0 ?        S<   08:01   0:00 [kworker/3:0H]
root        31  0.0  0.0      0   0 ?        S    08:01   0:00 [kdevtmpfs]
root        32  0.0  0.0      0   0 ?        S<   08:01   0:00 [netns]
root        34  0.0  0.0      0   0 ?        S    08:01   0:01 [kworker/2:1]
root        35  0.0  0.0      0   0 ?        S    08:01   0:00 [oom_reaper]
root        36  0.0  0.0      0   0 ?        S<   08:01   0:00 [writeback]
root        37  0.0  0.0      0   0 ?        S    08:01   0:00 [kcompactd0]
root        38  0.0  0.0      0   0 ?        SH   08:01   0:00 [ksmd]
root        39  0.0  0.0      0   0 ?        S<   08:01   0:00 [crypto]
root        40  0.0  0.0      0   0 ?        S<   08:01   0:00 [kintegrityd]
root        41  0.0  0.0      0   0 ?        S<   08:01   0:00 [bioset]
root        42  0.0  0.0      0   0 ?        S<   08:01   0:00 [kblockd]
root        44  0.0  0.0      0   0 ?        S    08:01   0:01 [kworker/0:1]
root        45  0.0  0.0      0   0 ?        S<   08:01   0:00 [ata_sff]
root        46  0.0  0.0      0   0 ?        S<   08:01   0:00 [md]
root        47  0.0  0.0      0   0 ?        S<   08:01   0:00 [devfreq_wq]
root        48  0.0  0.0      0   0 ?        S<   08:01   0:00 [watchdogd]
root        50  0.0  0.0      0   0 ?        S    08:01   0:00 [kauditd]
root        51  0.0  0.0      0   0 ?        S    08:01   0:00 [kworker/0:0]

```

```

root    693 0.0 0.0 0 0 0 ? Ss 08:01 0:00 [xrtio]
root    695 0.0 0.0 20388 1908 ? Ssl 08:01 0:00 /sbin/auditd
root    714 0.0 0.0 4112 1384 ? Sns 08:01 0:00 /usr/sbin/alsactl -s -n 19 -c -E ALSA_CONFIG_PATH=/etc/alsa/alsactl.conf --initfile=/lib/alsa/init/00main rdmaemo
root    715 0.0 0.0 11100 2080 ? Ss 08:01 0:00 /usr/sbin/nclog -i ignorenode --daemon -foreground
root    716 0.0 0.1 50948 8192 ? Ssl 08:01 0:00 /usr/sbin/ModemManager
root    718 0.0 0.1 30864 8420 ? Ss 08:01 0:00 /usr/sbin/sssd -i f
avahi   719 3.9 0.0 34632 7488 ? Ss 08:01 3:15 avahi-daemon: running [linux2.local]
root    720 0.0 0.0 14192 1384 ? Ssl 08:01 0:00 /usr/sbin/irqbalance --foreground
dbus    721 0.0 0.0 40312 5520 ? Ssl 08:01 0:00 /usr/bin/dbus-daemon --system --address=systemd: --nofork --nopidfile --systemd-activation --syslog-only
avahi   722 0.0 0.0 31204 296 ? S 08:01 0:00 avahi-daemon: chroot helper
root    727 0.0 0.0 48856 3352 ? Ss 08:01 0:00 /usr/sbin/gssproxy -D
root    735 0.0 0.0 66048 5808 ? Ssl 08:01 0:00 /usr/sbin/rsyslogd -n
root    736 0.0 0.0 5972 3896 ? Ss 08:01 0:00 /usr/sbin/smardt -n -q never
root    738 0.0 0.3 43212 26920 ? Ssl 08:01 0:00 /usr/bin/python3 -ts /usr/sbin/firewalld --nofork -nopid
rtkit   743 0.0 0.0 24164 3380 ? Sns1 08:01 0:00 /usr/libexec/rtkit-daemon
root    748 0.0 0.1 63102 8468 ? Ssl 08:01 0:00 /usr/sbin/abrt-d -s
chrony  753 0.0 0.0 22396 3156 ? S 08:01 0:00 /usr/sbin/chronyd
root    764 0.0 0.1 38936 9236 ? S 08:01 0:00 /usr/libexec/sssds/sssds_be --domain implicit/files --uid 0 --gid 0 --debug-to=files
root    768 0.0 0.1 70260 9576 ? Ss 08:01 0:00 /usr/bin/abrt-dump-journal-oops -fxtD
root    769 0.0 0.1 70224 8868 ? Ss 08:01 0:00 /usr/bin/abrt-dump-journal-core -fxtD
root    770 0.0 0.1 70224 9412 ? Ss 08:01 0:00 /usr/bin/abrt-dump-journal-core -d 1 f -a
root    772 0.0 0.3 42484 32760 ? S 08:01 0:00 /usr/libexec/sssds/sssds_nss --uid 0 --gid 0 --debug-to=files
root    772 0.0 0.1 66456 8548 ? Ssl 08:01 0:00 /usr/libexec/accounts-daemon
root    773 0.0 0.0 20680 8196 ? Ss 08:01 0:00 /usr/lib/systemd/systemd-logind
root    788 0.0 0.2 83628 17480 ? Ssl 08:01 0:00 /usr/sbin/NetworkManager --no-daemon
polkitd 789 0.0 0.1 104460 15588 ? Ssl 08:01 0:00 /usr/lib/polkit-1/polkitd --no-debug
root    820 0.0 0.0 14776 3308 ? Ss 08:01 0:00 /usr/sbin/crond -n
root    821 0.0 0.0 18104 2368 ? Ss 08:01 0:00 /usr/sbin/atd -f
root    823 0.0 0.1 73180 13760 ? Ssl 08:01 0:00 /usr/bin/sddm
root    884 0.2 0.6 108248 50960 tty1 Ssl+ 08:01 0:13 /usr/libexec/Xorg -nolisten tcp -auth /var/run/sddm/(28a38881-c890-485f-a7f8-244d759105bf) -background none -nor
root    1013 0.0 0.1 69328 10052 ? Ssl 08:01 0:01 /usr/libexec/udisks2/udisks2
root    1016 0.0 0.0 46296 6472 ? Ssl 08:01 0:00 /usr/libexec/upowerd
root    1058 0.0 0.1 61492 14076 ? Sl 08:12 0:00 /usr/libexec/sddm-helper --socket /tmp/sddm-ahost56c3439-e0ed-4e78-a691-f103713da942 --id 1 --start /usr/bin/sta
student 1062 0.0 0.0 51654 7616 ? Ss 08:12 0:00 /usr/lib/systemd/systemd --user
student 1064 0.0 0.0 51884 2404 ? Ss 08:12 0:00 (sd-pam)
student 1075 0.0 0.4 139196 33828 ? Sl 08:12 0:00 /usr/lib/kwalletd5 --pam-login 4 17
student 1078 0.0 0.0 5784 3092 ? Ss 08:12 0:00 /bin/sh /usr/bin/startkde
student 1091 0.0 0.0 33008 50512 ? Ssl 08:12 0:00 /usr/bin/dbus-daemon --session --address=systemd: --nofork --nopidfile --systemd-activation --syslog-only
student 1102 0.0 0.0 10644 528 ? Ss 08:12 0:00 /usr/bin/ssh-agent /bin/sh -c exec 1 /bin/bash -c "no /usr/bin/startkde"
student 1143 0.0 0.0 4468 120 ? Ss 08:12 0:00 /usr/libexec/kf5/start_kdeinit --kded skcinit_startup
student 1144 0.0 0.1 64524 8232 ? Ss 08:12 0:00 kdeinit5: Running...
student 1145 0.0 0.3 122860 32328 ? Sl 08:12 0:00 /usr/libexec/kf5/launcher --fd-9
student 1148 0.0 0.7 277396 58832 ? Sl 08:12 0:00 kdeinit5 [kdeinit5]
student 1161 0.0 0.0 34444 11440 ? Sl 08:12 0:00 qdbusdbusdbus

```



```

student 1172 0.0 0.4 140500 26380 ? S1 08:12 0:00 /usr/bin/kcserver
student 1178 0.0 0.3 123464 31244 ? S1 08:12 0:00 /usr/bin/kglobaccels
student 1183 0.0 0.1 58076 11780 ? S1 08:12 0:00 /usr/libexec/mission-control-5
colord 1185 0.0 0.1 53116 11664 ? Ssl 08:12 0:00 /usr/libexec/colord
student 1191 0.3 0.9 316792 79436 ? S1 08:12 0:13 kwin_x11
student 1205 0.0 0.2 88824 17476 ? S1 08:12 0:00 /usr/libexec/kf5/kcscreen_backend_launcher
student 1210 0.0 0.2 1125568 17704 ? Sml 08:12 0:00 /usr/bin/baloo_file
student 1212 0.0 0.4 151940 48124 ? S1 08:12 0:00 /usr/libexec/kdeconnectd
student 1214 0.0 1.2 1385270 99496 ? S1 08:12 0:01 /usr/bin/krunner
student 1216 0.3 2.5 1018156 210240 ? S1 08:12 0:15 /usr/bin/plasmashell
student 1217 0.0 0.4 157596 35264 ? S1 08:12 0:00 /usr/libexec/kf5/polkit-kde-authentication-agent-1
student 1218 0.0 0.3 129832 30440 ? S1 08:12 0:00 /usr/bin/smbdsmtpdproxy
root 1269 0.0 0.0 0 0 ? S 08:12 0:01 [worker/3:0]
student 1279 0.0 0.1 1484256 10852 ? Scl 08:12 0:00 /usr/bin/pulseaudio --start --log-target=syslog
student 1296 0.0 0.2 78868 23864 ? S1 08:12 0:00 /usr/bin/abrt-applet
student 1298 0.0 0.7 349124 65560 ? S1 08:12 0:00 /usr/bin/korgac
student 1299 0.0 0.4 151080 35844 ? S1 08:12 0:00 /usr/libexec/org_kde_powerdevil
student 1328 0.0 0.4 193268 39960 ? S1 08:12 0:00 /usr/bin/kactivitymanagerd start-daemon
student 1371 0.0 0.0 48172 7160 ? Ssl 08:12 0:00 /usr/libexec/at-spi-bus-launcher
student 1381 0.0 0.0 33240 4668 ? S1 08:12 0:00 /bin/dbus-daemon --config-file=/usr/share/defaults/at-spi2/accessibility.conf --nofork --print-address 3
student 1386 0.0 0.0 30076 6560 ? S1 08:12 0:00 /usr/libexec/at-spi2-registryd --use-gnome-session
root 1446 0.0 0.0 55488 8116 ? S1 08:12 0:00 /usr/sbin/abrt-dbus -t133
student 1452 0.0 0.3 130748 31028 ? S1 08:12 0:00 /usr/bin/akonadi_control
student 1456 0.0 0.3 344108 28140 ? S1 08:12 0:00 akonadiserver
student 1459 0.0 0.6 526992 55356 ? S1 08:12 0:02 /usr/libexec/mysqld --defaults-file=/home/student/.local/share/akonadi/mysql.conf --datadir=/home/student/.local
student 1499 0.0 0.4 145168 36240 ? S1 08:12 0:00 /usr/bin/akonadi_akonotes_resource --identifier akonadi_akonotes_resource.0
student 1500 0.0 0.7 345544 64868 ? S1 08:12 0:00 /usr/bin/akonadi_archivemail_agent --identifier akonadi_archivemail_agent
student 1501 0.0 0.4 150136 38044 ? S1 08:12 0:00 /usr/bin/akonadi_birthdays_resource --identifier akonadi_birthdays_resource
student 1502 0.0 0.4 144812 36384 ? S1 08:12 0:00 /usr/bin/akonadi_contacts_resource --identifier akonadi_contacts_resource.0
student 1503 0.0 0.4 160616 39780 ? S1 08:12 0:00 /usr/bin/akonadi_followupreminder_agent --identifier akonadi_followupreminder_agent
student 1504 0.0 0.4 151472 38864 ? S1 08:12 0:00 /usr/bin/akonadi_ical_resource --identifier akonadi_ical_resource.0
student 1507 0.0 0.4 154560 40440 ? Sml 08:12 0:00 /usr/bin/akonadi_indexing_agent --identifier akonadi_indexing_agent
student 1510 0.0 0.4 145168 35752 ? S1 08:12 0:00 /usr/bin/akonadi_maildir_resource --identifier akonadi_maildir_resource.0
student 1529 0.0 0.4 153640 37248 ? S1 08:12 0:00 /usr/bin/akonadi_maildispatcher_agent --identifier akonadi_maildispatcher_agent
student 1530 0.0 0.8 351476 67804 ? S1 08:12 0:00 /usr/bin/akonadi_mailfilter_agent --identifier akonadi_mailfilter_agent
student 1531 0.0 0.4 144376 36524 ? S1 08:12 0:00 /usr/bin/akonadi_migration_agent --identifier akonadi_migration_agent
student 1532 0.0 0.7 317728 58360 ? S1 08:12 0:00 /usr/bin/akonadi_newmailnotifier_agent --identifier akonadi_newmailnotifier_agent
student 1533 0.0 0.7 343168 63856 ? S1 08:12 0:00 /usr/bin/akonadi_sendlater_agent --identifier akonadi_sendlater_agent
student 1601 0.0 0.3 130504 32776 ? S1 08:12 0:00 /usr/bin/kuiserver5
root 1605 0.0 0.0 31532 7876 ? Ss 08:12 0:00 /usr/sbin/cupsd -l
root 1607 0.1 1.0 172724 88596 ? Ssl 08:12 0:06 /usr/libexec/packagekitd
root 1838 0.0 0.0 0 0 ? S 08:49 0:00 [worker/3:1]
root 1845 0.0 0.0 0 0 ? S 08:50 0:00 [worker/2:2]
root 1939 0.0 0.0 0 0 ? S 09:09 0:00 [worker/u8:0]
root 1942 0.0 0.0 0 0 ? S 09:10 0:00 [worker/u8:3]
root 1952 0.0 0.0 0 0 ? S 09:11 0:00 [worker/0:2]
root 1960 0.0 0.0 0 0 ? S 09:15 0:00 [worker/u8:1]
student 2004 3.6 2.3 1321396 193748 ? S1 09:16 0:13 /usr/bin/amarok
student 2008 0.0 0.1 83180 15240 ? Ss 09:16 0:00 kdeinit4: kdeinit4 Running...
student 2010 0.0 0.2 89312 19168 ? S 09:16 0:00 kdeinit4: klauncher [kdeinit] --fd-9
student 2012 0.0 0.3 108896 27292 ? S 09:16 0:00 kdeinit4: kded4 [kdeinit]
student 2014 0.0 0.0 12508 2708 ? S 09:16 0:00 /usr/libexec/gsm_server
student 2057 0.0 0.5 436824 45072 ? S1 09:17 0:00 /usr/bin/knotifyp2
student 2087 0.0 0.2 88256 22272 ? S 09:17 0:00 /usr/libexec/kde4/kio_http_cache_cleaner
root 2114 0.0 0.0 0 0 ? S 09:17 0:00 [worker/1:0]
student 2121 0.3 0.6 172348 56672 ? Rl 09:20 0:00 /usr/bin/konsole
student 2125 0.0 0.0 14580 3996 pts/1 Ss 09:20 0:00 /bin/bash
root 2158 0.0 0.0 0 0 ? S 09:22 0:00 [worker/1:1]
student 2163 0.0 0.0 16672 3616 pts/1 R+ 09:23 0:00 ps -aux

root 1607 0.1 1.0 172724 88596 ? Ssl 08:12 0:06 /usr/libexec/packagekitd
root 1838 0.0 0.0 0 0 ? S 08:49 0:00 [worker/3:1]
root 1845 0.0 0.0 0 0 ? S 08:50 0:00 [worker/2:2]
root 1939 0.0 0.0 0 0 ? S 09:09 0:00 [worker/u8:0]
root 1942 0.0 0.0 0 0 ? S 09:10 0:00 [worker/u8:3]
root 1952 0.0 0.0 0 0 ? S 09:11 0:00 [worker/0:2]
root 1960 0.0 0.0 0 0 ? S 09:15 0:00 [worker/u8:1]
student 2004 3.6 2.3 1321396 193748 ? S1 09:16 0:13 /usr/bin/amarok
student 2008 0.0 0.1 83180 15240 ? Ss 09:16 0:00 kdeinit4: kdeinit4 Running...
student 2010 0.0 0.2 89312 19168 ? S 09:16 0:00 kdeinit4: klauncher [kdeinit] --fd-9
student 2012 0.0 0.3 108896 27292 ? S 09:16 0:00 kdeinit4: kded4 [kdeinit]
student 2014 0.0 0.0 12508 2708 ? S 09:16 0:00 /usr/libexec/gsm_server
student 2057 0.0 0.5 436824 45072 ? S1 09:17 0:00 /usr/bin/knotifyp2
student 2087 0.0 0.2 88256 22272 ? S 09:17 0:00 /usr/libexec/kde4/kio_http_cache_cleaner
root 2114 0.0 0.0 0 0 ? S 09:17 0:00 [worker/1:0]
student 2121 0.3 0.6 172348 56672 ? Rl 09:20 0:00 /usr/bin/konsole
student 2125 0.0 0.0 14580 3996 pts/1 Ss 09:20 0:00 /bin/bash
root 2158 0.0 0.0 0 0 ? S 09:22 0:00 [worker/1:1]
student 2163 0.0 0.0 16672 3616 pts/1 R+ 09:23 0:00 ps -aux

[student@localhost ~]$ uname -a
Linux 4.11.8-300.fc26.i686PAE
[student@localhost ~]$ uname -s
Linux
[student@localhost ~]$ uname -v
#1 SMP Thu Jun 29 20:38:21 UTC 2017
[student@localhost ~]$ uname -a
Linux localhost.localdomain 4.11.8-300.fc26.i686PAE #1 SMP Thu Jun 29 20:38:21 UTC 2017 i686 i686 i386 GNU/Linux
[student@localhost ~]$ pwd
/home/student
[student@localhost ~]$ ls
Desktop Documents Downloads filename.sh gowtham karthi79 'lab 2 OS.txt' Music os.txt Pictures Public stu Templates Videos wx wxcollege
[student@localhost ~]$ mv os.txt karthi79
[student@localhost ~]$ cat karthi79
cat: karthi79: is a directory
[student@localhost ~]$ ls karthi79
os.txt
[student@localhost ~]$ cat os.txt
cat: os.txt: No such file or directory
[student@localhost ~]$ cd karthi79
[student@localhost karthi79]$ cat os.txt

```

```

linux localhost.localdomain 4.11.8-300.fc26.i686+PAE #1 SMP Thu Jun 29 20:38:21 UTC 2017 i686 i686 i386 GNU/Linux
[student@localhost ~]$ pwd
/home/student
[student@localhost ~]$ ls
Desktop  Documents  Downloads  filename.sh  gowtham  karthi79  'lab 2 OS.txt'  Music  os.txt  Pictures  Public  stu  Templates  Videos  wx  wxcollege
[student@localhost ~]$ mv os.txt karthi79
[student@localhost ~]$ cat karthi79
cat: karthi79: is a directory
[student@localhost ~]$ ls karthi79
os.txt
[student@localhost ~]$ cat os.txt
cat: os.txt: No such file or directory
[student@localhost ~]$ cd karthi79
[student@localhost karthi79]$ cat os.txt
Hi hello, how are you?
Good Bye
[student@localhost karthi79]$ cd -
/home/student
[student@localhost ~]$ cat os.txt
cat: os.txt: No such file or directory
[student@localhost ~]$ cd karthi79
[student@localhost karthi79]$ wc os.txt
 2  7 32 os.txt
[student@localhost karthi79]$ cd -
/home/student
[student@localhost ~]$ top gowtham
top: unknown option "g"
Usage:
top -hu | -bcHIoSS -d secs -n max -u|U user -p pid(s) -o field -w [cols]
[student@localhost ~]$ head gowtham
r
e
c
c
o
l
l
e
g
e
[student@localhost ~]$ tail gowtham
e
t

```

```

0
1
1
e
e
[student@localhost ~]$ tail gowtham
e
t
h
n
d
a
l
a
n
[student@localhost ~]$ ping gowtham
ping: gowtham: Name or service not known
[student@localhost ~]$ cd karthi79
[student@localhost karthi79]$ ping os.txt
ping: os.txt: Name or service not known
[student@localhost karthi79]$ cd -
/home/student
[student@localhost ~]$ ifconfig
enp2s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
    inet 172.16.0.29  netmask 255.255.252.0  broadcast 172.16.11.255
    inet6 fe80::1354:ba27:ebcc:5d62  prefixlen 64  scopeid 0x20<link>
    ether f8:bc:12:90:45:7e  txqueuelen 1000  (Ethernet)
    RX packets 409135  bytes 342188533 (326.3 MiB)
    RX errors 0  dropped 109  overruns 0  frame 0
    TX packets 7862  bytes 424093 (462.0 KiB)
    TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING>  mtu 65536
    inet 127.0.0.1  netmask 255.0.0.0
    inet6 ::1  prefixlen 128  scopeid 0x10<host>
    loop  txqueuelen 1000  (Local Loopback)
    RX packets 0  bytes 0 (0.0 B)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 0  bytes 0 (0.0 B)
    TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0
[student@localhost ~]$ cd karthi79

```

```
[student@localhost karthi79]$ cd -
/home/student
[student@localhost ~]$ ifconfig
enp2s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 172.16.0.29 netmask 255.255.252.0 broadcast 172.16.11.255
    inet6 fe80::354c:ba27:ebcc:5d02 prefixlen 64 scopeid 0x20<link>
    ether f8:bc:12:90:45:7e txqueuelen 1000 (Ethernet)
    RX packets 409135 bytes 342188533 (326.3 MiB)
    RX errors 0 dropped 109 overruns 0 frame 0
    TX packets 7862 bytes 474073 (462.9 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

[student@localhost ~]$ cd karthi79
[student@localhost karthi79]$ sort -r os.txt
Hi hello, how are you?
Good Bye
[student@localhost karthi79]$ sort -n os.txt
Good Bye
Hi hello, how are you?
[student@localhost karthi79]$ sort -m os.txt
Hi hello, how are you?
Good Bye
[student@localhost karthi79]$ grep "h" os.txt
bash: grep: command not found
[student@localhost karthi79]$ grep "h" os.txt
Hi hello, how are you?
[student@localhost karthi79]$ tail os.txt
Hi hello, how are you?
Good Bye
[student@localhost karthi79]$ who;date
student pts/0      2025-01-25 08:12 (:0)
student pts/1      2025-01-25 09:20 (:0)
Sat Jan 25 09:31:14 IST 2025
[student@localhost karthi79]$ who&&date
```

```
    inet 172.16.0.29 netmask 255.255.252.0 broadcast 172.16.11.255
    inet6 fe80::354c:ba27:ebcc:5d02 prefixlen 64 scopeid 0x20<link>
    ether f8:bc:12:90:45:7e txqueuelen 1000 (Ethernet)
    RX packets 409135 bytes 342188533 (326.3 MiB)
    RX errors 0 dropped 109 overruns 0 frame 0
    TX packets 7862 bytes 474073 (462.9 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

[student@localhost ~]$ cd karthi79
[student@localhost karthi79]$ sort -r os.txt
Hi hello, how are you?
Good Bye
[student@localhost karthi79]$ sort -n os.txt
Good Bye
Hi hello, how are you?
[student@localhost karthi79]$ sort -m os.txt
Hi hello, how are you?
Good Bye
[student@localhost karthi79]$ grep "h" os.txt
bash: grep: command not found
[student@localhost karthi79]$ grep "h" os.txt
Hi hello, how are you?
[student@localhost karthi79]$ tail os.txt
Hi hello, how are you?
Good Bye
[student@localhost karthi79]$ who;date
student pts/0      2025-01-25 08:12 (:0)
student pts/1      2025-01-25 09:20 (:0)
Sat Jan 25 09:31:14 IST 2025
[student@localhost karthi79]$ who&&date
student pts/0      2025-01-25 08:12 (:0)
student pts/1      2025-01-25 09:20 (:0)
Sat Jan 25 09:31:31 IST 2025
[student@localhost karthi79]$
```

**RESULT:**

Thus, the program of basic Linux commands has been executed and the output has been verified.



**Ex. No: 2a**  
**Date: 28/1/25**

## Shell Script

### AIM:

To write a Shell script to display a basic calculator.

### PROGRAM:

```
#!/bin/bash

while true; do
    echo
    "=====
echo "    Basic    Calculator"    echo
    "=====
    echo "1. Addition" echo
    "2. Subtraction" echo
    "3. Multiplication" echo
    "4. Division" echo "5.
    Exit"
    echo -n "Choose an option (1-5): "
    read choice

    if [[ $choice -eq 5 ]]; then echo
        "Exiting Calculator. Goodbye!" exit
        0
    fi

    echo -n "Enter first number: "
    read num1 echo -n "Enter
second number: " read num2

    case $choice in
        1)result=$((num1 + num2)) echo "Result:
            $num1 + $num2 = $result"
            ;;
        2)result=$((num1 - num2)) echo "Result:
            $num1 - $num2 = $result"
            ;;
        3)result=$((num1 * num2)) echo "Result:
            $num1 * $num2 = $result"
```

---

;;

2116231801025



```

4) if [[ $num2 -eq 0 ]]; then
    echo "Error: Division by zero is not allowed!"
else

    result=$(awk "BEGIN {print $num1 / $num2}")
    echo "Result: $num1 / $num2 = $result"
fi
;;
*) echo "Invalid option! Please choose between 1-5."
;;
esac
echo "-----"
echo ""
done

```

## OUTPUT:

```

Choose an option (1-5): 3
Enter first number: 5
Enter second number: 8
Result: 5 * 8 = 40
-----

Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 2
Enter first number: 9
Enter second number: 5
Result: 9 - 5 = 4
-----

Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 4
Enter first number: 5
Enter second number: 9
Result: 5 / 9 = 0.555556
-----

Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 5

```

```
File Edit Selection View Go Run Terminal Help ← → Search
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS COMMENTS
karthick.S@karthick2 MINGW64 ~
$ cd "/c:/Users/karthick.S/OneDrive/Documents/0s"
karthick.S@karthick2 MINGW64 ~/OneDrive/Documents/0s
$ bash calc.sh

-----
Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 1
Enter first number: 5
Enter second number: 2
Result: 5 + 2 = 7
-----

-----
Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 2
Enter first number: 5
Enter second number: 8
Result: 5 - 8 = -3
-----

-----
Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 3
```

```
File Edit Selection View Go Run Terminal Help ← → Search
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS COMMENTS
-----
Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 2
Enter first number: 9
Enter second number: 5
Result: 9 - 5 = 4
-----

-----
Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 4
Enter first number: 5
Enter second number: 9
Result: 5 / 9 = 0.555556
-----

-----
Basic Calculator
-----
1. Addition
2. Subtraction
3. Multiplication
4. Division
5. Exit
Choose an option (1-5): 5
Exiting Calculator. Goodbye!

karthick.S@karthick2 MINGW64 ~/OneDrive/Documents/0s
$
```

**RESULT:**

CS23431

---

Thus, the basic calculator program was successfully implemented using shell scripting.

2116231801025

**Ex. No: 2b**

**Date: 28/2/25**

## Shell Script

### AIM:

To write a Shellsript to test given year is leap or not using conditional statement


### PROGRAM:

```
#!/bin/bash
```

```
read -p "Enter year: " year
```

```
if (( year % 4 == 0 && year % 100 != 0 )) || (( year % 400 == 0 )); then  
    echo "Year is a Leap Year"  
else  
    echo "Year is not a Leap Year"  
fi
```

### OUTPUT:

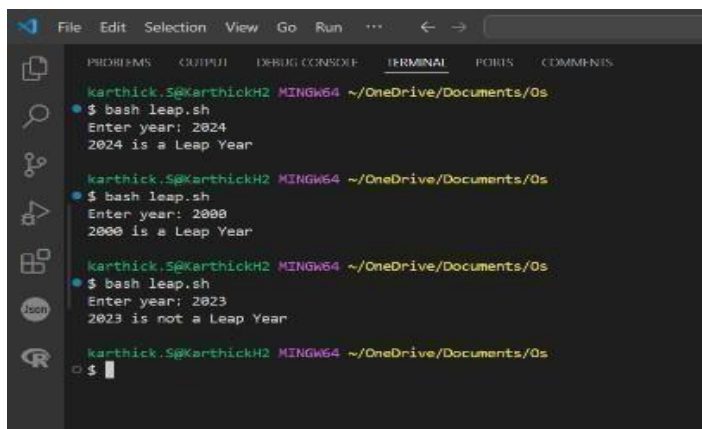

The screenshot shows a terminal window with the following content:

```
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/0s  
$ bash leap.sh  
Enter year: 2024  
2024 is a Leap Year  
  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/0s  
$ bash leap.sh  
Enter year: 2000  
2000 is a Leap Year  
  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/0s  
$ bash leap.sh  
Enter year: 2023  
2023 is not a Leap Year  
  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/0s  
$
```

### RESULT:

2116231801025

CS23431

Thus, the leap year program was successfully implemented using shell scripting.

**Ex. No: 3a Date:**  
**8/2/25**

## Shell Script – Reverse of Digit


### AIM:

To write a Shell script to reverse a given digit using looping statement.

### PROGRAM:

```
#!/bin/bash read -p "Enter a  
number: " num  
  
reverse=0 while [ $num -gt 0 ]; do  
digit=$(( num % 10 ))  
reverse=$(( reverse * 10 + digit ))  
num=$(( num / 10 ))  
done  
  
echo "Reversed number: $reverse"
```

### OUTPUT:

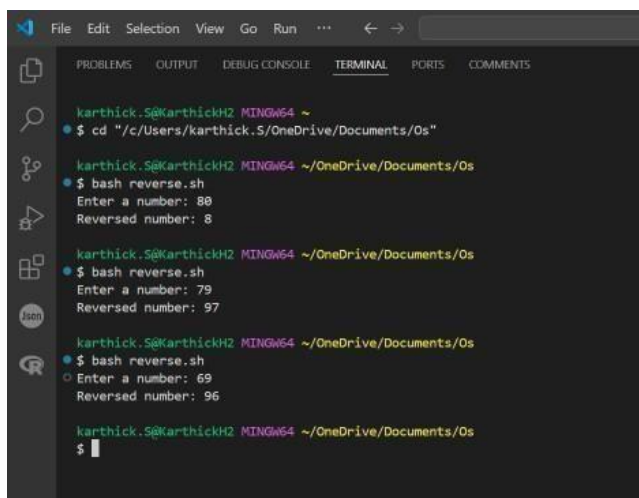A screenshot of a Visual Studio Code terminal window. The terminal shows the execution of a shell script named 'reverse.sh'. The user enters a number, and the script outputs the reversed number. The terminal output is as follows:

```
karthick.S@KarthickH2 MINGW64 ~  
$ cd "/c/Users/karthick.S/OneDrive/Documents/Os"  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os  
$ bash reverse.sh  
Enter a number: 88  
Reversed number: 8  
  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os  
$ bash reverse.sh  
Enter a number: 79  
Reversed number: 97  
  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os  
$ bash reverse.sh  
Enter a number: 69  
Reversed number: 96  
  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os  
$
```

### RESULT:

The shell script to reverse a given digit is successfully implemented.

**Ex. No: 3b Date:**

**8/2/25**

## Shell Script – Fibonacci Series

**AIM:**

To write a Shell script to generate a Fibonacci series using a for loop.


**PROGRAM:**

```
#!/bin/bash

read -p "Enter the number of terms: " n
a=0
b=1

echo "Fibonacci Series:"
for (( i=0; i<n; i++ )); do
echo -n "$a "
temp=$((a + b))
a=$b b=$temp
done
echo
```

**OUTPUT**

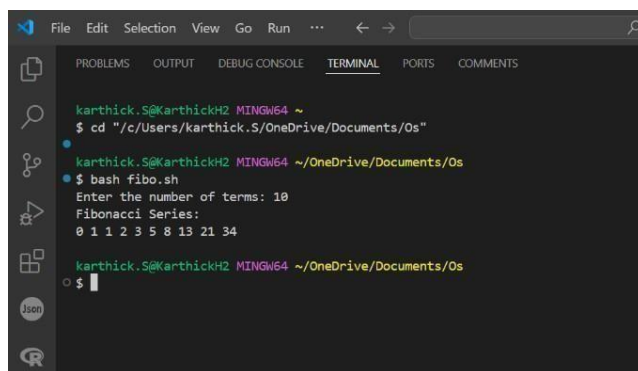A screenshot of a Windows terminal window with a dark background. The terminal shows the execution of a shell script. The prompt is 'karthick.S@KarthickH2 MINGW64 ~'. The user enters 'cd "/>

**RESULT:**

2116231801025

CS23431



---

The Shell Script to generate the Fibonacci series is successfully implemented.

**RESULT:**

2116231801025

CS23431

---

**Ex. No: 4a**

**Date: 13/2/25**

## **EMPLOYEE AVERAGE PAY**

### **AIM:**

To find out the average pay of all employees whose salary is more than 6000 and no. of days worked is more than 4.

### **ALGORITHM:**

1. Create a flat file emp.dat for employees with their name, salary per day and number of days worked and save it.
2. Create an awk script emp.awk
3. For each employee record do
  - a. If the Salary is greater than 6000 and number of days worked is more than 4, then print the name and salary earned
  - b. Compute total pay of employee
4. Print the total number of employees satisfying the criteria and their average pay.

### **PROGRAM:**

```
#!/usr/bin/awk -f
```

```
BEGIN {
    count = 0; total_pay
    = 0;
}


{ salary = $2;
  days = $3;

  if (salary > 6000 && days > 4)
  { pay = salary * days;
    print "Employee:", $1, "Total Pay:",
    pay; total_pay += pay; count++;
  }
}

END {
  if (count > 0) { avg_pay = total_pay
    / count; print "\nTotal
    Employees:", count; print "Total
    Pay:", total_pay; print "Average
    Pay:", avg_pay;
  } else { print "No employees satisfy the
    criteria.";
  }
}
```

**INPUT: John**  
**7000 10**  
**Alice 5000 12**  
**Bob 8000 9**  
**Mike 6500 6**

**OUTPUT:**

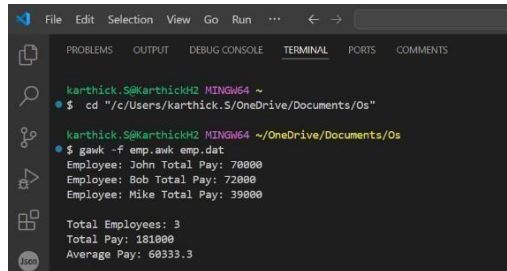

```
karthick.S@KarthickH2 MINGW64 ~  
$ cd "/c:/Users/karthick.S/OneDrive/Documents/Os"  
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os  
$ gawk -f emp.awk emp.dat  
Employee: John Total Pay: 70000  
Employee: Bob Total Pay: 72000  
Employee: Mike Total Pay: 39000  
  
Total Employees: 3  
Total Pay: 181000  
Average Pay: 60333.3
```

**RESULT:**

To find the average salary whose salary is above 6000 is successfully implemented.

**Ex. No: 4b**  
**Date: 13/2/25**

## **RESULTS OF EXAMINATION**

### **AIM:**

To print the pass/fail status of a student in a class.

### **ALGORITHM:**

1. Read the data from file
2. Get a data from each column
3. Compare the all subject marks column
  - a. If marks less than 45 then print Fail
  - b. else print Pass


### **PROGRAM:**

```
//marks.awk
#!/usr/bin/gawk -f
{ name = $1;
  pass = 1;
  for (i = 2; i <= NF; i++)
    { if ($i < 45) { pass
      = 0; break;}
    } if(pass) { print
name, "Pass";
  } else { print name,
"Fail";} }
```

### **INPUT:**

```
//marks.dat
John 50 60 45 70 80
Alice 40 55 30 65 75
Bob 80 85 90 78 88
Mike 35 40 50 60 45
```

## OUTPUT:

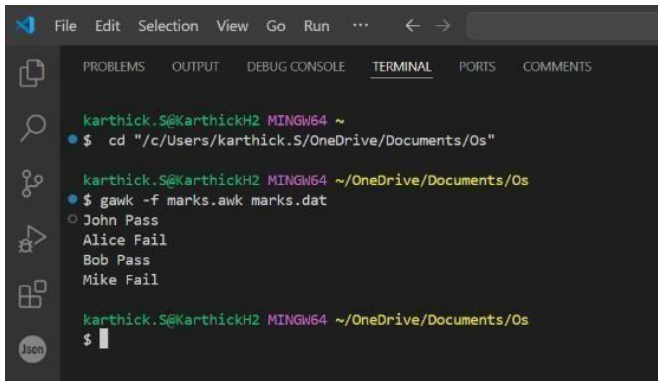

```
karthick.S@KarthickH2 MINGW64 ~
$ cd "/c:/Users/karthick.S/OneDrive/Documents/Os"

karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os
$ gawk -f marks.awk marks.dat
John Pass
Alice Fail
Bob Pass
Mike Fail

karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os
$
```

## RESULT:

2116231801025

CS23431

To print the Pass/Fail Status of a student in a class is successfully implemented.

Ex. No: 5  
Date: 20/2/25

## System Calls Programming

### AIM:

To experiment system calls using fork(), execlp() and pid() functions.

### ALGORITHM:

1. **Start**
2. **Include Header Files**
  - Include stdio.h for input/output functions
  - Include stdlib.h for general utility functions
3. **Variable Declaration** ○ Declare an integer variable pid to store the process ID returned by fork()
4. **Create a New Process** ○ Call the fork() function and assign its return value to pid
  - If fork() returns:
    - -1: Process creation failed
    - 0: This is the **child** process
    - A positive integer: This is the **parent** process
5. **Print Statement Executed by Both Processes**
  - Print: "THIS LINE EXECUTED TWICE"
6. **Check for Process Creation Failure** ○ If pid == -1:
  - Print: "CHILD PROCESS NOT CREATED"
  - Exit the program using exit(0)
7. **Child Process Execution Block** ○ If pid == 0:
  - Print:
  - "Process ID of child: " followed by getpid()
  - "Parent Process ID of child: " followed by getppid()
8. **Parent Process Execution Block** ○ If pid > 0:
  - Print:
  - "Process ID of parent: " followed by  
getpid()
  - "Parent's Parent Process ID: " followed  
by getppid()
9. **Final Print Statement (Executed by Both Processes)**
  - Print: objectives

IT CAN BE EXECUTED TWICE

CS23431

10. **End**

2116231801025





**PROGRAM:**

```
#include <stdio.h> #include
<stdlib.h>
#include <unistd.h>


int main() { int
    pid; pid =
    fork();
    printf("This Line Executed Twice\n");
if (pid < 0) { printf("Child Process Not
    Created\n");
    exit(1);
}

if (pid == 0) { printf("Child Process:\n");
    printf("Process ID:  %d\n", getpid());
    printf("Parent Process ID:  %d\n",
    getppid()); execlp("/bin/ls", "ls", NULL);
    perror("execlp failed"); exit(1);
} else { // Parent process printf("Parent
    Process:\n");      printf("Process
    ID: %d\n", getpid());
    printf("Parent's Parent Process ID:  %d\n",  getppid());
    printf("Child Process Completed\n");
} printf("It can be executed

twice\n");

return 0;
}
```

## OUTPUT:

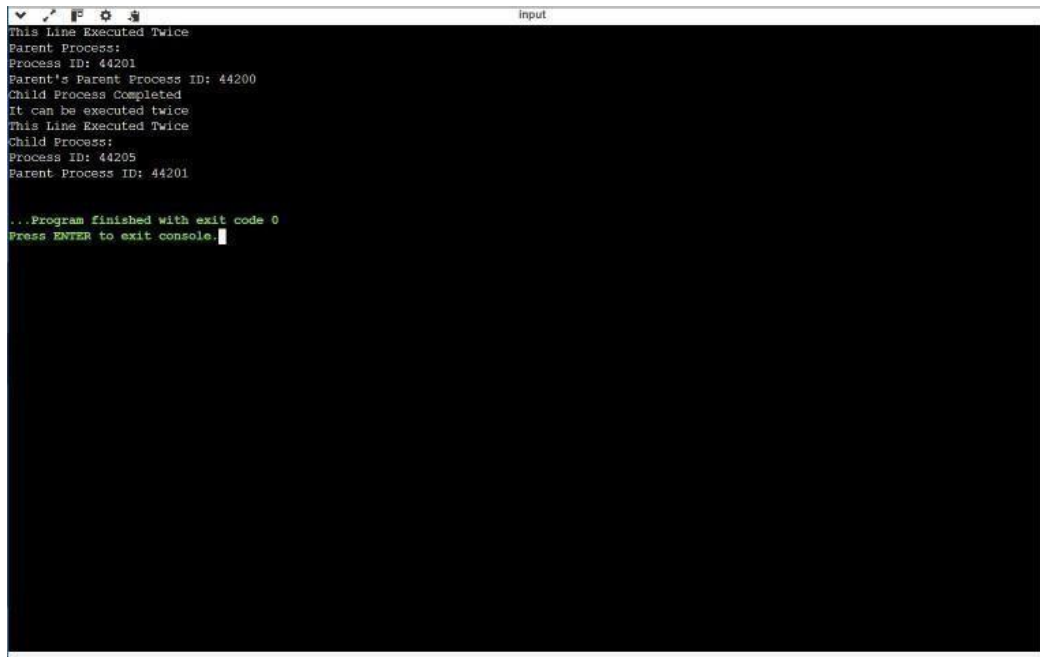A screenshot of a terminal window titled 'input'. The window has a dark background with light green text. The output shows a sequence of process-related messages: 'This Line Executed Twice', 'Parent Process:', 'Process ID: 44201', 'Parent's Parent Process ID: 44200', 'Child Process Completed', 'It can be executed twice', 'This Line Executed Twice', 'Child Process:', 'Process ID: 44205', and 'Parent Process ID: 44201'. At the bottom, it says '...Program finished with exit code 0' and 'Press ENTER to exit console.' followed by a cursor.

```
input
This Line Executed Twice
Parent Process:
Process ID: 44201
Parent's Parent Process ID: 44200
Child Process Completed
It can be executed twice
This Line Executed Twice
Child Process:
Process ID: 44205
Parent Process ID: 44201

...Program finished with exit code 0
Press ENTER to exit console.
```

## RESULT:

To Program is implemented using fork(),execlp() and pid() Functions.



**Ex. No: 6a**  
**Date: 20/2/25**

## **FIRST COME FIRST SERVE**

**AIM:**

To implement First-come First- serve (FCFS) scheduling technique

**ALGORITHM:**

1. Get the number of processes from the user.
2. Read the process name and burst time.
3. Calculate the total process time.
4. Calculate the total waiting time and total turnaround time for each process
5. Display the process name & burst time for each process.
6. Display the total waiting time, average waiting time, turnaround time.

**PROGRAM:**

```
#include <stdio.h>

int main() { int pid[15], bt[15],
             wt[15], n; float twt = 0, ttat
             = 0;

    printf("Enter the number of processes: ");
    scanf("%d", &n);

    printf("Enter process ID of all the
    processes:\n"); for (int i = 0; i < n; i++)
    { scanf("%d", &pid[i]);
    }

    printf("Enter burst time of all the
    processes:\n"); for (int i = 0; i < n; i++)
    { scanf("%d", &bt[i]);
    }

    wt[0] = 0;
    // Calculate waiting time for all other
    processes for (int i = 1; i < n; i++) { wt[i] =
    wt[i - 1] + bt[i - 1];
    } printf("\nProcess ID\tBurst Time\tWaiting Time\tTurnaround
    Time\n");

    for (int i = 0; i < n; i++)
    { int tat = bt[i] + wt[i];
      twt += wt[i]; ttat +=
```

---

tat;

2116231801025

```

printf("%d\t%d\t%d\t%d\t%d\n", pid[i], bt[i], wt[i], tat); }

printf("\nAverage waiting time = %.2f\n", twt / n); printf("Average
turnaround time = %.2f\n", ttat / n);

return 0;
}

```

## OUTPUT:

```

karthick@karthick02 MINGW64 ~/OneDrive/Documents/0s
$ ./Ex-a.exe
bash: ./Ex-a.exe: No such file or directory

karthick@karthick02 MINGW64 ~/OneDrive/Documents/0s
$ ls
calc.sh*  emp.dat  Ex-6a.c  Ex-6b.c  Ex-6c.c  Ex-6d.c  fibo.sh*  marks.awk*  Outputs/
emp.awk*  Ex-5.c  Ex-6a.exe*  Ex-6b.exe*  Ex-6c.exe*  Ex-6d.exe*  leap.sh*  marks.dat  reverse.sh*

karthick@karthick02 MINGW64 ~/OneDrive/Documents/0s
$ ./Ex-6a.exe
Enter the number of processes: 3
Enter process id of all the processes: 1 2 3
Enter burst time of all the processes: 2 25 3
Process ID    Burst time    Waiting time    Turnaround time
1              2              0                2
2             25              2              27
3              3             27              30
Avg. waiting time= 9.666667
Avg. turnaround time= 19.666666
karthick@karthick02 MINGW64 ~/OneDrive/Documents/0s
$

```

## RESULT:

The Program of first come first serve is successfully implemented.

**Ex. No: 6b**  
**Date: 20/2/25**

## **SHORTEST JOB FIRST**

**AIM:**

To implement the Shortest Job First (SJF) scheduling technique

**ALGORITHM:**

1. Declare the structure and its elements.
2. Get a number of processes as input from the user.
3. Read the process name, arrival time and burst time
4. Initialize waiting time, turnaround time & flag of read processes to zero.
5. Sort based on the burst time of all processes in ascending order.
6. Calculate the waiting time and turnaround time for each process.
7. Calculate the average waiting time and average turnaround time.
8. Display the results.

**PROGRAM:**

```
#include <stdio.h>

int main() { int A[100][4]; // A[i][0]=PID, A[i][1]=BT, A[i][2]=WT,
A[i][3]=TAT int i, j, n, total = 0, index, temp;
float avg_wt, avg_tat;

printf("Enter number of processes: ");
scanf("%d", &n);

printf("Enter      Burst
Time:\n"); for (i = 0; i < n;
i++) { printf("P%d: ", i + 1);
scanf("%d", &A[i][1]);
A[i][0] = i + 1; // Assign process ID }

for (i = 0; i < n; i++)
{ index = i;
for (j = i + 1; j < n; j++) { if
(A[j][1] < A[index][1])
index = j;
}

temp = A[i][1]; A[i][1]
= A[index][1];
```


2116231801025

CS23431

2116231801025

CS23431





```

    A[index][1] = temp;

    temp = A[i][0]; A[i][0]
    = A[index][0];
    A[index][0] = temp;
}

A[0][2] = 0; for (i = 1; i
< n; i++) { A[i][2] = 0;
for (j = 0; j < i; j++) {
    A[i][2] += A[j][1];
}
    total += A[i][2];
}
avg_wt = (float) total / n;

total = 0;
printf("\nProcess\tBT\tWT\tTAT\n");
for (i = 0; i < n; i++) {
    A[i][3] = A[i][1] + A[i][2]; // TAT = BT + WT
    total += A[i][3];
    printf("P%d\t%d\t%d\t%d\n", A[i][0], A[i][1], A[i][2], A[i][3]);
}
avg_tat = (float) total / n;

printf("\nAverage Waiting Time = %.2f", avg_wt); printf("\nAverage
Turnaround Time = %.2f\n", avg_tat);

return 0;
}

```

## OUTPUT:

```

karthick.S@karthick:2 MINGW64 ~
$ $ cd "/c:/Users/karthick.s/OneDrive/Documents/0s"
bash: $: command not found

karthick.S@karthick:2 MINGW64 ~
$ $ cd "/c:/Users/karthick.s/OneDrive/Documents/0s"

karthick.S@karthick:2 MINGW64 ~/OneDrive/Documents/0s
$ gcc Ex-6b.c -o Ex-6b.exe

karthick.S@karthick:2 MINGW64 ~/OneDrive/Documents/0s
$ ./Ex-6b.exe
Enter number of process: 4
Enter burst time:
P1: 2
P2: 5
P3: 7
P4: 1

P.    BT    WT    TAT
P4    1     0     1
P1    2     1     3
P2    5     3     8
P3    7     8    15
Average Waiting Time= 3.000000
Average Turnaround Time= 6.750000
karthick.S@karthick:2 MINGW64 ~/OneDrive/Documents/0s
$

```



---

**RESULT:**

The Program Shortest Job First is successfully implemented.

2116231801025



**Ex. No: 6c**

**Date: 22/2/25**

## **PRIORITY SCHEDULING**

**AIM:**

To implement a priority scheduling technique

**ALGORITHM:**

1. Get the number of processes from the user.
2. Read the process name, burst time and priority of the process.
3. Sort based on burst time of all processes in ascending order based on priority
4. Calculate the total waiting time and total turnaround time for each process
5. Display the process name & burst time for each process.
6. Display the total waiting time, average waiting time, turnaround time.

**PROGRAM:**

```
#include <stdio.h>
#include <stdlib.h>

void swap(int *a, int *b)
{
    int temp = *a; *a = *b;
    *b = temp;
}

int main()
{
    int n;
    printf("Enter number of processes: ");
    scanf("%d", &n);

    int *burst = (int*)malloc(n * sizeof(int));
    int *priority = (int*)malloc(n * sizeof(int));
    int *pid = (int*)malloc(n * sizeof(int));
    int total_wait = 0, total_turnaround = 0;

    for (int i = 0; i < n; i++) {
        printf("Enter Burst Time and Priority for Process %d: ", i + 1);
        scanf("%d %d", &burst[i], &priority[i]);
        pid[i] = i + 1;
    }

    for (int i = 0; i < n - 1; i++) {
        for (int j = i + 1; j < n; j++) {
            if (priority[j] > priority[i]) {
                swap(&priority[i], &priority[j]);
                swap(&burst[i], &burst[j]);
                swap(&pid[i], &pid[j]);
            }
        }
    }

    // Calculating waiting and turnaround times
    int current_time = 0;
    for (int i = 0; i < n; i++) {
        current_time += burst[i];
        total_wait += (current_time - burst[i]);
        total_turnaround += current_time;
    }

    printf("Total Waiting Time: %d\n", total_wait);
    printf("Average Waiting Time: %d\n", total_wait / n);
    printf("Total Turnaround Time: %d\n", total_turnaround);
    printf("Average Turnaround Time: %d\n", total_turnaround / n);
}
```

CS23431

---

2116231801025

2116231801025

CS23431

---

```

}

int wait_time = 0;
printf("\nProcess   Burst Time   Wait Time   Turnaround Time\n");

for (int i = 0; i < n; i++) { int
    turnaround_time = wait_time + burst[i];
    total_wait += wait_time; total_turnaround
    += turnaround_time;

    printf("P%d      %d      %d      %d\n", pid[i], burst[i], wait_time, turnaround_time);

    wait_time += burst[i];
}


printf("\nAverage Waiting Time: %.2f\n", (float)total_wait / n); printf("Average
Turnaround Time: %.2f\n", (float)total_turnaround / n);

free(burst);
free(priority);
free(pid);

return 0;
}

```

## OUTPUT:

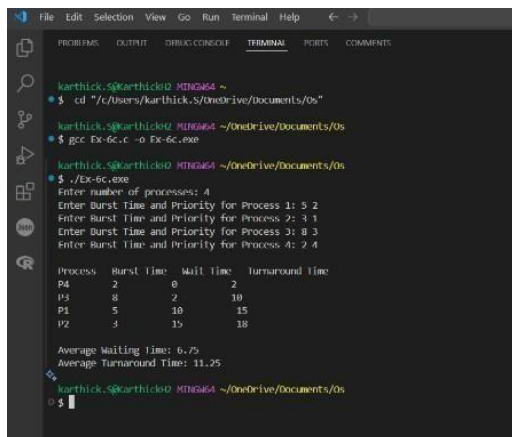

```

karthick.S@karthickD: ~$ cd "/c:/Users/karthick.S/OneDrive/Documents/05"
karthick.S@karthickD: ~/OneDrive/Documents/05$ gcc Ex-6c.c -o Ex-6c.exe
karthick.S@karthickD: ~/OneDrive/Documents/05$ ./Ex-6c.exe
Enter number of processes: 4
Enter Burst Time and Priority for Process 1: 5 2
Enter Burst Time and Priority for Process 2: 3 1
Enter Burst Time and Priority for Process 3: 8 3
Enter Burst Time and Priority for Process 4: 2 4
Process  Burst Time  Wait Time  Turnaround Time
P4       2           0           2
P5       8           2          10
P1       5          10          15
P2       3          15          18
Average Waiting Time: 6.75
Average Turnaround Time: 11.25
karthick.S@karthickD: ~/OneDrive/Documents/05$

```

## RESULT:

The Program of Priority scheduling is successfully implemented.

Ex. No: 6d

2116231801025

CS23431



### AIM:

To implement the round-robin (RR) scheduling technique

### ALGORITHM:

1. Declare the structure and its elements.
2. Get a number of processes and Time quantum as input from the user.
3. Read the process name, arrival time and burst time
4. Create an array rem\_bt[] to keep track of the remaining burst time of processes which is initially copy of bt[] (burst times array)
5. Create another array wt[] to store waiting times of processes. Initialize this array as 0.
6. Initialize time : t = 0
7. Keep traversing all processes while all processes are not done. Do the following for i'th process if it is not done yet.  
a- If rem\_bt[i] > quantum (i) t = t + quantum (ii) bt\_rem[i] -= quantum;  
b- Else // Last cycle for this process  
(i) t = t + bt\_rem[i];  
(ii) wt[i] = t - bt[i]  
(iii) bt\_rem[i] = 0; // This process is over
8. Calculate the waiting time and turnaround time for each process.
9. Calculate the average waiting time and average turnaround time.
10. Display the results.

### PROGRAM:

```
#include <stdio.h>
#include <stdlib.h>

int main() { int n,
time_quantum;
printf("Enter number of processes: ");
scanf("%d", &n);

int *arrival = (int*)malloc(n * sizeof(int)); int
*burst = (int*)malloc(n * sizeof(int)); int
*remaining = (int*)malloc(n * sizeof(int));
int wait_time = 0, turnaround_time = 0, total = 0, x = n;

for (int i = 0; i < n; i++) { printf("Enter arrival time and burst time for
process %d: ", i + 1); scanf("%d %d", &arrival[i], &burst[i]);
remaining[i] = burst[i];
}

printf("Enter time quantum: ");
scanf("%d", &time_quantum);printf("\nProcess\tBurst\tTurnaround\tWaiting\n");

for (int i = 0; x != 0;) {
```

```

    if (remaining[i] > 0) { if (remaining[i]
        <= time_quantum) { total +=
        remaining[i]; remaining[i] = 0; x--;
        printf("P%d\t%d\t%d\t%d\n", i + 1, burst[i], total - arrival[i], total - arrival[i] - burst[i]);
        wait_time += total - arrival[i] - burst[i]; turnaround_time += total - arrival[i];
        } else { remaining[i] -=
        time_quantum;
        total += time_quantum;
        }
    }
}

i = (i + 1) % n;
}

printf("\nAverage Waiting Time: %.2f", (float)wait_time / n); printf("\nAverage
Turnaround Time: %.2f\n", (float)turnaround_time / n);

free(arrival);
free(burst);
free(remaining);

return 0;
}

```

## OUTPUT:

```

karthick.S@KarthickH2 MINGW64 ~
$ cd "/c:/Users/karthick.S/OneDrive/Documents/Os"

karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os
$ ./Ex-6d.exe
Enter number of processes: 3
Enter arrival time and burst time for process 1: 0 4
Enter arrival time and burst time for process 2: 1 3
Enter arrival time and burst time for process 3: 2 5
Enter time quantum: 2

Process Burst   Turnaround   Waiting
P1      4          8           4
P2      3          8           5
P3      5         10           5

Average Waiting Time: 4.67
Average Turnaround Time: 8.67

karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/Os
$ |

```



**RESULT:**

CS23431

The Program of Round Robin Scheduling is successfully implemented.

2116231801025



**Ex. No: 7**

**Date: 27/2/25**

## **IPC USING SHARED MEMORY**

### **AIM:**

To write a C program to do Inter-Process Communication (IPC) using shared memory between the sender process and the receiver process.

### **ALGORITHM:**

#### **sender**

1. Set the size of the shared memory segment
2. Allocate the shared memory segment using shmget
3. Attach the shared memory segment using shmat
4. Write a string to the shared memory segment using sprintf
5. Set delay using sleep
6. Detach shared memory segment using shmdt

#### **receiver**

1. Set the size of the shared memory segment
2. Allocate the shared memory segment using shmget
3. Attach the shared memory segment using shmat 4. Print the shared memory contents sent by the sender process.
5. Detach shared memory segment using shmdt

### **PROGRAM:**

#### **SENDER**

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/ipc.h>
#include <sys/shm.h>

#include <unistd.h>

#define SHMSIZE
1024

typedef struct { int
    ready;
    char message[SHMSIZE];
} SharedMemory;

int main() { key_t key =
```

CS23431

```
flok("sender.c", 65);
```

2116231801025





```

int shmid;
SharedMemory *shm;

shmid = shmget(key, sizeof(SharedMemory), 0666 | IPC_CREAT);
if (shmid == -1) { perror("shmget failed");
    exit(1);
}

shm = (SharedMemory *)shmat(shmid, NULL, 0);
if (shm == (SharedMemory *)-1)
    { perror("shmat failed");
      exit(1);
    }

printf("Sender: Enter a message to send to receiver: "); fgets(shm-
>message, SHMSIZE, stdin);

shm->message[strcspn(shm->message, "\n")] = '\0';

shm->ready = 1;

sleep(5);

if (shmdt(shm) == -1)
    { perror("shmdt failed");
      exit(1);
    }

return 0;
}

```

## RECEIVER

```

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/ipc.h>
#include <sys/shm.h>

#include <unistd.h>

#define SHMSIZE

1024

typedef struct { int
    ready;
    char message[SHMSIZE];
} SharedMemory;

```

```
int main() { key_t key =  
    ftok("sender.c", 65);
```

2116231801025

```

int shmid;
SharedMemory *shm;

shmid = shmget(key, sizeof(SharedMemory), 0666 | IPC_CREAT); if
(shmid == -1) {
    perror("shmget failed");
    exit(1);
}

shm = (SharedMemory *)shmat(shmid, NULL, 0);
if (shm == (SharedMemory *)-1) {
    perror("shmat failed");
    exit(1);
}

while (shm->ready == 0) {
    sleep(1);
} printf("Receiver: Message received from sender: %s\n", shm->message);


if (shmdt(shm) == -1) {
    perror("shmdt failed");
    exit(1);
}

if (shmctl(shmid, IPC_RMID, NULL) == -1) {
    perror("shmctl failed");
    exit(1);
}

return 0;
}

```

## OUTPUT:

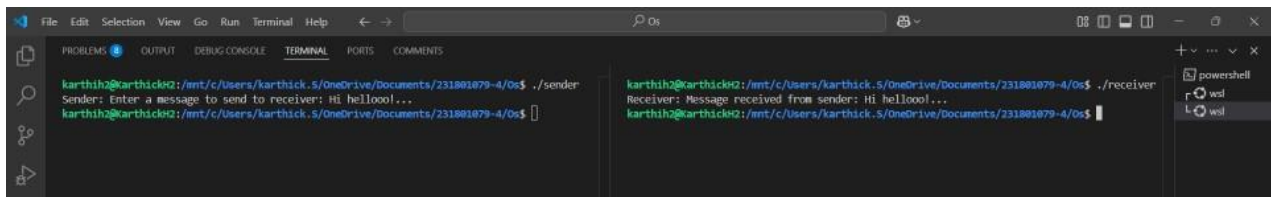

The screenshot shows a Visual Studio Code terminal window with two panes. The left pane shows the output of the sender process, and the right pane shows the output of the receiver process. The sender process prompts the user to enter a message, and the receiver process prints the received message.

```

karthih2@karthickh2:/mnt/c/Users/karthick.S/OneDrive/Documents/231001079-4/0s$ ./sender
Sender: Enter a message to send to receiver: Hi hellool...
karthih2@karthickh2:/mnt/c/Users/karthick.S/OneDrive/Documents/231001079-4/0s$

karthih2@karthickh2:/mnt/c/Users/karthick.S/OneDrive/Documents/231001079-4/0s$ ./receiver
Receiver: Message received from sender: Hi hellool...
karthih2@karthickh2:/mnt/c/Users/karthick.S/OneDrive/Documents/231001079-4/0s$

```

---

**RESULT:**

CS23431

2116231801025

CS23431

---

The IPC Program with Shared Memory is Successfully Implemented.

2116231801025

**Ex. No: 8**

**Date:** 08/3/25

## **PRODUCER CONSUMER USING SEMAPHORES**

### **AIM:**

To write a program to implement solutions to producer consumer problem using semaphores.

### **ALGORITHM:**

1. Initialize semaphore empty, full and mutex.
2. Create two threads- the producer thread and the consumer thread.
3. Wait for target thread termination.
4. Call sem\_wait on empty semaphore followed by mutex semaphore before entry into critical section.
5. Produce/Consume the item in the critical section.
6. Call sem\_post on mutex semaphore followed by full semaphore 7. before exiting the critical section.
8. Allow the other thread to enter its critical section.
9. Terminate after looping ten times in producer and consumer Threads each.

### **PROGRAM:**

```
#include <stdio.h>
#include <stdlib.h>
#include <pthread.h>

int mutex = 1;
int full = 0; int empty
= 10, x = 0;
pthread_mutex_t lock;

void *producer(void *arg)
{ pthread_mutex_lock(&lock);

    if (empty != 0) {
        --mutex;
        ++full; --
        empty; x++;
        printf("\nProducer produces item %d\n", x);
        ++mutex;
    } else { printf("Buffer is
        full!\n");
    }

    pthread_mutex_unlock(&lock);
    return NULL;
```

```

}

void *consumer(void *arg)
{ pthread_mutex_lock(&lock);

  if (full != 0) {
    --mutex;
    --full;
    ++empty;
    printf("\nConsumer consumes item %d\n", x); x--;
    ;
    ++mutex;
  } else { printf("Buffer is
empty!\n"); }

  pthread_mutex_unlock(&lock);
  return NULL;
}

int main()
{ int n, i; pthread_t prod_thread,
  cons_thread;
  pthread_mutex_init(&lock, NULL);

  printf("\n1. Press 1 for Producer"
        "\n2. Press 2 for Consumer"
        "\n3. Press 3 for Exit\n");

  for (i = 1; i > 0; i++)
  { printf("\nEnter your choice: ");
    scanf("%d", &n);

    switch (n)
    { case 1:
      if (mutex == 1 && empty != 0)
        { pthread_create(&prod_thread, NULL, producer,
          NULL); pthread_join(prod_thread, NULL);
        } else { printf("Buffer is
full!\n");
        }
      break;

      case 2:
      if (mutex == 1 && full != 0)
        { pthread_create(&cons_thread, NULL, consumer,
          NULL); pthread_join(cons_thread, NULL);
        } else { printf("Buffer is
empty!\n");
        }
    }
  }
}

```



```

        } break;

        case 3:
            pthread_mutex_destroy(&lock);
            exit(0); break;
        default: printf("Invalid choice! Please enter a valid
option.\n"); }
    }

    return 0;
}

```

## OUTPUT:

```

input
1. Press 1 for Producer
2. Press 2 for Consumer
3. Press 3 for Exit
Enter your choice: 1
Producer produces item 1
Enter your choice: 2
Consumer consumes item 1
Enter your choice: 2
Buffer is empty!
Enter your choice: 1
Producer produces item 1
Enter your choice: 1
Producer produces item 2
Enter your choice: 1
Producer produces item 3
Enter your choice: 1
Producer produces item 4
Enter your choice: 1
Buffer is full!
Enter your choice:

```

## RESULT:

The Producer Consumer Program using Semaphore is Successfully Implemented.

**Ex. No.: 9**

**Date:** 27/3/25

## **DEADLOCK AVOIDANCE**

### **AIM:**

To find out a safe sequence using Banker's algorithm for deadlock avoidance.

### **ALGORITHM:**

1. Initialize work=available and finish[i]=false for all values of i 2.

Find an i such that both:

finish[i]=false and Needi<= work 3.

If no such i exists go to step 6

4. Compute work=work+allocationi

5. Assign finish[i] to true and go to step 2

6. If finish[i]==true for all i, then print safe sequence

7. Else print there is no safe sequence.

### **PROGRAM:**

```
#include <stdio.h>
```

```
#include <stdbool.h>
```

```
#define MAX 10
```

```
void findSafeSequence(int n, int m, int available[], int max[][MAX], int allocation[][MAX]) { int  
    work[MAX], finish[MAX] = {0}, safeSeq[MAX], need[MAX][MAX]; for (int i = 0; i < m;  
    i++) work[i] = available[i]; for (int i = 0; i < n; i++) for (int j = 0; j < m; j++) need[i][j] =  
    max[i][j] - allocation[i][j];
```

```
    int count = 0; while (count < n) { bool found = false; for (int i =  
    0; i < n; i++) { if (!finish[i]) { bool canAllocate = true; for (int j  
    = 0; j < m; j++) if (need[i][j] > work[j]) { canAllocate = false;  
    break; }
```

```
        if (canAllocate) { for (int j = 0; j < m; j++) work[j]  
            += allocation[i][j]; safeSeq[count++] = i;  
            finish[i] = 1; found  
            = true;
```

```
        }
```

```
    }
```

```
}
```

```

        if (!found) { printf("No safe sequence.\n"); return; }
    }
    printf("Safe sequence: ");
    for (int i = 0; i < n; i++) printf("P%d ", safeSeq[i]);
    printf("\n");
}

int main() {
    int n, m, available[MAX], max[MAX][MAX], allocation[MAX][MAX];

    printf("Enter processes and resources: ");
    scanf("%d %d", &n, &m); while
    (getchar() != '\n');

    printf("Enter available resources: "); for (int i = 0; i
    < m; i++) scanf("%d", &available[i]); while
    (getchar() != '\n');

    printf("Enter Max matrix: \n"); for (int i = 0; i < n;
    i++) for (int j = 0; j < m; j++) scanf("%d",
    &max[i][j]);
    while (getchar() != '\n');

    printf("Enter Allocation matrix: \n"); for (int i = 0; i < n;
    i++) for (int j = 0; j < m; j++) scanf("%d",
    &allocation[i][j]);
    while (getchar() != '\n');

    findSafeSequence(n, m, available, max, allocation);
    return 0;
}

```

## OUTPUT:

```

karthick.S@karthick02 HUNG464 ~/OneDrive/Documents/231801879-4/0s
$ gcc Ex-9.c -o Ex-9_new
karthick.S@karthick02 HUNG464 ~/OneDrive/Documents/231801879-4/0s
$ ./Ex-9
Enter processes and resources: 5 3
Enter available resources: 3 3 2
Enter Max matrix: 7 5 3
3 2 2
9 0 2
2 2 2
4 3 3
Enter Allocation matrix: 0 1 0
2 0 0
3 0 2
2 1 1
0 0 2
Safe sequence: P1 P3 P4 P0 P2
karthick.S@karthick02 HUNG464 ~/OneDrive/Documents/231801879-4/0s
$

```



---

**RESULT:**

The Safe Sequence is found using Banker's Algorithm for Deadlock Avoidance.

2116231801025

**Ex. No: 10a**  
**Date: 29/3/25**

## **BEST FIT**

**AIM:**

To implement Best Fit memory allocation technique using Python.

**ALGORITHM:**

1. Input memory blocks and processes with sizes
2. Initialize all memory blocks as free.
3. Start by picking each process and find the minimum block size that can be assigned to current process
4. If found then assign it to the current process.
5. If not found then leave that process and keep checking the further processes.

**PROGRAM:**

```
def
best_fit(blocks, processes):
    allocation = [-1] * len(processes)

    for i in range(len(processes)):
        best_index = -1

        for j in range(len(blocks)):
            if blocks[j] >= processes[i]:
                if best_index == -1 or blocks[j] < blocks[best_index]:
                    best_index = j


        if best_index != -1: allocation[i] =
            best_index blocks[best_index] -=
            processes[i]

    print("\nProcess No.\tProcess Size\tBlock No.")
    for i in range(len(processes)):
        print(f"{i + 1}\t\t{processes[i]}\t\t{allocation[i] + 1 if allocation[i] != -1 else 'Not Allocated'}")

if __name__ == "__main__":
    num_blocks = int(input("Enter number of memory blocks: "))
    blocks = list(map(int, input(f"Enter sizes of {num_blocks} memory blocks (space-separated): ").split()))

    num_processes = int(input("\nEnter number of processes: ")) processes = list(map(int, input(f"Enter sizes
of {num_processes} processes (space-separated): ").split())) best_fit(blocks, processes)
```

## OUTPUT:

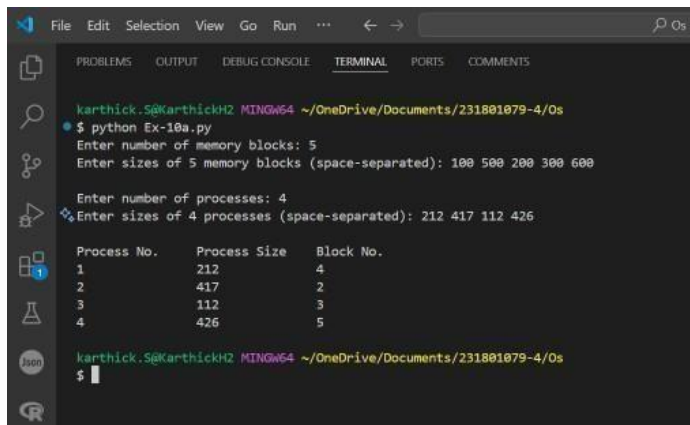

```
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/Os
$ python Ex-10a.py
Enter number of memory blocks: 5
Enter sizes of 5 memory blocks (space-separated): 100 500 200 300 600

Enter number of processes: 4
Enter sizes of 4 processes (space-separated): 212 417 112 426

Process No.    Process Size    Block No.
1              212             4
2              417             2
3              112             3
4              426             5

karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/Os
$
```

**RESULT:**

Thus, the Best Fit Memory allocation technique is implemented successfully using Python.

**Ex. No: 10b**

**Date: 29/3/25**

**FIRST FIT****AIM:**

To write a C program for the implementation of memory allocation methods for a fixed partition using the first fit.

**ALGORITHM:**

1. Define the max as 25.
2. Declare the variable frag[max],b[max],f[max],i,j, nb,nf, temp, highest=0, bf[max],ff[max].
3. Get the number of blocks, files, size of the blocks using a for loop.
4. In for loop check bf[j]!=1, if so temp=b[j]-f[i]
5. Check the highest.

**PROGRAM:**

```
#include <stdio.h>
#define MAX 25

int main() { int frag[MAX], b[MAX], f[MAX], i, j,
             nb, nf, temp; static int bf[MAX], ff[MAX];

    printf("Enter the number of blocks: ");
    scanf("%d", &nb);

    printf("Enter the number of files: ");
    scanf("%d", &nf);

    printf("Enter the size of the
    blocks:\n"); for (i = 0; i < nb; i++)
    { printf("Block %d: ", i + 1);
      scanf("%d", &b[i]);
    }

    printf("Enter the size of the
    files:\n"); for (i = 0; i < nf; i++)
    { printf("File %d: ", i + 1);
      scanf("%d", &f[i]);
    }
```



```

for (i = 0; i < nf; i++)
{
    for (j = 0; j < nb; j++)
    {
        if (bf[j] != 1) { temp
        = b[j] - f[i];
            if (temp >= 0)
            {
                ff[i] = j;
                bf[j] = 1;
                frag[i] = temp;
                break;
            }
        }
    }
}

printf("\nFile No.\tFile Size\tBlock No.\tBlock Size\tFragment\n");
for (i = 0; i < nf; i++) {
    if (bf[ff[i]] == 1)
        printf("%d\t%d\t%d\t%d\t%d\n", i + 1, f[i], ff[i] + 1, b[ff[i]], frag[i]);
    else
        printf("%d\t%d\t\tNot Allocated\n", i + 1, f[i]);
}

return 0;
}

```

## OUTPUT:

```

karthick.5@karthickH2 MINGW64 ~/OneDrive/Documents/231801879-4/Os
$ gcc Ex-10b.c -o Ex-10b

karthick.5@karthickH2 MINGW64 ~/OneDrive/Documents/231801879-4/Os
$ ./Ex-10b
Enter the number of blocks: 5
Enter the number of files: 4
Enter the size of the blocks:
Block 1: 100
Block 2: 500
Block 3: 200
Block 4: 300
Block 5: 600
Enter the size of the files:
File 1: 212
File 2: 417
File 3: 112
File 4: 426

File No.    File Size    Block No.    Block Size    Fragment
1           212          2            500           288
2           417          5            600           183
3           112          3            200           88
4           426          Not Allocated

```

---

**RESULT:**

Thus, the First Fit allocation technique is implemented successfully using C.

**Ex. No: 11a**

**Date: 3/4/25**

## **FIFO PAGE REPLACEMENT**

### **AIM:**

To find out the number of page faults that occur using the First-in First-out (FIFO) page replacement technique.

### **ALGORITHM:**

1. Declare the size with respect to page length
2. Check the need for replacement from the page to memory
3. Check the need for replacement from the old page to the new page in memory
4. Form a queue to hold all pages
5. Insert the page required memory into the queue
6. Check for bad replacement and page fault 7. Get the number of processes to be inserted
8. Display the values.

### **PROGRAM:**


```
def fifo_page_replacement(pages,
    frame_size): frames = [] page_faults = 0
    front = 0 print("\nPage Replacement
    Process:")

    for page in pages:
        if page not in frames:
            if len(frames) < frame_size:
                frames.append(page) else:
                    frames[front] = page front =
                    (front + 1) % frame_size
                page_faults += 1
                print(f"Page {page} => {frames} *Page Fault*")
            else: print(f"Page {page} => {frames}")
        print(f"\nTotal Page Faults = {page_faults}")

if __name__ == "__main__":
    n = int(input("Enter the number of pages: "))
    pages = [] print("Enter the page numbers
    one by one:") for i in range(n):
        page = int(input(f"Page {i+1}: "))
        pages.append(page)
```

```
frame_size = int(input("Enter the number of frames: "))  
  
fifo_page_replacement(pages, frame_size)
```

## OUTPUT:

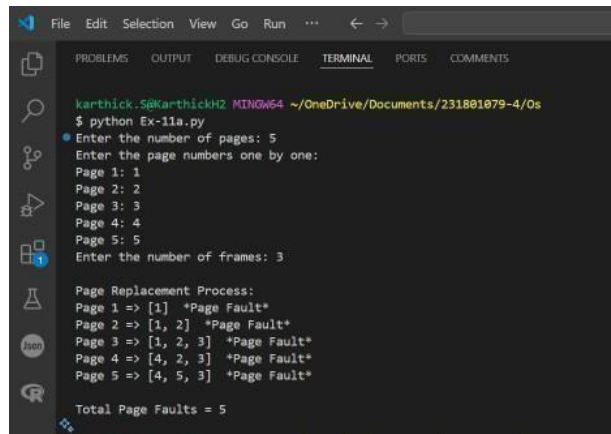

```
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/Os  
$ python Ex-11a.py  
Enter the number of pages: 5  
Enter the page numbers one by one:  
Page 1: 1  
Page 2: 2  
Page 3: 3  
Page 4: 4  
Page 5: 5  
Enter the number of frames: 3  
  
Page Replacement Process:  
Page 1 => [1] *Page Fault*  
Page 2 => [1, 2] *Page Fault*  
Page 3 => [1, 2, 3] *Page Fault*  
Page 4 => [4, 2, 3] *Page Fault*  
Page 5 => [4, 5, 3] *Page Fault*  
  
Total Page Faults = 5
```

## RESULT:

The Fifo Page Replacement is Successfully Implemented using Python.

**Ex. No: 11b**

**Date: 5/4/25**

## LRU

### AIM:

To write a C program to implement LRU page replacement algorithm.

### ALGORITHM:

1. Start the process
2. Declare the size
3. Get the number of pages to be inserted
4. Get the value
5. Declare counter and stack
6. Select the least recently used page by counter value
7. Stack them according the selection.
8. Display the values
9. Stop the process

### PROGRAM:

```
#include <stdio.h>

int main() {
    int pages[50], frames[10], counter[10]; int n,
    frameSize, i, j, k, flag, least, time = 0, faults = 0;
    printf("Enter the number of frames: "); scanf("%d",
    &frameSize);

    printf("Enter the number of pages: ");
    scanf("%d", &n);

    printf("Enter the page reference string: ");
    for(i = 0; i < n; i++) {
        scanf("%d", &pages[i]);
    }

    for(i = 0; i < frameSize; i++)
        { frames[i] = -1; counter[i]
        = 0;
        }

    for(i = 0; i < n; i++)
        { flag = 0;

            for(j = 0; j < frameSize; j++) {
                if(frames[j] == pages[i]) {
                    counter[j] = ++time;
```

```

        flag = 1; break;
    }
}

if(flag == 0) {
    int pos = -1, min = 9999;


    for(j = 0; j < frameSize; j++) {
        if(frames[j] == -1) {
            pos = j; break;
        } else if(counter[j] < min)
            { min = counter[j]; pos
              = j;
            }
    }

    frames[pos] = pages[i]; counter[pos] =
    ++time; faults++; } printf("Frames after
    inserting %d: ", pages[i]); for(k = 0; k <
    frameSize; k++) { if(frames[k] != -1)
        printf("%d ", frames[k]);
        else
            printf("-
        "); } printf("\n");
    }

    printf("\nTotal Page Faults: %d\n", faults);
    return 0;
}

```

## OUTPUT:

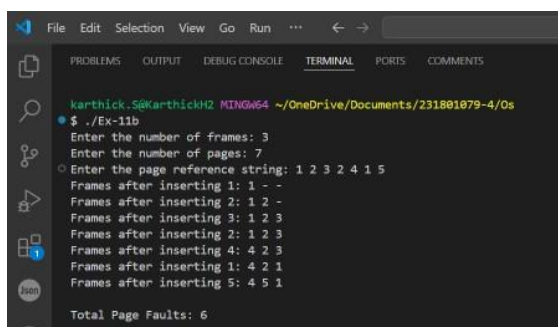

```

karthick_5@KarthickH2 MINGW64 ~/OneDrive/Documents/231801025-4/Os
$ ./Ex-11b
Enter the number of frames: 3
Enter the number of pages: 7
Enter the page reference string: 1 2 3 2 4 1 5
Frames after inserting 1: 1 - -
Frames after inserting 2: 1 2 -
Frames after inserting 3: 1 2 3
Frames after inserting 2: 1 2 3
Frames after inserting 4: 4 2 3
Frames after inserting 1: 4 2 1
Frames after inserting 5: 4 5 1
Total Page Faults: 6

```

**RESULT:**

The LRU Program is Successfully Implemented using C.

**Ex. No: 11c Date:**

5/4/25

## **Optimal**

**AIM:**

To write a c program to implement the Optimal page replacement algorithm

**ALGORITHM:**

1. Start the process
2. Declare the size
3. Get the number of pages to be inserted
4. Get the value
5. Declare counter and stack
6. Select the least frequently used page by counter value.
7. Stack them according to the selection.
8. Display the values
9. Stop the process

### PROGRAM:

```
#include <stdio.h>
#include <stdlib.h>

int isInFrame(int frame[], int count, int page)
{ for (int i = 0; i < count; i++) if (frame[i] ==
page) return 1;
return 0;
}

int predict(int pages[], int frame[], int n, int index, int count) { int
farthest = index, res = -1; for (int i = 0; i < count; i++) { int j;
for (j = index; j < n; j++)
{ if (frame[i] == pages[j])
{ if (j > farthest)
{ farthest = j; res = i; }
break;
} }
if (j == n) return i; // If page not found in future
}
return (res == -1) ? 0 : res;
}

int main() {
int n, frameCount, pageFaults = 0, filled = 0;
printf("Enter number of pages: ");
scanf("%d", &n); int* pages =
malloc(n * sizeof(int));

printf("Enter the page numbers:\n");
for (int i = 0; i < n; i++)
scanf("%d", &pages[i]);

printf("Enter number of frames: ");
scanf("%d", &frameCount); int* frame =
malloc(frameCount * sizeof(int)); for (int i =
0; i < frameCount; i++)
frame[i] = -1;
```



```


for (int i = 0; i < n; i++) { if (!isInFrame(frame,
frameCount, pages[i])) {
    if (filled < frameCount)
        frame[filled++] = pages[i];
    else
        frame[predict(pages, frame, n, i, frameCount)] = pages[i];
    pageFaults++;
}

printf("Frame: "); for (int j = 0; j <
frameCount; j++)
    frame[j] == -1 ? printf("- ") : printf("%d ", frame[j]);
printf("\n");
}

printf("\nTotal Page Faults = %d\n",
pageFaults); free(pages); free(frame); return 0;

```

## OUTPUT:

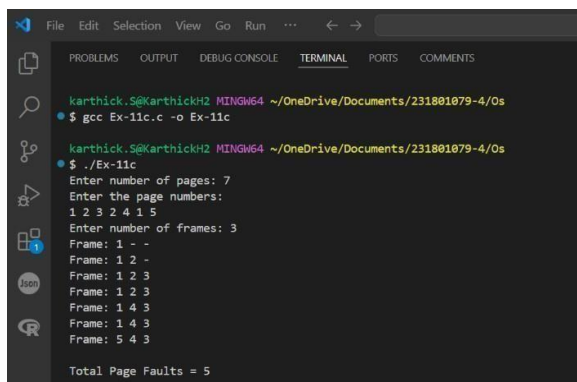

```

karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/Os
$ gcc Ex-11c.c -o Ex-11c
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/Os
$ ./Ex-11c
Enter number of pages: 7
Enter the page numbers:
1 2 3 2 4 1 5
Enter number of frames: 3
Frame: 1 - -
Frame: 1 2 -
Frame: 1 2 3
Frame: 1 2 3
Frame: 1 4 3
Frame: 1 4 3
Frame: 5 4 3
Total Page Faults = 5

```

**RESULT:**

The Optimal page replacement Program is Successfully Implemented using C.

**Ex. No: 12 Date:**

5/4/25

## **File Organization Technique- Single- and Two-level directory**

### **AIM:**

To implement File Organization Structures in C are a.

Single Level Directory

b. Two-Level Directory

c. Hierarchical Directory Structure

d. Directed Acyclic Graph Structure

### **A. SINGLE LEVEL DIRECTORY**

#### **ALGORITHM:**

1. Start
2. Declare the number, names and size of the directories and file names. 3. Get the values for the declared variables.
4. Display the files that are available in the directories.
5. Stop.

#### **PROGRAM:**

```
#include <stdio.h>
#include <string.h>

struct File { char
    name[20];
};

int    main()
{ int n, i;
  struct File files[10];

  printf("Enter the number of files: ");
  scanf("%d", &n);

  if (n <= 0 || n > 10) { printf("Please enter a valid number
    of files (1-10).\n"); return 1;
  }

  for (i = 0; i < n; i++) {
```

```

        printf("Enter the file %d: ", i + 1);
        scanf("%s", files[i].name);
    }

    printf("\n\nRoot Directory\n");
    printf("\n");

    for (i = 0; i < n; i++) { printf("|--
        %s\n", files[i].name);
    }

    return 0;
}

```

OUTPUT:

```

karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/0s
$ gcc Ex-12a.c -o Ex-12a
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/0s
$ ./Ex-12a
Enter the number of files: 4
Enter the file 1: A
Enter the file 2: B
Enter the file 3: Game
Enter the file 4: File123

Root Directory
|-- A
|-- B
|-- Game
|-- File123

```

## B. TWO-LEVEL DIRECTORY STRUCTURE ALGORITHM:

1. Start
2. Declare the number, names and size of the directories and subdirectories and file names.
3. Get the values for the declared variables.
4. Display the files that are available in the directories and subdirectories. 5. Stop.

### PROGRAM:

```

#include <stdio.h>
#include <string.h>

struct File { char
    name[20];
};

struct SubDirectory { char
    name[20];

```

```

    struct File files[10];
    int fileCount;
};

struct Directory {
    char    name[20];    struct
    SubDirectory subDirs[10]; int
    subDirCount;
};

int main() { struct
    Directory dir; int i,
    j;

    printf("Enter root directory name: "); scanf("%s",
    dir.name);

    printf("How many subdirectories in '%s'? ", dir.name);
    scanf("%d", &dir.subDirCount);

    for (i = 0; i < dir.subDirCount; i++) { printf("\nEnter name of
    subdirectory %d under '%s': ", i + 1, dir.name); scanf("%s",
    dir.subDirs[i].name);

    printf("How many files in '%s'? ", dir.subDirs[i].name);
    scanf("%d", &dir.subDirs[i].fileCount);

    for (j = 0; j < dir.subDirs[i].fileCount; j++) { printf("Enter
    file %d in '%s': ", j + 1, dir.subDirs[i].name); scanf("%s",
    dir.subDirs[i].files[j].name);
    }
    }


    printf("\nDirectory
    Structure:\n"); printf("NULL\n");
    printf("|___ %s\n", dir.name);

    for (i = 0; i < dir.subDirCount; i++) {
        printf(" |_____ %s\n", dir.subDirs[i].name);
        for (j = 0; j < dir.subDirs[i].fileCount; j++) {
            printf(" | ____ %s\n", dir.subDirs[i].files[j].name);
        }
    }

    return 0;
}

```

OUTPUT:

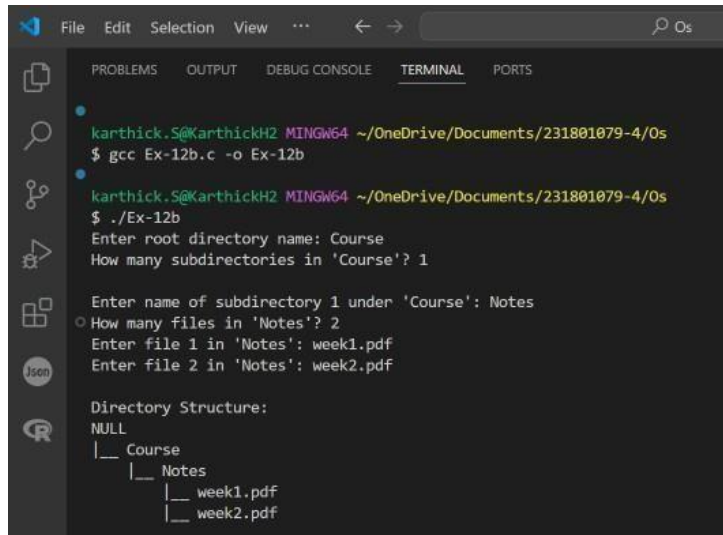

```
File Edit Selection View ... ← → Os
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/0s
$ gcc Ex-12b.c -o Ex-12b
karthick.S@KarthickH2 MINGW64 ~/OneDrive/Documents/231801079-4/0s
$ ./Ex-12b
Enter root directory name: Course
How many subdirectories in 'Course'? 1
Enter name of subdirectory 1 under 'Course': Notes
How many files in 'Notes'? 2
Enter file 1 in 'Notes': week1.pdf
Enter file 2 in 'Notes': week2.pdf
Directory Structure:
NULL
|__ Course
|   |__ Notes
|       |__ week1.pdf
|       |__ week2.pdf
```

**RESULT:**

The File Organization Technique-Single and Two-Level Directory Program is Successfully Implemented using C.