

COLLEGE OF ENGINEERING TRIVANDRUM

DEPARTMENT OF COMPUTER APPLICATIONS

20MCA134 ADVANCED DBMS LAB

LAB ASSIGNMENT -1

DATE: 06-May-2021

Deadline: 10-May -2021

Mark: 10 M

Mode of submission :


1. Submit the sql query in google class room.

File naming convention : "Lab#1 _Two digit rollno _your name .sql "

Eg:- Lab#1_ 01_Anu.sql

2. Create a repository in your github/gitlab account for ADBMS Lab and push the commits .

The following database diagram describes a company database.

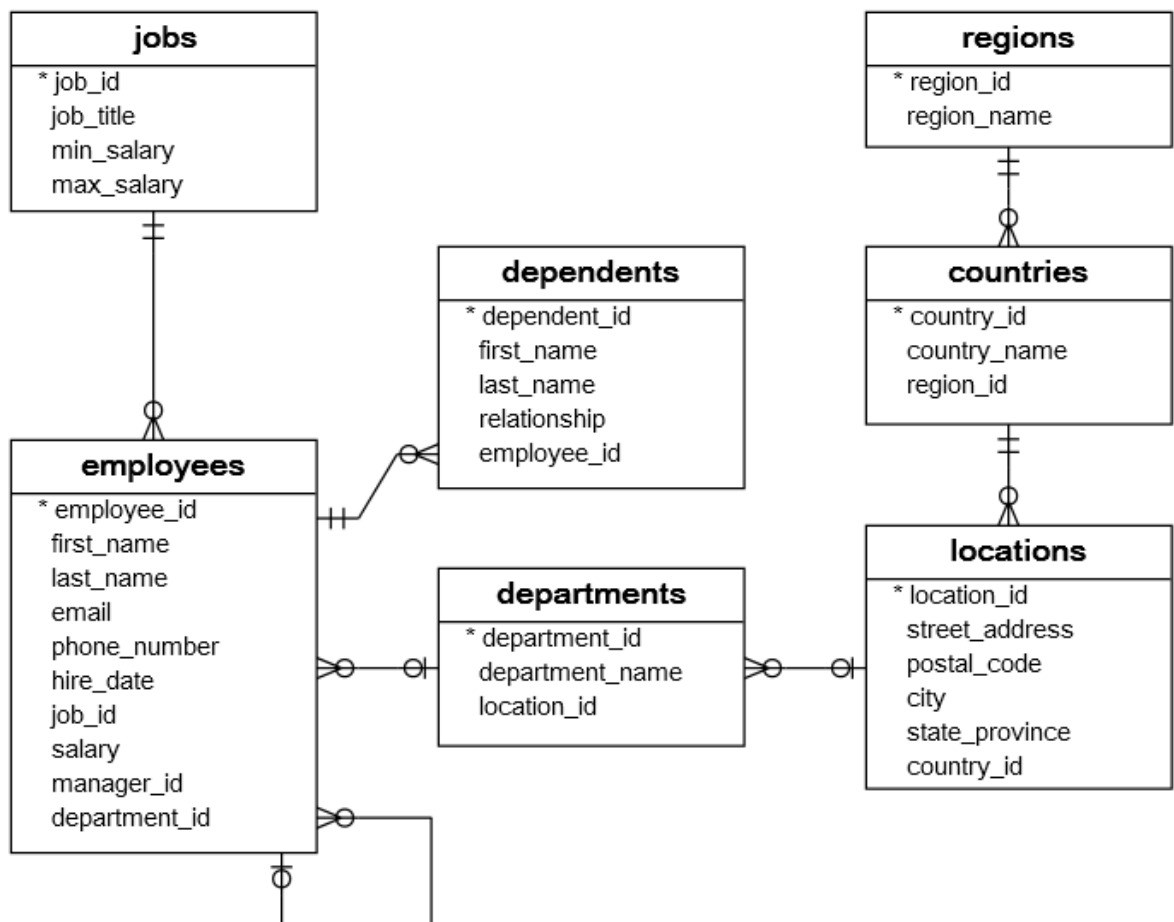

The company database has seven tables:

1. The employees table stores the data of employees.
2. The jobs table stores the job data including job title and salary range.
3. The departments table stores department data.
4. The dependents table stores the employee's dependents.
5. The locations table stores the location of the departments of the company.
6. The countries table stores the data of countries where the company is doing business.
7. The regions table stores the data of regions such as Asia, Europe, America, and the Middle East and Africa. The countries are grouped into regions.

I. WRITE QUERIES IN MYSQL TO DO THE FOLLOWING :

DDL COMMANDS

1. Design and create database which consists of above seven tables.
2. Rename Departments table to Dept.
3. Modify Column Salary from int to smallint

4. Add Commission column to the Employees table.

DML COMMANDS

5. Enter following queries to insert values in Employees table.

(Note : Check the columns in the table before you insert data and do appropriate modifications)

```
/*Data for the table regions */
```

```
INSERT INTO regions(region_id,region_name) VALUES (1,'Europe');
```

```
INSERT INTO regions(region_id,region_name) VALUES (2,'Americas');
```

```
INSERT INTO regions(region_id,region_name) VALUES (3,'Asia');
```

```
INSERT INTO regions(region_id,region_name) VALUES (4,'Middle East and  
Africa');
```

```
/*Data for the table countries */
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('AR','Argentina',2);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('AU','Australia',3);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('BE','Belgium',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('BR','Brazil',2);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('CA','Canada',2);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('CH','Switzerland',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('CN','China',3);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('DE','Germany',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('DK','Denmark',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('EG','Egypt',4);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('FR','France',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('HK','HongKong',3);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('IL','Israel',4);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('IN','India',3);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('IT','Italy',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('JP','Japan',3);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('KW','Kuwait',4);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('MX','Mexico',2);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('NG','Nigeria',4);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('NL','Netherlands',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('SG','Singapore',3);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('UK','United Kingdom',1);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('US','United States of America',2);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('ZM','Zambia',4);
```

```
INSERT INTO countries(country_id,country_name,region_id) VALUES  
('ZW','Zimbabwe',4);
```

```
/*Data for the table locations */
```

```
INSERT INTO  
locations(location_id,street_address,postal_code,city,state_province,country_  
id) VALUES (1400,'2014 Jabberwocky Rd','26192','Southlake','Texas','US');
```

```
INSERT INTO  
locations(location_id,street_address,postal_code,city,state_province,country_  
id) VALUES (1500,'2011 Interiors Blvd','99236','South San  
Francisco','California','US');
```

```
INSERT INTO  
locations(location_id,street_address,postal_code,city,state_province,country_  
id) VALUES (1700,'2004 Charade Rd','98199','Seattle','Washington','US');
```

```
INSERT INTO  
locations(location_id,street_address,postal_code,city,state_province,country_  
id) VALUES (1800,'147 Spadina Ave','M5V 2L7','Toronto','Ontario','CA');
```

INSERT INTO

locations(location_id,street_address,postal_code,city,state_province,country_id) VALUES (2400,'8204 Arthur St',NULL,'London',NULL,'UK');

INSERT INTO

locations(location_id,street_address,postal_code,city,state_province,country_id) VALUES (2500,'Magdalen Centre, The Oxford Science Park','OX9 9ZB','Oxford','Oxford','UK');

INSERT INTO

locations(location_id,street_address,postal_code,city,state_province,country_id) VALUES (2700,'Schwanthalerstr. 7031','80925','Munich','Bavaria','DE');

/*Data for the table jobs */

INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (1,'Public Accountant',4200.00,9000.00);

INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (2,'Accounting Manager',8200.00,16000.00);

INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (3,'Administration Assistant',3000.00,6000.00);

INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (4,'President',20000.00,40000.00);

INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (5,'Administration Vice President',15000.00,30000.00);

INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (6,'Accountant',4200.00,9000.00);

INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (7,'Finance Manager',8200.00,16000.00);

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (8,'Human  
Resources Representative',4000.00,9000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES  
(9,'Programmer',4000.00,10000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES  
(10,'Marketing Manager',9000.00,15000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES  
(11,'Marketing Representative',4000.00,9000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (12,'Public  
Relations Representative',4500.00,10500.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES  
(13,'Purchasing Clerk',2500.00,5500.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES  
(14,'Purchasing Manager',8000.00,15000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (15,'Sales  
Manager',10000.00,20000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (16,'Sales  
Representative',6000.00,12000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES  
(17,'Shipping Clerk',2500.00,5500.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (18,'Stock  
Clerk',2000.00,5000.00);
```

```
INSERT INTO jobs(job_id,job_title,min_salary,max_salary) VALUES (19,'Stock  
Manager',5500.00,8500.00);
```

```
/*Data for the table departments */
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (1,'Administration',1700);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (2,'Marketing',1800);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (3,'Purchasing',1700);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (4,'Human Resources',2400);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (5,'Shipping',1500);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (6,'IT',1400);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (7,'Public Relations',2700);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (8,'Sales',2500);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (9,'Executive',1700);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (10,'Finance',1700);
```

```
INSERT INTO departments(department_id,department_name,location_id)  
VALUES (11,'Accounting',1700);
```



```
/*Data for the table employees */
```

```
INSERT INTO
```

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(100,'Steven','King','steven.king@sqltutorial.org','515.123.4567','1987-06-17',4,24000.00,NULL,9);
```

```
INSERT INTO
```

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(101,'Neena','Kochhar','neena.kochhar@sqltutorial.org','515.123.4568','1989-09-21',5,17000.00,100,9);
```

```
INSERT INTO
```

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES (102,'Lex','De Haan','lex.de haan@sqltutorial.org','515.123.4569','1993-01-13',5,17000.00,100,9);
```

```
INSERT INTO
```

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(103,'Alexander','Hunold','alexander.hunold@sqltutorial.org','590.423.4567','1990-01-03',9,9000.00,102,6);
```

```
INSERT INTO
```

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(104,'Bruce','Ernst','bruce.ernst@sqltutorial.org','590.423.4568','1991-05-21',9,6000.00,103,6);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(105,'David','Austin','david.austin@sqltutorial.org','590.423.4569','1997-06-25',9,4800.00,103,6);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(106,'Valli','Pataballa','valli.pataballa@sqltutorial.org','590.423.4560','1998-02-05',9,4800.00,103,6);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(107,'Diana','Lorentz','diana.lorentz@sqltutorial.org','590.423.5567','1999-02-07',9,4200.00,103,6);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(108,'Nancy','Greenberg','nancy.greenberg@sqltutorial.org','515.124.4569','1994-08-17',7,12000.00,101,10);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(109,'Daniel','Faviet','daniel.faviet@sqltutorial.org','515.124.4169','1994-08-16',6,9000.00,108,10);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(110,'John','Chen','john.chen@sqltutorial.org','515.124.4269','1997-09-28',6,8200.00,108,10);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(111,'Ismael','Sciarra','ismael.sciarra@sqlltutorial.org','515.124.4369','1997-09-30',6,7700.00,108,10);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES (112,'Jose  
Manuel','Urman','jose manuel.urman@sqlltutorial.org','515.124.4469','1998-03-07',6,7800.00,108,10);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(113,'Luis','Popp','luis.popp@sqlltutorial.org','515.124.4567','1999-12-07',6,6900.00,108,10);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(114,'Den','Raphaely','den.raphaely@sqlltutorial.org','515.127.4561','1994-12-07',14,11000.00,100,3);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(115,'Alexander','Khoo','alexander.khoo@sqlltutorial.org','515.127.4562','1995-05-18',13,3100.00,114,3);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(116,'Shelli','Baida','shelli.baida@sqlltutorial.org','515.127.4563','1997-12-24',13,2900.00,114,3);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(117,'Sigal','Tobias','sigal.tobias@sqltutorial.org','515.127.4564','1997-07-24',13,2800.00,114,3);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(118,'Guy','Himuro','guy.himuro@sqltutorial.org','515.127.4565','1998-11-15',13,2600.00,114,3);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(119,'Karen','Colmenares','karen.colmenares@sqltutorial.org','515.127.4566','1999-08-10',13,2500.00,114,3);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(120,'Matthew','Weiss','matthew.weiss@sqltutorial.org','650.123.1234','1996-07-18',19,8000.00,100,5);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(121,'Adam','Fripp','adam.fripp@sqltutorial.org','650.123.2234','1997-04-10',19,8200.00,100,5);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(122,'Payam','Kaufling','payam.kaufling@sqltutorial.org','650.123.3234','1995-05-01',19,7900.00,100,5);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(123,'Shanta','Vollman','shanta.vollman@sqltutorial.org','650.123.4234','1997-10-10',19,6500.00,100,5);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(126,'Irene','Mikkilineni','irene.mikkilineni@sqltutorial.org','650.124.1224','1998-09-28',18,2700.00,120,5);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(145,'John','Russell','john.russell@sqltutorial.org',NULL,'1996-10-01',15,14000.00,100,8);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(146,'Karen','Partners','karen.partners@sqltutorial.org',NULL,'1997-01-05',15,13500.00,100,8);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(176,'Jonathon','Taylor','jonathon.taylor@sqltutorial.org',NULL,'1998-03-24',16,8600.00,100,8);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(177,'Jack','Livingston','jack.livingston@sqltutorial.org',NULL,'1998-04-23',16,8400.00,100,8);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(178,'Kimberely','Grant','kimberely.grant@sqltutorial.org',NULL,'1999-05-24',16,7000.00,100,8);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(179,'Charles','Johnson','charles.johnson@sqltutorial.org',NULL,'2000-01-04',16,6200.00,100,8);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(192,'Sarah','Bell','sarah.bell@sqltutorial.org','650.501.1876','1996-02-04',17,4000.00,123,5);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(193,'Britney','Everett','britney.everett@sqltutorial.org','650.501.2876','1997-03-03',17,3900.00,123,5);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(200,'Jennifer','Whalen','jennifer.whalen@sqltutorial.org','515.123.4444','1987-09-17',3,4400.00,101,1);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(201,'Michael','Hartstein','michael.hartstein@sqltutorial.org','515.123.5555','1996-02-17',10,13000.00,100,2);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(202,'Pat','Fay','pat.fay@sqltutorial.org','603.123.6666','1997-08-17',11,6000.00,201,2);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(203,'Susan','Mavris','susan.mavris@sqltutorial.org','515.123.7777','1994-06-07',8,6500.00,101,4);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(204,'Hermann','Baer','hermann.baer@sqltutorial.org','515.123.8888','1994-06-07',12,10000.00,101,7);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(205,'Shelley','Higgins','shelley.higgins@sqltutorial.org','515.123.8080','1994-06-07',2,12000.00,101,11);
```

INSERT INTO

```
employees(employee_id,first_name,last_name,email,phone_number,hire_date,job_id,salary,manager_id,department_id) VALUES  
(206,'William','Gietz','william.gietz@sqltutorial.org','515.123.8181','1994-06-07',1,8300.00,205,11);
```

```
/*Data for the table dependents */
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (1,'Penelope','Gietz','Child',206);
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (2,'Nick','Higgins','Child',205);
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (3,'Ed','Whalen','Child',200);
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (4,'Jennifer','King','Child',100);
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (5,'Johnny','Kochhar','Child',101);
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (6,'Bette','De Haan','Child',102);
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (7,'Grace','Faviet','Child',109);
```

```
INSERT INTO
```

```
dependents(dependent_id,first_name,last_name,relationship,employee_id)  
VALUES (8,'Matthew','Chen','Child',110);
```



```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (9,'Joe','Sciarra','Child',111);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (10,'Christian','Urman','Child',112);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (11,'Zero','Popp','Child',113);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (12,'Karl','Greenberg','Child',108);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (13,'Uma','Mavris','Child',203);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (14,'Vivien','Hunold','Child',103);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (15,'Cuba','Ernst','Child',104);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (16,'Fred','Austin','Child',105);
```

```
INSERT INTO
dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (17,'Helen','Pataballa','Child',106);
```

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (18,'Dan','Lorentz','Child',107);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (19,'Bob','Hartstein','Child',201);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (20,'Lucille','Fay','Child',202);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (21,'Kirsten','Baer','Child',204);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (22,'Elvis','Khoo','Child',115);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (23,'Sandra','Baida','Child',116);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (24,'Cameron','Tobias','Child',117);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (25,'Kevin','Himuro','Child',118);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (26,'Rip','Colmenares','Child',119);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (27,'Julia','Raphaely','Child',114);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (28,'Woody','Russell','Child',145);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (29,'Alec','Partners','Child',146);

INSERT INTO

dependents(dependent_id,first_name,last_name,relationship,employee_id)
VALUES (30,'Sandra','Taylor','Child',176);O REGIONS VALUES (4,'Middle East
and Africa');