

Data Wrangling

with pandas Cheat Sheet

<http://pandas.pydata.org>

[Pandas API Reference](#) [Pandas User Guide](#)

Creating DataFrames

	a	b	c
1	4	7	10
2	5	8	11
3	6	9	12

```
df = pd.DataFrame(  
    {"a" : [4, 5, 6],  
     "b" : [7, 8, 9],  
     "c" : [10, 11, 12]},  
    index = [1, 2, 3])
```

Specify values for each column.

```
df = pd.DataFrame(  
    [[4, 7, 10],  
     [5, 8, 11],  
     [6, 9, 12]],  
    index=[1, 2, 3],  
    columns=['a', 'b', 'c'])
```

Specify values for each row.

		a	b	c
N	v			
D	1	4	7	10
	2	5	8	11
e	2	6	9	12

```
df = pd.DataFrame(  
    {"a" : [4, 5, 6],  
     "b" : [7, 8, 9],  
     "c" : [10, 11, 12]},  
    index = pd.MultiIndex.from_tuples(  
        [('d', 1), ('d', 2),  
        ('e', 2)], names=['n', 'v']))
```

Create DataFrame with a MultiIndex

Method Chaining

Most pandas methods return a DataFrame so that another pandas method can be applied to the result. This improves readability of code.

```
df = (pd.melt(df)  
      .rename(columns={  
          'variable': 'var',  
          'value': 'val'})  
      .query('val >= 200'))
```

Tidy Data – A foundation for wrangling in pandas

In a tidy data set:




Each **variable** is saved in its own **column**

&



Each **observation** is saved in its own **row**

Tidy data complements pandas's **vectorized operations**. pandas will automatically preserve observations as you manipulate variables. No other format works as intuitively with pandas.

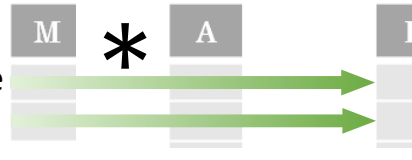

M * A

Reshaping Data – Change layout, sorting, reindexing, renaming



`pd.melt(df)`
Gather columns into rows.



`df.pivot(columns='var', values='val')`
Spread rows into columns.



`pd.concat([df1, df2])`
Append rows of DataFrames



`pd.concat([df1, df2], axis=1)`
Append columns of DataFrames

`df.sort_values('mpg')`
Order rows by values of a column (low to high).

`df.sort_values('mpg', ascending=False)`
Order rows by values of a column (high to low).

`df.rename(columns = {'y': 'year'})`
Rename the columns of a DataFrame

`df.sort_index()`
Sort the index of a DataFrame

`df.reset_index()`
Reset index of DataFrame to row numbers, moving index to columns.

`df.drop(columns=['Length', 'Height'])`
Drop columns from DataFrame

Subset Observations - rows



`df[df.Length > 7]`
Extract rows that meet logical criteria.

`df.drop_duplicates()`
Remove duplicate rows (only considers columns).

`df.sample(frac=0.5)`
Randomly select fraction of rows.

`df.sample(n=10)` Randomly select n rows.

`df.nlargest(n, 'value')`
Select and order top n entries.

`df.nsmallest(n, 'value')`
Select and order bottom n entries.

`df.head(n)`
Select first n rows.

`df.tail(n)`
Select last n rows.

Subset Variables - columns



`df[['width', 'length', 'species']]`
Select multiple columns with specific names.

`df['width']` or `df.width`
Select single column with specific name.

`df.filter(regex='regex')`
Select columns whose name matches regular expression *regex*.

Using query

`query()` allows Boolean expressions for filtering rows.

`df.query('Length > 7')`

`df.query('Length > 7 and Width < 8')`

`df.query('Name.str.startswith("abc")', engine="python")`

Subsets - rows and columns

Use `df.loc[]` and `df.iloc[]` to select only rows, only columns or both.

Use `df.at[]` and `df.iat[]` to access a single value by row and column.

First index selects rows, second index columns.

`df.iloc[10:20]`
Select rows 10-20.

`df.iloc[:, [1, 2, 5]]`
Select columns in positions 1, 2 and 5 (first column is 0).

`df.loc[:, 'x2': 'x4']`
Select all columns between x2 and x4 (inclusive).

`df.loc[df['a'] > 10, ['a', 'c']]`
Select rows meeting logical condition, and only the specific columns.

`df.iat[1, 2]` Access single value by index

`df.at[4, 'A']` Access single value by label

Logic in Python (and pandas)			
<	Less than	<code>!=</code>	Not equal to
>	Greater than	<code>df.column.isin(values)</code>	Group membership
==	Equals	<code>pd.isnull(obj)</code>	Is NaN
<=	Less than or equals	<code>pd.notnull(obj)</code>	Is not NaN
>=	Greater than or equals	<code>&, , ~, ^, df.any(), df.all()</code>	Logical and, or, not, xor, any, all

regex (Regular Expressions) Examples	
<code>'\.'</code>	Matches strings containing a period '.'
<code>'Length\$'</code>	Matches strings ending with word 'Length'
<code>'^Sepal'</code>	Matches strings beginning with the word 'Sepal'
<code>'^x[1-5]\$'</code>	Matches strings beginning with 'x' and ending with 1,2,3,4,5
<code>'^(?!Species\$).*\$'</code>	Matches strings except the string 'Species'

Summarize Data

df['w'].value_counts()

Count number of rows with each unique value of variable

len(df)

of rows in DataFrame.

df.shape

Tuple of # of rows, # of columns in DataFrame.

df['w'].nunique()

of distinct values in a column.

df.describe()

Basic descriptive and statistics for each column (or GroupBy).



pandas provides a large set of **summary functions** that operate on different kinds of pandas objects (DataFrame columns, Series, GroupBy, Expanding and Rolling (see below)) and produce single values for each of the groups. When applied to a DataFrame, the result is returned as a pandas Series for each column. Examples:

sum()

Sum values of each object.

count()

Count non-NA/null values of each object.

median()

Median value of each object.

quantile([0.25,0.75])

Quantiles of each object.

apply(function)

Apply function to each object.

min()

Minimum value in each object.

max()

Maximum value in each object.

mean()

Mean value of each object.

var()

Variance of each object.

std()

Standard deviation of each object.

Group Data



df.groupby(by="col")

Return a GroupBy object, grouped by values in column named "col".

df.groupby(level="ind")

Return a GroupBy object, grouped by values in index level named "ind".

All of the summary functions listed above can be applied to a group. Additional GroupBy functions:

size()

Size of each group.

agg(function)

Aggregate group using function.

Windows

df.expanding()

Return an Expanding object allowing summary functions to be applied cumulatively.

df.rolling(n)

Return a Rolling object allowing summary functions to be applied to windows of length n.

Handling Missing Data


df.dropna()

Drop rows with any column having NA/null data.

df.fillna(value)

Replace all NA/null data with value.

Make New Columns



df.assign(Area=lambda df: df.Length*df.Height)

Compute and append one or more new columns.

df['Volume'] = df.Length*df.Height*df.Depth

Add single column.

pd.qcut(df.col, n, labels=False)

Bin column into n buckets.



pandas provides a large set of **vector functions** that operate on all columns of a DataFrame or a single selected column (a pandas Series). These functions produce vectors of values for each of the columns, or a single Series for the individual Series. Examples:

max(axis=1)

Element-wise max.

min(axis=1)

Element-wise min.

clip(lower=-10,upper=10)

Trim values at input thresholds

abs()

Absolute value.

The examples below can also be applied to groups. In this case, the function is applied on a per-group basis, and the returned vectors are of the length of the original DataFrame.

shift(1)

Copy with values shifted by 1.

rank(method='dense')

Ranks with no gaps.

rank(method='min')

Ranks. Ties get min rank.

rank(pct=True)

Ranks rescaled to interval [0, 1].

rank(method='first')

Ranks. Ties go to first value.

shift(-1)

Copy with values lagged by 1.

cumsum()

Cumulative sum.

cummax()

Cumulative max.

cummin()

Cumulative min.


cumprod()

Cumulative product.

Plotting


df.plot.hist()

Histogram for each column



df.plot.scatter(x='w',y='h')

Scatter chart using pairs of points



Combine Data Sets

adf

x1	x2
A	1
B	2
C	3

bdf

x1	x3
A	T
B	F
D	T



Standard Joins

x1	x2	x3
A	1	T
B	2	F
C	3	NaN

pd.merge(adf, bdf, how='left', on='x1')
Join matching rows from bdf to adf.

x1	x2	x3
A	1.0	T
B	2.0	F
D	NaN	T

pd.merge(adf, bdf, how='right', on='x1')
Join matching rows from adf to bdf.

x1	x2	x3
A	1	T
B	2	F

pd.merge(adf, bdf, how='inner', on='x1')
Join data. Retain only rows in both sets.

x1	x2	x3
A	1	T
B	2	F
C	3	NaN
D	NaN	T

pd.merge(adf, bdf, how='outer', on='x1')
Join data. Retain all values, all rows.

Filtering Joins

x1	x2
A	1
B	2

adf[adf.x1.isin(bdf.x1)]
All rows in adf that have a match in bdf.

x1	x2
C	3

adf[~adf.x1.isin(bdf.x1)]
All rows in adf that do not have a match in bdf.

ydf

x1	x2
A	1
B	2
C	3

zdf

x1	x2
B	2
C	3
D	4



Set-like Operations

x1	x2
B	2
C	3

pd.merge(ydf, zdf)
Rows that appear in both ydf and zdf (Intersection).

x1	x2
A	1
B	2
C	3
D	4

pd.merge(ydf, zdf, how='outer')
Rows that appear in either or both ydf and zdf (Union).

x1	x2
A	1

pd.merge(ydf, zdf, how='outer', indicator=True)
.query('_merge == "left_only"')
.drop(columns=['_merge'])
Rows that appear in ydf but not zdf (Setdiff).