

CS1632: Test Plans and TM

Wonsun Ahn


Test Plans

What is a Test Plan?

- Test Plan: A document laying out a plan for testing a software system
- Why do we need a **plan**?
 - Goal of testing is to minimize risk of defects given a time/cost budget
 - Careful planning can maximize test coverage with a limited number of tests
- Why do we need to **document** the plan?
 - Allows project managers to estimate test coverage and manage risk
 - Allows quality engineers to reliably repeat the same tests over and over again
 - **Repeatability** of tests is particularly important for *regression tests*


Regression Tests prevent SW from regressing

- *Regression*: A failure of a previously working feature
 - Can be caused by (seemingly) unrelated enhancements or defect fixes
 - Why? Because code fixes often have non-local effects
 - Regression test must test modified feature but also all other features
- For timely regression detection, regression test is run on each code update

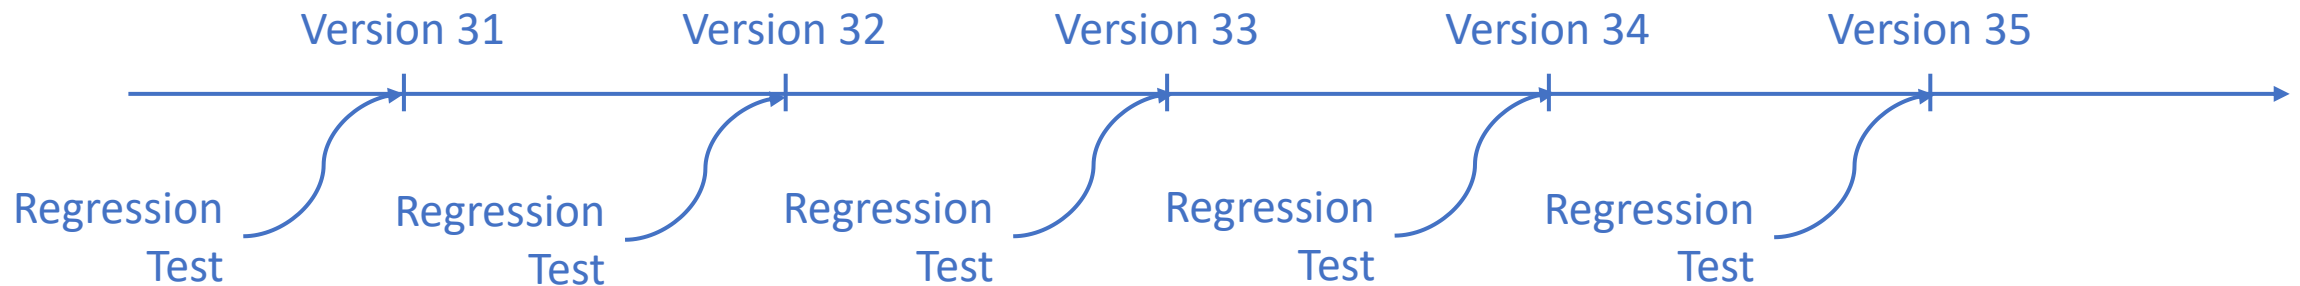

Repeatable tests can pinpoint defective version

- Suppose a regression test fails on a code update:

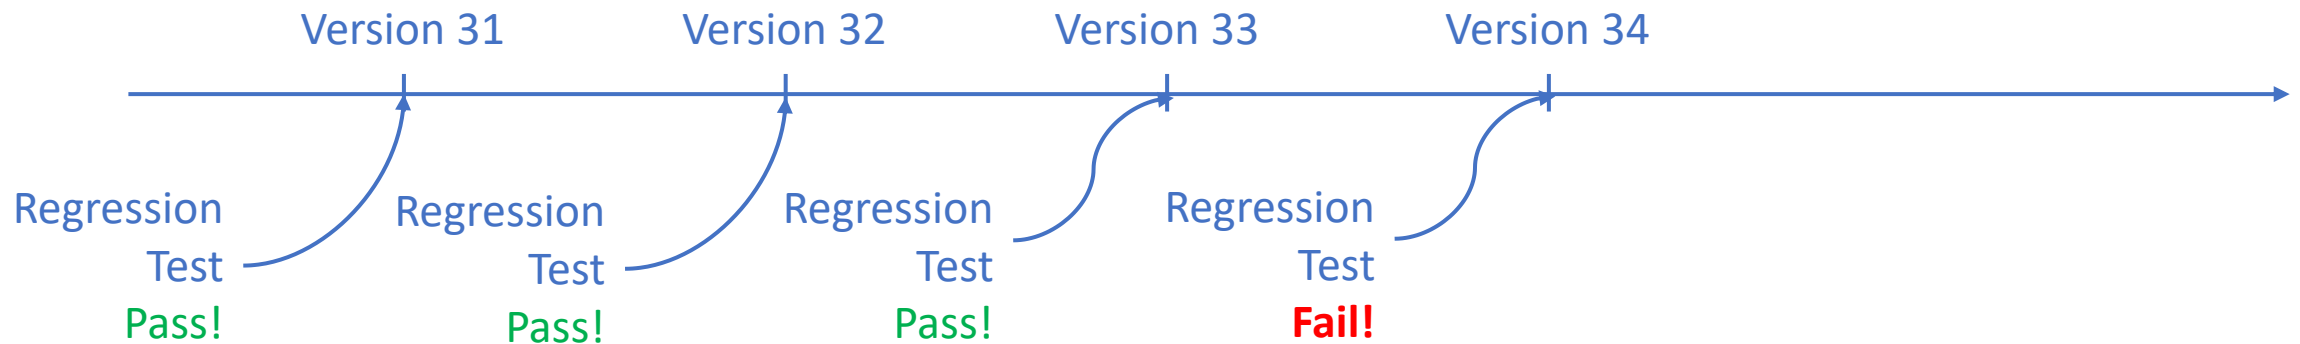

- We can pinpoint where the defect crept in, at Version 34.
- Why? Because we are confident that we are repeating the same tests!
- Now, if we ran different tests each time, would we know?

How formal should the plan be documented?

- As formal or informal as necessary!
- Think about what you are testing
 - How critical is the software that you are testing?
 - How many times is the test plan going to be used?

What are you testing?

- Throw-away script?
- Development tool?
- Internal website?
- Enterprise software?
- Commercial software?
- Operating system?
- Avionics software?

Testing is context-dependent

- How you test
- How much you test
- What tools you use
- What documentation you provide
- ...All vary based on software context.

Test Cases

Test Plans and Test Cases

- A test plan consists of a list of related test cases that are run together
- *Test case*: Smallest unit of a test plan that tests an individual behavior
 - You can think of one input value as one test case
 - Describes what is to be tested and what steps to perform
 - Describes expected behavior after the steps are performed

Test Case main body consists of ...

- *Preconditions*: State of the system before testing. E.g.,
 - Packages X and Y are installed on the system
 - Configuration file X contains entry Y
 - Database has table X set up populated with Y entry
- *Execution Steps*: Steps to perform test
- *Postconditions*: **Expected** state of the system after testing. E.g.,
 - Database entry Y is no longer present in table X
 - Output X is displayed on to the console
 - Variable X is set to value Y

Test Case header identifies and describes it

- *Identifier*: A way to identify the test case
 - Could be numerical, e.g. TC-452
 - Or a descriptive label, e.g. INVALID-PASSWORD-THREE-TIMES-TEST
- *Test Case*: A short description of what is being tested

In full, a test case contains the following items

- Identifier
- Test Case
- Preconditions
- Execution Steps
- Postconditions

See IEEE 829, "Standard for Software Test Documentation", at [resources/IEEE829.pdf](#)

Example Test Case 1

- Identifier: SORT-ASCENDING-FOUR-INTEGERS-TEST
- Test Case: When SORT_ASCENDING flag is set, calling sort([9,3,4,2]) returns a new sorted array [2,3,4,9].
- Preconditions: SORT_ASCENDING global variable is set to true.
- Execution Steps:
 1. Set test_array = [9,3,4,2].
 2. Call sort(test_array).
- Postconditions: Return value of sort(test_array) is array [2,3,4,9].

Example Test Case 2

- Identifier: ADD-ONE-WIDGET-TO-CART-TEST
- Test Case: When shopping cart is empty, when I add one widget to the cart, the number of widgets in the cart becomes one.
- Preconditions:
 - Windows 10 is running on the machine.
 - The URL <https://my.ecommerce.site> is open on Chrome browser (version 100).
 - Shopping cart is empty.
- Execution Steps:
 1. Select first widget from the list of widgets by clicking on the checkbox.
 2. Click “Add to Cart” button.
- Postconditions: Shopping cart displays one widget.

Example Test Case 2 Using No Preconditions

- Identifier: ADD-ONE-WIDGET-TO-CART-TEST
- Test Case: When shopping cart is empty, when I add one widget to the cart, the number of widgets in the cart becomes one.
- Preconditions: None
- Execution Steps:
 1. Install and launch Windows 10 on the machine.
 2. Install and launch Chrome browser (version 100).
 3. Enter URL <https://my.ecommerce.site> on Chrome browser search box.
 4. Click on the search button on Chrome browser.
 5. Select first widget from the list of widgets by clicking on the checkbox.
 6. Click “Add to Cart” button.
- Postconditions: Shopping cart displays one widget.

Where is the Sweet Spot?

- Preconditions: conditions that need to be satisfied
 - If conditions already satisfied, no need to perform – potentially saves time
 - Does not enforce same steps to reach condition – potentially less repeatable
- Execution steps: steps that are performed verbatim each time
 - Performed even when they are redundant – potentially wastes time
 - Enforces same steps in the same order specified – more repeatable

Creating Good Test Cases

- Should consider equivalence classes to maximize test coverage.
- Besides that, what other considerations are there?
 1. Reproducibility
 2. Independence

A Good Test Case is Reproducible

- Preconditions + Execution Steps always result in same behavior
- What happens when a test case is unreproducible?
 - Defect found by test may not manifest when developer tries to debug it
 - Test does not find defect but defect manifests when software is deployed
- What causes a test case to be unreproducible?
 - Incomplete preconditions (OS state, DB state, filesystem state, memory state)
 - E.g. OS environment variable that impacts test case is not specified
 - E.g. A configuration file that impacts test case is not specified
 - Imprecise execution steps
 - E.g. “Open new browser window” → Multiple ways: Ctrl+N, Menu, Icon double click

A Good Test Case is Independent

- Test case shouldn't depend on the execution of a previous test case
 - E.g. Should not depend on database entries inserted by previous test case
 - Test cases may be executed selectively, meaning previous may not execute
 - Test cases may execute out of order, causing previous case to execute later (Often, test cases are run in parallel to save testing time)
- What causes a test case to be dependent?
 - Relying on previous test case to fulfill part of the preconditions
 - All preconditions should be explicitly specified and set up before each test case

Test Run – Actual execution


- *Test run*: Actual execution of a test case / test plan / test suite
 - Subsets of test cases may be chosen to run or the entire test suite
 - All depends on the type of code modification and the testing context
- The purpose of a test run is to obtain *observed behavior*
 - Passes or fails after comparing *observed behavior* with *postcondition*

Status after Test Run

- Possible Statuses
 - PASSED: Completed with expected result
 - FAILED: Completed but unexpected result
 - PAUSED: Test paused in middle of execution
 - RUNNING: Test in the middle of execution
 - BLOCKED: Did not complete because precondition not fulfilled
 - ERROR: Problem with running test itself
- During test run, tester manually (or automatically) executes each test case and sets the status for each
- A FAILED status signals a defect that needs to be reported.

Testing Hierarchy

A group of test plans make up a *test suite*...

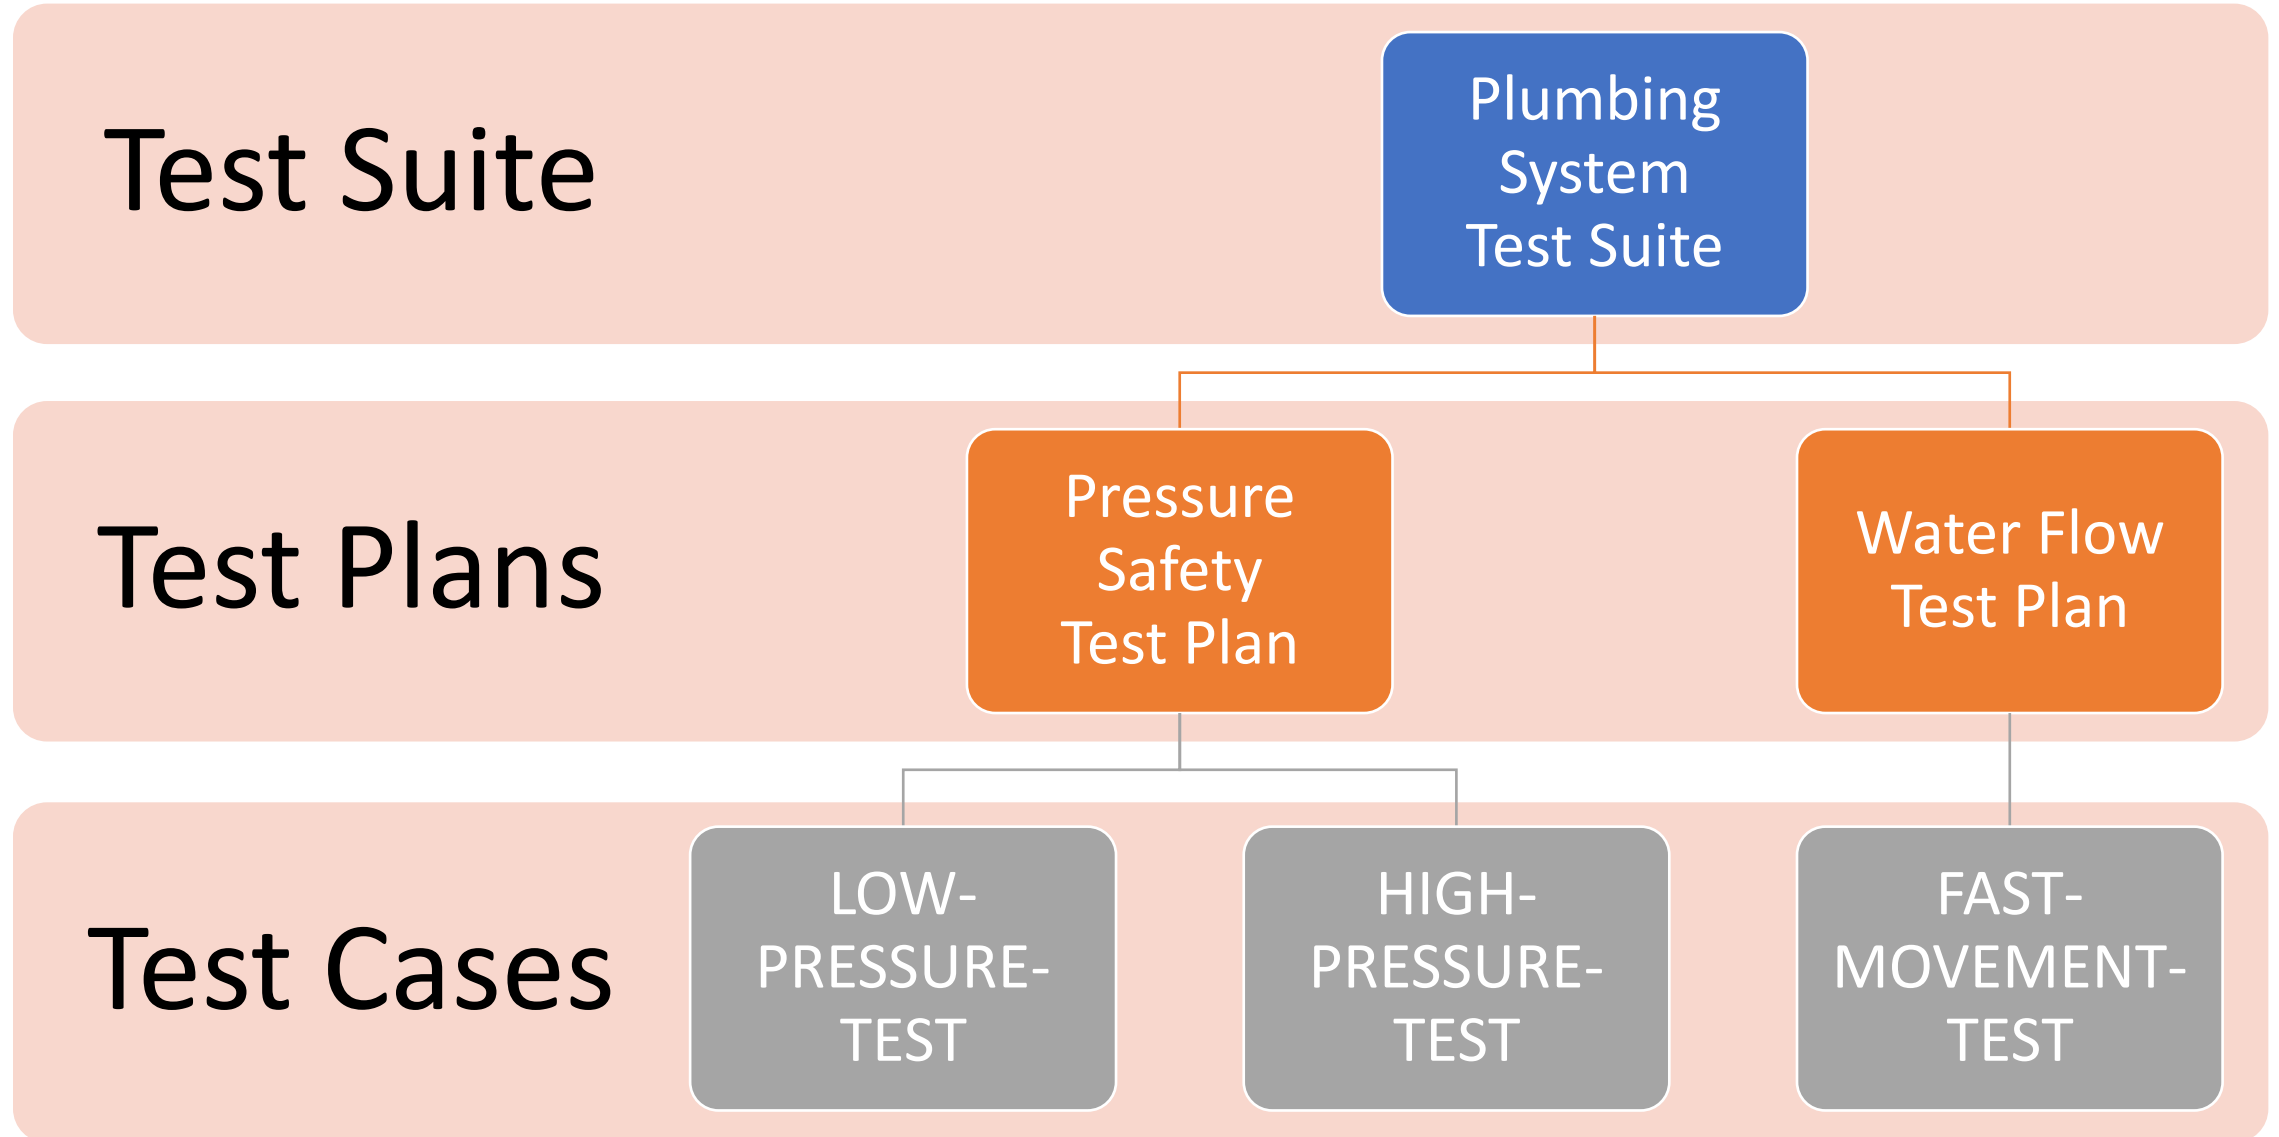

Creating a test suite from requirements

- Take top-down approach to create hierarchy of test plans and cases.
 1. Subdivide system into features or subsystems
 2. Create a test plan for each of those features
 3. For each feature, decide on what aspects to test
 4. For each aspect, decide on which inputs or user interactions to test
 5. Create a test case for each input, under the subsystem test plan

Traceability Matrix

Traceability: Ability to trace requirements to test cases (and vice versa)

- Forward Traceability
 - Ability to trace **requirement** → **test cases**
 - Given a requirement, allows listing of all test cases that test it
 - Ensures there are no requirements with insufficient test cases (test coverage)
- Backward Traceability
 - Ability to trace **test case** → **requirements**
 - Given a test case, allows listing of all requirements that are tested
 - Ensures there are no test cases that are not testing any requirements
→ “Orphaned” test cases need to be removed, along with the implementation
- Ensures requirements, and only requirements, are implemented

Traceability Matrix ensures traceability

- **Traceability Matrix:**
Table describing relationship between requirements and test cases
- Why is it a “matrix”?
 - One test case may test multiple requirements
 - One requirement may be tested by multiple test cases
 - It's a many-to-many relationship, hence the matrix

Good Forward Traceability Matrix Example

REQ1: TEST_CASE_1, TEST_CASE_2

REQ2: TEST_CASE_1, TEST_CASE_3

REQ3: TEST_CASE_1

REQ4: TEST_CASE_2

REQ5: TEST_CASE_4

- Mapping requirements → test cases
- All requirements have at least one test case testing that requirement
- All requirements have **some** test coverage

Bad Forward Traceability Matrix Example

REQ1: TEST_CASE_1, TEST_CASE_2

REQ2:

REQ3: TEST_CASE_1

REQ4: TEST_CASE_2

REQ5: TEST_CASE_4

- *No test case is testing requirement 2!*
- *Add test cases for requirement 2!*

Good Backward Traceability Matrix Example

TEST_CASE_1: REQ1, REQ2, REQ3

TEST_CASE_2: REQ1, REQ4

TEST_CASE_3: REQ2

TEST_CASE_4: REQ5

- Mapping test cases → requirements
- All test cases have at least one requirement it is testing

Bad Backward Traceability Matrix Example

TEST_CASE_1: REQ1, REQ2, REQ3

TEST_CASE_2: REQ1, REQ4


TEST_CASE_3: REQ2

TEST_CASE_4: REQ5

TEST_CASE_5:

- *Test case 5 not checking any requirement*
- *Remove test case 5!*

A Bi-Directional Traceability Matrix

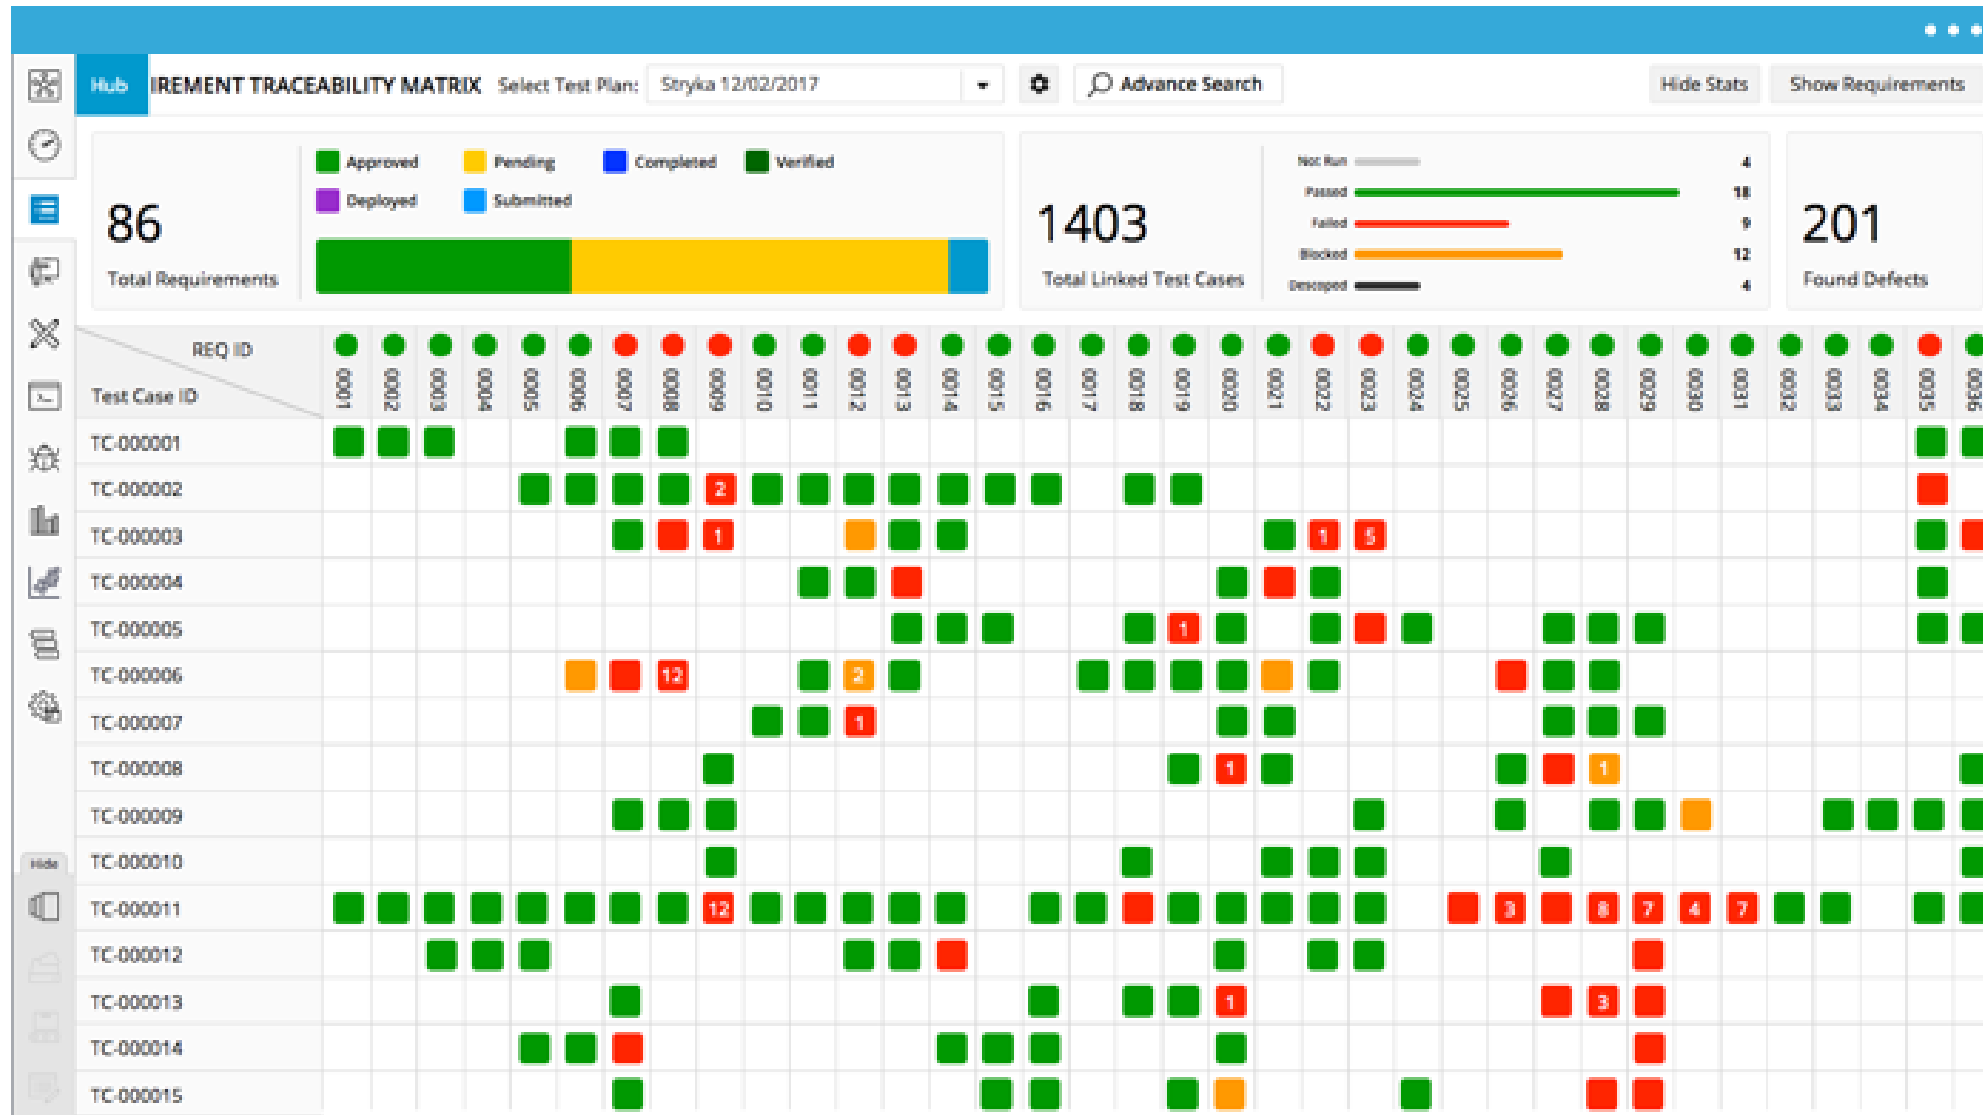

Reference:
reportportal.io

Now Please Read Textbook Chapters 6 and 8

- In particular, read Chapter 8 carefully since that's mostly what you will be doing for our first in-class exercise next week.
- If you are interested in further reading:

IEEE Standard for Software Test Documentation (IEEE 829-2008)

- Can be found in resources/IEEE829.pdf in course repository