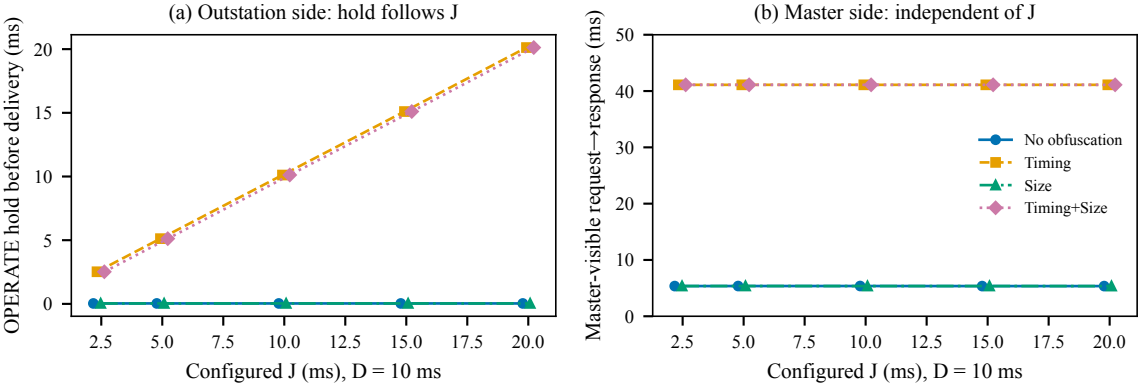
(a) Outstation side: hold follows J
OPERATE hold before delivery (ms)
0
5
10
15
20
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
Configured J (ms), D = 10 ms
(b) Master side: independent of J
Master-visible request→response (ms)
0
10
20
30
40
50
No obfuscation
Timing
Size
Timing+Size
Configured J (ms), D = 10 ms