## TITLE

Author





## Table des matières

1 UML example page 2





## 1 UML example

## ClassName name: attribute type name: attribute type = default value name(parameter list): type of value returned name(parameters list): type of value returned

Figure 1 – une Classe UML classsique.




FIGURE 2 – une Classe abstraite.



FIGURE 3 – une Agrégation.







FIGURE 4 – une composition.

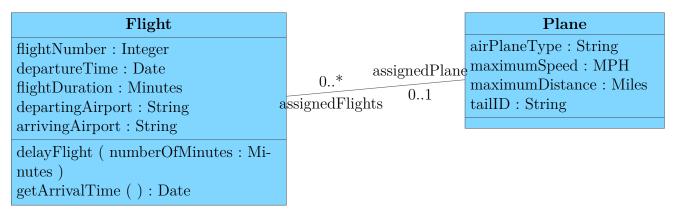


FIGURE 5 – une Association.




FIGURE 6 – Changer les couleurs.

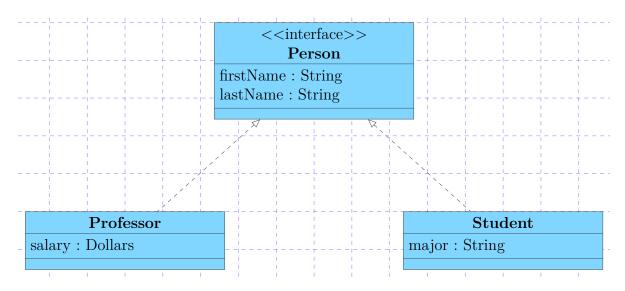


FIGURE 7 – Implémentation - interface.





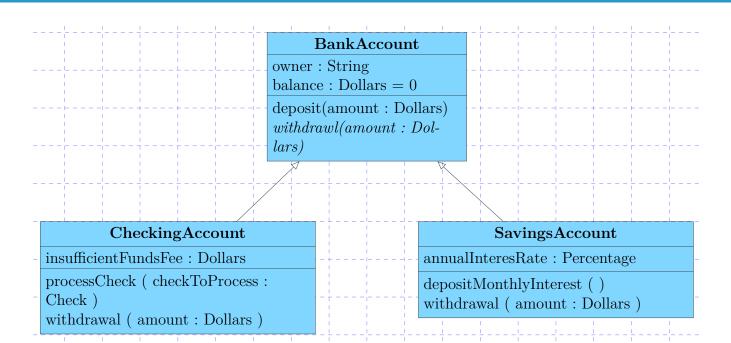


FIGURE 8 – Héritage.

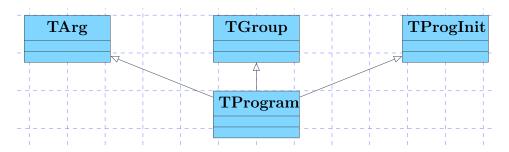


FIGURE 9 – Multi-Héritage.

This is a note.

FIGURE 10 – Note.

Instance Name : Class Name
attribute name = value

FIGURE 11 - Objet.

Thomas' account : BankAccount	
owne	er = Thomas
balaı	nce = 100
depo	sit(amount : Dollars)
with	drawl(amount:Dollars)

FIGURE 12 – Objet avec méthodes.





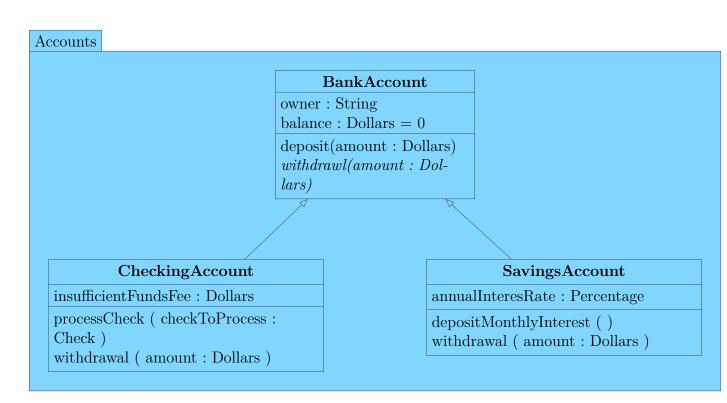


Figure 13 – Package.

