


Time diagram for invalid packet header RRQ error to server

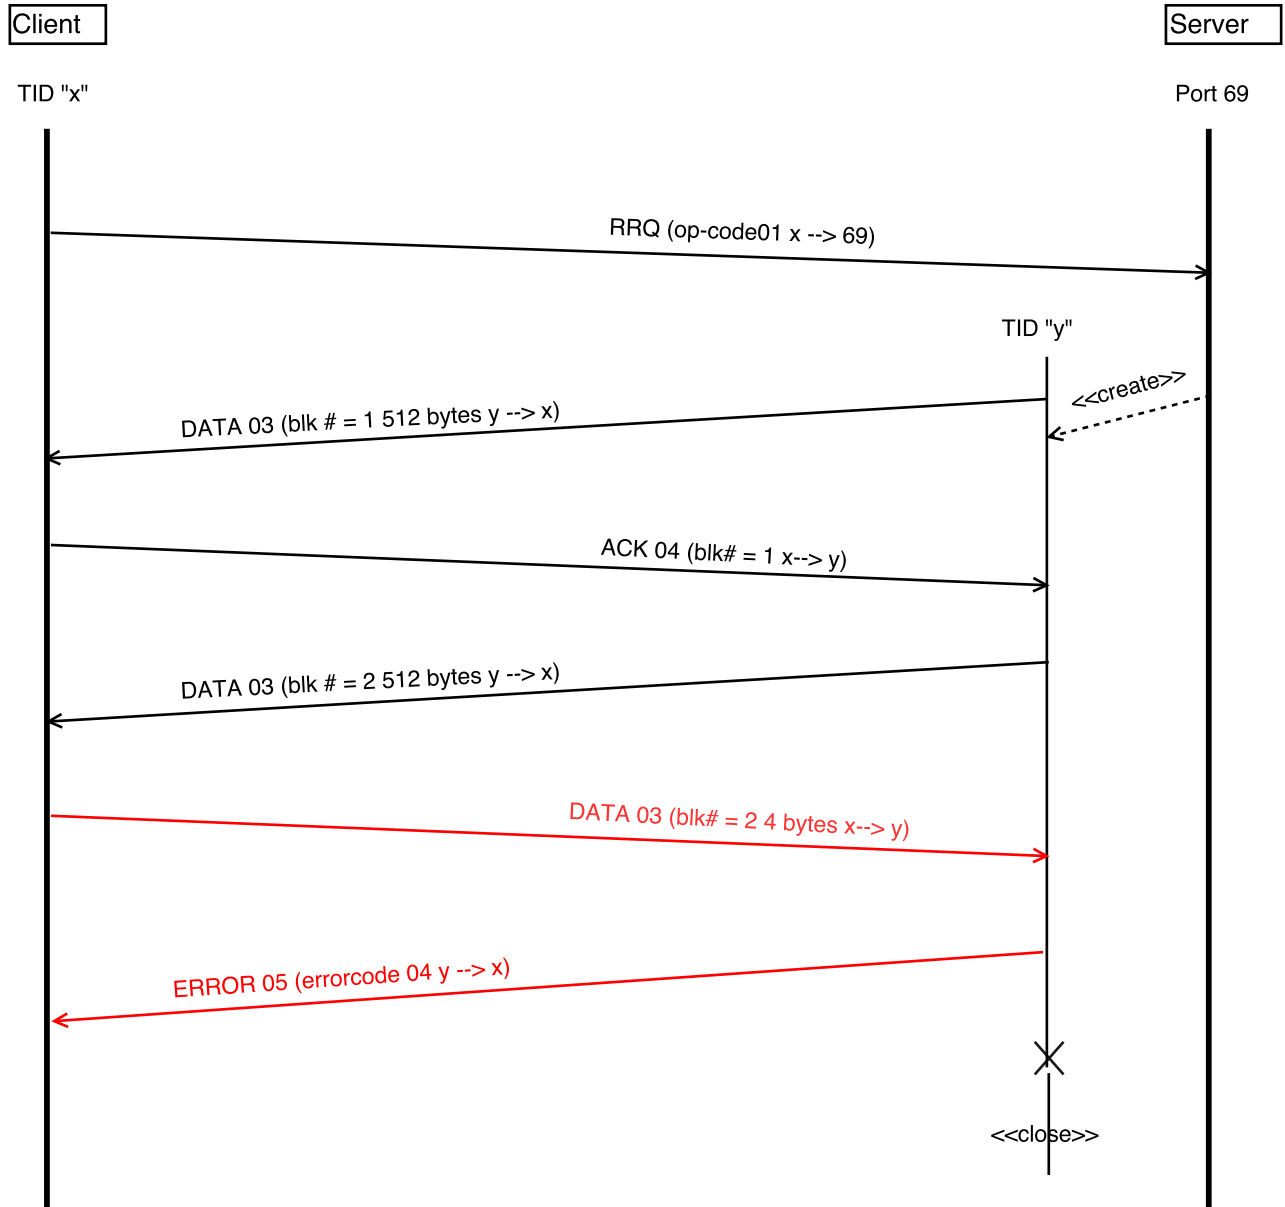

Invalid packet header error includes all the packet sent at the wrong time

In this timing diagram, an example is given as a DATA packet gets sent when server is expecting a ACK packet.

In the real program, the DATA packet could be replaced by any other kinds of packet excepts ACK packet.