


# Time diagram for invalid packet header WRQ error to client

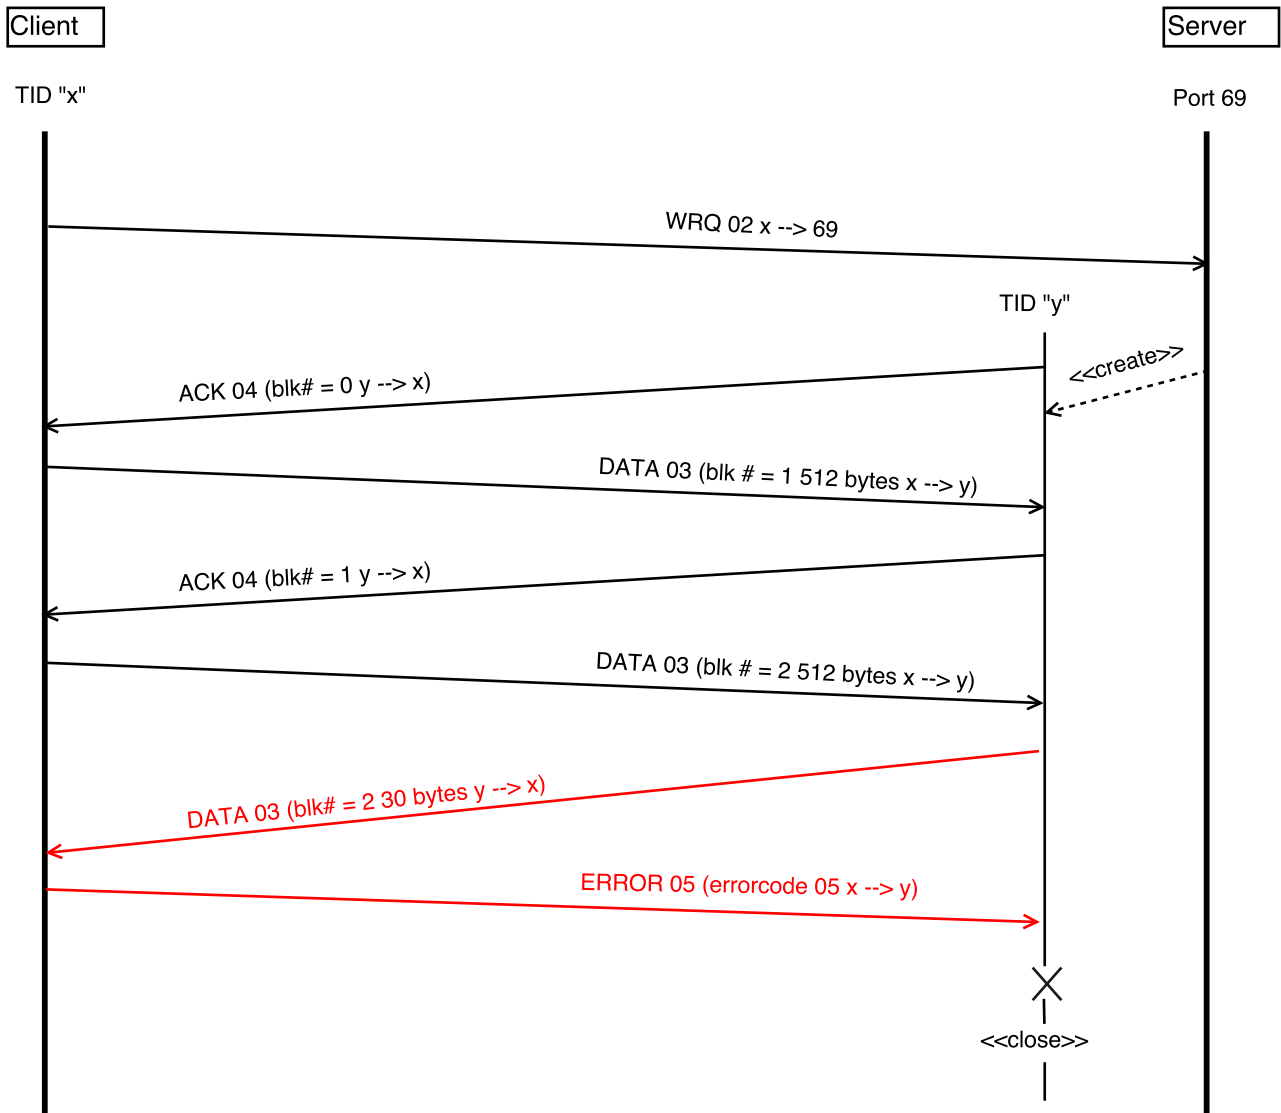

Invalid packet header error includes all the packet sent at the wrong time

In this timing diagram, an example is given as an DATA packet gets sent when client is expecting a ACK packet.

In the real program, the DATA packet could be replaced by any other kinds of packet excepts ACK packet.