


Time diagram for invalid packet header RRQ error to client

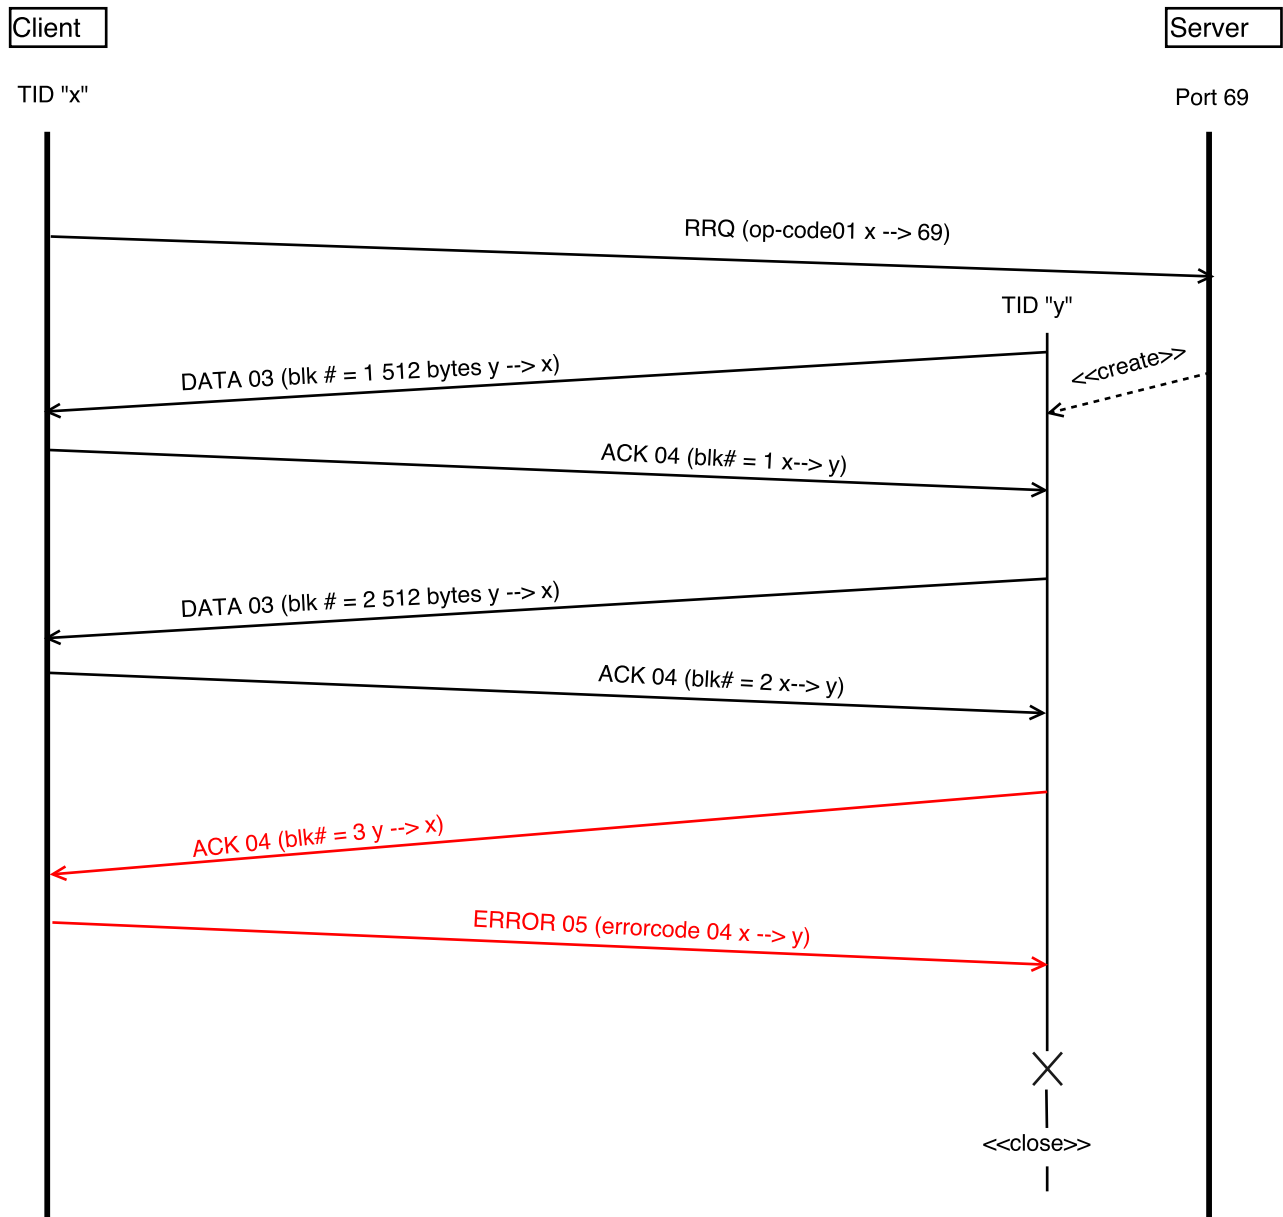

Invalid packet header error includes all the packet sent at the wrong time

In this timing diagram, an example is given as an ACK packet gets sent when client is expecting a DATA packet.

In the real program, the ACK packet could be replaced by any other kinds of packet excepts DATA and ERROR packet.