


Time diagram for invalid packet header WRQ error to server

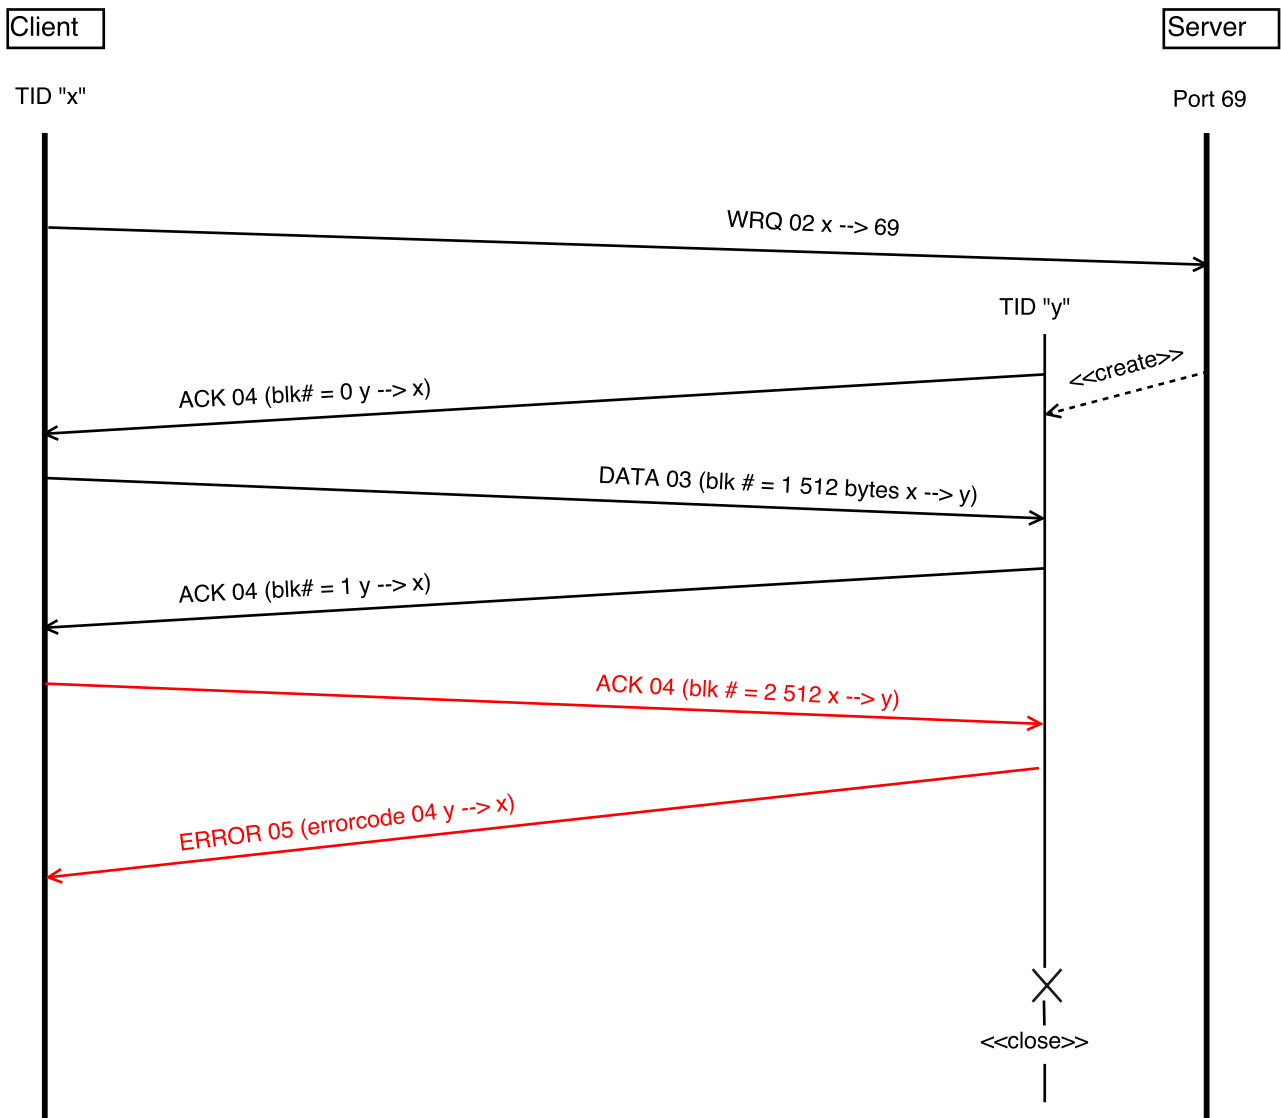

Invalid packet header error includes all the packet sent at the wrong time
 In this timing diagram, an example is given as an DATA packet gets sent when server is expecting a DATA packet.
 In the real program, the ACK packet could be replaced by any other kinds of packet excepts DATA packet.