← Neural Network Basics

Quiz, 10 questions

10/10 points (100%)

✔ **Congratulations! You passed!**

Next Item

Neural Network Basics

10/10 points (100%)

1. What does a neuron compute?

1 / 1
points

○ A neuron computes the mean of all features before applying the output to an activation function

⦿ A neuron computes a linear function (z = Wx + b) followed by an activation function

Correct
Correct, we generally say that the output of a neuron is a = g(Wx + b) where g is the activation function (sigmoid, tanh, ReLU, ...).

○ A neuron computes an activation function followed by a linear function (z = Wx + b)

○ A neuron computes a function g that scales the input x linearly (Wx + b)

2. Which of these is the "Logistic Loss"?

Neural Network Basics

10/10 points (100%)

Quiz, 10 questions
1 / 1 points

$$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = | y^{(i)} - \hat{y}^{(i)} |$$

$$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = max(0, y^{(i)} - \hat{y}^{(i)})$$

$$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = | y^{(i)} - \hat{y}^{(i)} |^2$$

○ $$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = -(y^{(i)}\log(\hat{y}^{(i)}) + (1 - y^{(i)})\log(1 - \hat{y}^{(i)}))$$
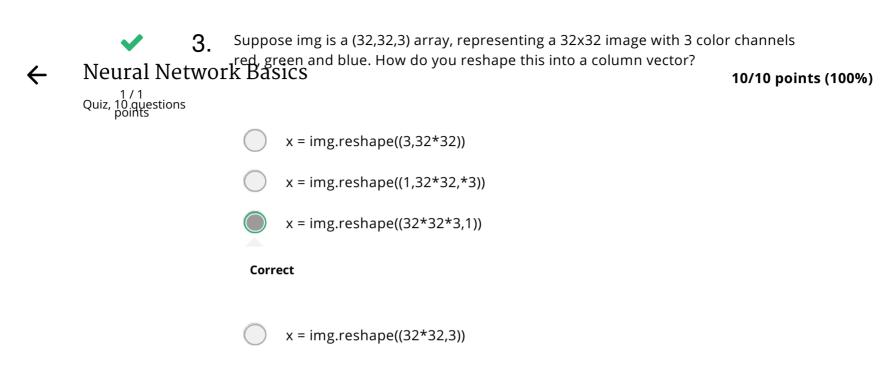
Correct

Correct, this is the logistic loss you've seen in lecture!

← **Neural Network Basics**

3. Suppose img is a (32,32,3) array, representing a 32x32 image with 3 color channels red, green and blue. How do you reshape this into a column vector?

10/10 points (100%)

1 / 1 points

○ x = img.reshape((3,32*32))

○ x = img.reshape((1,32*32,*3))

◉ x = img.reshape((32*32*3,1))

Correct

○ x = img.reshape((32*32,3))

✔   **4.**   Consider the two following random arrays "a" and "b":

← **Neural Network Basics**

10/10 points (100%)

```
1   a = np.random.randn(2, 3) # a.shape = (2, 3)
2   b = np.random.randn(2, 1) # b.shape = (2, 1)
3   c = a + b
```

1 / 1
Quiz, 10 questions
points

What will be the shape of "c"?

○   c.shape = (2, 1)

◉   c.shape = (2, 3)

▲

Correct
Yes! This is broadcasting. b (column vector) is copied 3 times so that it can be summed to each column of a.

○   c.shape = (3, 2)

○   The computation cannot happen because the sizes don't match. It's going to be "Error"!

✔ **5.** Consider the two following random arrays "a" and "b":

← Neural Network Basics

```
1   a = np.random.randn(4, 3) # a.shape = (4, 3)
2   b = np.random.randn(3, 2) # b.shape = (3, 2)
3   c = a*b
```

10/10 points (100%)

What will be the shape of "c"?
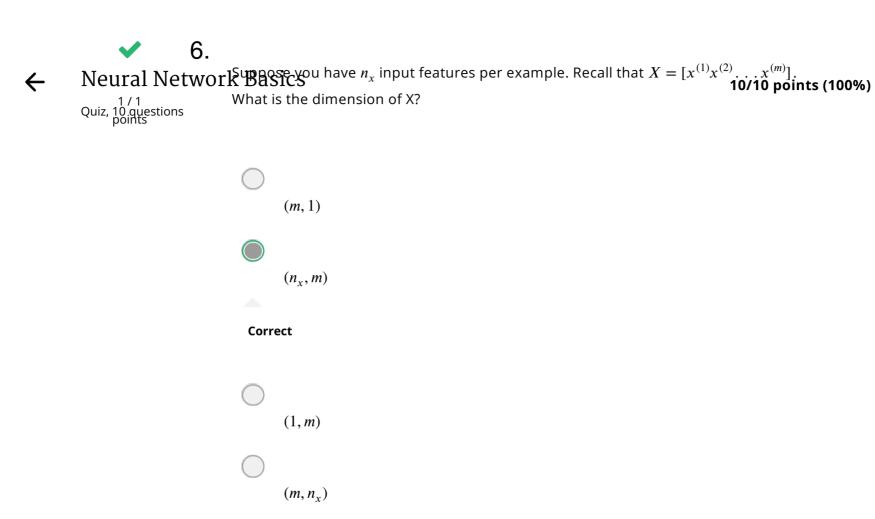
○ c.shape = (3, 3)

○ c.shape = (4, 3)

◉ The computation cannot happen because the sizes don't match. It's going to be "Error"!

▲

Correct

Indeed! In numpy the "*" operator indicates element-wise multiplication. It is different from "np.dot()". If you would try "c = np.dot(a,b)" you would get c.shape = (4, 2).

○ c.shape = (4,2)

✔   6.

← **Neural Network Basics**

Suppose you have n_x input features per example. Recall that $X = [x^{(1)} x^{(2)} \ldots x^{(m)}]$.

What is the dimension of X?

10/10 points (100%)

1 / 1
Quiz, 10 questions
points

○ $(m, 1)$

◉ (n_x, m)

▲

Correct

○ $(1, m)$

○ (m, n_x)

✔

Neural Network Basics

7. Recall that "np.dot(a,b)" performs a matrix multiplication on a and b, whereas "a*b" performs an element-wise multiplication.

10/10 points (100%)

Consider the two following random arrays "a" and "b":

```
1    a = np.random.randn(12288, 150) # a.shape = (12288, 150)
2    b = np.random.randn(150, 45) # b.shape = (150, 45)
3    c = np.dot(a,b)
```

What is the shape of c?

○   c.shape = (12288, 150)

○   The computation cannot happen because the sizes don't match. It's going to be "Error"!

◉   c.shape = (12288, 45)

Correct

Correct, remember that a np.dot(a, b) has shape (number of rows of a, number of columns of b). The sizes match because :

"number of columns of a = 150 = number of rows of b"

○   c.shape = (150,150)

Coursera | Online Courses From Top Universities. Join for Free

https://www.coursera.org/learn/neural-networks-deep-learning/exam/9u...

8. Consider the following code snippet:

Neural Network Basics

10/10 points (100%)

```
1    # a.shape = (3,4)
2    # b.shape = (4,1)
3
4    for i in range(3):
5      for j in range(4):
6        c[i][j] = a[i][j] + b[j]
```

How do you vectorize this?

○ c = a + b

○ c = a.T + b

○ c = a.T + b.T

◉ c = a + b.T

Correct

Coursera | Online Courses From Top Universities. Join for Free

https://www.coursera.org/learn/neural-networks-deep-learning/exam/9u...

9.

Consider the following code:

Neural Network Basics

1 / 1
Quiz, 10 questions
points

10/10 points (100%)

```
1   a = np.random.randn(3, 3)
2   b = np.random.randn(3, 1)
3   c = a*b
```
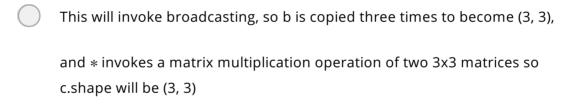
What will be c? (If you're not sure, feel free to run this in python to find out).

⦿ This will invoke broadcasting, so b is copied three times to become (3,3),

and ∗ is an element-wise product so c.shape will be (3, 3)

Correct

◯ This will invoke broadcasting, so b is copied three times to become (3, 3),

and ∗ invokes a matrix multiplication operation of two 3x3 matrices so
c.shape will be (3, 3)

◯ This will multiply a 3x3 matrix a with a 3x1 vector, thus resulting in a 3x1
vector. That is, c.shape = (3,1).

◯ It will lead to an error since you cannot use "*" to operate on these two
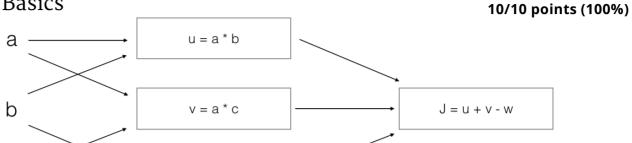matrices. You need to instead use np.dot(a,b)

10. Consider the following computation graph.

← **Neural Network Basics**   **10/10 points (100%)**

What is the output J?

○ J = (c - 1)*(b + a)

◉ J = (a - 1) * (b + c)

Correct

Yes. J = u + v - w = a*b + a*c - (b + c) = a * (b + c) - (b + c) = (a - 1) * (b + c).