

SIMATS ENGINEERING

ASSESSMENT TOOL 1

COURSE NAME: Artificial Intelligence COURSE CODE: CSA1704

COURSE OUTCOME COVERED

CO1: Apply AI basics such as intelligent agents and uninformed search methods to solve problems effectively. (BL3)

Assessment Tool Weightage: 50%

QUESTIONS: 5

Total Marks:50

Duration : 1 Hour

Annexure A

Analytical Problem Solving

Code of Conduct:

I Y.Akhil Reddy(192311121) (Name / Reg No) certify that this submission is my
I S.Chandra Shekhar Reddy(192372163) (Name / Reg No) certify that this submission is my

original work and that I have adhered to the guidelines specified for this assessment. I understand that any violation of academic integrity rules will result in disciplinary action.


Signature of the student:

Annexure A

Analytical Problem Solving

1. Solve the Water Jug problem: you are given 2 jugs, a 4-gallon one and 3-gallon one. Neither has any measuring maker on it. There is a pump that can be used to fill the jugs with water. How can you get exactly 2 gallons of water into 4-gallon jug? Explicit assumptions: A jug can be filled from the pump, water can be poured out of a jug onto the ground, water can be poured from one jug to another and that there are no other measuring devices available.
2. Find out how Mars Rover, analyse and explore the samples on Mars by answering the following questions.
 - i. What are the percept's for this agent?
 - ii. Characterize the operating environment.
 - iii. What are the actions the agent can take?
 - iv. How can one evaluate the performance of the agent?
 - v. What sort of agent architecture do you think is most suitable for this agent?
Why?
3. Explore the search space using search strategies and formulate the problem components for the 8-Queens problem using the following information: Place 8 queens on a chessboard such that none of the queen's attack any of the others. A configuration of 8 queens on the board as shown in the figure below, but this does not represent a solution as the queen in the first column is on the same diagonal as the queen in the last column.
4. A customer wants to travel from the one location to another location using OLA Cab booking mobile application. The customer can select the any of the cab type as mini, micro, sedan, shared, prime and so on based on his comfort to reach the destination. Identify what type of problem-solving agent can be used and write the pseudocode for the above problem.
5. A logistics company operates a delivery network where packages must be transported between warehouses at minimum cost. Each route between warehouses has an associated travel cost (fuel + time). The company wants to determine the least-cost path from the starting warehouse S to the destination warehouse G using the Uniform Cost Search (UCS) algorithm.

The delivery network is represented as a weighted graph:

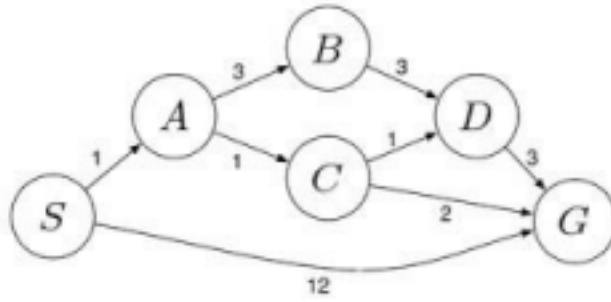

RUBRICS FOR CALCULATION:

Criteria Weightage		Level 4 (Exemplary)	Level 3 (Proficient)	Level 2 (Developing)	Level 1 (Beginning)
Problem Understanding	20%	Clearly interprets problem, identifies all parameters and requirements accurately	Understands problem with minor gaps	Partial understanding; misses key elements	Misinterprets or unable to understand problem
Method Selection	20%	Selects most appropriate method/formula with strong justification	Selects correct method with minor errors	Inappropriate or partially correct method	Unable to select method
Solution Process	25%	Logical, systematic steps with correct approach throughout	Mostly correct steps with minor mistakes	Disorganized steps; multiple errors	No clear process
Accuracy of Calculation	20%	All calculations accurate; correct final answer	Minor calculation errors	Frequent errors; incorrect final answer	No valid calculations

Interpretation of Results	15%	Clearly interprets results with units and engineering relevance	Basic interpretation with minor omissions	Limited or unclear interpretation	No interpretation
---------------------------	-----	---	---	-----------------------------------	-------------------

		Clearly interprets		Partial	Misinterprets
Problem		problem,	Understands		
		identifies all		understanding;	or unable to
Understanding 20%			problem with		
		parameters and	minor gaps	misses key	understand
		requirements accurately		elements	problem

Question 1

Solve the Water Jug Problem using AI Search Problem

Statement:

You are given two jugs:

- Jug A = 4 gallons
- Jug B = 3 gallons

Initially, both jugs are empty. Using only the pump, pouring water between jugs, and emptying jugs, obtain exactly **2 gallons in the 4-gallon jug**.

State Representation

Represent each state as:

(A, B) Where:

- A = Amount of water in the 4-gallon jug
 - B = Amount of water in the 3-gallon jug
- Initial State: (0,0)

Goal State:

(2,x) where x can be 0, 1, 2, or 3.

Operators

The possible operations are:

1. Fill the 4-gallon jug.
2. Fill the 3-gallon jug.
3. Empty the 4-gallon jug.
4. Empty the 3-gallon jug.
5. Pour water from the 4-gallon jug to the 3-gallon jug.
6. Pour water from the 3-gallon jug to the 4-gallon jug.


State Space Solution Step State (4G,3G) Operation

- 1 (0,0) Initial State
- 2 (4,0) Fill 4-gallon jug
- 3 (1,3) Pour 4G $\rightarrow$ 3G
- 4 (1,0) Empty 3-gallon jug
- 5 (0,1) Pour remaining 1 gallon into 4G
- 6 (4,1) Fill 4-gallon jug
- 7 **(2,3)** Pour 4G $\rightarrow$ 3G until full

Goal Achieved:

The **4-gallon jug contains exactly 2 gallons.**

State Space Diagram

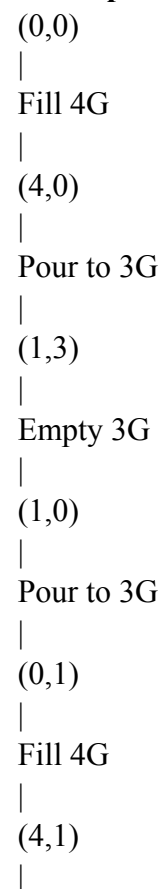

Pour to 3G

|

(2,3) ← Goal

Search Strategy

The Water Jug problem is a **state-space search problem**. Each state represents the amount of water in both jugs. AI explores possible states using search algorithms such as **Breadth-First Search (BFS)** or **Depth-First Search (DFS)** until the goal state is reached. BFS is generally preferred because it guarantees the shortest solution path.

Algorithm (BFS Approach)

1. Start from the initial state **(0,0)**.
2. Generate all possible next states using the allowed operations.
3. Avoid revisiting previously explored states.
4. Continue exploring level by level.
5. Stop when the state **(2,x)** is reached.

Applications

- AI problem solving
- Robotics
- State-space search
- Puzzle solving
- Planning and scheduling

Result

Using the state-space search approach, the Water Jug problem is solved successfully. The goal state **(2,3)** is reached, where the **4-gallon jug contains exactly 2 gallons**, satisfying the given condition.

Question 2

Mars Rover – Intelligent Agent Analysis i.

What are the percepts for this agent?

Percepts are the information collected by the Mars Rover through its sensors.

- Images captured by onboard cameras
- Rock and soil composition
- Atmospheric temperature and pressure
- Terrain and obstacle information
- Radiation levels
- Position and GPS/navigation data
- Wheel status and battery level

ii. Characterize the operating environment

Property Description

Observability Partially Observable

Agents Single Agent

Deterministic Mostly Stochastic
Episodic/Sequential Sequential
Static/Dynamic Dynamic
Discrete/Continuous Continuous
Known/Unknown Partially Known

iii. Actions performed by the agent

- Move forward or backward
- Turn left or right
- Capture images
- Collect rock and soil samples
- Drill the surface
- Analyze collected samples
- Send data to Earth
- Avoid obstacles
- Recharge using solar panels

iv. Performance Measure

The Mars Rover is evaluated based on:


- Accuracy of sample collection
- Successful navigation
- Obstacle avoidance
- Battery efficiency
- Scientific discoveries
- Communication success
- Mission completion


v. Suitable Agent Architecture Model

Based Goal-Based Agent Reason:

A Mars Rover operates in an uncertain environment. It stores information about previously visited locations, plans its route toward scientific goals, avoids obstacles, and makes intelligent decisions without continuous human control. Therefore, a **Model-Based GoalBased Agent** is the most suitable architecture.

Architecture Diagram

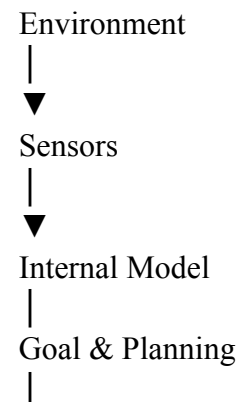



Result

The Mars Rover is an intelligent autonomous agent that senses its environment, makes decisions, and performs scientific exploration using a **Model-Based Goal-Based Agent Architecture**.

Question 3

8-Queens Problem Problem Formulation

The objective is to place **8 queens** on an **8 × 8 chessboard** such that no queen attacks another queen.

A queen can attack:

- Horizontally
- Vertically
- Diagonally

Problem Components Initial State

Empty chessboard.

State

A partially filled chessboard with queens placed safely.

Operators

- Place one queen in a safe position.
- Move to the next column.

Goal State

Eight queens are placed without attacking each other.

Path Cost

Each queen placement has equal cost.

Search Strategy


The 8-Queens problem is solved using **Backtracking Search**.

Steps:

1. Place the first queen in the first column.
2. Move to the next column.
3. Check whether the position is safe.
4. If safe, place the queen.
5. If not safe, try another row.
6. If no position is possible, backtrack.

7. Continue until all eight queens are placed.

Search Space Diagram

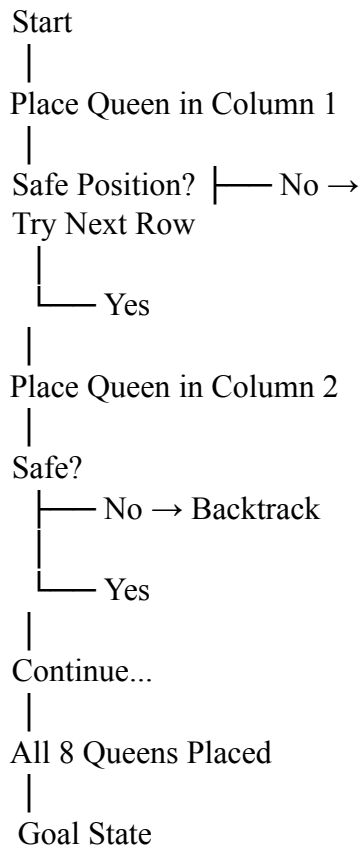

Example Solution

Q
 Q . .
 Q .
 Q . .
 . . Q
 Q .
 . Q
 . . . Q

Advantages

- Reduces unnecessary searching.
- Uses backtracking to eliminate invalid states.
- Guarantees a valid solution if one exists.
- Efficient compared to brute-force search.

Applications

- AI search problems
- Scheduling systems
- Resource allocation
- Puzzle solving

- Constraint Satisfaction Problems (CSP)

Result

The **8-Queens Problem** is a **Constraint Satisfaction Problem (CSP)** solved efficiently using **Backtracking Search**, ensuring that all eight queens are placed without attacking each other.

Question 4

OLA Cab Booking – Problem Solving Agent Problem

Statement

A customer wants to travel from one location to another using the **OLA Cab Booking** application. The customer can choose different cab types such as **Mini, Micro, Sedan, Shared, Prime**, etc., based on comfort and fare.

Type of Problem-Solving Agent

The most suitable AI agent is a **Goal-Based Agent**.

Reason

A Goal-Based Agent selects actions based on a specific goal. Here, the goal is to **reach the destination safely, quickly, and at minimum cost**. The agent evaluates different cab options and selects the one that best satisfies the user's requirements such as price, comfort, waiting time, and availability.

Working of the Agent

1. User enters pickup and destination locations.
2. The system calculates the available routes.
3. Available cab types are displayed.
4. The user selects a preferred cab.
5. The system calculates fare and estimated arrival time.
6. The nearest driver is assigned.
7. The trip begins and navigation is provided.
8. The customer reaches the destination and completes payment.

Flowchart

Start



Enter Pickup & Destination



Search Available Cabs



Display Cab Types



Select Preferred Cab



Calculate Fare & ETA



Assign Driver
|
Start Journey
|
Reach Destination
|
Payment & Trip Complete
|
Stop

Pseudocode

BEGIN

Input Pickup Location
Input Destination

Search Available Cabs

Display Cab Types

User Selects Cab

Calculate Fare

Assign Nearest Driver
Navigate Driver to Pickup

Start Trip

Reach Destination

Generate Bill

Complete Payment

END

Advantages

- Quick cab allocation
- Shortest route selection
- Reduced waiting time
- User-friendly booking process
- Real-time tracking
- Secure payment system

Result

A **Goal-Based Agent** is the most suitable AI agent for the OLA Cab Booking system because it selects the best cab option to achieve the customer's goal efficiently.

Question 5

Uniform Cost Search (UCS) Problem Statement

Find the **least-cost path** from S (Start) to G (Goal) using the **Uniform Cost Search (UCS)** algorithm.

Edge Costs From
the graph:

- $S \rightarrow A = 1$
- $S \rightarrow G = 12$
- $A \rightarrow B = 3$
- $A \rightarrow C = 1$
- $B \rightarrow D = 3$
- $C \rightarrow D = 1$
- $C \rightarrow G = 2$
- $D \rightarrow G = 3$

Uniform Cost Search Steps

Step	Expanded Node	Path Cost
------	---------------	-----------

1	S	0
2	A	1
3	C	2
4	D	3
5	G	4

Search Tree

```
S
/\
1 /\12
A G
/\
3 /\1
B C
\|
3\|\2
D----|--G
\1
\
G
```

Cost Calculation Path 1

$S \rightarrow G$

Cost = **12**

Path 2

$S \rightarrow A \rightarrow B \rightarrow D \rightarrow G$

Cost

$= 1 + 3 + 3 + 3$

= **10**

Path 3

$S \rightarrow A \rightarrow C \rightarrow G$

Cost

$= 1 + 1 + 2$

= **4**

Path 4

$S \rightarrow A \rightarrow C \rightarrow D \rightarrow G$

Cost

$= 1 + 1 + 1 + 3$

= **6**

Least Cost Path $S \rightarrow A \rightarrow C \rightarrow G$ Total Cost = 4

Working of UCS

Uniform Cost Search expands the node with the **lowest cumulative path cost** first. It uses a **priority queue** to store frontier nodes in increasing order of cost. The algorithm continues expanding nodes until the goal node is removed from the priority queue. UCS always guarantees the **optimal (least-cost) solution** when all edge costs are positive.

Advantages

- Finds the optimal solution.
- Works with different path costs.
- Complete and optimal algorithm.
- Suitable for route planning and navigation.
- Used in GPS, robotics, and logistics.

Result

Using the **Uniform Cost Search (UCS)** algorithm, the least-cost path is:

$S \rightarrow A \rightarrow C \rightarrow G$ Minimum Cost = 4