




How to build an agent

Let's dive into an example
of an email agent






LangChain

1 Define




Identify a realistic agent use case and gather 5-10 concrete examples.

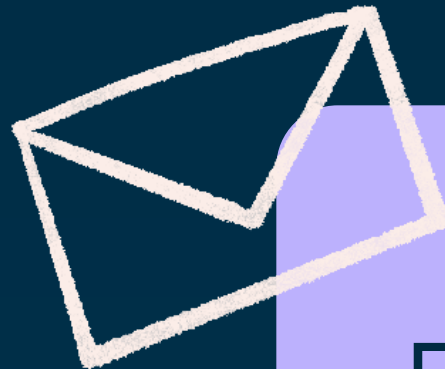

Example tasks for an email agent:

- Categorize email by priority
- Schedule meetings
- Answer product questions




2

Design the Operating Procedure

Break down tasks into a clear step-by-step procedure.

Example steps:

- Categorize response priority.
- Checks calendar availability and schedule meeting
- Draft response & queue for human review.



LangChain




3

Build MVP with prompt

Build prompts
that handle the
core reasoning.

Example:

Build core prompt for
email classification
and response
generation, testing
with manually-
provided context
and sample data.





LangChain


4

Connect & Orchestrate

Connect to live data sources and build orchestration logic.

Example integrations:

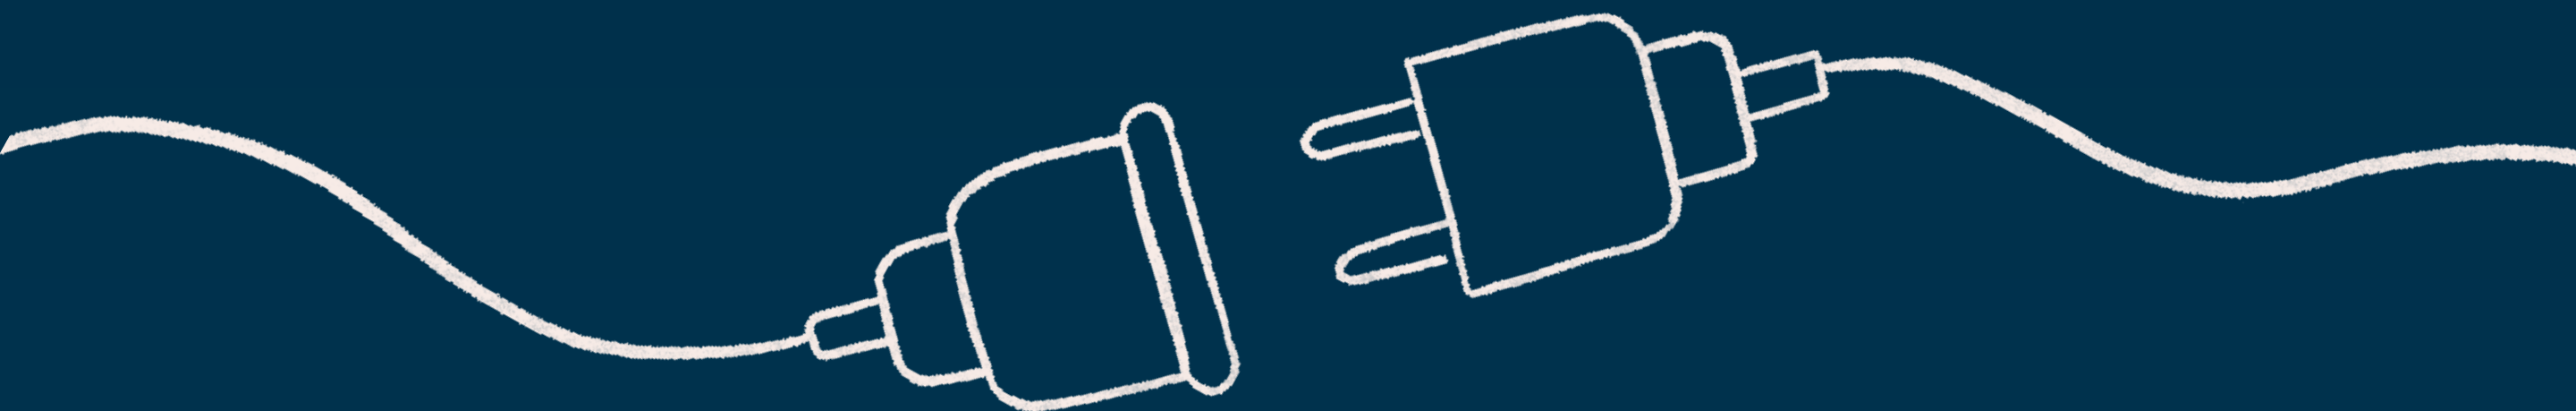



5

Test & Iterate


Evaluate & measure performance of your agent against examples.

Example:

Success criteria include:

- Quality of response
- Accuracy of response
- Professional tone





LangChain




Example:

Monitor traffic, use cases, and feedback. Iterate to improve performance and add additional features

6 Deploy, Scale, Refine

Deploy the agent and monitor in real-time — then continuously refine.

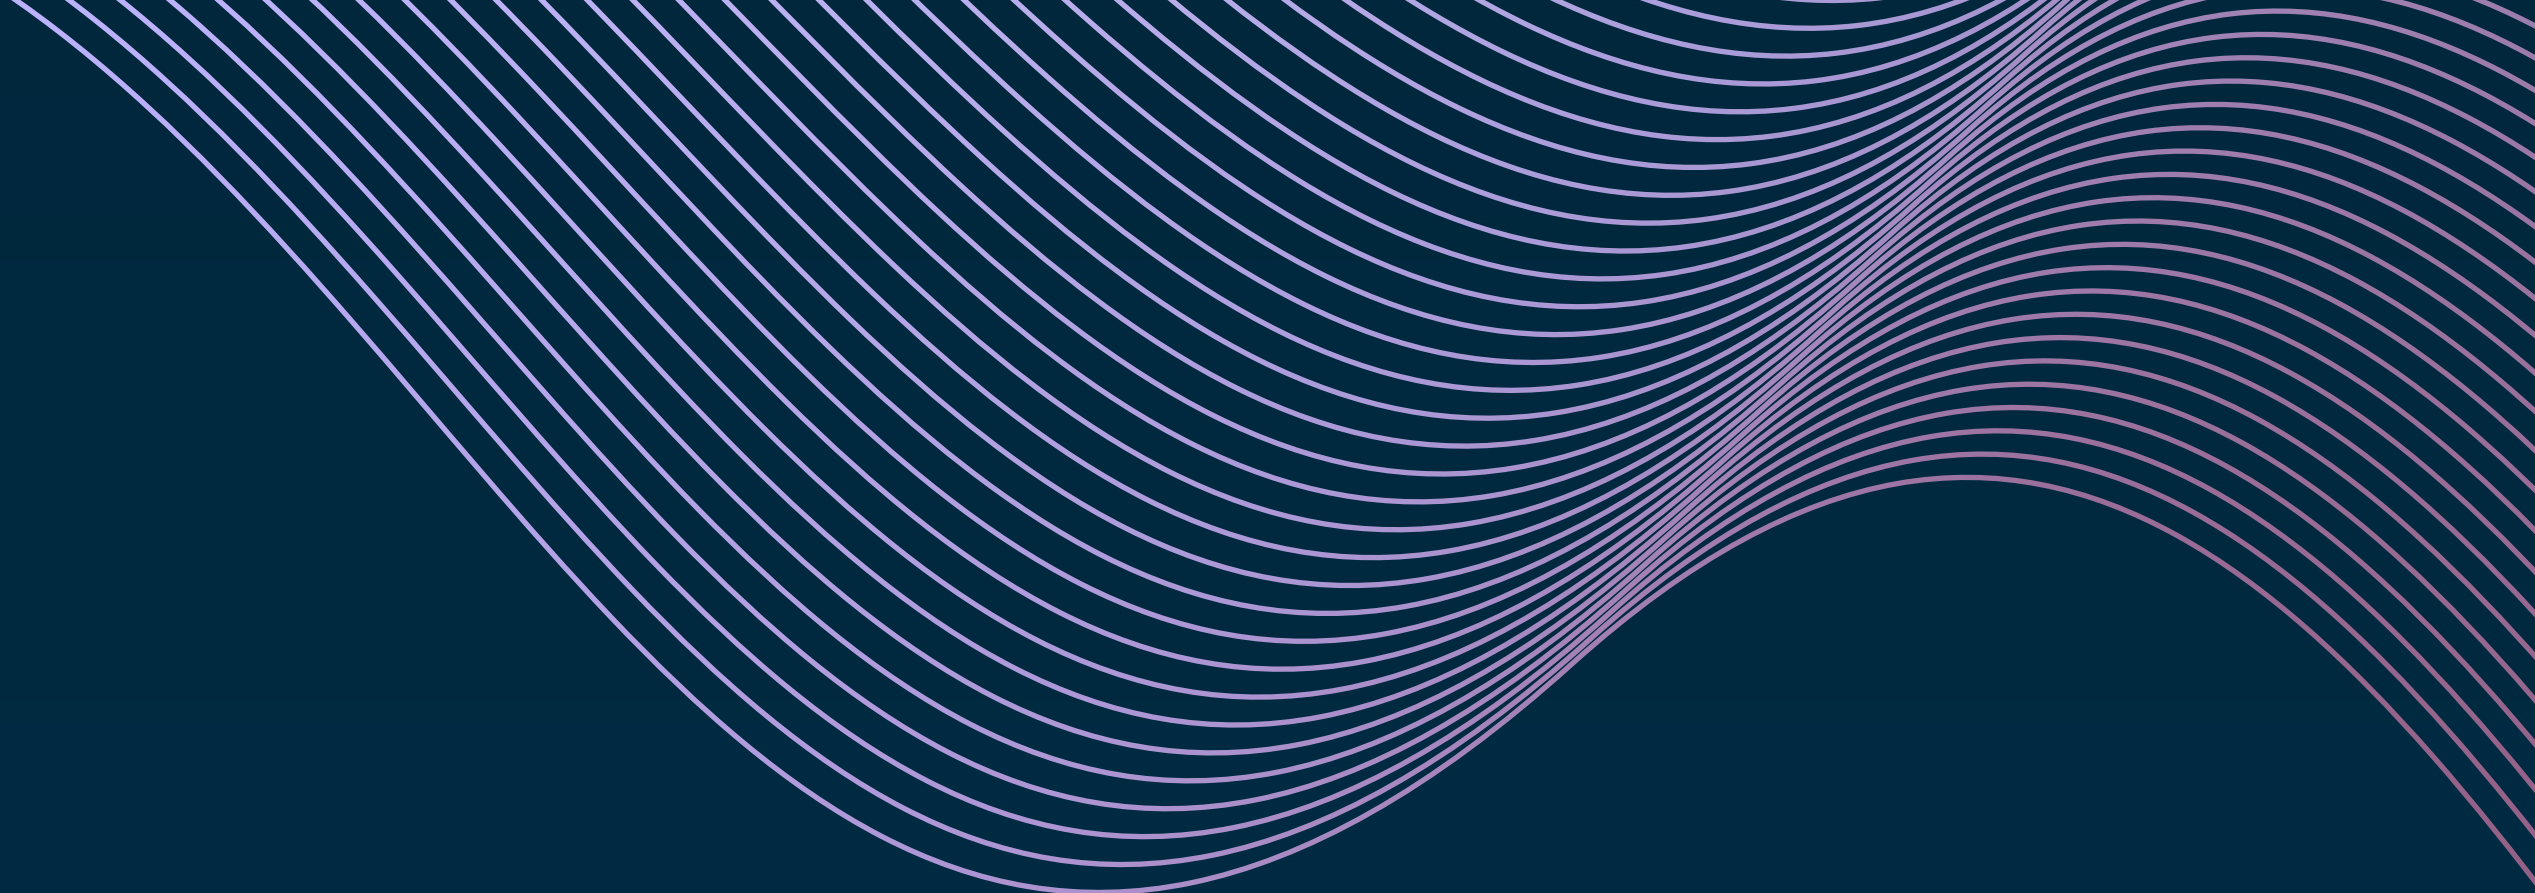

Check out the blog post!

[blog.langchain.com/
how-to-build-an-agent/](https://blog.langchain.com/how-to-build-an-agent/)

