ϕ

Generate an embedding into a navigable
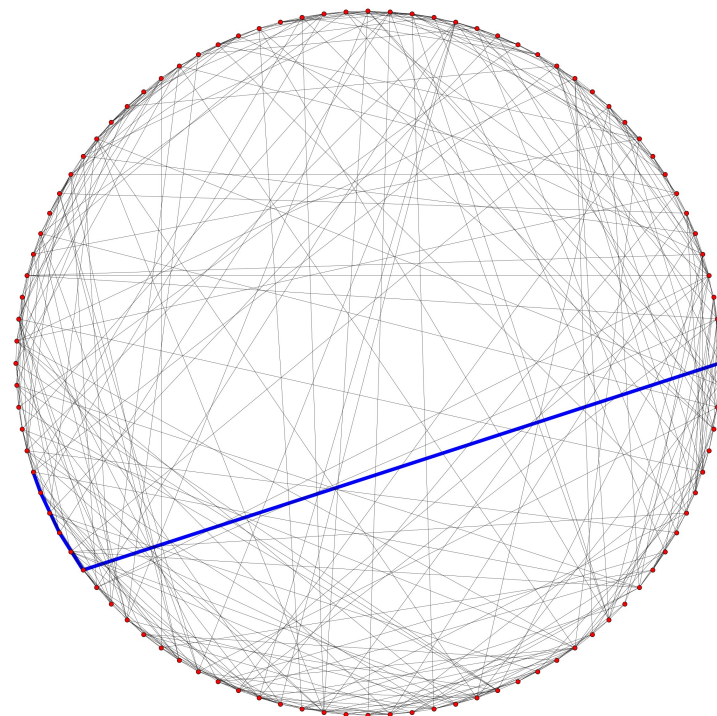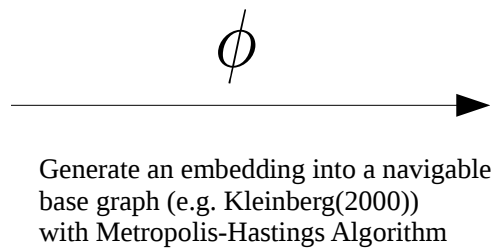base graph (e.g. Kleinberg(2000))
with Metropolis-Hastings Algorithm

Real-world F2F network

Decentralized routing in a base graph