



CHRIST
UNIVERSITY
BENGALURU, INDIA

Declared as Deemed to be University under Section 3 of UGC Act 1956

DEPARTMENT - COMPUTER SCIENCE

Course Pack FOR PROGRAMMING IN JAVA-BCA434

BCA434 - PROGRAMMING IN JAVA

Total Teaching Hours For Semester : 60

Total Teaching Hours For Semester : 4

Max Marks : 100

Credits : 4

Course Objectives/Course Description:

This course teaches students how to develop java applications. Course gives an overview of difference between C++ and Java. Students will be developing and testing java application as a practical course work. The course introduces the concept of UI design in java using AWT.

Objectives of the course are

and bull; To introduce concepts of core java in a methodical way.

and bull; To demonstrate the principles underlying the design of high level programming languages.

Learning Outcome

- The students will have the competence in the use of Java Programming language.
- The development of small to medium sized application programs that demonstrate professionally acceptable coding.

and nbsp;

Unit-1

Teaching Hours:10

Introduction

History-Features of Java-Java and the Internet-How Java differs from C and C++-Java Environment-Structure of Java Program-Java Virtual Machine-Data Types-Constants-Variables-Declaration of variables-Giving values to variables-Scope of variables-Symbolic constants-Literals. Operators-Arithmetic, Boolean logical, Relational and Bitwise operators-Operator Precedence. Classes and Objects - General form of a class-Declaring objects-Accessing class members-Constructors-Parameterized constructors-Overloading constructors-Defining methods-Overloading methods-Returning a value-Recursion-Introducing Access Control-Understanding static-Introducing Final-Garbage collection-finalize method-this keyword. and nbsp;

Unit-2

Teaching Hours:9

- Arrays and string handling

Introduction to Arrays-One Dimensional Arrays and mdash;Creation of Arrays-Array Initialization Multidimensional Arrays-arrayname.length-Command Line Arguments. String Constructors-String length-String Literals-String Concatenation-String concatenation with other data types-String conversion and toString- Character Extraction- String Comparison-Searching Strings- Modifying a String- Data Conversion using valueOf-Changing the case of characters-String Buffer.

Unit-3

Teaching Hours:9

Inheritance and exception handling

Basics-Member Access and Inheritance- Super class variable referring to a sub classApplications of

keyword super- Creating a Multilevel Hierarchy-Order of calling constructors-Method Overriding-Dynamic method dispatch-Abstract classes-Using final with Inheritance. Defining an Interface - Implementing interfaces-Variables in interfacesExtending interfaces. Introduction-Types of errors and ndash;Exception- Uncaught Exceptions - try and catch - Multiple catch - Nested Try - throw, throws and finally-Built-in Exceptions. and nbsp;Self Learning: Packages and nbsp;

Unit-4

Teaching Hours:11

- Multithreading and io package

Multithreaded Programming and ndash; Creating Threads-Life cycle of a Thread- Thread PrioritiesSynchronization-Interthread communication-Deadlock . I/O Basics-Streams-Byte Streams and Character Streams-Reading console Input-Reading Characters-Reading Strings-Writing console output- PrintWriter class-Reading and Writing files-Java I/O classes and interfaces. Self Learning: Runnable interface in multithreading and nbsp;

Unit-5

Teaching Hours:11

Applets

Applet basics-How Applet differs from Applications-Applet Architecture-Applet life cycleApplet display methods-Repaint-Status window-passing parameters to appletsgetDocumentBase and getCodeBase- AppletContext and showDocument. Event HandlingEvent handling mechanisms-Delegation Event Model- Event classes-Sources of events-Event and nbsp;listener interfaces-Handling mouse and keyboard events-Adapter classes-Inner classes. Self Learning: Intro to networking clones and interfaces

Unit-6

Teaching Hours:10

AWT classes

AWT classes-Window fundamentals-working with frame windows-Creating a frame window in an applet- Creating a windowed program-Displaying information within a window.AWT Controls, Layout Managers and ndash; Control fundamentals-Labels-ButtonsCheckBoxes-CheckBoxGroup-ChoiceControl-Lists- ScrollBar-TextField-TextAreaLayoutManagers.Self Learning: Working with Graphics, Color, font

Text Books And Reference Books:

[1]. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011 .

Essential Reading / Recommended Reading:

[1].E. Balagurusamy ,Programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4

th

Edition,2010,

[2].Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc,

2009.and nbsp;

Course Plan

Class Name : 4BCA A

Subject Name : PROGRAMMING IN JAVA

Subject Code : BCA434

Teacher Name : SHONEY SEBASTIAN

Planned Date	No of Hours	Unit	Heading	Details	Method	Reading/Ref
01/11/2017 04/11/2017	2.00	Unit-1	Introduction	History-Features of Java-Java and the Internet-How Java differs from C and C++	Lecturing, case studies, Activities	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
06/11/2017 11/11/2017	4.00	Unit-1	Introduction	Classes and Objects - General form of a class- Declaring objects- Accessing class members,Constructors- Parameterized constructors-	Lecturing, CV(Concept Visualization through real implementation)	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc,

				Overloading constructors		2009.
13/11/2017 18/11/2017	4.00	Unit-1	Introduction	Defining methods Overloading methods-Returning a value-Recursion-Introducing Access Control Understanding static-Introducing Final- Garbage collection-finalize method-this keyword.	Lecturing and CV	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
20/11/2017 25/11/2017	4.00	Unit-1	Introduction	Defining methods Overloading methods-Returning a value-Recursion-Introducing Access Control Understanding static-Introducing Final- Garbage collection-finalize method-this keyword.	Lecturing, CV	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
27/11/2017 02/12/2017	4.00	Unit-2	- Arrays and string handling	Introduction to Arrays- One Dimensional Arrays?Creation of Arrays-Array Initialization Multidimensional Arrays- arrayname.length- Command Line Arguments.	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
04/12/2017 09/12/2017	4.00	Unit-2	- Arrays and string handling	String Constructors- String length-String Literals-String Concatenation-String concatenation with other data types-String conversion and toString- Character Extraction-String Comparison Searching Strings- Modifying a String- Data Conversion using valueOf- Changing the case of characters-String Buffer.	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
11/12/2017 16/12/2017	4.00	Unit-3	Inheritance and exception handling	Basics-Member Access and Inheritance- Super class variable referring to a sub class Applications of keyword super- Creating a Multilevel Hierarchy- Order of calling constructors-Method Overriding	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
18/12/2017 23/12/2017	2.00	Unit-3	Inheritance and exception handling	Dynamic method dispatch-Abstract classes-Using final with Inheritance. Defining an Interface - Implementing interfaces-Variables in interfaces Extending interfaces. Introduction-Types of errors	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
01/01/2018 06/01/2018	3.00	Unit-3	Inheritance and exception handling	Defining an Interface - Implementing interfaces- Variables in interfaces Extending interfaces. Introduction-Types of errors ?Exception-Uncaught Exceptions - try and catch - Multiple catch - Nested Try - throw, throws and finally-Built-in Exceptions.	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
08/01/2018 13/01/2018	4.00	Unit-4	- Multithreading and io package	Multithreaded Programming ? Creating Threads-Life cycle of a Thread- Thread Priorities Synchronization-Interthread communication-Deadlock	Lecturing, CV	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited,Delhi , 4th Edition, 2010, 3. Dr.Rao,Nageswara ,Core Java,An Integrated Approach ,New Edition Kongent Solutions Inc, 2009.
22/01/2018 27/01/2018	4.00	Unit-4	- Multithreading and io package	I/O Basics-Streams-Byte Streams and Character Streams-Reading	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition,2011. 2.E.balagurusamy programming with JAVA a

				console Input-Reading Characters-Reading		Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.
29/01/2018 03/02/2018	4.00	Unit-4	- Multithreading and io package	Strings-Writing console output-PrintWriter class- Reading and Writing files-Java I/O classes and interfaces. Self Learning: Runnable interface in multithreading	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition, 2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.
05/02/2018 10/02/2018	4.00	Unit-5	Applets	Applet basics-How Applet differs from Applications-Applet Architecture-Applet life cycleApplet display methods-Repaint-Status window-passing	Lecturing, CV	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition, 2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.
12/02/2018 17/02/2018	4.00	Unit-5	Applets	parameters to appletsgetDocumentBas e and getCodeBase- AppletContext and showDocument. Event HandlingEvent handling mechanisms-Delegation Event Model-Event classes-Sources of events-Event listener interfaces-Handling mouse and keyboard events	Lecturing, CV	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition, 2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.
19/02/2018 24/02/2018	4.00	Unit-5	Applets	Adapter classes-Inner classes. Self Learning: Intro to networking clones and interfaces	Lecturing, CV, Web reference	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition, 2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.
26/02/2018 03/03/2018	4.00	Unit-6	AWT classes	AWT classes-Window fundamentals-working with frame windows- Creating a frame window in an applet-Creating a windowed program- Displaying information within a window.AWT Controls	Lecturing, CV, case studies	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition, 2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.
05/03/2018 10/03/2018	4.00	Unit-6	AWT classes	Layout Managers ? Control fundamentals- Labels- ButtonsCheckBoxes- CheckBoxGroup- ChoiceControl-Lists- ScrollBar-TextField- TextAreaLayoutManager s.	Lecturing, CV, case studies	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition, 2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.
12/03/2018 17/03/2018	4.00	Unit-6	AWT classes	Revision	Lecturing, CV, case studies	1. Schildt Herbert, Java :The Complete Reference, Tata McGraw- Hill, 8th Edition, 2011. 2.E.balagurusamy programming with JAVA a Primer, Tata McGraw-Hill Publishing Company Limited, Delhi, 4th Edition, 2010, 3. Dr.Rao, Nageswara, Core Java, An Integrated Approach, New Edition Kongent Solutions Inc, 2009.

CIA 1

Component/Task 1

CIA Details

Assignment Title : Programming Test [Apply Level]

Assignment Details: It is an Individual assignment. A scenario based programming question will be given to each student to solve within 90 minutes. The following points are mandatory in this assignment. €Program implementation.€Input / Output Design.€Appropriate usage of OOPs concepts.€Validation of the input data.€Accuracy of the result.

Submission Details: The program will be evaluated on the same day by a set of teachers. After the evaluation the source file needs to upload in the google class room. Time line : 90 mins for implementation and 30 mins for evaluation

CIA Details will display from 07/11/2017

Learning Objective

Assignment Learning Objectives: By the end of this assignment you will be able to improve 1. logical thinking 2. coding skill 3. debugging skill 4. the OOPS concepts

Assessment Strategies aligned to LO:

The assignment question is designed by keeping the above learning objective in mind. Assessment criteria is on the spot implementation of the programming question and uploading the result. **Technology Tools used along with their Purpose:**

JDK 1.8 for implementing the code, Google class room for uploading the result.

Evaluation Rubrics

The assignment question will have 4 functions to solve. The evaluation criteria is given below

The correct class design with data members	- 4 marks
The correct declaration of the functions	- 4 x 1 = 4 marks
The correct implementation of the functions	- 4 x 1 = 4 marks
The full execution of the program	- 3 marks

Component/Task 2

CIA Details

Assignment Title : Report on different java technologies [Understanding Level]

Assignment Details : It is an individual assignment.

The objective of this component is to enhance the reading habit of the students. Students will have to submit a report on different Java technologies (Maximum 2 java

technologies). Students can refer any text book for this topic and submit a report in the word/pdf format with the following details. Title of the technology : Briefing of the technology : (Introduction, What, where - Maximum 1 page for 1 technology) comparison with any other similar technology

Submission Details: The final report needs to upload in Google classroom.

CIA Details will display from 07/11/2017

Learning Objective

Assignment Learning Objectives: Learning objectives 1. To understand different java based technologies 2. To improve reading habit 3. To be aware of the similar technologies

Assessment Strategies aligned to LO: Assessment strategy Briefing of the technology in maximum 1 page and compare with any similar technologies. **Technology Tools used along with their Purpose:** Google classroom - To upload the final file

Evaluation Rubrics

Writing of each technology	- 2 x 1.5 = 3 marks
Comparison with similar technologies	- 2x1 = 2 marks

CIA 3

Component/Task 1

CIA Details

Assignment Title : Problem solving using the tool HackerRank Description. Students are expected to solve the java based problems given in HackerRank Tool based on the syllabus. Weightage is given for solving the challenging questions posted there. Requirements Evaluation on the basis of the complexity of the question attended

CIA Details will display from 07/11/2017

Learning Objective

Assignment Learning Objectives: objective of this component is 1. make them understand on the industry tool HackerRank. 2. To improve the programming skill 3. To apply the


theoretical knowledge in the actual scenarios. **Assessment Strategies aligned to LO:**

Students will get challenging programming questions and come out with the solution using HackerRank. Minimum 20 question for the evaluation of CIA 3 **Technology Tools used along with their Purpose:** HackerRank Tool, Google Classroom

Evaluation Rubrics

20 questions x 1/2 mark	= 10 mark
5 marks for attending additional questions. Depend upon the number of additional questions attended by the student in comparison with the highest number of additional questions attended in the class, 5 marks will be distributed.	
5 marks for attending challenging questions. Depend upon the number of challenging questions attended by the student in comparison with the highest number of challenging questions attended in the class, 5 marks will be distributed.	

1. SL275_OH



Sun Services

Java™ Programming Language

SL-275



Copyright 2006 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, U.S.A. All rights reserved.

This product or document is protected by copyright and distributed under licenses restricting its use, copying, distribution, and decompilation. No part of this product or document may be reproduced in any form by any means without prior written authorization of Sun and its licensors, if any.

Third-party software, including font technology, is copyrighted and licensed from Sun suppliers.

Sun, Sun Microsystems, the Sun Logo, Java, JavaBeans, JavaOS, JDBC, JDK, JVM, J2SE, Jini, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries.

UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Netscape Navigator is a trademark of Netscape Communications Corporation.

The OPEN LOOK and Sun Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

U.S. Government approval might be required when exporting the product.

RESTRICTED RIGHTS: Use, duplication, or disclosure by the U.S. Government is subject to restrictions of FAR 52.227-14(g)(2)(6/87) and FAR 52.227-19(6/87), or DFAR 252.227-7015 (b)(6/95) and DFAR 227.7202-3(a).

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS, AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Export Commodity Classification Number Assigned: 2 February 2002

Copyright 2006 Sun Microsystems Inc., 4150 Network Circle, Santa Clara, California 95054, Etats-Unis. Tous droits réservés.

Ce produit ou document est protégé par un copyright et distribué avec des licences qui en restreignent l'utilisation, la copie, la distribution, et la décompilation. Aucune partie de ce produit ou document ne peut être reproduite sous aucune forme, par quelque moyen que ce soit, sans l'autorisation préalable et écrite de Sun et de ses bailleurs de licence, s'il y en a.

Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun.

Sun, Sun Microsystems, the Sun Logo, Java, JavaBeans, JavaOS, JDBC, JDK, JVM, J2SE, Jini, et Solaris sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays.

UNIX est une marques déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

Netscape Navigator est une marque de Netscape Communications Corporation aux Etats-Unis et dans d'autres pays.

L'interface d'utilisation graphique OPEN LOOK et Sun™ a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui en outre se conforment aux licences écrites de Sun.

L'accord du gouvernement américain est requis avant l'exportation du produit.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFAÇON.


Course Contents

About This Course	Preface-xvi
Course Goals	Preface-xvii
Course Overview	Preface-xix
Course Map	Preface-xx
Topics Not Covered	Preface-xxi
How Prepared Are You?	Preface-xxii
Introductions	Preface-xxiii
How to Use the Icons	Preface-xxiv
Typographical Conventions and Symbols	Preface-xxv
Getting Started	1-1
Objectives	1-2
Relevance	1-3
What Is the Java™ Technology?	1-4
Primary Goals of the Java Technology	1-5
The Java Virtual Machine	1-8
Garbage Collection	1-11
The Java Runtime Environment	1-12
Operation of the JRE With a Just-In-Time (JIT) Compiler	1-13
JVM™ Tasks	1-14
The Class Loader	1-15
The Bytecode Verifier	1-16
A Simple Java Application	1-17
The TestGreeting Application	1-18
The Greeting Class	1-19
Compiling and Running the TestGreeting Program	1-20

Compile-Time Errors	1-21
Runtime Errors	1-22
Java Technology Runtime Environment	1-23

Object-Oriented Programming 2-1

Objectives	2-2
Relevance	2-3
Software Engineering	2-4
The Analysis and Design Phase	2-5
Abstraction	2-6
Classes as Blueprints for Objects	2-7
Declaring Java Technology Classes	2-8
Declaring Attributes	2-9
Declaring Methods	2-10
Accessing Object Members	2-11
Information Hiding	2-12
Encapsulation	2-14
Declaring Constructors	2-15
The Default Constructor	2-16
Source File Layout	2-17
Software Packages	2-18
The package Statement	2-19
The import Statement	2-20
Directory Layout and Packages	2-21
Development	2-22
Compiling Using the -d Option	2-23
Terminology Recap	2-24
Using the Java Technology API Documentation	2-25
Java Technology API Documentation With HTML3	2-26



Identifiers, Keywords, and Types	3-1
Objectives	3-2
Relevance	3-4
Comments	3-5
Semicolons, Blocks, and White Space	3-6
Identifiers	3-9
Java Programming Language Keywords	3-10
Primitive Types	3-11
Logical – boolean	3-12
Textual – char	3-13
Textual – String	3-14
Integral – byte, short, int, and long	3-15
Floating Point – float and double	3-17
Variables, Declarations, and Assignments	3-19
Java Reference Types	3-20
Constructing and Initializing Objects	3-21
Memory Allocation and Layout	3-22
Explicit Attribute Initialization	3-23
Executing the Constructor	3-24
Assigning a Variable	3-25
Assigning References	3-26
Pass-by-Value	3-27
The this Reference	3-32
Java Programming Language Coding Conventions	3-36

Expressions and Flow Control	4-1
Objectives	4-2
Relevance	4-4
Variables and Scope	4-5
Variable Scope Example	4-6

Variable Initialization	4-7
Initialization Before Use Principle	4-8
Operator Precedence	4-9
Logical Operators	4-10
Bitwise Logical Operators	4-11
Right-Shift Operators >> and >>>	4-12
Left-Shift Operator <<	4-13
Shift Operator Examples	4-14
String Concatenation With +	4-15
Casting	4-16
Promotion and Casting of Expressions	4-17
Simple if, else Statements	4-18
Complex if, else Statements	4-19
Switch Statements	4-21
Looping Statements	4-24
Special Loop Flow Control	4-27
The break Statement	4-28
The continue Statement	4-29
Using break Statements with Labels	4-30
Using continue Statements with Labels	4-31

Arrays	5-1
Objectives	5-2
Relevance	5-3
Declaring Arrays	5-4
Creating Arrays	5-5
Creating Reference Arrays	5-7
Initializing Arrays	5-9
Multidimensional Arrays	5-10
Array Bounds	5-12

Using the Enhanced for Loop	5-13
Array Resizing	5-14
Copying Arrays	5-15

Class Design	6-1
Objectives	6-2
Relevance	6-3
Subclassing	6-4
Single Inheritance	6-7
Access Control	6-9
Overriding Methods	6-10
Overridden Methods Cannot Be Less Accessible	6-12
Invoking Overridden Methods	6-13
Polymorphism	6-15
Virtual Method Invocation	6-17
Heterogeneous Collections	6-18
Polymorphic Arguments	6-19
The instanceof Operator	6-20
Casting Objects	6-21
Overloading Methods	6-23
Methods Using Variable Arguments	6-24
Overloading Constructors	6-25
Constructors Are Not Inherited	6-27
Invoking Parent Class Constructors	6-28
Constructing and Initializing Objects: A Slight Reprise	6-30
Constructor and Initialization Examples	6-31
The Object Class	6-34
The equals Method	6-35
An equals Example	6-36
The toString Method	6-40


Wrapper Classes	6-41
Autoboxing of Primitive Types	6-43

Advanced Class Features	7-1
Objectives	7-2
Relevance	7-3
The <code>static</code> Keyword	7-4
Class Attributes	7-5
Class Methods	7-7
Static Initializers	7-10
The <code>final</code> Keyword	7-12
Final Variables	7-13
Blank Final Variables	7-14
Old-Style Enumerated Type Idiom	7-15
The New Enumerated Type	7-19
Advanced Enumerated Types	7-23
Static Imports	7-25
Abstract Classes	7-27
The Solution	7-31
Interfaces	7-34
The Flyer Example	7-35
Multiple Interface Example	7-42
Uses of Interfaces	7-44

Exceptions and Assertions	8-1
Objectives	8-2
Relevance	8-3
Exceptions and Assertions	8-4
Exceptions	8-5
Exception Example	8-6

The try-catch Statement	8-7
Call Stack Mechanism	8-10
The finally Clause	8-11
Exception Categories	8-12
Common Exceptions	8-13
The Handle or Declare Rule	8-14
Method Overriding and Exceptions	8-15
Creating Your Own Exceptions	8-17
Handling a User-Defined Exception	8-18
Assertions	8-20
Recommended Uses of Assertions	8-21
Internal Invariants	8-22
Control Flow Invariants	8-23
Postconditions and Class Invariants	8-24
Controlling Runtime Evaluation of Assertions	8-25

Text-Based Applications	9-1
Objectives	9-2
Relevance	9-3
Command-Line Arguments	9-4
System Properties	9-6
The Properties Class	9-7
Console I/O	9-10
Writing to Standard Output	9-11
Reading From Standard Input	9-12
Simple Formatted Output	9-14
Simple Formatted Input	9-15
Files and File I/O	9-16
Creating a New File Object	9-17
The File Tests and Utilities	9-18



File Stream I/O	9-20
File Output Example	9-23
The Collections API	9-25
A Set Example	9-27
A List Example	9-28
Collections in JDK™ Version 1.1	9-29
Generics	9-30
Generic Collections API	9-31
Compiler Warnings	9-32
Iterators	9-33
The Iterator Interface Hierarchy	9-34
Enhanced for Loop	9-35

Building Java GUIs	10-1
Objectives	10-2
Relevance	10-3
Abstract Window Toolkit	10-4
The java.awt Package	10-5
Containers	10-6
Positioning Components	10-7
Frames	10-8
The FrameExample Class	10-9
Example Frame	10-10
Panels	10-11
The FrameWithPanel Class	10-12
Layout Managers	10-15
Default Layout Managers	10-16
A Simple FlowLayout Example	10-17
The FlowLayout Manager	10-20
The FlowExample Class	10-22

The BorderLayout Manager	10-24
Organization of the Border Layout Components	10-25
The BorderExample Class	10-26
Example of BorderLayout	10-28
The GridLayout Manager	10-29
The GridExample Class	10-30
Example of GridLayout	10-32
The ComplexLayoutExample Class	10-33
Drawing in AWT	10-36
Various Shapes Drawn by the Graphics Object	10-37

GUI Event Handling	11-1
Objectives	11-2
Relevance	11-3
What Is an Event?	11-4
Delegation Model	11-5
A Listener Example	11-7
Event Categories	11-9
Method Categories and Interfaces	11-10
Complex Example	11-13
Multiple Listeners	11-17
Event Adapters	11-18
Event Handling Using Inner Classes	11-19
Event Handling Using Anonymous Classes	11-21


GUI-Based Applications	12-1
Objectives	12-2
Relevance	12-3
AWT Components	12-4
AWT Listeners	12-7

How to Create a Menu	12-9
Creating a MenuBar	12-10
Creating a Menu	12-11
Creating a MenuItem	12-13
Creating a CheckBoxMenuItem	12-15
Controlling Visual Aspects	12-17
J.F.C./Swing Technology	12-18


Threads	13-1
Objectives	13-2
Relevance	13-3
Threads	13-4
Creating the Thread	13-5
Starting the Thread	13-7
Thread Scheduling	13-8
Thread Scheduling Example	13-9
Terminating a Thread	13-10
Basic Control of Threads	13-12
The join Method	13-13
Other Ways to Create Threads	13-14
Selecting a Way to Create Threads	13-15
Using the synchronized Keyword	13-16
The Object Lock Flag	13-17
Releasing the Lock Flag	13-20
Using synchronized – Putting It Together	13-21
Thread State Diagram With Synchronization	13-23
Deadlock	13-24
Thread Interaction – wait and notify	13-25
Thread Interaction	13-26
Thread State Diagram With wait and notify	13-27

Monitor Model for Synchronization	13-28
The Producer Class	13-29
The Consumer Class	13-31
The SyncStack Class	13-33
The pop Method	13-34
The push Method	13-35
The SyncTest Class	13-36
The SyncTest Class	13-37

Advanced I/O Streams	14-1
Objectives	14-2
Relevance	14-3
I/O Fundamentals	14-4
Fundamental Stream Classes	14-5
Data Within Streams	14-6
The InputStream Methods	14-7
The OutputStream Methods	14-8
The Reader Methods	14-9
The Writer Methods	14-10
Node Streams	14-11
A Simple Example	14-12
Buffered Streams	14-14
I/O Stream Chaining	14-16
Processing Streams	14-17
The InputStream Class Hierarchy	14-19
The OutputStream Class Hierarchy	14-20
The Reader Class Hierarchy	14-21
The Writer Class Hierarchy	14-22



Networking	15-1
Objectives	15-2
Relevance	15-3
Networking	15-4
Networking With Java Technology	15-6
Java Networking Model	15-7
Minimal TCP/IP Server	15-8
Minimal TCP/IP Client	15-11



Sun Services


Preface

About This Course

Course Goals

This course provides you with knowledge and skills to:

- Create Java™ technology applications that leverage the object-oriented features of the Java language, such as encapsulation, inheritance, and polymorphism
- Execute a Java technology application from the command-line
- Use Java technology data types and expressions
- Use Java technology flow control constructs
- Use arrays and other data collections
- Implement error-handling techniques using exception handling




Course Goals

- Create an event-driven graphical user interface (GUI) by using Java technology GUI components: panels, buttons, labels, text fields, and text areas
- Implement input/output (I/O) functionality to read from and write to data and text files
- Create multithreaded programs
- Create a simple Transmission Control Protocol/Internet Protocol (TCP/IP) client that communicates through sockets

Course Overview


This course describes the following areas:

- The syntax of the Java programming language
- Object-oriented concepts as they apply to the Java programming language
- GUI programming
- Multithreading
- Networking




Course Map


The Java Programming Language Basics

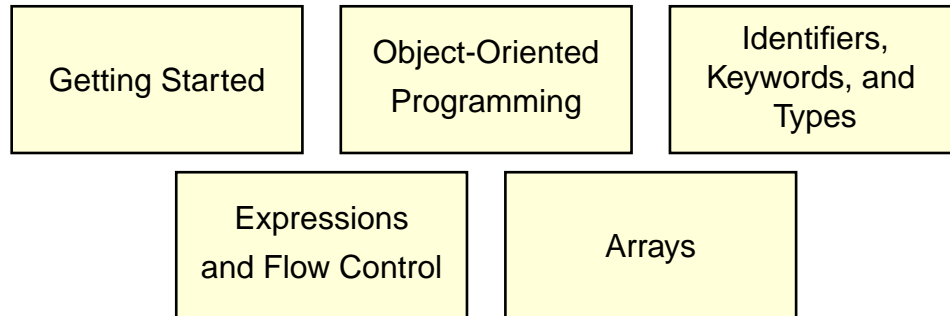


More Object-Oriented Programming

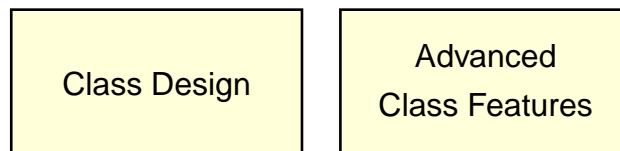


Building Applications

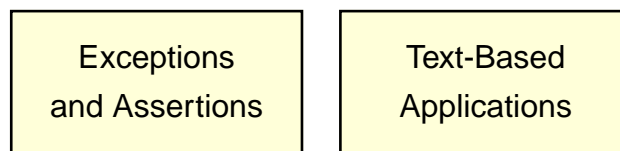


Developing Graphical User Interfaces

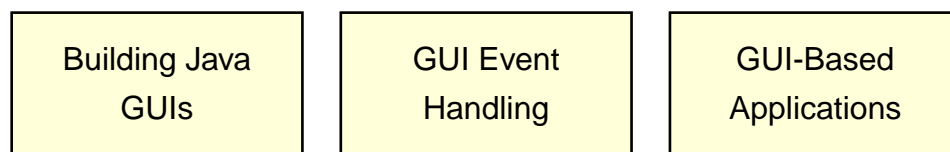

Advanced Java Programming

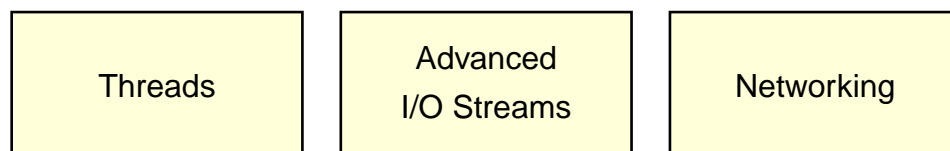




Topics Not Covered

- Object-oriented analysis and design – Covered in OO-226: *Object-Oriented Application Analysis and Design Using UML*
- General programming concepts – Covered in SL-110: *Fundamentals of the Java™ Programming Language*

How Prepared Are You?

Before attending this course, you should have completed SL-110: *Fundamentals of the JavaTM Programming Language*, or have:

- Created and compiled programs with C or C++
- Created and edited text files using a text editor
- Used a World Wide Web (WWW) browser, such as Netscape NavigatorTM



Introductions

- Name
- Company affiliation
- Title, function, and job responsibility
- Experience related to topics presented in this course
- Reasons for enrolling in this course
- Expectations for this course

How to Use the Icons

Additional resources



Discussion



Note



Caution



Visual Aid



Typographical Conventions and Symbols

- `Courier` is used for the names of commands, files, directories, programming code, programming constructs, and on-screen computer output.
- **Courier bold** is used for characters and numbers that you type, and for each line of programming code that is referenced in a textual description.
- *Courier italics* is used for variables and command-line placeholders that are replaced with a real name or value.
- ***Courier italics bold*** is used to represent variables whose values are to be entered by the student as part of an activity.


Typographical Conventions and Symbols

- *Palatino italics* is used for book titles, new words or terms, or words that are emphasized.

Additional Conventions

Java programming language examples use the following additional conventions:


- `Courier` is used for the class names, methods, and keywords.
- Methods are not followed by parentheses unless a formal or actual parameter list is shown.
- Line breaks occur where there are separations, conjunctions, or white space in the code.
- If a command on the Solaris™ Operating System (Solaris OS) is different from the Microsoft Windows platform, both commands are shown.



Sun Services

Module 1


Getting Started



Objectives

- Describe the key features of Java technology
- Write, compile, and run a simple Java technology application
- Describe the function of the Java Virtual Machine (JVM™)
- Define garbage collection
- List the three tasks performed by the Java platform that handle code security

NOTE: The terms “Java Virtual Machine” and “JVM” mean a Virtual Machine for the Java™ platform.



Relevance

- Is the Java programming language a complete language or is it useful only for writing programs for the Web?
- Why do you need another programming language?
- How does the Java technology platform improve on other language platforms?

What Is the Java™ Technology?

- Java technology is:
 - A programming language
 - A development environment
 - An application environment
 - A deployment environment
- It is similar in syntax to C++.
- It is used for developing both *applets* and *applications*.

Primary Goals of the Java Technology

- Provides an easy-to-use language by:
 - Avoiding many pitfalls of other languages
 - Being object-oriented
 - Enabling users to create streamlined and clear code
- Provides an interpreted environment for:
 - Improved speed of development
 - Code portability

Primary Goals of the Java Technology

- Enables users to run more than one thread of activity
- Loads classes dynamically; that is, at the time they are actually needed
- Supports changing programs dynamically during runtime by loading classes from disparate sources
- Furnishes better security

Primary Goals of the Java Technology

The following features fulfill these goals:

- The Java Virtual Machine (JVMTM)¹
- Garbage collection
- The Java Runtime Environment (JRE)
- JVM tool interface

1. The terms "Java Virtual Machine" and "JVM" mean a Virtual Machine for the Java platform

The Java Virtual Machine

- Provides hardware platform specifications
- Reads compiled byte codes that are platform-independent
- Is implemented as software or hardware
- Is implemented in a Java technology development tool or a Web browser

The Java Virtual Machine

JVM provides definitions for the:

- Instruction set (central processing unit [CPU])
- Register set
- Class file format
- Stack
- Garbage-collected heap
- Memory area
- Fatal error reporting
- High-precision timing support

The Java Virtual Machine


- The majority of type checking is done when the code is compiled.
- Implementation of the JVM approved by Sun Microsystems must be able to run any compliant class file.
- The JVM executes on multiple operating environments.

Garbage Collection


- Allocated memory that is no longer needed should be deallocated.
- In other languages, deallocation is the programmer's responsibility.
- The Java programming language provides a system-level thread to track memory allocation.
- Garbage collection has the following characteristics:
 - Checks for and frees memory no longer needed
 - Is done automatically
 - Can vary dramatically across JVM implementations


The Java Runtime Environment

The Java application environment performs as follows:

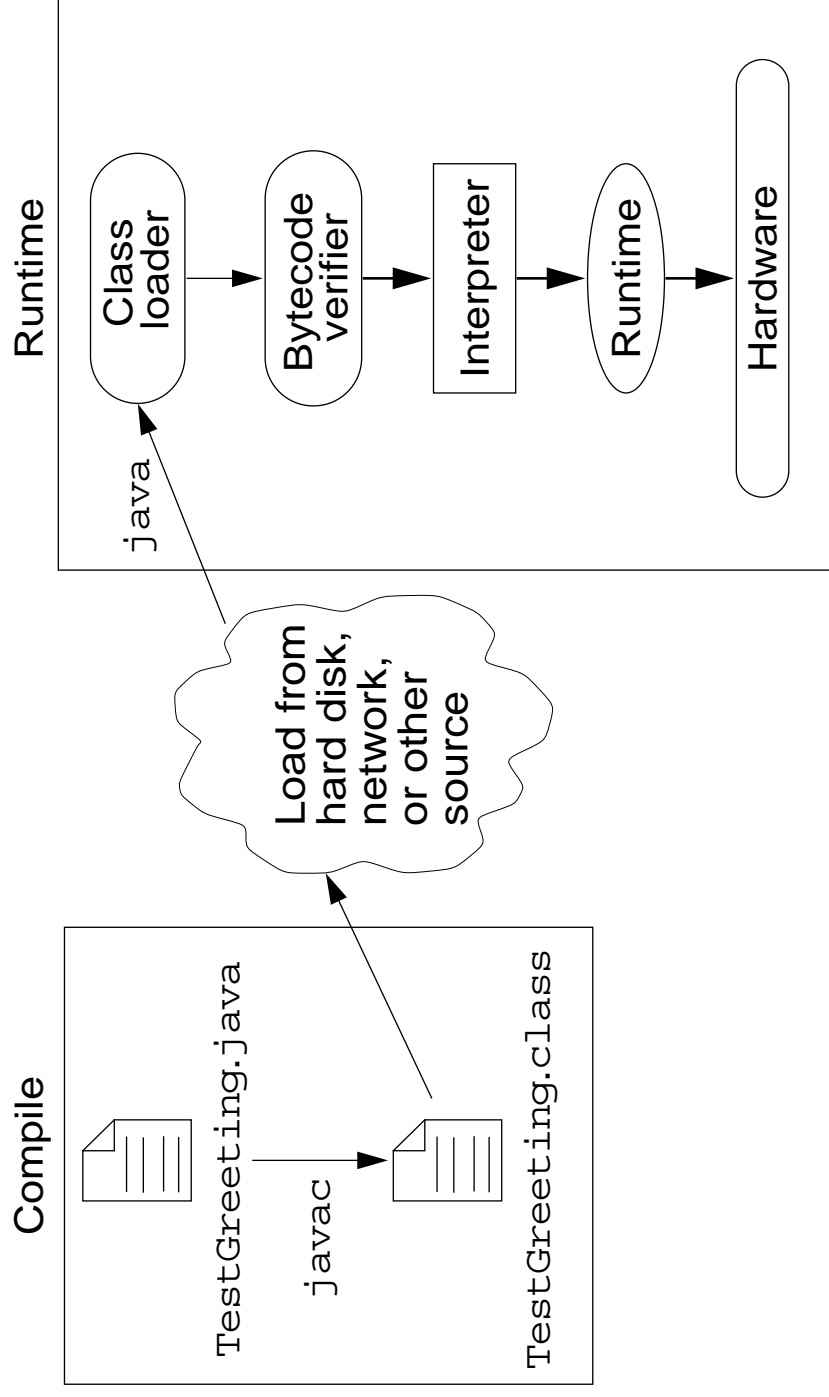

Operation of the JRE With a Just-In-Time Compiler

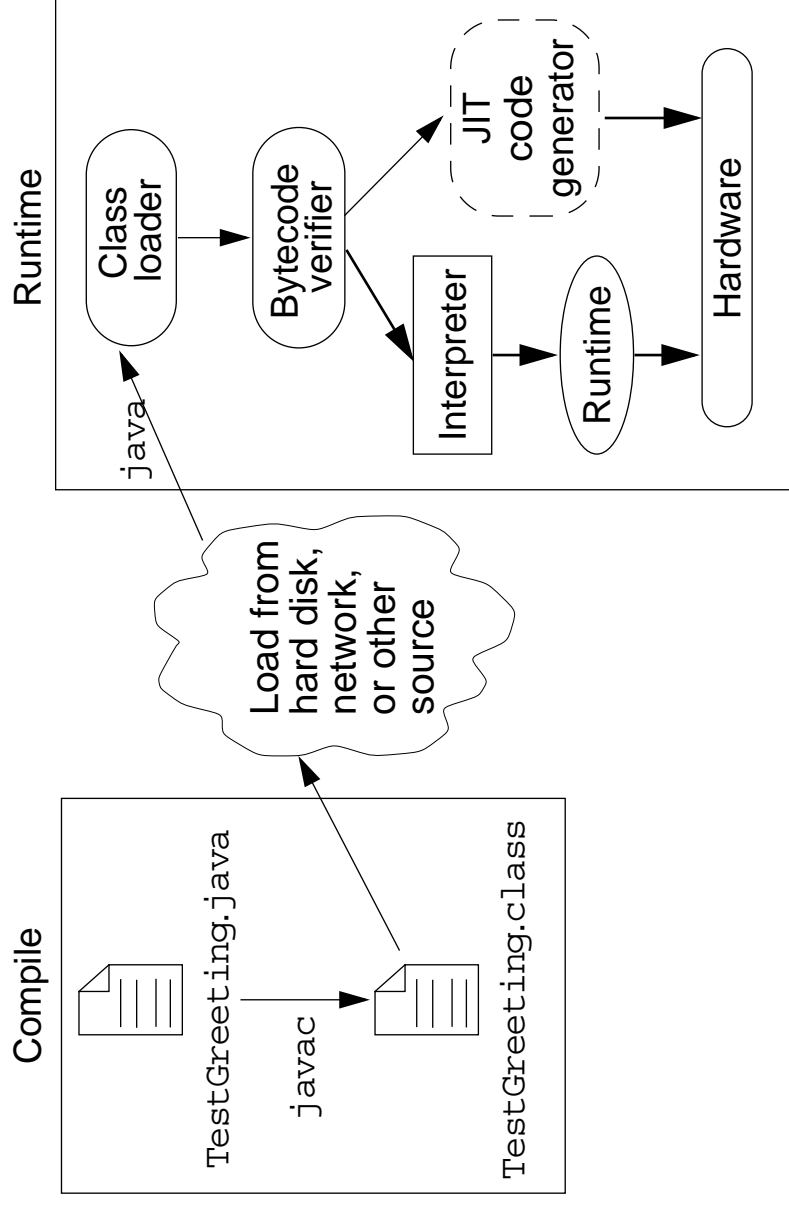




JVM™ Tasks

The JVM performs three main tasks:

- Loads code
- Verifies code
- Executes code



The Class Loader

- Loads all classes necessary for the execution of a program
- Maintains classes of the local file system in separate *namespaces*
- Prevents spoofing

The Bytecode Verifier

Ensures that:

- The code adheres to the JVM specification.
- The code does not violate system integrity.
- The code causes no operand stack overflows or underflows.
- The parameter types for all operational code are correct.
- No illegal data conversions (the conversion of integers to pointers) have occurred.


A Simple Java Application

The TestGreeting.java Application

```
1 //  
2 // Sample "Hello World" application  
3 //  
4 public class TestGreeting {  
5     public static void main (String[] args) {  
6         Greeting hello = new Greeting();  
7         hello.greet();  
8     }  
9 }
```


The Greeting.java Class

```
1 public class Greeting {  
2     public void greet() {  
3         System.out.println("hi");  
4     }  
5 }
```



The TestGreeting Application

- Comment lines
- Class declaration
- The `main` method
- Method body




The Greeting Class

- Class declaration
- The greet method


Compiling and Running the TestGreeting Program

- Compile TestGreeting.java:
`javac TestGreeting.java`
- The Greeting.java is compiled automatically.
- Run the application by using the following command:
`java TestGreeting`
- Locate common compile and runtime errors.




Compile-Time Errors

- javac: Command not found
- Greeting.java:4: cannot resolve symbol
symbol : method println (java.lang.String)
location: class java.io.PrintStream
System.out.println("hi");
^
- TestGreet.java:4: Public class TestGreeting
must be defined in a file called
"TestGreeting.java".





Runtime Errors

- Can't find class TestGreeting
- Exception in thread "main"
`java.lang.NoSuchMethodError: main`



Java Technology Runtime Environment

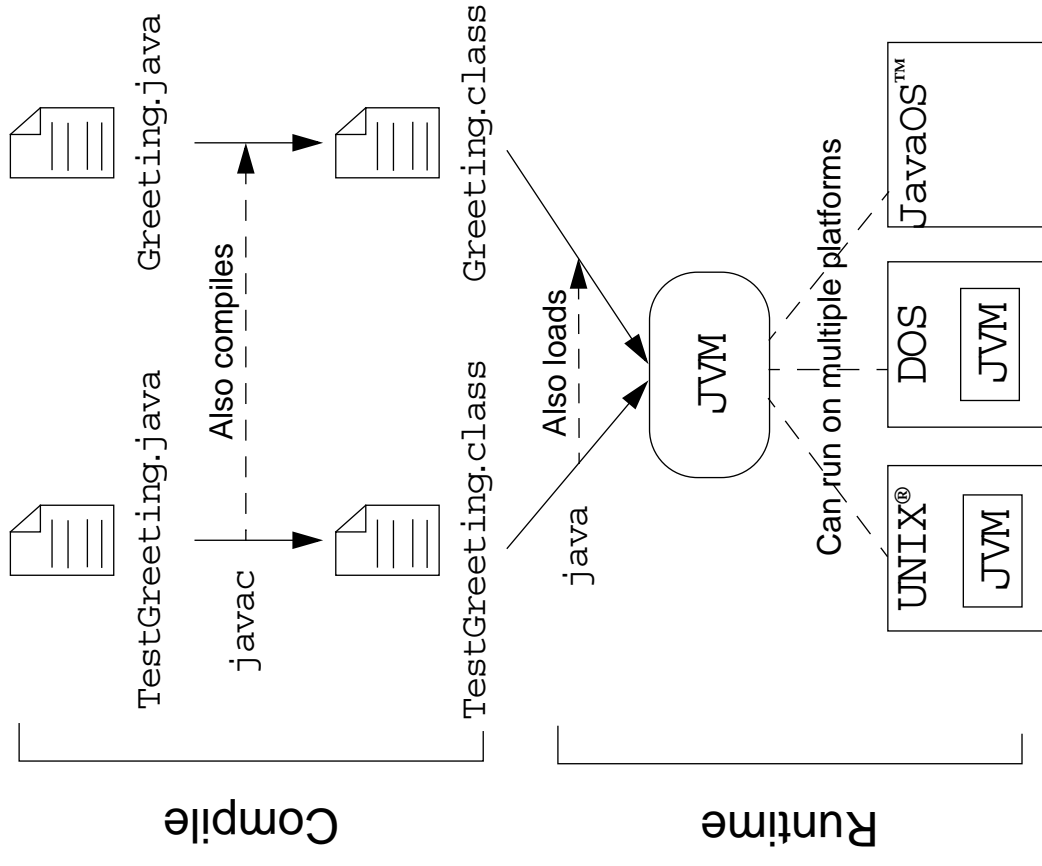




Sun Services

Module 2

Object-Oriented Programming


Objectives

- Define modeling concepts: *abstraction*, *encapsulation*, and *packages*
- Discuss why you can reuse Java technology application code
- Define *class*, *member*, *attribute*, *method*, *constructor*, and *package*
- Use the access modifiers `private` and `public` as appropriate for the guidelines of encapsulation
- Invoke a method on a particular object
- Use the Java technology application programming interface (API) online documentation



Relevance

- What is your understanding of software analysis and design?
- What is your understanding of design and code reuse?
- What features does the Java programming language possess that make it an object-oriented language?
- Define the term *object-oriented*.



Software Engineering

Toolkits / Frameworks / Object APIs (1990s–Up)				
Java 2 SDK	AWT / J.F.C./Swing	Jini™	JavaBeans™	JDBC™

Object-Oriented Languages (1980s–Up)				
SELF	Smalltalk	Common Lisp	Object System	Eiffel C++ Java


Libraries / Functional APIs (1960s–Early 1980s)				
NASTRAN	TCP/IP	ISAM	X-Windows	OpenLook

High-Level Languages (1950s–Up)			Operating Systems (1960s–Up)		
Fortran	LISP	C COBOL	OS/360	UNIX	MacOS Microsoft Windows

Machine Code (Late 1940s–Up)					
------------------------------	--	--	--	--	--

The Analysis and Design Phase

- Analysis describes *what* the system needs to do:
Modeling the real-world, including actors and activities, objects, and behaviors
- Design describes *how* the system does it:
 - Modeling the relationships and interactions between objects and actors in the system
 - Finding useful abstractions to help simplify the problem or solution



Abstraction

- Functions – Write an algorithm once to be used in many situations
- Objects – Group a related set of attributes and behaviors into a class
- Frameworks and APIs – Large groups of objects that support a complex activity; Frameworks can be used as is or be modified to extend the basic behavior

Classes as Blueprints for Objects

- In manufacturing, a blueprint describes a device from which many physical devices are constructed.
- In software, a class is a description of an object:
 - A class describes the data that each object includes.
 - A class describes the behaviors that each object exhibits.
- In Java technology, classes support three key features of object-oriented programming (OOP):
 - Encapsulation
 - Inheritance
 - Polymorphism

Declaring Java Technology Classes

- Basic syntax of a Java class:

```
<modifier>* class <class_name> {  
    <attribute_declaration>*  
    <constructor_declaration>*  
    <method_declaration>*  
}
```

- Example:

```
1 public class Vehicle {  
2     private double maxLoad;  
3     public void setMaxLoad(double value) {  
4         maxLoad = value;  
5     }  
6 }
```


Declaring Attributes

- Basic syntax of an attribute:

`<modifier>* <type> <name> [= <initial_value>] ;`

- Examples:

```
1 public class Foo {  
2     private int x;  
3     private float y = 10000.0F;  
4     private String name = "Bates Motel";  
5 }
```

Declaring Methods

- Basic syntax of a method:

```
<modifier>* <return_type> <name> ( <argument>* ) {  
    <statement>*  
}
```

- Examples:

```
1 public class Dog {  
2     private int weight;  
3     public int getWeight() {  
4         return weight;  
5     }  
6     public void setWeight(int newWeight) {  
7         if ( newWeight > 0 ) {  
8             weight = newWeight;  
9         }  
10    }  
11 }
```

Accessing Object Members

- The *dot* notation is: `<object>.<member>`
- This is used to access object members, including attributes and methods.
- Examples of dot notation are:

```
d.setWeight(42);  
d.weight = 42; // only permissible if weight is public
```

Information Hiding

The problem:

MyDate
+day : int
+month : int
+year : int

Client code has direct access to internal data (d refers to a MyDate object):

```
d.day = 32;  
// invalid day  
  
d.month = 2; d.day = 30;  
// plausible but wrong  
  
d.day = d.day + 1;  
// no check for wrap around
```

Information Hiding

The solution:

MyDate
-day : int -month : int -year : int
+getDay() : int +getMonth() : int +getYear() : int +setDay(int) : boolean +setMonth(int) : boolean +setYear(int) : boolean

Verify days in month


Client code must use setters and getters to access internal data:

```
MyDate d = new MyDate();

d.setDay(32);
// invalid day, returns false

d.setMonth(2);
d.setDay(30);
// plausible but wrong,
// setDay returns false

d.setDay(d.getDay() + 1);
// this will return false if wrap around
// needs to occur
```



Encapsulation

- Hides the implementation details of a class
- Forces the user to use an interface to access data
- Makes the code more maintainable

MyDate
-date : long
+getDay() : int +getMonth() : int +getYear() : int +setDay(int) : boolean +setMonth(int) : boolean +setYear(int) : boolean -isValid(int) : boolean


Declaring Constructors

- Basic syntax of a constructor:

```
[<modifier>] <class_name> ( <argument>* ) {  
    <statement>*  
}
```

- Example:

```
1  public class Dog {  
2  
3      private int weight;  
4  
5      public Dog() {  
6          weight = 42;  
7      }  
8  }
```



The Default Constructor

- There is always at least one constructor in every class.
- If the writer does not supply any constructors, the default constructor is present automatically:
 - The default constructor takes no arguments
 - The default constructor body is empty
- The default enables you to create object instances with `new Xxx ()` without having to write a constructor.

Source File Layout


- Basic syntax of a Java source file is:

*[<package_declaration>]
<import_declaration>*
<class_declaration>+*
- For example, the `VehicleCapacityReport.java` file is:

```
1 package shipping.reports;  
2  
3 import shipping.domain.*;  
4 import java.util.List;  
5 import java.io.*;  
6  
7 public class VehicleCapacityReport {  
8     private List vehicles;  
9     public void generateReport(Writer output) {...}  
10 }
```

Software Packages

- Packages help manage large software systems.
- Packages can contain classes and sub-packages.

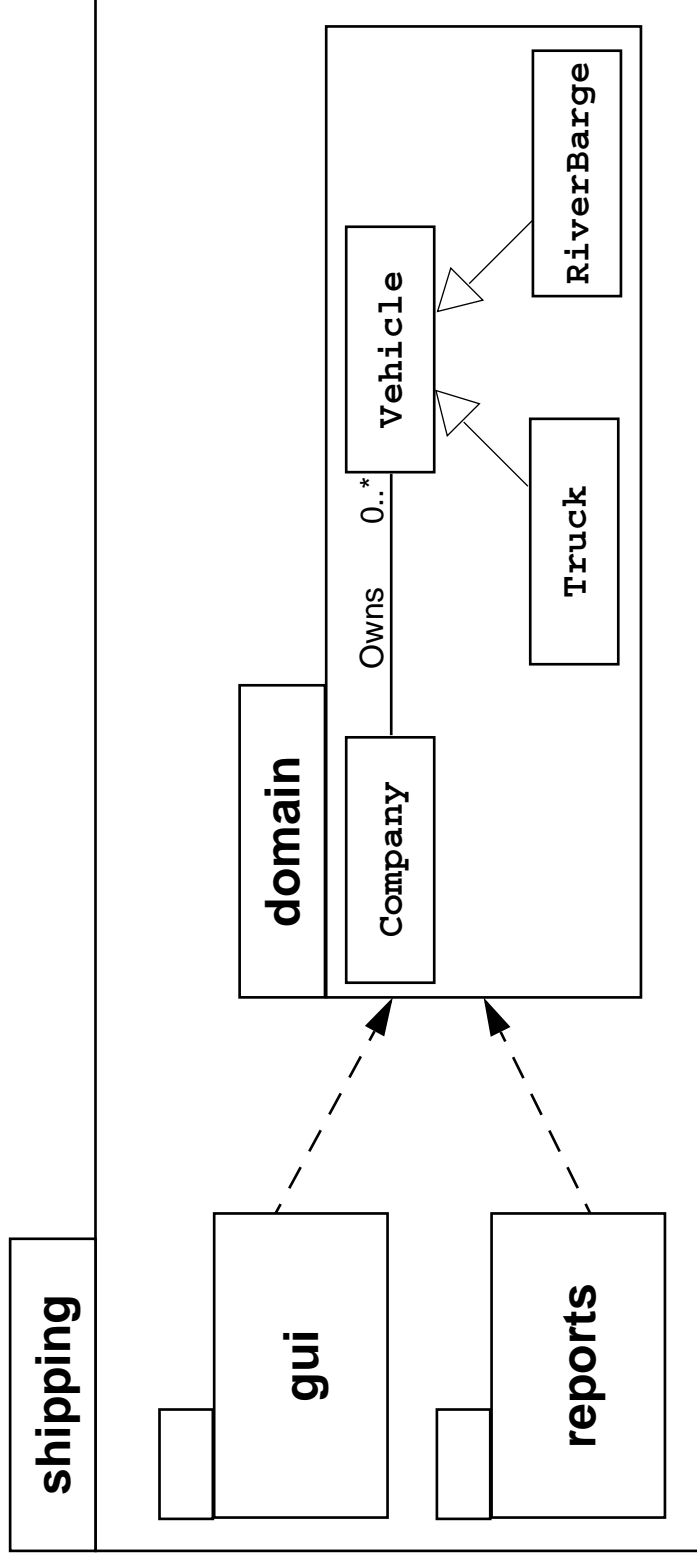

The package Statement

- Basic syntax of the package statement is:
`package <top_pkg_name>[.<sub_pkg_name>]*;`
- Examples of the statement are:
`package shipping.gui.reportscreens;`
- Specify the package declaration at the beginning of the source file.
- Only one package declaration per source file.
- If no package is declared, then the class is placed into the default package.
- Package names must be hierarchical and separated by dots.

The import Statement

- Basic syntax of the import statement is:

```
import <pkg_name>[.<sub_pkg_name>]*.<class_name>;  
OR  
import <pkg_name>[.<sub_pkg_name>]*.*;
```


- Examples of the statement are:


```
import java.util.List;  
import java.io.*;  
import shipping.gui.reportscreens.*;
```

- The import statement does the following:
 - Precedes all class declarations
 - Tells the compiler where to find classes


Directory Layout and Packages


- Packages are stored in the directory tree containing the package name.
- An example is the shipping application packages.

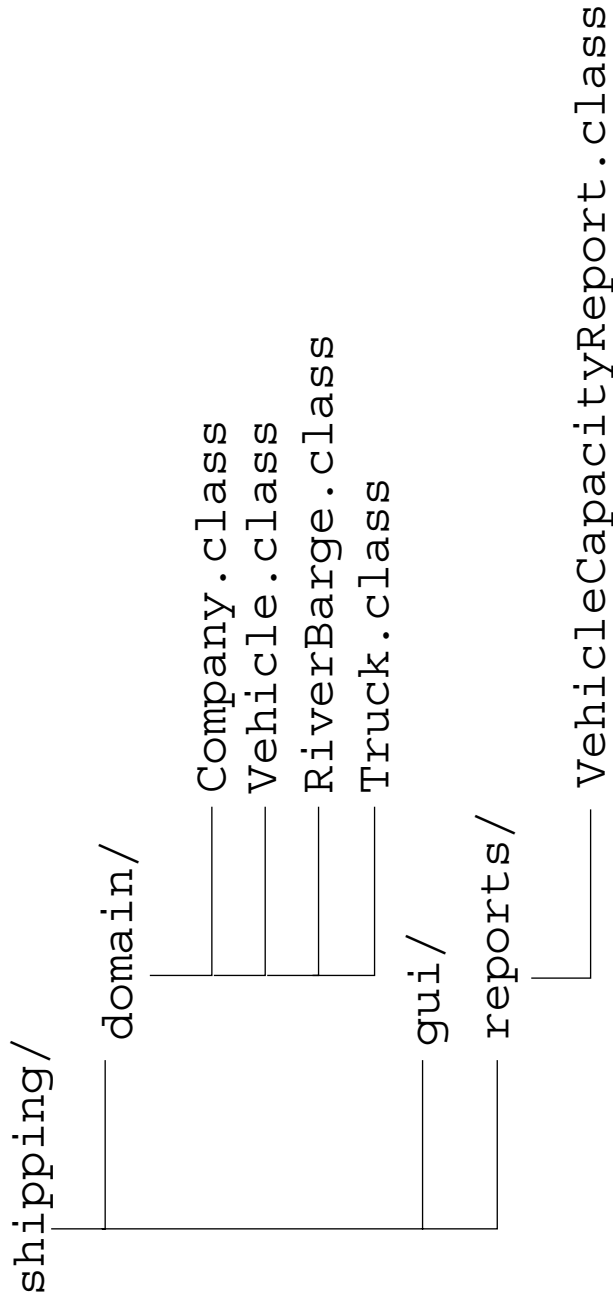



Development

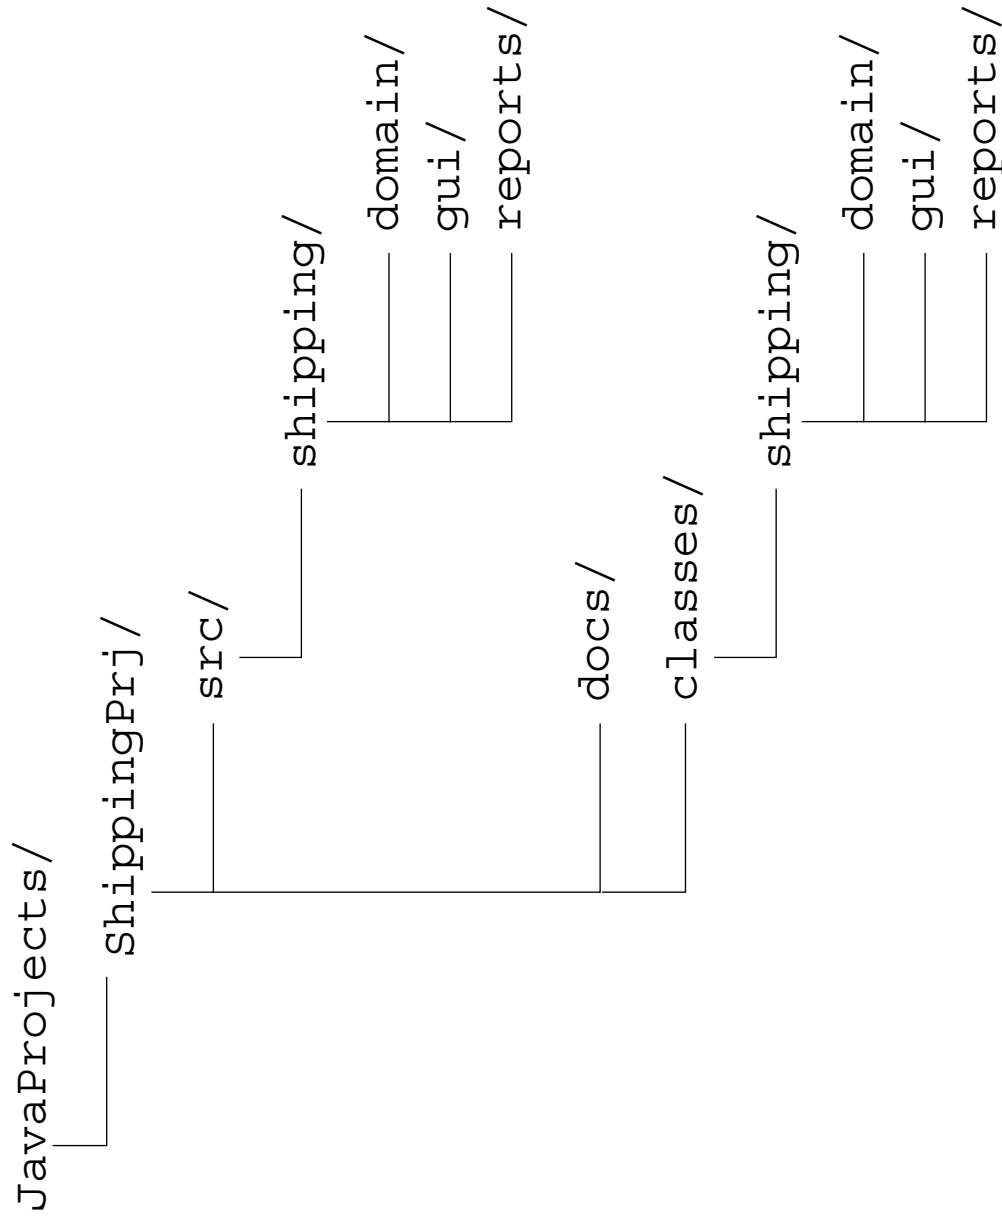



Compiling Using the -d Option


```
cd JavaProjects/ShippingPrj/src  
javac -d ../classes shipping/domain/*.java
```

Terminology Recap

- Class – The source-code blueprint for a run-time object
- Object – An instance of a class; also known as *instance*
- Attribute – A data element of an object; also known as *data member*, *instance variable*, and *data field*
- Method – A behavioral element of an object; also known as *algorithm*, *function*, and *procedure*
- Constructor – A *method-like* construct used to initialize a new object
- Package – A grouping of classes and sub-packages

Using the Java Technology API Documentation

- A set of Hypertext Markup Language (HTML) files provides information about the API.
- A frame describes a package and contains hyperlinks to information describing each class in that package.
- A class document includes the class hierarchy, a description of the class, a list of member variables, a list of constructors, and so on.



Java Technology API Documentation With HTML3

The screenshot shows a web browser window titled "Object (Java 2 Platform SE 5.0) – Web Browser". The address bar shows the file path "file:///opt/java/docs/api/index.html". The browser has a menu bar with File, Edit, View, Go, Bookmarks, Tools, Window, and Help. Below the menu bar is a toolbar with navigation buttons and a search icon. A bookmarks bar is visible with links like Java Store, Apple Training, Admin, SES, Java, Tomcat, Java Web Tech, and Personal. The main content area displays the "Class Object" documentation for the "java.lang" package. The left sidebar lists various Java classes and packages, including "All Classes", "Packages", and a list of classes like "java.applet", "java.awt", "java.awt.color", etc. The main content area has a navigation bar with links: Overview, Package, Class (selected), Use, Tree, Deprecated, Index, and Help. Below this are links for "PREV CLASS", "NEXT CLASS", "FRAMES", and "NO FRAMES". The "SUMMARY" section lists "NESTED", "FIELD", "CONSTR", and "METHOD". The "DETAIL" section lists "FIELD", "CONSTR", and "METHOD". The "Class Object" section shows the "java.lang.Object" class. It states that "Class Object is the root of the class hierarchy. Every class has Object as a superclass. All objects, including arrays, implement the methods of this class." It also mentions "Since: JDK1.0" and "See Also: Class". Below this are sections for "Constructor Summary" and "Method Summary". The "Constructor Summary" shows the "Object()" constructor. The "Method Summary" lists several methods: "clone()", "equals()", "finalize()", "getClass()", "hashCode()", "notify()", and "notifyAll()".

Object (Java 2 Platform SE 5.0) – Web Browser

File Edit View Go Bookmarks Tools Window Help

file:///opt/java/docs/api/index.html

Bookmarks Java Store Apple Training Admin SES Java Tomcat Java Web Tech Personal

Java™ 2 Platform Standard Ed. 5.0

All Classes

Packages

java.applet

java.awt

java.awt.color

java.awt.datatransfer

java.awt.dnd

java.awt.event

java.awt.font

java.awt.geom

NumberFormatException

NumericShaper

NVList

QAFParameterSpec

OBJ_ADAPTER

Object

ObjectFactory

ObjectFactoryBuilder

ObjectHelper

ObjectHolder

ObjectIdHelper

ObjectImpl

ObjectInputStream

ObjectInputStream.GetField

ObjectInputStream.Validation

ObjectInstance

ObjectName

ObjectNotActive

ObjectNotActiveHelper

ObjectOutput

ObjectOutputStream

ObjectOutputStream.PutField

ObjectReferenceFactory

ObjectReferenceFactoryHelper

ObjectReferenceTemplate

ObjectReferenceTemplate3

ObjectReferenceTemplate3

Overview Package **Class** Use Tree Deprecated Index Help

PREV CLASS NEXT CLASS FRAMES NO FRAMES

SUMMARY: NESTED | FIELD | CONSTR | METHOD DETAIL: FIELD | CONSTR | METHOD

java.lang

Class Object

java.lang.Object

public class **Object**

Class Object is the root of the class hierarchy. Every class has Object as a superclass. All objects, including arrays, implement the methods of this class.

Since: JDK1.0

See Also: [Class](#)


Constructor Summary

[Object\(\)](#)

Method Summary

protected Object	clone()	Creates and returns a copy of this object.
boolean	equals(Object obj)	Indicates whether some other object is "equal to" this one.
protected void	finalize()	Called by the garbage collector on an object when garbage collection determines that there are no more references to the object.
Class extends Object	getClass()	Returns the runtime class of an object.
int	hashCode()	Returns a hash code value for the object.
void	notify()	Wakes up a single thread that is waiting on this object's monitor.
void	notifyAll()	


file:///opt/java/docs/api/java/lang/Object.html



Sun Services


Module 3

Identifiers, Keywords, and Types




Objectives

- Use comments in a source program
- Distinguish between valid and invalid identifiers
- Recognize Java technology keywords
- List the eight primitive types
- Define literal values for numeric and textual types
- Define the terms *primitive variable* and *reference variable*




Objectives

- Declare variables of class type
- Construct an object using `new`
- Describe default initialization
- Describe the significance of a reference variable
- State the consequences of assigning variables of class type



Relevance

- Do you know the primitive Java types?
- Can you describe the difference between variables holding primitive values as compared with object references?



Comments

The three permissible styles of comment in a Java technology program are:

```
// comment on one line
```

```
/* comment on one  
 * or more lines  
 */
```

```
/** documentation comment  
 * can also span one or more lines  
 */
```

Semicolons, Blocks, and White Space

- A *statement* is one or more lines of code terminated by a semicolon (;):

```
totals = a + b + c
        + d + e + f;
```

- A *block* is a collection of statements bound by opening and closing braces:

```
{
    x = y + 1;
    y = x + 1;
}
```


Semicolons, Blocks, and White Space

- *A class definition uses a special block:*

```
public class MyDate {  
    private int day;  
    private int month;  
    private int year;  
}
```

- **You can nest block statements.**

```
while ( i < large ) {  
    a = a + i;  
    // nested block  
    if ( a == max ) {  
        b = b + a;  
        a = 0;  
    }  
    i = i + 1;  
}
```

Semicolons, Blocks, and White Space

- Any amount of *white space* is permitted in a Java program.

For example:

```
{int x;x=23*54;}
```

is equivalent to:

```
{  
    int x;  
  
    x = 23 * 54;  
}
```

Identifiers

Identifiers have the following characteristics:

- Are names given to a variable, class, or method
- Can start with a Unicode letter, underscore (`_`), or dollar sign (`$`)
- Are case-sensitive and have no maximum length
- Examples:

```
identifier  
userName  
user_name  
_sys_var1  
$change
```

Java Programming Language Keywords

abstract	continue	for	new	switch
assert	default	goto	package	synchronized
boolean	do	if	private	this
break	double	implements	protected	throw
byte	else	import	public	throws
case	enum	instanceof	return	transient
catch	extends	int	short	try
char	final	interface	static	void
class	finally	long	strictfp	volatile
const	float	native	super	while

Reserved literal words: null, true, and false

Primitive Types

The Java programming language defines eight primitive types:

- Logical – boolean
- Textual – char
- Integral – byte, short, int, and long
- Floating – double and float

Logical – boolean

The boolean primitive has the following characteristics:

- The boolean data type has two literals, `true` and `false`.
- For example, the statement:

```
boolean truth = true;
```

declares the variable `truth` as boolean type and assigns it a value of `true`.

Textual – char

The textual `char` primitive has the following characteristics:

- Represents a 16-bit Unicode character
- Must have its literal enclosed in single quotes (' ')
- Uses the following notations:

<code>'a'</code>	The letter a
<code>'\t'</code>	The tab character
<code>'\u????'</code>	A specific Unicode character, <code>????</code> , is replaced with exactly four hexadecimal digits . For example, <code>'\u03A6'</code> is the Greek letter phi [Φ].

Textual – String

The textual String type has the following characteristics:

- Is not a primitive data type; it is a class
- Has its literal enclosed in double quotes (" ")

"The quick brown fox jumps over the lazy dog."

- Can be used as follows:

```
String greeting = "Good Morning !! \n";  
String errorMessage = "Record Not Found !";
```


Integral – byte, short, int, and long

The integral primitives have the following characteristics:

- Integral primitives use three forms: Decimal, octal, or hexadecimal

2	The decimal form for the integer 2.
077	The leading 0 indicates an octal value.
0xBAAC	The leading 0x indicates a hexadecimal value.

- Literals have a default type of `int`.
- Literals with the suffix `L` or `l` are of type `long`.

Integral – byte, short, int, and long

- Integral data types have the following ranges:

Integer Length	Name or Type	Range
8 bits	byte	-2^7 to $2^7 - 1$
16 bits	short	-2^{15} to $2^{15} - 1$
32 bits	int	-2^{31} to $2^{31} - 1$
64 bits	long	-2^{63} to $2^{63} - 1$

Floating Point – float and double

The floating point primitives have the following characteristics:


- Floating-point literal includes either a decimal point or one of the following:
 - **E** or **e** (add exponential value)
 - **F** or **f** (float)
 - **D** or **d** (double)

3.14	A simple floating-point value (a double)
6.02E23	A large floating-point value
2.718F	A simple float size value
123.4E+306D	A large double value with redundant D

Floating Point – float and double

- Literals have a default type of double.
- Floating-point data types have the following sizes:

Float Length	Name or Type
32 bits	float
64 bits	double



Variables, Declarations, and Assignments

```
1  public class Assign {
2      public static void main (String args []) {
3          // declare integer variables
4          int x, y;
5          // declare and assign floating point
6          float z = 3.414f;
7          // declare and assign double
8          double w = 3.1415;
9          // declare and assign boolean
10         boolean truth = true;
11         // declare character variable
12         char c;
13         // declare String variable
14         String str;
15         // declare and assign String variable
16         String str1 = "bye";
17         // assign value to char variable
18         c = 'A';
19         // assign value to String variable
20         str = "Hi out there!";
21         // assign values to int variables
22         x = 6;
23         y = 1000;
24     }
25 }
```

Java Reference Types

- In Java technology, beyond primitive types all others are reference types.
- A *reference variable* contains a *handle* to an object.
- For example:


```
1 public class MyDate {  
2     private int day = 1;  
3     private int month = 1;  
4     private int year = 2000;  
5     public MyDate(int day, int month, int year) { ... }  
6     public String toString() { ... }  
7 }
```

```
1 public class TestMyDate {  
2     public static void main(String[] args) {  
3         MyDate today = new MyDate(22, 7, 1964);  
4     }  
5 }
```

Constructing and Initializing Objects

- Calling `new XYZ()` performs the following actions:
 - a. Memory is allocated for the object.
 - b. Explicit attribute initialization is performed.
 - c. A constructor is executed.
 - d. The object reference is returned by the `new` operator.
- The reference to the object is assigned to a variable.
- An example is:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```



Memory Allocation and Layout

- A declaration allocates storage only for a reference:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```


my_birth	????
----------	------

- Use the new operator to allocate space for `MyDate`:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

my_birth	????
----------	------

day	0
month	0
year	0




Explicit Attribute Initialization

- Initialize the attributes as follows:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

my_birth	???
day	1
month	1
year	2000

- The default values are taken from the attribute declaration in the class.




Executing the Constructor

- Execute the matching constructor as follows:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

my_birth	???
day	22
month	7
year	1964


- In the case of an overloaded constructor, the first constructor can call another.




Assigning a Variable

- Assign the newly created object to the reference variable as follows:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

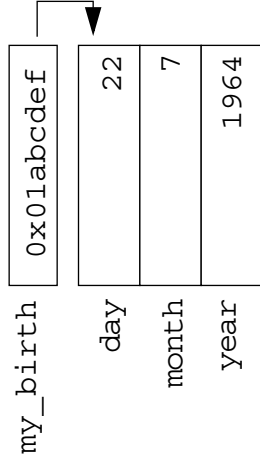




Assigning References


- Two variables refer to a single object:


```
1 int x = 7;  
2 int y = x;  
3 MyDate s = new MyDate(22, 7, 1964);  
4 MyDate t = s;
```

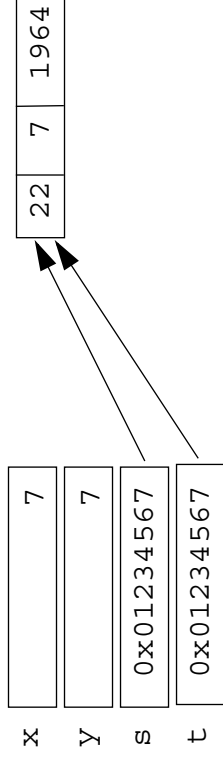

- Reassignment makes two variables point to two objects:

```
5 t = new MyDate(22, 12, 1964);
```

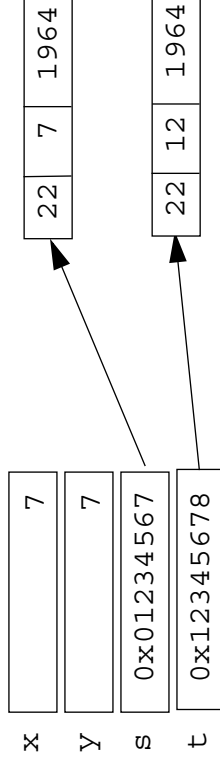




Pass-by-Value

- In a single virtual machine, the Java programming language only passes arguments by value.
- When an object instance is passed as an argument to a method, the value of the argument is a *reference* to the object.
- The *contents* of the object can be changed in the called method, but the original object reference is never changed.

Pass-by-Value

```
1 public class PassTest {
2
3     // Methods to change the current values
4     public static void changeInt(int value) {
5         value = 55;
6     }
7     public static void changeObjectRef(MyDate ref) {
8         ref = new MyDate(1, 1, 2000);
9     }
10    public static void changeObjectAttr(MyDate ref) {
11        ref.setDay(4);
12    }
```




Pass-by-Value

```
13
14     public static void main(String args[]) {
15         MyDate date;
16         int val;
17
18         // Assign the int
19         val = 11;
20         // Try to change it
21         changeInt(val);
22         // What is the current value?
23         System.out.println("Int value is: " + val);
```

The result of this output is:

Int value is: 11



Pass-by-Value

```
24
25      // Assign the date
26      date = new MyDate(22, 7, 1964);
27      // Try to change it
28      changeObjectRef(date);
29      // What is the current value?
30      System.out.println("MyDate: " + date);
```

The result of this output is:

MyDate: 22-7-1964

Pass-by-Value

```
31
32      // Now change the day attribute
33      // through the object reference
34      changeObjectAttr(date);
35      // What is the current value?
36      System.out.println("MyDate: " + date);
37  }
38 }
```

The result of this output is:

MyDate: 4-7-1964


The `this` Reference

Here are a few uses of the `this` keyword:

- To resolve ambiguity between instance variables and parameters
- To pass the current object as a parameter to another method or constructor

The `this` Reference

```
1  public class MyDate {
2      private int day = 1;
3      private int month = 1;
4      private int year = 2000;
5
6      public MyDate(int day, int month, int year) {
7          this.day = day;
8          this.month = month;
9          this.year = year;
10     }
11     public MyDate(MyDate date) {
12         this.day = date.day;
13         this.month = date.month;
14         this.year = date.year;
15     }
```



The `this` Reference

```
16
17     public MyDate addDays(int moreDays) {
18         MyDate newDate = new MyDate(this);
19         newDate.day = newDate.day + moreDays;
20         // Not Yet Implemented: wrap around code...
21         return newDate;
22     }
23     public String toString() {
24         return "\"" + day + "-" + month + "-" + year;
25     }
26 }
```

The this Reference

```
1 public class TestMyDate {
2     public static void main(String[] args) {
3         MyDate my_birth = new MyDate(22, 7, 1964);
4         MyDate the_next_week = my_birth.addDays(7);
5
6         System.out.println(the_next_week);
7     }
8 }
```

Java Programming Language Coding Conventions

- **Packages:**
`com.example.domain;`
- **Classes, interfaces, and enum types:**
`SavingsAccount`
- **Methods:**
`getAccount ()`
- **Variables:**
`currentCustomer`
- **Constants:**
`HEAD_COUNT`


Java Programming Language Coding Conventions

- Control structures:

```
if ( condition ) {  
    statement1;  
} else {  
    statement2;  
}
```

- Spacing:


- Use one statement per line.
 - Use two or four spaces for indentation.
- Comments:
 - Use `//` to comment inline code.
 - Use `/**` documentation `*/` for class members.



Sun Services


Module 4

Expressions and Flow Control




Objectives

- Distinguish between instance and local variables
- Describe how to initialize instance variables
- Identify and correct a Possible reference before assignment compiler error
- Recognize, describe, and use Java software operators
- Distinguish between legal and illegal assignments of primitive types



Objectives

- Identify boolean expressions and their requirements in control constructs
- Recognize assignment compatibility and required casts in fundamental types
- Use if, switch, for, while, and do constructions and the labeled forms of break and continue as flow control structures in a program



Relevance

- What types of variables are useful to programmers?
- Can multiple classes have variables with the same name and, if so, what is their scope?
- What types of control structures are used in other languages? What methods do these languages use to control flow?

Variables and Scope

Local variables are:

- Variables that are defined inside a method and are called *local*, *automatic*, *temporary*, or *stack* variables
- Variables that are created when the method is executed and are destroyed when the method is exited

Variable initialization comprises the following:

- Local variables require explicit initialization.
- Instance variables are initialized automatically.

Variable Scope Example

```

public class ScopeExample {
    private int i=1;


    public void firstMethod() {
        int i=4, j=5;

        this.i = i + j;
        secondMethod(7);
    }
    public void secondMethod(int i) {
        int j=8;
        this.i = i + j;
    }
}

public class TestScoping {
    public static void main(String[] args) {
        ScopeExample scope = new ScopeExample();

        scope.firstMethod();
    }
}

```

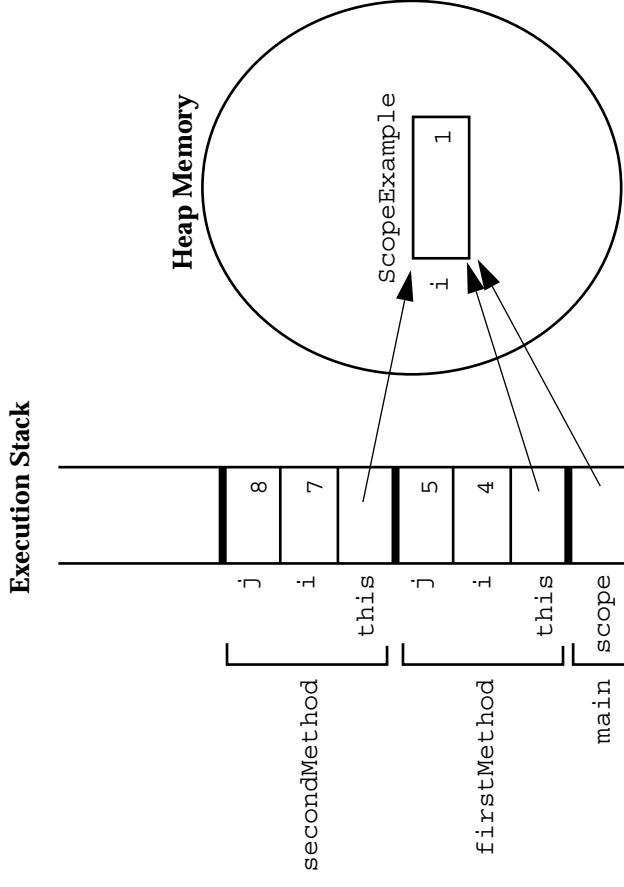

Variable Initialization

Variable	Value
byte	0
short	0
int	0
long	0L
float	0.0F
double	0.0D
char	'\u0000'
boolean	false
All reference types	null

Initialization Before Use Principle

The compiler will verify that local variables have been initialized before used.


```
3    public void doComputation() {
4        int x = (int) (Math.random() * 100);
5        int y;
6        int z;
7        if (x > 50) {
8            y = 9;
9        }
10       z = y + x; // Possible use before initialization
11    }
```

javac TestInitBeforeUse.java

```
TestInitBeforeUse.java:10: variable y might not have been initialized
    z = y + x; // Possible use before initialization
        ^
1 error
```

Operator Precedence

Operators	Associative
++ -- + unary - unary ~ ! (<i><data_type></i>)	R to L
* /	L to R
+ -	L to R
<< >> >>>	L to R
< > <= >= instanceof	L to R
== !=	L to R
&	L to R
^	L to R
	L to R
&&	L to R
	L to R
<i><boolean_expr> ? <expr1> : <expr2></i>	R to L
= *= /= %= += -= <=> >>= >>>= &= ^= =	R to L



Logical Operators

- The boolean operators are:

!	-	NOT	&	-	AND
	-	OR	^	-	XOR

- The short-circuit boolean operators are:

&&	-	AND		-	OR
----	---	-----	--	---	----

- You can use these operators as follows:

```
MyDate d = reservation.getDepartureDate();
if ( (d != null) && (d.day > 31) {
    // do something with d
}
```

Bitwise Logical Operators

- The integer *bitwise* operators are:

\sim - Complement $\&$ - AND
 \wedge - XOR $|$ - OR

- Byte-sized examples include:

\sim	0	1	0	0	1	1	1	1
	1	0	1	1	0	0	0	0
	0	1	0	0	1	1	1	1
$\&$	0	0	0	0	1	1	0	1

	0	0	1	0	1	1	0	1
\wedge	0	1	0	0	1	1	1	1
	0	1	1	0	0	0	1	0
$ $	0	1	1	0	1	1	1	1


Right-Shift Operators \gg and \ggg

- *Arithmetic or signed* right shift (\gg) operator:

- Examples are:

128	$\gg 1$	returns	$128/2^1$	=	64
256	$\gg 4$	returns	$256/2^4$	=	16
-256	$\gg 4$	returns	$-256/2^4$	=	-16

- The sign bit is copied during the shift.
- *Logical or unsigned right-shift* (\ggg) operator:
 - This operator is used for bit patterns.
 - The sign bit is not copied during the shift.



Left-Shift Operator <<

- Left-shift (<<) operator works as follows:

```
128 << 1 returns 128 * 21 = 256
16  << 2 returns 16 * 22 = 64
```

Shift Operator Examples

1357 =

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	1	1	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

-1357 =

1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	1	0	0	1	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

1357 >> 5 =

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

-1357 >> 5 =

1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

1357 >>> 5 =

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

-1357 >>> 5 =

0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

1357 << 5 =

0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	1	1	0	1	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---


-1357 << 5 =

1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	0	1	1	0	0	1	1	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

String Concatenation With +

- The + operator works as follows:
 - Performs String concatenation
 - Produces a new String:

```
String salutation = "Dr.";
String name = "Pete" + " " + "Seymour";
String title = salutation + " " + name;
```
- One argument must be a String object.
- Non-strings are converted to String objects automatically.



Casting

- If information might be lost in an assignment, the programmer must confirm the assignment with a cast.
- The assignment between `long` and `int` requires an explicit cast.

```
long bigValue = 99L;
int squashed = bigValue;           // Wrong, needs a cast
int squashed = (int) bigValue;     // OK

int squashed = 99L;
int squashed = (int) 99L;          // Wrong, needs a cast
int squashed = 99;                 // OK, but...
int squashed = 99;                 // default integer literal
```

Promotion and Casting of Expressions

- Variables are promoted automatically to a longer form (such as `int` to `long`).
- Expression is *assignment-compatible* if the variable type is at least as large (the same number of bits) as the expression type.

```
long bigval = 6;           // 6 is an int type, OK
int smallval = 99L;        // 99L is a long, illegal

double z = 12.414F;        // 12.414F is float, OK
float z1 = 12.414;         // 12.414 is double, illegal
```


Simple if, else Statements

The if statement syntax:

```
if ( <boolean_expression> )  
    <statement_or_block>
```

Example:

```
if ( x < 10 )  
    System.out.println("Are you finished yet?");
```

or (*recommended*):

```
if ( x < 10 ) {  
    System.out.println("Are you finished yet?");  
}
```

Complex if, else Statements

The if-else statement syntax:

```
if ( <boolean_expression> )  
    <statement_or_block>  
else  
    <statement_or_block>
```

Example:

```
if ( x < 10 ) {  
    System.out.println("Are you finished yet?");  
} else {  
    System.out.println("Keep working...");  
}
```

Complex if, else Statements

The if-else-if statement syntax:

```
if ( <boolean_expression> )  
    <statement_or_block>  
else if ( <boolean_expression> )  
    <statement_or_block>
```

Example:

```
int count = getCount(); // a method defined in the class  
if (count < 0) {  
    System.out.println("Error: count value is negative.");  
} else if (count > getMaxCount()) {  
    System.out.println("Error: count value is too big.");  
} else {  
    System.out.println("There will be " + count +  
        " people for lunch today.");  
}
```

Switch Statements

The switch statement syntax:

```
switch ( <expression> ) {  
    case <constant1>:  
        <statement_or_block>*  
        [break;]  
    case <constant2>:  
        <statement_or_block>*  
        [break;]  
    default:  
        <statement_or_block>*  
        [break;]  
}
```

Switch Statements

A switch statement example:

```
switch ( carModel ) {  
    case DELUXE:  
        addAirConditioning();  
        addRadio();  
        addWheels();  
        addEngine();  
        break;  
    case STANDARD:  
        addRadio();  
        addWheels();  
        addEngine();  
        break;  
    default:  
        addWheels();  
        addEngine();  
}
```

Switch Statements

This switch statement is equivalent to the previous example:

```
switch ( carModel ) {  
    case DELUXE:  
        addAirConditioning();  
    case STANDARD:  
        addRadio();  
    default:  
        addWheels();  
        addEngine();  
}
```

Without the break statements, the execution falls through each subsequent case clause.

Looping Statements

The for loop:

```
for ( <init_expr>; <test_expr>; <alter_expr> )  
    <statement_or_block>
```

Example:

```
for ( int i = 0; i < 10; i++ )  
    System.out.println(i + " squared is " + (i*i));
```

or (*recommended*):

```
for ( int i = 0; i < 10; i++ ) {  
    System.out.println(i + " squared is " + (i*i));  
}
```

Looping Statements

The while loop:

```
while ( <test_expr> )  
    <statement_or_block>
```

Example:

```
int i = 0;  
while ( i < 10 ) {  
    System.out.println(i + " squared is " + (i*i));  
    i++;  
}
```



Looping Statements

The do/while loop:

```
do
    <statement_or_block>
while ( <test_expr> );
```

Example:

```
int i = 0;
do {
    System.out.println(i + " squared is " + (i*i));
    i++;
} while ( i < 10 );
```



Special Loop Flow Control

- The **break** *[<label>]* ; command
- The **continue** *[<label>]* ; command
- The *<label>* : *<statement>* command, where *<statement>* should be a loop

The break Statement

```
1  do {  
2      statement;  
3      if ( condition ) {  
4          break;  
5      }  
6      statement;  
7  } while ( test_expr );
```

The `continue` Statement


```
1  do {  
2      statement;  
3      if ( condition ) {  
4          continue;  
5      }  
6      statement;  
7  } while ( test_expr );
```

Using break Statements with Labels

```
1  outer:
2      do {
3          statement1;
4          do {
5              statement2;
6              if ( condition ) {
7                  break outer;
8              }
9              statement3;
10         } while ( test_expr );
11         statement4;
12     } while ( test_expr );
```

Using `continue` Statements with Labels


```
1  test:  
2  do {  
3      statement1;  
4      do {  
5          statement2;  
6          if ( condition ) {  
7              continue test;  
8          }  
9          statement3;  
10         } while ( test_expr );  
11         statement4;  
12     } while ( test_expr );
```



Sun Services


Module 5

Arrays



Objectives

- Declare and create arrays of primitive, class, or array types
- Explain why elements of an array are initialized
- Explain how to initialize the elements of an array
- Determine the number of elements in an array
- Create a multidimensional array
- Write code to copy array values from one array to another



Relevance

What is the purpose of an array?

Declaring Arrays

- Group data objects of the same type.
- Declare arrays of primitive or class types:

```
char s[];  
Point p[];
```



```
char [] s;  
Point [] p;
```
- Create space for a reference.
- An array is an object; it is created with `new`.


Creating Arrays

Use the new keyword to create an array object.

For example, a primitive (char) array:

```
1 public char[] createArray() {  
2     char[] s;  
3  
4     s = new char[26];  
5     for ( int i=0; i<26; i++ ) {  
6         s[i] = (char) ( 'A' + i );  
7     }  
8  
9     return s;  
10 }
```

Creating an Array of Character Primitives

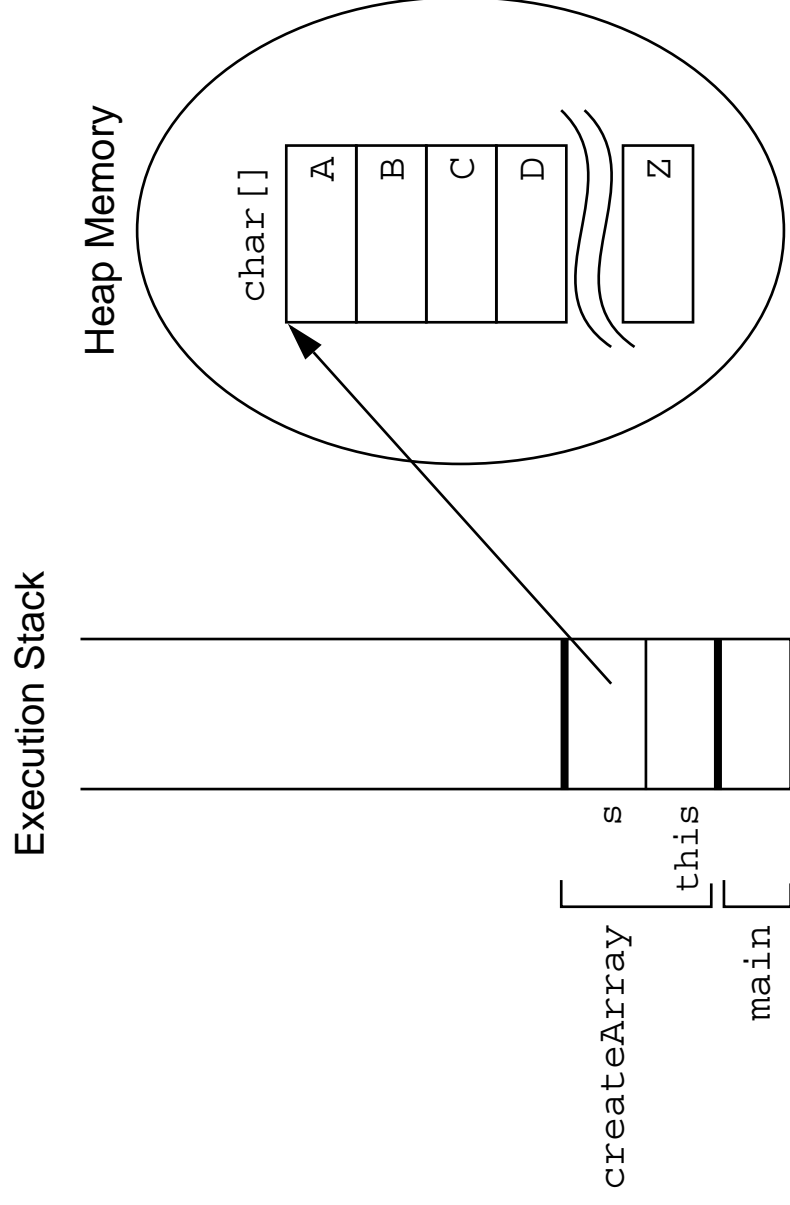


Creating Reference Arrays

Another example, an object array:

```
1  public Point[] createArray() {  
2      Point[] p;  
3  
4      p = new Point[10];  
5      for ( int i=0; i<10; i++ ) {  
6          p[i] = new Point(i, i+1);  
7      }  
8  
9      return p;  
10 }
```

Creating an Array of Character Primitives With Point Objects

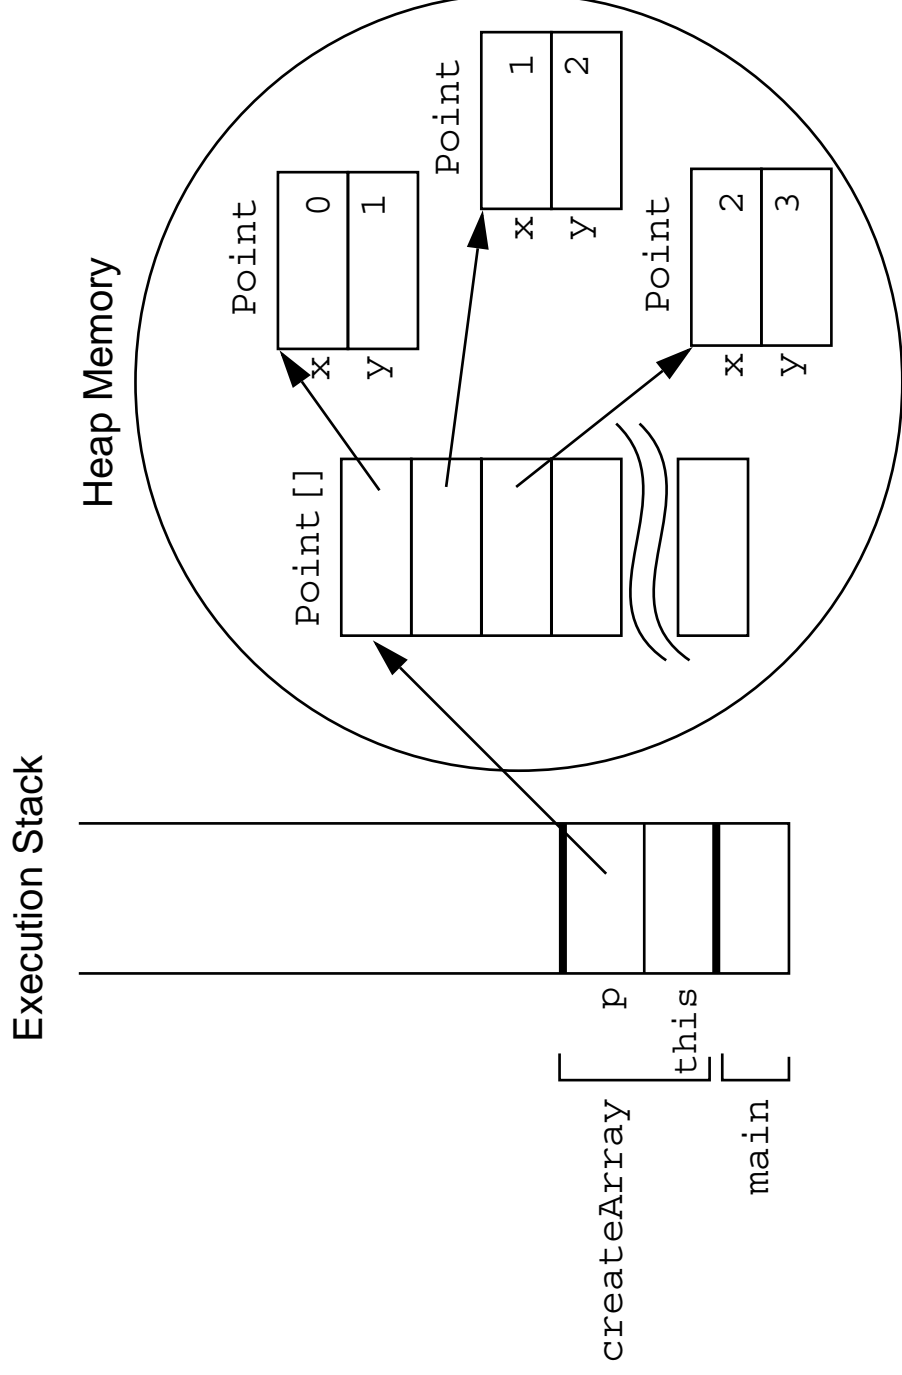

Initializing Arrays

- Initialize an array element.
- Create an array with initial values.

```
String[] names;  
names = new String[3];  
names[0] = "Georgianna";  
names[1] = "Jen";  
names[2] = "Simon";  
  
String[] names = {  
    "Georgianna",  
    "Jen",  
    "Simon"  
};
```

```
MyDate[] dates;  
dates = new MyDate[3];  
dates[0] = new MyDate(22, 7, 1964);  
dates[1] = new MyDate(1, 1, 2000);  
dates[2] = new MyDate(22, 12, 1964);  
  
MyDate[] dates = {  
    new MyDate(22, 7, 1964),  
    new MyDate(1, 1, 2000),  
    new MyDate(22, 12, 1964)  
};
```

Multidimensional Arrays

Arrays of arrays:

```
int [] [] twoDim = new int [4] [] ;  
twoDim[0] = new int [5] ;  
twoDim[1] = new int [5] ;
```

```
int [] [] twoDim = new int [] [4] ; // illegal
```



Multidimensional Arrays

- Non-rectangular arrays of arrays:

```
twoDim[0] = new int[2];  
twoDim[1] = new int[4];  
twoDim[2] = new int[6];  
twoDim[3] = new int[8];
```

- Array of four arrays of five integers each:

```
int[][] twoDim = new int[4][5];
```



Array Bounds

All array subscripts begin at 0:

```
public void printElements(int[] list) {  
    for (int i = 0; i < list.length; i++) {  
        System.out.println(list[i]);  
    }  
}
```

Using the Enhanced for Loop

Java 2 Platform, Standard Edition (J2SE™) version 5.0 introduced an enhanced for loop for iterating over arrays:


```
public void printElements(int[] list) {  
    for ( int element : list ) {  
        System.out.println(element);  
    }  
}
```

The for loop can be read as *for each* element *in* list *do*.

Array Resizing

- You cannot resize an array.
- You can use the same reference variable to refer to an entirely new array, such as:


```
int[] myArray = new int [6];  
myArray = new int [10];
```



Copying Arrays

The `System.arraycopy()` method to copy arrays is:


```
1 //original array
2 int[] myArray = { 1, 2, 3, 4, 5, 6 };
3
4 // new larger array
5 int[] hold = { 10, 9, 8, 7, 6, 5, 4, 3, 2, 1 };
6
7 // copy all of the myArray array to the hold
8 // array, starting with the 0th index
9 System.arraycopy(myArray, 0, hold, 0, myArray.length);
```



Sun Services


Module 6

Class Design



Objectives

- Define *inheritance, polymorphism, overloading, overriding, and virtual method invocation*
- Use the access modifiers protected and the default (*package-friendly*)
- Describe the concepts of constructor and method overloading
- Describe the complete object construction and initialization operation



Relevance

How does the Java programming language support object inheritance?

Subclassing

The Employee class is shown here.

Employee
+name : String = ""
+salary : double
+birthDate : Date
+getDetails() : String

```
public class Employee {  
    public String name = "";  
    public double salary;  
    public Date birthDate;  
  
    public String getDetails() {...}  
}
```


Subclassing

The Manager class is shown here.

Manager
+name : String = ""
+salary : double
+birthDate : Date
+department : String
+getDetails() : String

```
public class Manager {  
    public String name = "";  
    public double salary;  
    public Date birthDate;  
    public String department;  
  
    public String getDetails() {...}  
}
```


Class Diagrams for Employee and Manager Using Inheritance

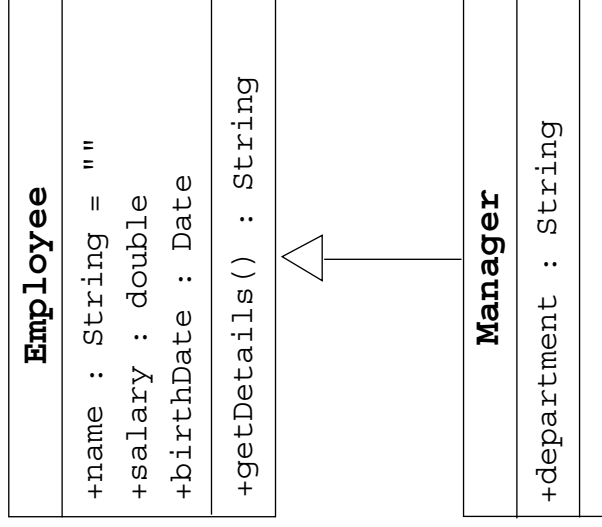

```
public class Employee {
    public String name = "";
    public double salary;
    public Date birthDate;

    public String getDetails() {...}
}


public class Manager extends Employee {
    public String department;
}
```




Single Inheritance

- When a class inherits from only one class, it is called *single inheritance*.
- *Interfaces* provide the benefits of multiple inheritance without drawbacks.
- Syntax of a Java class is as follows:

```
<modifier> class <name> [extends <superclass>] {  
    <declaration>*  
}
```



Single Inheritance

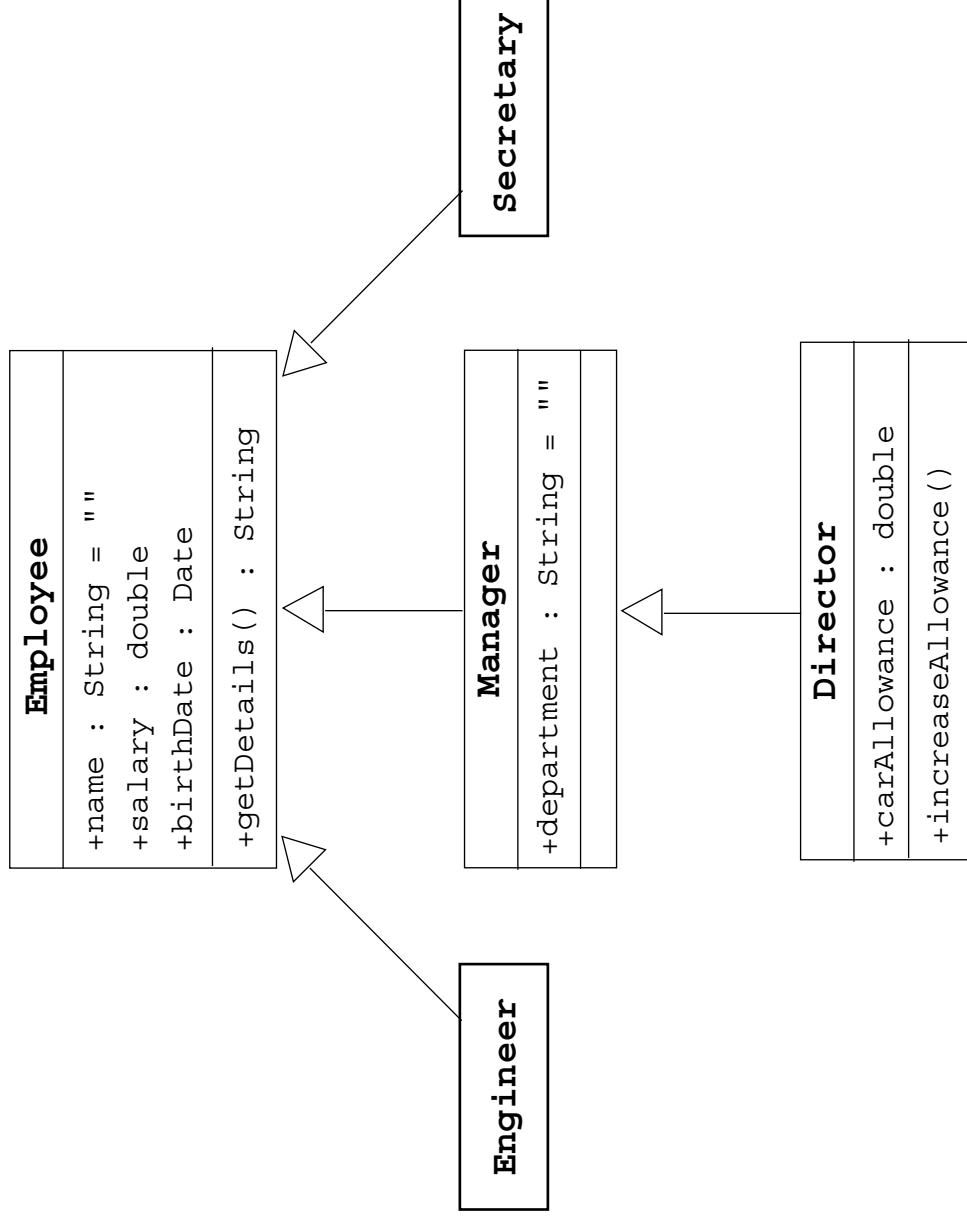

Access Control

Access modifiers on class member declarations are listed here.

Modifier	Same Class	Same Package	Subclass	Universe
private	Yes			
default	Yes	Yes		
protected	Yes	Yes	Yes	
public	Yes	Yes	Yes	Yes

Overriding Methods

- A subclass can modify behavior inherited from a parent class.
- A subclass can create a method with different functionality than the parent's method but with the same:
 - Name
 - Return type¹
 - Argument list

1. In J2SE version 5, the return type can be a subclass of the overridden return type.

Overriding Methods

```
1 public class Employee {
2     protected String name;
3     protected double salary;
4     protected Date birthDate;
5
6     public String getDetails() {
7         return "Name: " + name + "\n" +
8             "Salary: " + salary;
9     }
10 }

```

```
1 public class Manager extends Employee {
2     protected String department;
3
4     public String getDetails() {
5         return "Name: " + name + "\n" +
6             "Salary: " + salary + "\n" +
7             "Manager of: " + department;
8     }
9 }

```


Overridden Methods Cannot Be Less Accessible

```
1 public class Parent {
2     public void doSomething() {}
3 }

1 public class Child extends Parent {
2     private void doSomething() {} // illegal
3 }

1 public class UseBoth {
2     public void doOtherThing() {
3         Parent p1 = new Parent();
4         Parent p2 = new Child();
5         p1.doSomething();
6         p2.doSomething();
7     }
8 }
```

Invoking Overridden Methods


A subclass method may invoke a superclass method using the `super` keyword:

- The keyword `super` is used in a class to refer to its superclass.
- The keyword `super` is used to refer to the members of superclass, both data attributes and methods.
- Behavior invoked does not have to be in the superclass; it can be further up in the hierarchy.

Invoking Overridden Methods


```
1 public class Employee {
2     private String name;
3     private double salary;
4     private Date birthDate;
5
6     public String getDetails() {
7         return "Name: " + name + "\nSalary: " + salary;
8     }
9 }
```

```
1 public class Manager extends Employee {
2     private String department;
3
4     public String getDetails() {
5         // call parent method
6         return super.getDetails()
7             + "\nDepartment: " + department;
8     }
9 }
```



Polymorphism

- *Polymorphism* is the ability to have many different forms; for example, the `Manager` class has access to methods from `Employee` class.
- An object has only one form.
- A reference variable can refer to objects of different forms.



Polymorphism

```
Employee e = new Manager(); // legal

// illegal attempt to assign Manager attribute
e.department = "Sales";
// the variable is declared as an Employee type,
// even though the Manager object has that attribute
```

Virtual Method Invocation

- Virtual method invocation is performed as follows:

```
Employee e = new Manager();  
e.getDetails();
```

- Compile-time type and runtime type invocations have the following characteristics:
 - The method name must be a member of the declared variable type; in this case `Employee` has a method called `getDetails`.
 - The method implementation used is based on the runtime object's type; in this case the `Manager` class has an implementation of the `getDetails` method.

Heterogeneous Collections

- Collections of objects with the same class type are called *homogeneous* collections. For example:

```
MyDate[] dates = new MyDate[2];  
dates[0] = new MyDate(22, 12, 1964);  
dates[1] = new MyDate(22, 7, 1964);
```

- Collections of objects with different class types are called *heterogeneous* collections. For example:

```
Employee [] staff = new Employee[1024];  
staff[0] = new Manager();  
staff[1] = new Employee();  
staff[2] = new Engineer();
```

Polymorphic Arguments


Because a Manager is an Employee, the following is valid:

```
public class TaxService {  
    public TaxRate findTaxRate(Employee e) {  
        // calculate the employee's tax rate  
    }  
}  
  
// Meanwhile, elsewhere in the application class  
TaxService taxSvc = new TaxService();  
Manager m = new Manager();  
TaxRate t = taxSvc.findTaxRate(m);
```


The instanceof Operator


```
public class Employee extends Object
public class Manager extends Employee
public class Engineer extends Employee
-----

public void doSomething(Employee e) {
    if ( e instanceof Manager ) {
        // Process a Manager
    } else if ( e instanceof Engineer ) {
        // Process an Engineer
    } else {
        // Process any other type of Employee
    }
}
```



Casting Objects

```
public void doSomething(Employee e) {  
    if ( e instanceof Manager ) {  
        Manager m = (Manager) e;  
        System.out.println( "This is the manager of "  
                             + m.getDepartment() );  
    }  
    // rest of operation  
}
```



Casting Objects

- Use instanceof to test the type of an object.
- Restore full functionality of an object by casting.
- Check for proper casting using the following guidelines:
 - Casts *upward* in the hierarchy are done implicitly.
 - *Downward* casts must be to a subclass and checked by the compiler.
 - The object type is checked at runtime when runtime errors can occur.

Overloading Methods

- Use overloading as follows:

```
public void println(int i)
public void println(float f)
public void println(String s)
```

- Argument lists *must* differ.
- Return types *can* be different.

Methods Using Variable Arguments

- Methods using *variable arguments* permit multiple number of arguments in methods.

For example:

```
public class Statistics {  
    public float average(int... nums) {  
        int sum = 0;  
        for ( int x : nums ) {  
            sum += x;  
        }  
        return ((float) sum) / nums.length;  
    }  
}
```

- The *vararg* parameter is treated as an array. For example:

```
float gradePointAverage = stats.average(4, 3, 4);  
float averageAge = stats.average(24, 32, 27, 18);
```

Overloading Constructors

- As with methods, constructors can be overloaded.


An example is:

```
public Employee(String name, double salary, Date DoB)
public Employee(String name, double salary)
public Employee(String name, Date DoB)
```

- Argument lists *must* differ.
- You can use the `this` reference at the first line of a constructor to call another constructor.

Overloading Constructors

```
1 public class Employee {
2     private static final double BASE_SALARY = 15000.00;
3     private String name;
4     private double salary;
5     private Date    birthDate;
6
7     public Employee(String name, double salary, Date DoB) {
8         this.name = name;
9         this.salary = salary;
10        this.birthDate = DoB;
11    }
12    public Employee(String name, double salary) {
13        this(name, salary, null);
14    }
15    public Employee(String name, Date DoB) {
16        this(name, BASE_SALARY, DoB);
17    }
18    // more Employee code...
19 }
```



Constructors Are Not Inherited

- A subclass inherits all methods and variables from the superclass (parent class).
- A subclass does not inherit the constructor from the superclass.
- Two ways to include a constructor are:
 - Use the default constructor.
 - Write one or more explicit constructors.

Invoking Parent Class Constructors

- To invoke a parent constructor, you must place a call to `super` in the first line of the constructor.
- You can call a specific parent constructor by the arguments that you use in the call to `super`.
- If no `this` or `super` call is used in a constructor, then the compiler adds an implicit call to `super()` that calls the parent no argument constructor (which could be the *default* constructor).

If the parent class defines constructors, but does not provide a no-argument constructor, then a compiler error message is issued.

Invoking Parent Class Constructors


```
1 public class Manager extends Employee {
2     private String department;
3
4     public Manager(String name, double salary, String dept) {
5         super(name, salary);
6         department = dept;
7     }
8     public Manager(String name, String dept) {
9         super(name);
10        department = dept;
11    }
12    public Manager(String dept) { // This code fails: no super()
13        department = dept;
14    }
15    //more Manager code...
16 }
```

Constructing and Initializing Objects: A Slight Reprise

Memory is allocated and default initialization occurs.

Instance variable initialization uses these steps recursively:

1. Bind constructor parameters.
2. If explicit `this()`, call recursively, and then skip to Step 5.
3. Call recursively the implicit or explicit `super` call, except for `Object`.
4. Execute the explicit instance variable initializers.
5. Execute the body of the current constructor.



Constructor and Initialization Examples

```
1  public class Object {  
2      public Object() {}  
3  }
```

```
1  public class Employee extends Object {  
2      private String name;  
3      private double salary = 15000.00;  
4      private Date    birthDate;  
5  
6      public Employee(String n, Date DoB) {  
7          // implicit super();  
8          name = n;  
9          birthDate = DoB;  
10     }  
11     public Employee(String n) {  
12         this(n, null);  
13     }  
14 }
```


```
1  public class Manager extends Employee {  
2      private String department;  
3  
4      public Manager(String n, String d) {  
5          super(n);  
6          department = d;  
7      }  
8  }
```

Constructor and Initialization Examples

- 0 Basic initialization
 - 0.1 Allocate memory for the complete `Manager` object
 - 0.2 Initialize all instance variables to their default values (0 or null)
- 1 Call constructor: `Manager ("Joe Smith", "Sales")`
 - 1.1 Bind constructor parameters: `n="Joe Smith", d="Sales"`
 - 1.2 No explicit `this()` call
 - 1.3 Call `super(n)` for `Employee(String)`
 - 1.3.1 Bind constructor parameters: `n="Joe Smith"`
 - 1.3.2 Call `this(n, null)` for `Employee(String, Date)`
 - 1.3.2.1 Bind constructor parameters: `n="Joe Smith", DoB=null`
 - 1.3.2.2 No explicit `this()` call
 - 1.3.2.3 Call `super()` for `Object()`
 - 1.3.2.3.1 No binding necessary
 - 1.3.2.3.2 No `this()` call
 - 1.3.2.3.3 No `super()` call (`Object` is the root)
 - 1.3.2.3.4 No explicit variable initialization for `Object`
 - 1.3.2.3.5 No method body to call

Constructor and Initialization Examples

- 1.3.2.4 Initialize explicit Employee variables: `salary=15000.00;`
- 1.3.2.5 Execute body: `name="Joe Smith"; date=null;`
- 1.3.3 - 1.3.4 Steps skipped
- 1.3.5 Execute body: No body in `Employee (String)`
- 1.4 No explicit initializers for Manager
- 1.5 Execute body: `department="Sales"`



The Object Class


- The Object class is the root of all classes in Java.
- A class declaration with no extends clause implies extends Object. For example:

```
public class Employee {  
    ...  
}
```

is equivalent to:


```
public class Employee extends Object {  
    ...  
}
```

- Two important methods are:
 - equals
 - toString




The equals Method

- The `==` operator determines if two references are identical to each other (that is, refer to the same object).
- The `equals` method determines if objects are *equal* but not necessarily identical.
- The `Object` implementation of the `equals` method uses the `==` operator.
- User classes can override the `equals` method to implement a domain-specific test for equality.
- Note: You should override the `hashCode` method if you override the `equals` method.



An equals Example

```
1 public class MyDate {  
2     private int day;  
3     private int month;  
4     private int year;  
5  
6     public MyDate(int day, int month, int year) {  
7         this.day = day;  
8         this.month = month;  
9         this.year = year;  
10    }  
}
```



An equals Example

```
11
12  public boolean equals(Object o) {
13      boolean result = false;
14      if ( (o != null) && (o instanceof MyDate) ) {
15          MyDate d = (MyDate) o;
16          if ( (day == d.day) && (month == d.month)
17              && (year == d.year) ) {
18              result = true;
19          }
20      }
21      return result;
22  }
23
24  public int hashCode() {
25      return (day ^ month ^ year);
26  }
27 }
```

An equals Example

```
1  class TestEquals {
2      public static void main(String[] args) {
3          MyDate date1 = new MyDate(14, 3, 1976);
4          MyDate date2 = new MyDate(14, 3, 1976);
5
6          if ( date1 == date2 ) {
7              System.out.println("date1 is identical to date2");
8          } else {
9              System.out.println("date1 is not identical to date2");
10         }
11
12         if ( date1.equals(date2) ) {
13             System.out.println("date1 is equal to date2");
14         } else {
15             System.out.println("date1 is not equal to date2");
16         }
```

An equals Example

```
17
18 System.out.println("set date2 = date1;");
19 date2 = date1;
20
21 if ( date1 == date2 ) {
22     System.out.println("date1 is identical to date2");
23 } else {
24     System.out.println("date1 is not identical to date2");
25 }
26 }
27 }
```

This example generates the following output:

```
date1 is not identical to date2
date1 is equal to date2
set date2 = date1;
date1 is identical to date2
```

The `toString` Method

The `toString` method has the following characteristics:

- This method converts an object to a `String`.
- Use this method during string concatenation.
- Override this method to provide information about a user-defined object in readable format.
- Use the wrapper class's `toString` static method to convert primitive types to a `String`.

Wrapper Classes

Look at primitive data elements as objects.

Primitive Data Type	Wrapper Class
boolean	Boolean
byte	Byte
char	Character
short	Short
int	Integer
long	Long
float	Float
double	Double

Wrapper Classes

An example of a wrapper class is:

```
int pInt = 420;  
Integer wInt = new Integer(pInt); // this is called boxing  
int p2 = wInt.intValue(); // this is called unboxing
```

Other methods are:

```
int x = Integer.valueOf(str).intValue();  
int x = Integer.parseInt(str);
```


Autoboxing of Primitive Types

Autoboxing has the following description:

- Conversion of primitive types to the object equivalent
- Wrapper classes not always needed
- Example:

```
int pInt = 420;  
Integer wInt = pInt; // this is called autoboxing  
int p2 = wInt; // this is called autounboxing
```


- Language feature used most often when dealing with collections
- Wrapped primitives also usable in arithmetic expressions
- Performance loss when using autoboxing



Sun Services


Module 7

Advanced Class Features




Objectives

- Create static variables, methods, and initializers
- Create final classes, methods, and variables
- Create and use enumerated types
- Use the static import statement
- Create abstract classes and methods
- Create and use an interface




Relevance

- How can you create a constant?
- How can you declare data that is shared by all instances of a given class?
- How can you keep a class or method from being subclassed or overridden?




The static Keyword

- The `static` keyword is used as a modifier on variables, methods, and nested classes.
- The `static` keyword declares the attribute or method is associated with the class as a whole rather than any particular instance of that class.
- Thus static members are often called *class members*, such as *class attributes* or *class methods*.



Class Attributes

Class attributes are shared among all instances of a class:

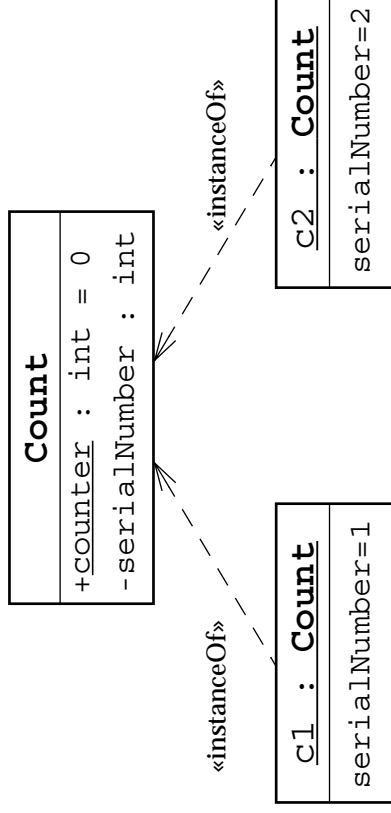

```
1 public class Count {
2     private int serialNumber;
3     public static int counter = 0;
4
5     public Count() {
6         counter++;
7         serialNumber = counter;
8     }
9 }
```

Class Attributes

If the static member is `public`:

```
1 public class Count1 {
2     private int serialNumber;
3     public static int counter = 0;
4     public Count1() {
5         counter++;
6         serialNumber = counter;
7     }
8 }
```

it can be accessed from outside the class without an instance:

```
1 public class OtherClass {
2     public void incrementNumber() {
3         Count1.counter++;
4     }
5 }
```

Class Methods

You can create static methods:

```
1 public class Count2 {  
2     private int serialNumber;  
3     private static int counter = 0;  
4  
5     public static int getTotalCount() {  
6         return counter;  
7     }  
8  
9     public Count2() {  
10         counter++;  
11         serialNumber = counter;  
12     }  
13 }
```

Class Methods

You can invoke static methods without any instance of the class to which it belongs:

```
1 public class TestCounter {
2     public static void main(String[] args) {
3         System.out.println("Number of counter is "
4                             + Count2.getTotalCount());
5         Count2 counter = new Count2();
6         System.out.println("Number of counter is "
7                             + Count2.getTotalCount());
8     }
9 }
```


The output of the TestCounter program is:

```
Number of counter is 0
Number of counter is 1
```


Class Methods

Static methods cannot access instance variables:

```
1 public class Count3 {
2     private int serialNumber;
3     private static int counter = 0;
4
5     public static int getSerialNumber() {
6         return serialNumber; // COMPILER ERROR!
7     }
8 }
```



Static Initializers

- A class can contain code in a *static block* that does not exist within a method body.
- Static block code executes once only, when the class is loaded.
- Usually, a static block is used to initialize static (class) attributes.


Static Initializers

```
1 public class Count4 {
2     public static int counter;
3     static {
4         counter = Integer.getInteger("myApp.Count4.counter").intValue();
5     }
6 }
```

```
1 public class TestStaticInit {
2     public static void main(String[] args) {
3         System.out.println("counter = "+ Count4.counter);
4     }
5 }
```

The output of the TestStaticInit program is:

```
java -DmyApp.Count4.counter=47 TestStaticInit
counter = 47
```




The final Keyword

- You cannot subclass a `final` class.
- You cannot override a `final` method.
- A `final` variable is a constant.
- You can set a `final` variable once only, but that assignment can occur independently of the declaration; this is called a *blank final variable*.
- A blank `final` instance attribute must be set in every constructor.
- A blank `final` method variable must be set in the method body before being used.

Final Variables

Constants are static final variables.

```
public class Bank {  
    private static final double  DEFAULT_INTEREST_RATE = 3.2;  
    ... // more declarations  
}
```



Blank Final Variables

```
1 public class Customer {
2
3     private final long customerId;
4
5     public Customer() {
6         customerId = createID();
7     }
8
9     public long getID() {
10         return customerId;
11     }
12
13     private long createID() {
14         return ... // generate new ID
15     }
16
17     // more declarations
18
19 }
```

Old-Style Enumerated Type Idiom

Enumerated types are a common idiom in programming.

```
1 package cards.domain;
2
3 public class PlayingCard {
4
5     // pseudo enumerated type
6     public static final int SUIT_SPADES    = 0;
7     public static final int SUIT_HEARTS   = 1;
8     public static final int SUIT_CLUBS    = 2;
9     public static final int SUIT_DIAMONDS = 3;
10
11     private int suit;
12     private int rank;
13
14     public PlayingCard(int suit, int rank) {
15         this.suit = suit;
16         this.rank = rank;
17     }
```

Old-Style Enumerated Type Idiom

```
22 public String getSuitName() {
23     String name = "";
24     switch ( suit ) {
25         case SUIT_SPADES:
26             name = "Spades";
27             break;
28         case SUIT_HEARTS:
29             name = "Hearts";
30             break;
31         case SUIT_CLUBS:
32             name = "Clubs";
33             break;
34         case SUIT_DIAMONDS:
35             name = "Diamonds";
36             break;
37         default:
38             System.err.println("Invalid suit.");
39     }
40     return name;
41 }
```


Old-Style Enumerated Type Idiom

Old-style idiom is not type-safe:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4
5 public class TestPlayingCard {
6     public static void main(String[] args) {
7
8         PlayingCard card1
9             = new PlayingCard(PlayingCard.SUIT_SPADES, 2);
10        System.out.println("card1 is the " + card1.getRank()
11                           + " of " + card1.getSuitName());
12
13        // You can create a playing card with a bogus suit.
14        PlayingCard card2 = new PlayingCard(47, 2);
15        System.out.println("card2 is the " + card2.getRank()
16                           + " of " + card2.getSuitName());
17    }
18 }
```

Old-Style Enumerated Type Idiom

This enumerated type idiom has several problems:

- Not type-safe
- No namespace
- Brittle character
- Uninformative printed values

The New Enumerated Type


Now you can create type-safe enumerated types:

```
1 package cards.domain;  
2  
3 public enum Suit {  
4     SPADES,  
5     HEARTS,  
6     CLUBS,  
7     DIAMONDS  
8 }
```

The New Enumerated Type

Using enumerated types is easy:

```
1  package cards.domain;
2
3  public class PlayingCard {
4
5      private Suit suit;
6      private int rank;
7
8      public PlayingCard(Suit suit, int rank) {
9          this.suit = suit;
10         this.rank = rank;
11     }
12
13     public Suit getSuit() {
14         return suit;
15     }
```



The New Enumerated Type

```
16 public String getSuitName() {
17     String name = "";
18     switch ( suit ) {
19         case SPADES:
20             name = "Spades";
21             break;
22         case HEARTS:
23             name = "Hearts";
24             break;
25         case CLUBS:
26             name = "Clubs";
27             break;
28         case DIAMONDS:
29             name = "Diamonds";
30             break;
31         default:
32             // No need for error checking as the Suit
33             // enum is finite.
34     }
35     return name;
36 }
```

The New Enumerated Type

Enumerated types are type-safe:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4 import cards.domain.Suit;
5
6 public class TestPlayingCard {
7     public static void main(String[] args) {
8
9         PlayingCard card1
10             = new PlayingCard(Suit.SPADES, 2);
11         System.out.println("card1 is the " + card1.getRank()
12                             + " of " + card1.getSuitName());
13
14         // PlayingCard card2 = new PlayingCard(47, 2);
15         // This will not compile.
16     }
17 }
```

Advanced Enumerated Types

Enumerated types can have attributes and methods:

```
1 package cards.domain;
2
3 public enum Suit {
4     SPADES ("Spades"),
5     HEARTS ("Hearts"),
6     CLUBS ("Clubs"),
7     DIAMONDS ("Diamonds");
8
9     private final String name;
10
11     private Suit(String name) {
12         this.name = name;
13     }
14
15     public String getName() {
16         return name;
17     }
18 }
```

Advanced Enumerated Types

Public methods on enumerated types are accessible:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4 import cards.domain.Suit;
5
6 public class TestPlayingCard {
7     public static void main(String[] args) {
8
9         PlayingCard card1
10             = new PlayingCard(Suit.SPADES, 2);
11         System.out.println("card1 is the " + card1.getRank()
12                             + " of " + card1.getSuit().getName());
13
14         // NewPlayingCard card2 = new NewPlayingCard(47, 2);
15         // This will not compile.
16     }
17 }
```


Static Imports

- A *static import* imports the static members from a class:

```
import static <pkg_list>.<class_name>.<member_name>;  
OR  
import static <pkg_list>.<class_name>.*;
```

- A static import imports members individually or collectively:

```
import static cards.domain.Suit.SPADES;  
OR  
import static cards.domain.Suit.*;
```

- There is no need to qualify the static constants:
`PlayingCard card1 = new PlayingCard(SPADES, 2);`
- *Use this feature sparingly.*


Static Imports

An example of a static import is:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4 import static cards.domain.Suit.*;
5
6 public class TestPlayingCard {
7     public static void main(String[] args) {
8
9         PlayingCard card1 = new PlayingCard(SPADES, 2);
10        System.out.println("card1 is the " + card1.getRank()
11                           + " of " + card1.getSuit().getName());
12
13        // NewPlayingCard card2 = new NewPlayingCard(47, 2);
14        // This will not compile.
15    }
16 }
```

Abstract Classes

The design of the Shipping system looks like this:

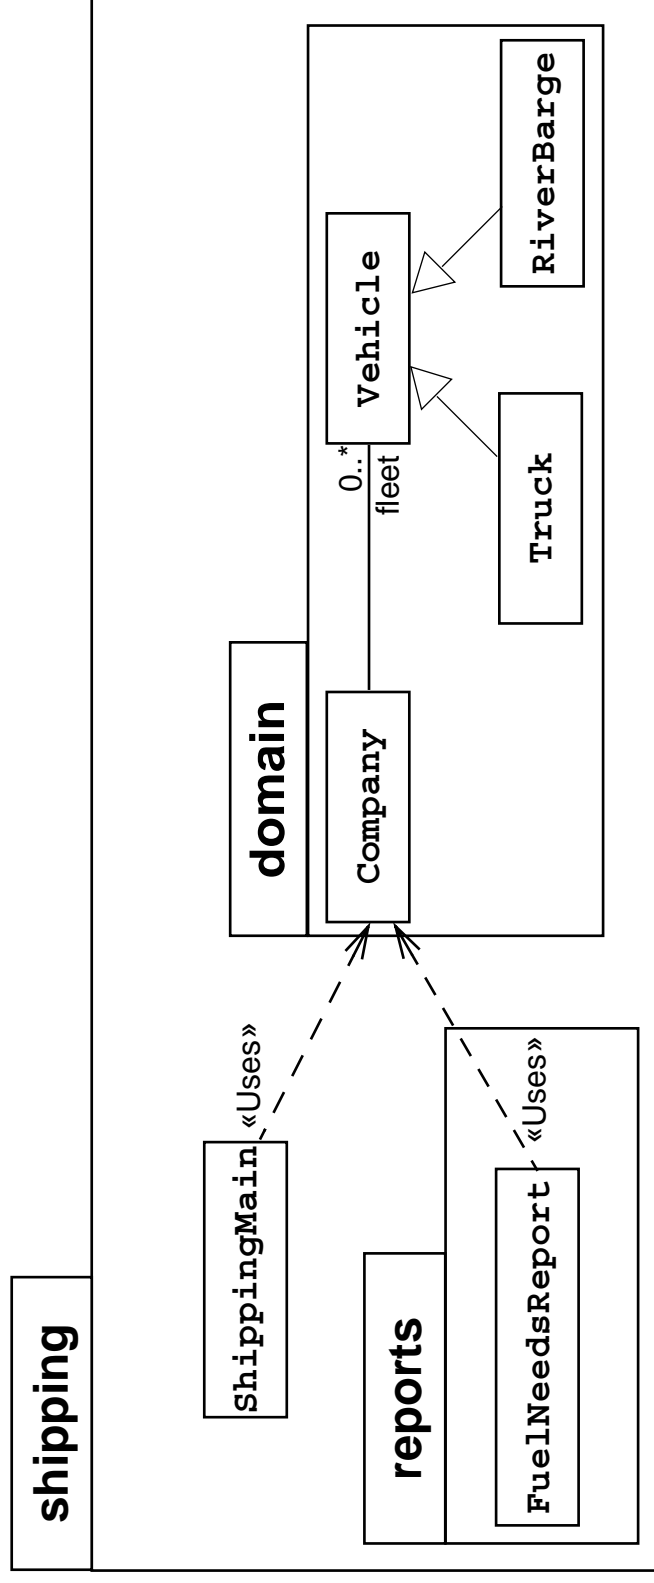


Abstract Classes

Fleet initialization code is shown here:

```
1 public class ShippingMain {
2     public static void main(String[] args) {
3         Company c = new Company();
4
5         // populate the company with a fleet of vehicles
6         c.addVehicle( new Truck(10000.0) );
7         c.addVehicle( new Truck(15000.0) );
8         c.addVehicle( new RiverBarge(500000.0) );
9         c.addVehicle( new Truck(9500.0) );
10        c.addVehicle( new RiverBarge(750000.0) );
11
12        FuelNeedsReport report = new FuelNeedsReport(c);
13        report.generateText(System.out);
14    }
15 }
```

Abstract Classes

```
1 public class FuelNeedsReport {
2     private Company company;
3
4     public FuelNeedsReport (Company company) {
5         this.company = company;
6     }
7
8     public void generateText (PrintStream output) {
9         Vehicle1 v;
10        double fuel;
11        double total_fuel = 0.0;
12
13        for ( int i = 0; i < company.getFleetSize(); i++ ) {
14            v = company.getVehicle(i);
15        }
```




Abstract Classes

```
16 // Calculate the fuel needed for this trip
17 fuel = v.calcTripDistance() / v.calcFuelEfficiency();
18
19 output.println("Vehicle " + v.getName() + " needs "
20               + fuel + " liters of fuel.");
21 total_fuel += fuel;
22 }
23 output.println("Total fuel needs is " + total_fuel + " liters.");
24 }
25 }
```

The Solution

An abstract class models a class of objects in which the full implementation is not known but is supplied by the concrete subclasses.

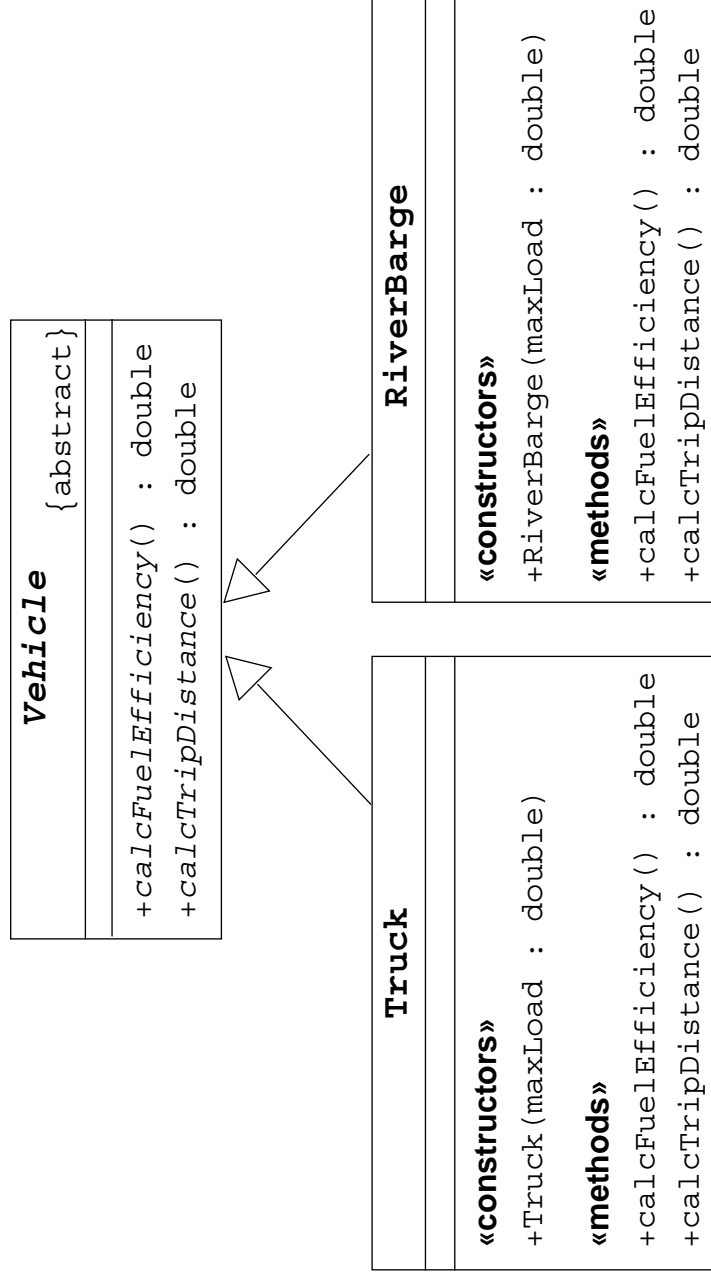

The Solution

The declaration of the `Vehicle` class is:

```
1 public abstract class Vehicle {
2     public abstract double calcFuelEfficiency();
3     public abstract double calcTripDistance();
4 }
```

The `Truck` class must create an implementation:

```
1 public class Truck extends Vehicle {
2     public Truck(double maxLoad) {...}
3     public double calcFuelEfficiency() {
4         /* calculate the fuel consumption of a truck at a given load */
5     }
6     public double calcTripDistance() {
7         /* calculate the distance of this trip on highway */
8     }
9 }
```


The Solution


Likewise, the `RiverBarge` class must create an implementation:

```
1 public class RiverBarge extends Vehicle {
2     public RiverBarge(double maxLoad) {...}
3     public double calcFuelEfficiency() {
4         /* calculate the fuel efficiency of a river barge */
5     }
6     public double calcTripDistance() {
7         /* calculate the distance of this trip along the river-ways */
8     }
9 }
```


Interfaces

- A *public interface* is a contract between *client code* and the class that implements that interface.
- A Java *interface* is a formal declaration of such a contract in which all methods contain no implementation.
- Many unrelated classes can implement the same interface.
- A class can implement many unrelated interfaces.
- Syntax of a Java class is as follows:

```
<modifier> class <name> [extends <superclass>]  
    [implements <interface> [, <interface>* ] ] {  
    <member_declaration>*  
}
```




The Flyer Example

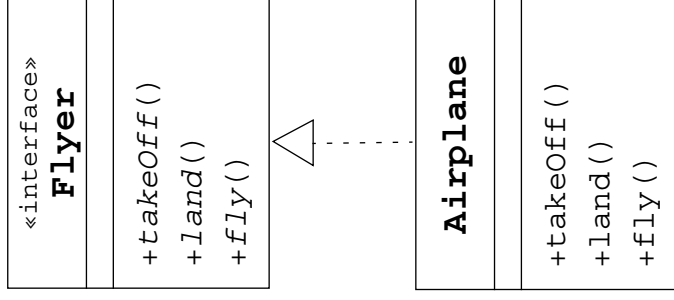


```
public interface Flyer {
    public void takeOff();
    public void land();
    public void fly();
}
```

The Flyer Example


```
public class Airplane implements Flyer {  
    public void takeOff() {  
        // accelerate until lift-off  
        // raise landing gear  
    }  
    public void land() {  
        // lower landing gear  
        // decelerate and lower flaps until touch-down  
        // apply brakes  
    }  
    public void fly() {  
        // keep those engines running  
    }  
}
```



The Flyer Example

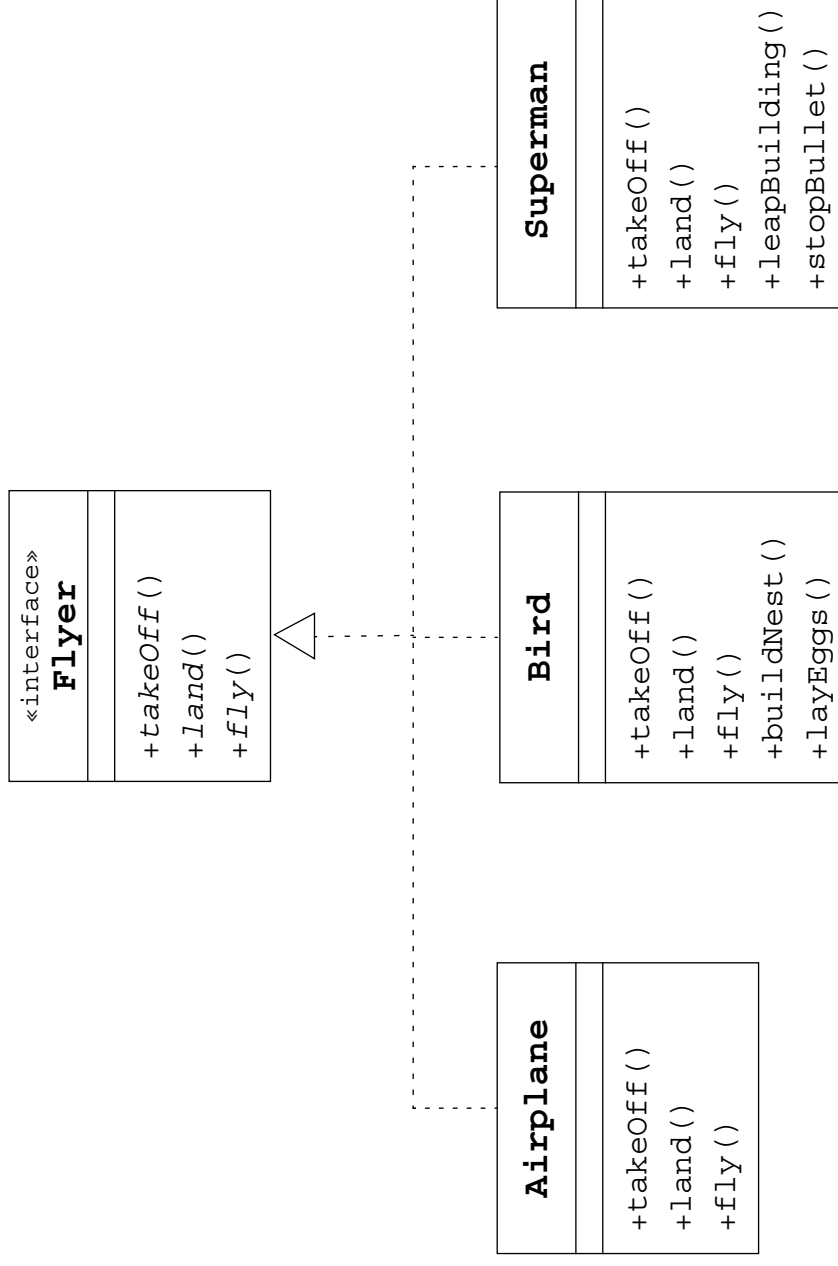


The Flyer Example

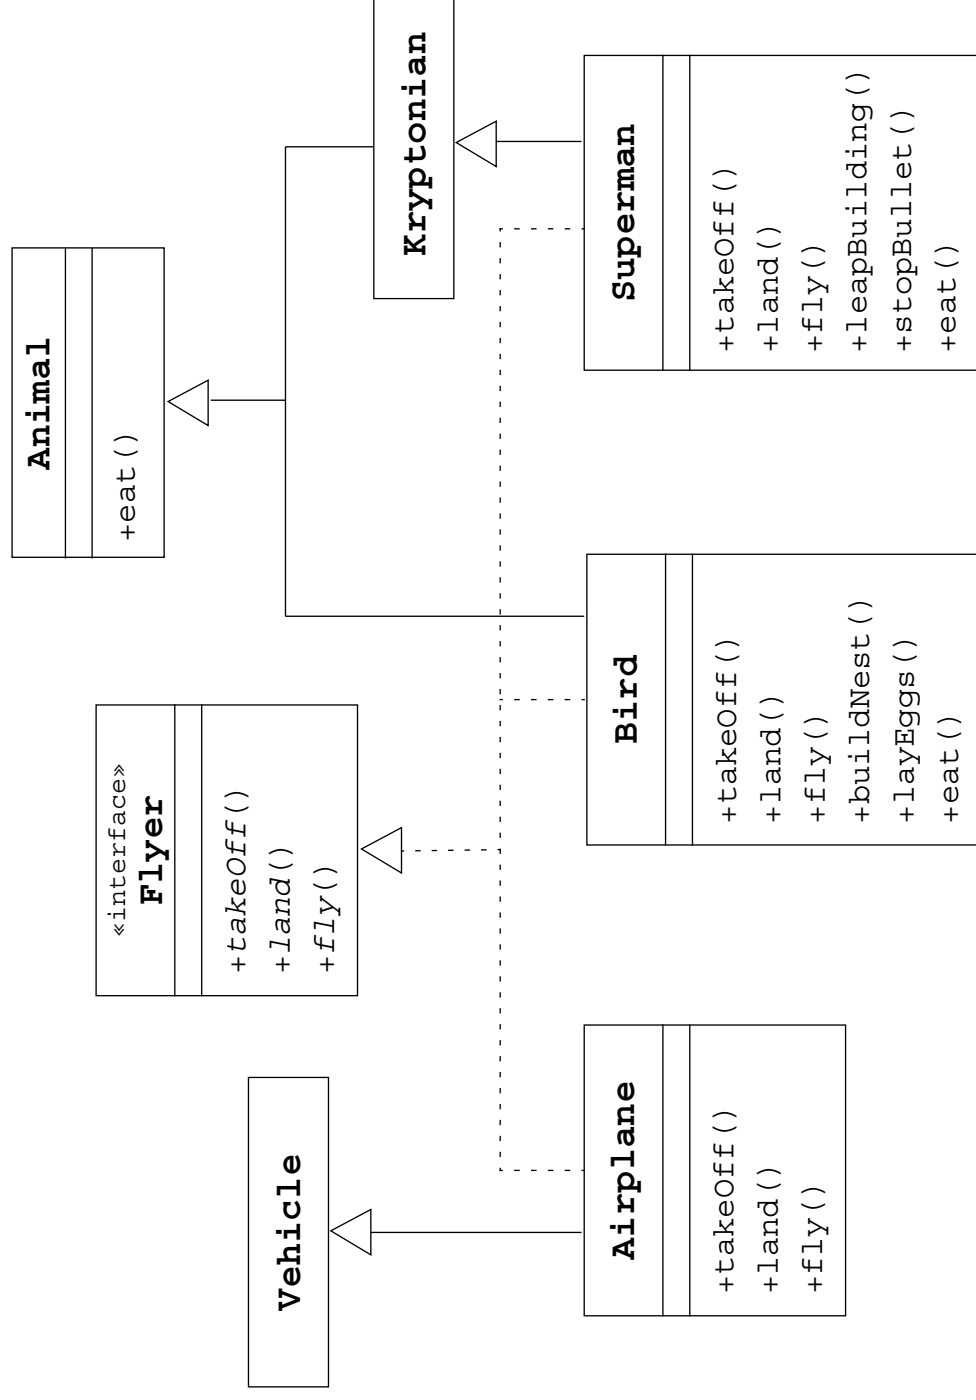


The Flyer Example

```
public class Bird extends Animal implements Flyer {  
    public void takeOff() { /* take-off implementation */ }  
    public void land() { /* landing implementation */ }  
    public void fly() { /* fly implementation */ }  
    public void buildNest() { /* nest building behavior */ }  
    public void layEggs() { /* egg laying behavior */ }  
    public void eat() { /* override eating behavior */ }  
}
```




The Flyer Example

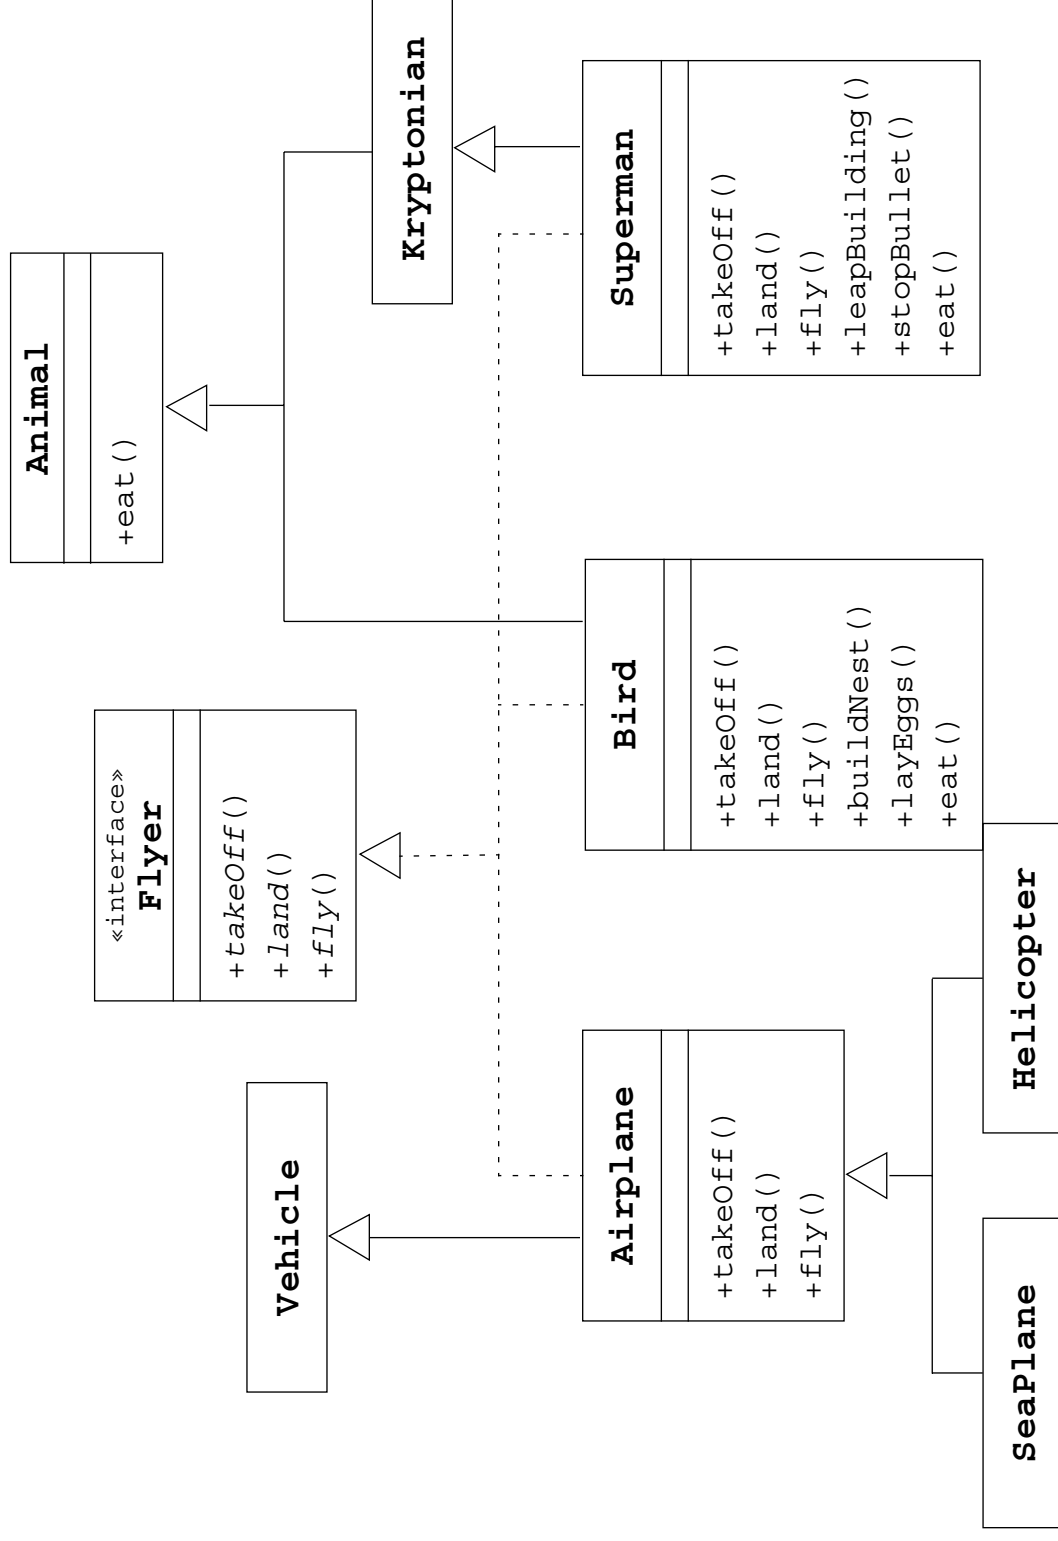

The Flyer Example

```
public class Airport {  
    public static void main(String[] args) {  
        Airport metropolisAirport = new Airport();  
        Helicopter copter = new Helicopter();  
        SeaPlane sPlane = new SeaPlane();  
  
        metropolisAirport.givePermissionToLand(copter);  
        metropolisAirport.givePermissionToLand(sPlane);  
    }  
  
    private void givePermissionToLand(Flyer f) {  
        f.land();  
    }  
}
```

Multiple Interface Example

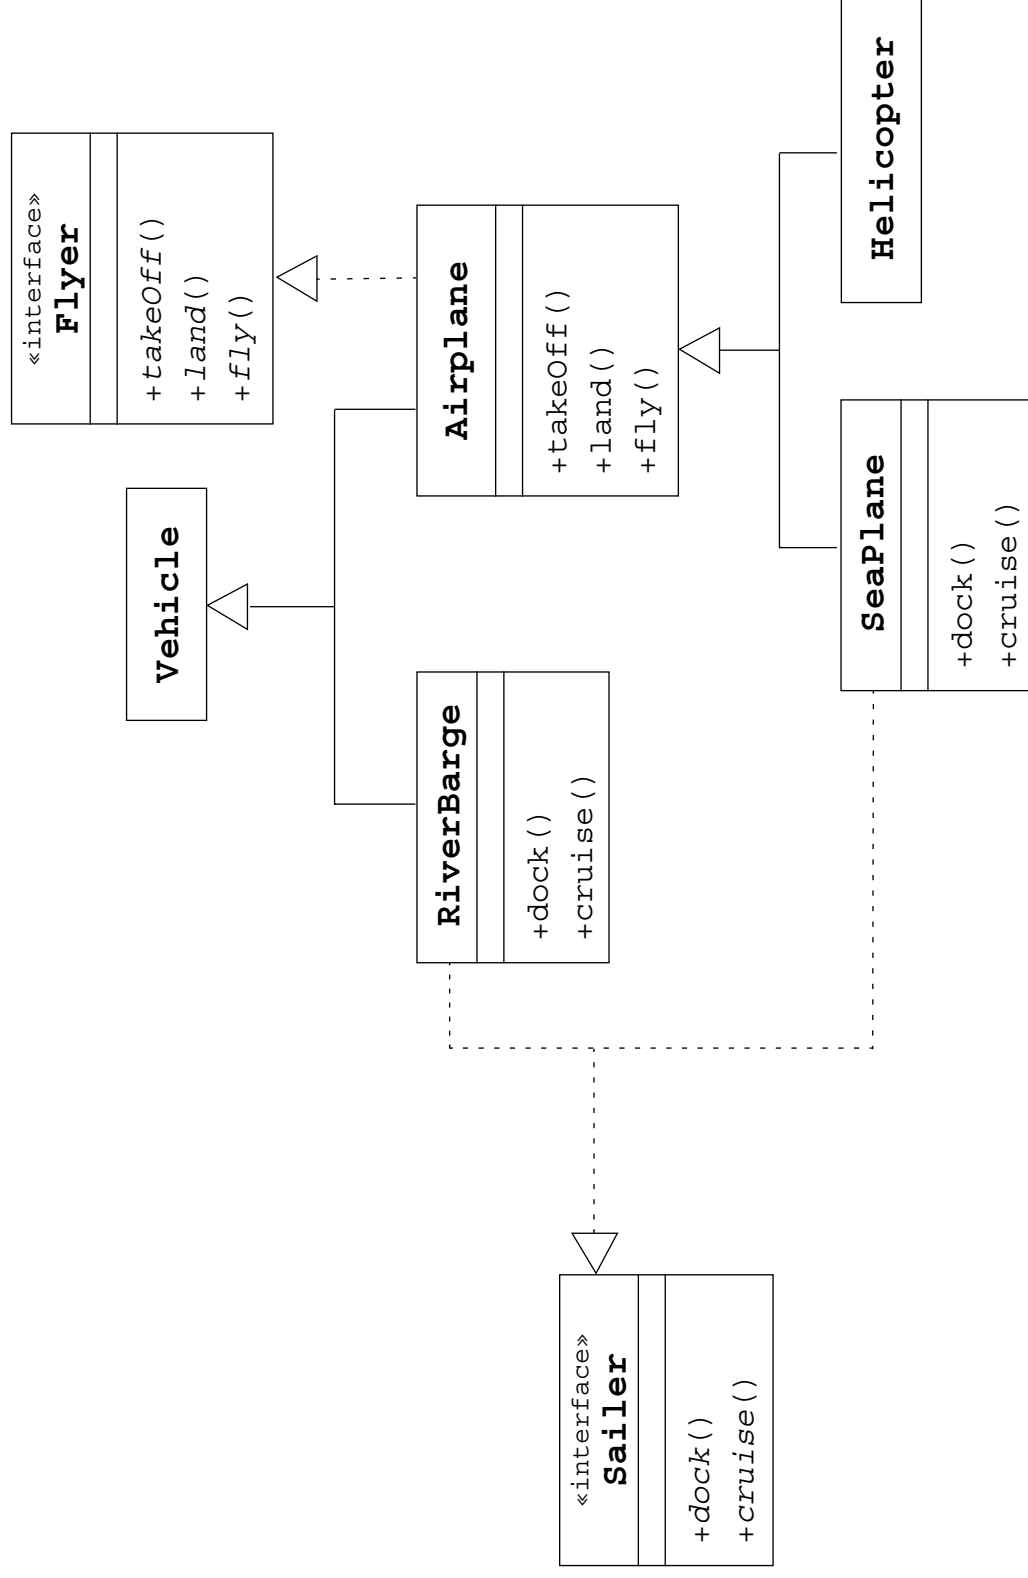


Multiple Interface Example

```
public class Harbor {  
    public static void main(String[] args) {  
        Harbor bostonHarbor = new Harbor();  
        RiverBarge barge = new RiverBarge();  
        SeaPlane sPlane = new SeaPlane();  
  
        bostonHarbor.givePermissionToDock(barge);  
        bostonHarbor.givePermissionToDock(sPlane);  
    }  
  
    private void givePermissionToDock(Sailer s) {  
        s.dock();  
    }  
}
```

Uses of Interfaces

Interface uses include the following:

- Declaring methods that one or more classes are expected to implement
- Determining an object's programming interface without revealing the actual body of the class
- Capturing similarities between unrelated classes without forcing a class relationship
- Simulating multiple inheritance by declaring a class that implements several interfaces




Sun Services

Module 8

Exceptions and Assertions


Objectives

- Define exceptions
- Use try, catch, and finally statements
- Describe exception categories
- Identify common exceptions
- Develop programs to handle your own exceptions
- Use assertions
- Distinguish appropriate and inappropriate uses of assertions
- Enable assertions at runtime



Relevance

- In most programming languages, how do you resolve runtime errors?
- If you make assumptions about the way your code works, and those assumptions are wrong, what might happen?
- Is it always necessary or desirable to expend CPU power testing assertions in production programs?



Exceptions and Assertions

- Exceptions handle unexpected situations – Illegal argument, network failure, or file not found
- Assertions document and test programming assumptions – *This can never be negative here*
- Assertion tests can be removed entirely from code at runtime, so the code is not slowed down at all.

Exceptions

- Conditions that can readily occur in a correct program are *checked exceptions*.
These are represented by the `Exception` class.
- Severe problems that normally are treated as fatal or situations that probably reflect program bugs are *unchecked exceptions*.
Fatal situations are represented by the `Error` class.
Probable bugs are represented by the `RuntimeException` class.
- The API documentation shows checked exceptions that can be thrown from a method.

Exception Example

```
1 public class AddArguments {
2     public static void main(String args[]) {
3         int sum = 0;
4         for ( String arg : args ) {
5             sum += Integer.parseInt(arg);
6         }
7         System.out.println("Sum = " + sum);
8     }
9 }
```

```
java AddArguments 1 2 3 4
Sum = 10
```

```
java AddArguments 1 two 3.0 4
Exception in thread "main" java.lang.NumberFormatException: For input string: "two"
    at java.lang.NumberFormatException.forInputString(NumberFormatException.java:48)
    at java.lang.Integer.parseInt(Integer.java:447)
    at java.lang.Integer.parseInt(Integer.java:497)
    at AddArguments.main(AddArguments.java:5)
```

The try-catch Statement

```
1 public class AddArguments2 {
2     public static void main(String args[]) {
3         try {
4             int sum = 0;
5             for ( String arg : args ) {
6                 sum += Integer.parseInt(arg);
7             }
8             System.out.println("Sum = " + sum);
9         } catch (NumberFormatException nfe) {
10             System.err.println("One of the command-line "
11                                + "arguments is not an integer.");
12         }
13     }
14 }
```

java AddArguments2 1 two 3.0 4

One of the command-line arguments is not an integer.

The try-catch Statement

```
1 public class AddArguments3 {
2     public static void main(String args[]) {
3         int sum = 0;
4         for ( String arg : args ) {
5             try {
6                 sum += Integer.parseInt(arg);
7             } catch (NumberFormatException nfe) {
8                 System.err.println "[" + arg + "]" is not an integer"
9                     + " and will not be included in the sum.");
10            }
11        }
12        System.out.println("Sum = " + sum);
13    }
14 }
```

java AddArguments3 1 two 3.0 4

[two] is not an integer and will not be included in the sum.


[3.0] is not an integer and will not be included in the sum.

Sum = 5

The try-catch Statement

A try-catch statement can use multiple catch clauses:

```
try {  
    // code that might throw one or more exceptions  
} catch (MyException e1) {  
    // code to execute if a MyException exception is thrown  
}  
catch (MyOtherException e2) {  
    // code to execute if a MyOtherException exception is thrown  
}  
catch (Exception e3) {  
    // code to execute if any other exception is thrown  
}
```




Call Stack Mechanism

- If an exception is not handled in the current `try-catch` block, it is thrown to the caller of that method.
- If the exception gets back to the main method and is not handled there, the program is terminated abnormally.


The finally Clause


The finally clause defines a block of code that *always* executes.

```
1  try {  
2      startFaucet () ;  
3      waterLawn () ;  
4  } catch (BrokenPipeException e) {  
5      logProblem(e) ;  
6  } finally {  
7      stopFaucet () ;  
8  }
```



Exception Categories

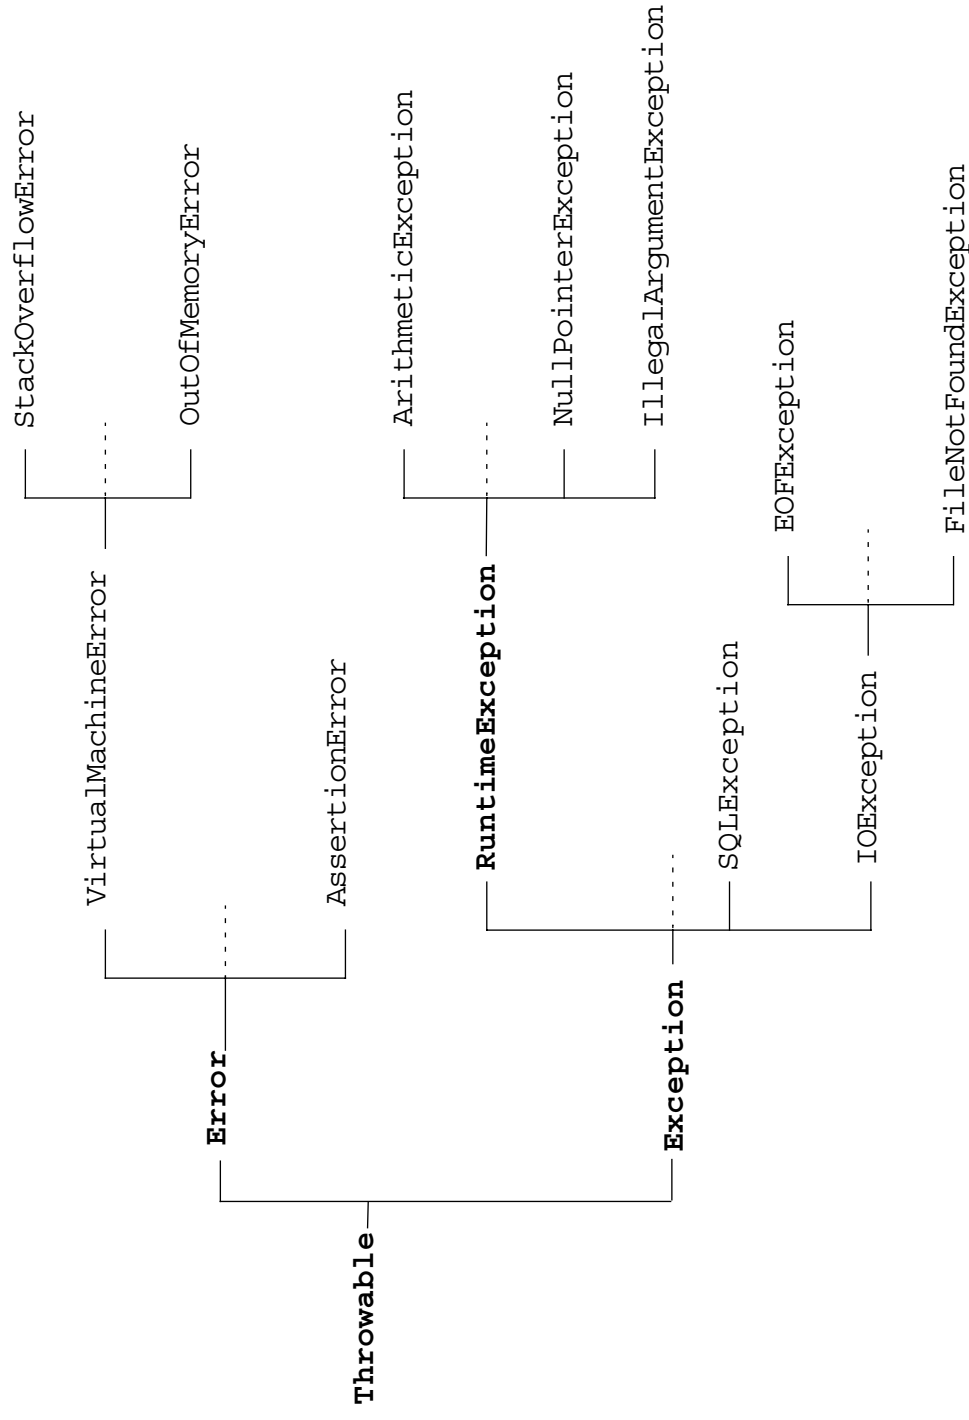



Common Exceptions

- `NullPointerException`
- `FileNotFoundException`
- `NumberFormatException`
- `ArithmeticException`
- `SecurityException`

The Handle or Declare Rule

Use the handle or declare rule as follows:

- Handle the exception by using the try-catch-finally block.
- Declare that the code causes an exception by using the throws clause.

```
void trouble() throws IOException { ... }  
void trouble() throws IOException, MyException { ... }
```

Other Principles

- You do not need to declare runtime exceptions or errors.
- You can choose to handle runtime exceptions.

Method Overriding and Exceptions

The overriding method can throw:

- No exceptions
- One or more of the exceptions thrown by the overridden method
- One or more subclasses of the exceptions thrown by the overridden method

The overriding method cannot throw:

- Additional exceptions not thrown by the overridden method
- Superclasses of the exceptions thrown by the overridden method

Method Overriding and Exceptions

```
1 public class TestA {  
2     public void methodA() throws IOException {  
3         // do some file manipulation  
4     }  
5 }
```

```
1 public class TestB1 extends TestA {  
2     public void methodA() throws EOFException {  
3         // do some file manipulation  
4     }  
5 }
```

```
1 public class TestB2 extends TestA {  
2     public void methodA() throws Exception { // WRONG  
3         // do some file manipulation  
4     }  
5 }
```

Creating Your Own Exceptions

```
1 public class ServerTimedOutException extends Exception {
2     private int port;
3
4     public ServerTimedOutException(String message, int port) {
5         super(message);
6         this.port = port;
7     }
8
9     public int getPort() {
10         return port;
11     }
12 }
```

Use the `getMessage` method, inherited from the `Exception` class, to get the reason for which the exception was made.

Handling a User-Defined Exception


A method can throw a user-defined, checked exception:

```
1 public void connectMe(String serverName)
2     throws ServerTimedOutException {
3     boolean successful;
4     int portToConnect = 80;
5
6     successful = open(serverName, portToConnect);
7
8     if ( ! successful ) {
9         throw new ServerTimedOutException("Could not connect",
10                                     portToConnect);
11     }
12 }
```

Handling a User-Defined Exception

Another method can use a `try-catch` block to capture user-defined exceptions:

```
1 public void findServer () {
2     try {
3         connectMe (defaultServer);
4     } catch (ServerTimedOutException e) {
5         System.out.println("Server timed out, trying alternative");
6         try {
7             connectMe (alternativeServer);
8         } catch (ServerTimedOutException e1) {
9             System.out.println("Error: " + e1.getMessage() +
10                                " connecting to port " + e1.getPort());
11         }
12     }
13 }
```



Assertions

- Syntax of an assertion is:

```
assert <boolean_expression> ;  
assert <boolean_expression> : <detail_expression> ;
```
- If <boolean_expression> evaluates false, then an `AssertionError` is thrown.
- The second argument is converted to a string and used as descriptive text in the `AssertionError` message.

Recommended Uses of Assertions

Use assertions to document and verify the assumptions and internal logic of a single method:

- Internal invariants
- Control flow invariants
- Postconditions and class invariants

Inappropriate Uses of Assertions

- Do not use assertions to check the parameters of a public method.
- Do not use methods in the assertion check that can cause side-effects.

Internal Invariants

The problem is:

```
1  if (x > 0) {  
2    // do this  
3  } else {  
4    // do that  
5  }
```

The solution is:

```
1  if (x > 0) {  
2    // do this  
3  } else {  
4    assert ( x == 0 );  
5    // do that, unless x is negative  
6  }
```

Control Flow Invariants

For example:

```
1  switch (suit) {  
2      case Suit.CLUBS: // ...  
3          break;  
4      case Suit.DIAMONDS: // ...  
5          break;  
6      case Suit.HEARTS: // ...  
7          break;  
8      case Suit.SPADES: // ...  
9          break;  
10     default: assert false : "Unknown playing card suit";  
11         break;  
12 }
```

Postconditions and Class Invariants

For example:

```
1  public Object pop() {
2      int size = this.getElementCount();
3      if (size == 0) {
4          throw new RuntimeException("Attempt to pop from empty stack");
5      }
6
7      Object result = /* code to retrieve the popped element */ ;
8
9      // test the postcondition
10     assert (this.getElementCount() == size - 1);
11
12     return result;
13 }
```

Controlling Runtime Evaluation of Assertions


- If assertion checking is disabled, the code runs as fast as if the check was never there.
- Assertion checks are disabled by default. Enable assertions with the following commands:

```
java -enableassertions MyProgram
```

or:

```
java -ea MyProgram
```

- Assertion checking can be controlled on class, package, and package hierarchy bases, see: <docs/guide/language/assert.html>




Sun Services

Module 9

Text-Based Applications

Objectives

- Write a program that uses command-line arguments and system properties
- Write a program that reads from *standard input*
- Describe the C-type formatted input and output
- Write a program that can create, read, and write files
- Describe the basic hierarchy of collections in the Java 2 Software Development Kit (Java 2 SDK)
- Write a program that uses sets and lists
- Write a program to iterate over a collection
- Write a program that uses generic collections



Relevance

- It is often the case that certain elements of a program should not be hard-coded, such as file names or the name of a database. How can a program be coded to supply these elements at runtime?
- Simple arrays are far too static for most collections (that is, a fixed number of elements). What Java technology features exist to support more flexible collections?
- Besides computation, what are key elements of any text-based application?

Command-Line Arguments

- Any Java technology application can use command-line arguments.
- These string arguments are placed on the command line to launch the Java interpreter, after the class name:

```
java TestArgs arg1 arg2 "another arg"
```

- Each command-line argument is placed in the `args` array that is passed to the static `main` method:


```
public static void main(String[] args)
```

Command-Line Arguments

```
1 public class TestArgs {
2     public static void main(String[] args) {
3         for ( int i = 0; i < args.length; i++ ) {
4             System.out.println("args[" + i + "]" is ' " + args[i] + "'");
5         }
6     }
7 }
```


Example execution:

```
java TestArgs arg1 arg2 "another arg"
args[0] is 'arg1'
args[1] is 'arg2'
args[2] is 'another arg'
```



System Properties

- System properties are a feature that replaces the concept of *environment variables* (which are platform-specific).
- The `System.getProperties` method returns a `Properties` object.
- The `getProperty` method returns a `String` representing the value of the named property.
- Use the `-D` option to include a new property.



The Properties Class

- The `Properties` class implements a mapping of names to values (a `String` to `String` map).
- The `propertyNames` method returns an `Enumeration` of all property names.
- The `getProperty` method returns a `String` representing the value of the named property.
- You can also read and write a properties collection into a file using `load` and `store`.

The Properties Class

```
1 import java.util.Properties;
2 import java.util.Enumeration;
3
4 public class TestProperties {
5     public static void main(String[] args) {
6         Properties props = System.getProperties();
7         Enumeration propNames = props.propertyNames();
8
9         while ( propNames.hasMoreElements() ) {
10             String propName = (String) propNames.nextElement();
11             String property = props.getProperty(propName);
12             System.out.println("property '" + propName
13                               + "' is '" + property + "'");
14         }
15     }
16 }
```


The Properties Class

Here is an example test run of this program:

```
java -DmyProp=theValue TestProperties
```

Here is the (partial) output:

```
property 'java.version' is '1.5.0-rc'  
property 'java.compiler' is 'NONE'  
property 'path.separator' is ':'  
property 'file.separator' is '/'  
property 'user.home' is '/home/basham'  
property 'java.specification.vendor' is 'Sun Microsystems Inc.'  
property 'user.language' is 'en'  
property 'user.name' is 'basham'  
property 'myProp' is 'theValue'
```



Console I/O

- The variable `System.out` enables you to write to *standard output*.
It is an object of type `PrintStream`.
- The variable `System.in` enables you to read from *standard input*.
It is an object of type `InputStream`.
- The variable `System.err` enables you to write to *standard error*.
It is an object of type `PrintStream`.

Writing to Standard Output

- The `println` methods print the argument and a newline character (`\n`).
- The `print` methods print the argument without a newline character.
- The `print` and `println` methods are overloaded for most primitive types (`boolean`, `char`, `int`, `long`, `float`, and `double`) and for `char[]`, `Object`, and `String`.
- The `print (Object)` and `println (Object)` methods call the `toString` method on the argument.

Reading From Standard Input

```
1 import java.io.*;
2
3 public class KeyboardInput {
4     public static void main (String args[]) {
5         String s;
6         // Create a buffered reader to read
7         // each line from the keyboard.
8         InputStreamReader ir
9             = new InputStreamReader(System.in);
10        BufferedReader in = new BufferedReader(ir);
11
12        System.out.println("Unix: Type ctrl-d to exit." +
13                           "\nWindows: Type ctrl-z to exit");
```

Reading From Standard Input

```
14  try {
15      // Read each input line and echo it to the screen.
16      s = in.readLine();
17      while ( s != null ) {
18          System.out.println("Read: " + s);
19          s = in.readLine();
20      }
21
22      // Close the buffered reader.
23      in.close();
24  } catch (IOException e) { // Catch any IO exceptions.
25      e.printStackTrace();
26  }
27  }
28 }
```

Simple Formatted Output

- You can use the formatting functionality as follows


```
out.printf("name count\n");  
String s = String.format("%s %5d%n", user, total);
```
- Common formatting codes are listed in this table.

Code	Description
%s	Formats the argument as a string, usually by calling the <code>toString</code> method on the object.
%d %o %x	Formats an integer, as a decimal, octal, or hexadecimal value.
%f %g	Formats a floating point number. The <code>%g</code> code uses scientific notation.
%n	Inserts a newline character to the string or stream.
%%	Inserts the <code>%</code> character to the string or stream.

Simple Formatted Input

- The Scanner API provides a formatted input function.
- A Scanner can be used with console input streams as well as file or network streams.
- You can read console input as follows:

```
1 import java.io.*;
2 import java.util.Scanner;
3 public class ScanTest {
4     public static void main(String [] args) {
5         Scanner s = new Scanner(System.in);
6         String param = s.next();
7         System.out.println("the param 1" + param);
8         int value = s.nextInt();
9         System.out.println("second param" + value);
10        s.close();
11    }
12 }
```



Files and File I/O

The `java.io` package enables you to do the following:

- Create `File` objects
- Manipulate `File` objects
- Read and write to file streams

Creating a New `File` Object

The `File` class provides several utilities:

- `File myFile;`
- `myFile = new File("myfile.txt");`
- `myFile = new File("MyDocs", "myfile.txt");`

Directories are treated just like files in Java; the `File` class supports methods for retrieving an array of files in the directory, as follows:

```
File myDir = new File("MyDocs");  
myFile = new File(myDir, "myfile.txt");
```

The File Tests and Utilities

- **File information:**

```
String getName()  
String getPath()  
String getAbsolutePath()  
String getParent()  
long lastModified()  
long length()
```

- **File modification:**

```
boolean renameTo(File newName)  
boolean delete()
```


- **Directory utilities:**

```
boolean mkdir()  
String[] list()
```

The File Tests and Utilities

- File tests:

```
boolean exists()  
boolean canWrite()  
boolean canRead()  
boolean isFile()  
boolean isDirectory()  
boolean isAbsolute();
```

File Stream I/O

- For file input:
 - Use the `FileReader` class to read characters.
 - Use the `BufferedReader` class to use the `readLine` method.
- For file output:
 - Use the `FileWriter` class to write characters.
 - Use the `PrintWriter` class to use the `print` and `println` methods.

File Stream I/O

A file input example is:

```
1 import java.io.*;
2 public class ReadFile {
3     public static void main (String[] args) {
4         // Create file
5         File file = new File(args[0]);
6
7         try {
8             // Create a buffered reader
9             // to read each line from a file.
10            BufferedReader in
11                = new BufferedReader(new FileReader(file));
12            String s;
13        }
```

File Stream I/O

```
14 // Read each line from the file and echo it to the screen.
15 s = in.readLine();
16 while ( s != null ) {
17     System.out.println("Read: " + s);
18     s = in.readLine();
19 }
20 // Close the buffered reader
21 in.close();
22
23 } catch (FileNotFoundException e1) {
24     // If this file does not exist
25     System.err.println("File not found: " + file);
26
27 } catch (IOException e2) {
28     // Catch any other IO exceptions.
29     e2.printStackTrace();
30 }
31 }
32 }
```

File Output Example


```
1 import java.io.*;
2
3 public class WriteFile {
4     public static void main (String[] args) {
5         // Create file
6         File file = new File(args[0]);
7
8         try {
9             // Create a buffered reader to read each line from standard in.
10            InputStreamReader isr
11                = new InputStreamReader(System.in);
12            BufferedReader in
13                = new BufferedReader(isr);
14            // Create a print writer on this file.
15            PrintWriter out
16                = new PrintWriter(new FileWriter(file));
17            String s;
```

File Output Example


```
18
19 System.out.print("Enter file text. ");
20 System.out.println("[Type ctrl-d to stop.]");
21
22 // Read each input line and echo it to the screen.
23 while ((s = in.readLine()) != null) {
24     out.println(s);
25 }
26
27 // Close the buffered reader and the file print writer.
28 in.close();
29 out.close();
30
31 } catch (IOException e) {
32     // Catch any IO exceptions.
33     e.printStackTrace();
34 }
35 }
36 }
```

The Collections API

- A *collection* is a single object representing a group of objects known as its elements.
- The Collections API contains interfaces that group objects as one of the following:
 - `Collection` – A group of objects called elements; any specific ordering (or lack of) and allowance of duplicates is specified by each implementation
 - `Set` – An unordered collection; no duplicates are permitted
 - `List` – An ordered collection; duplicates are permitted



The Collections API

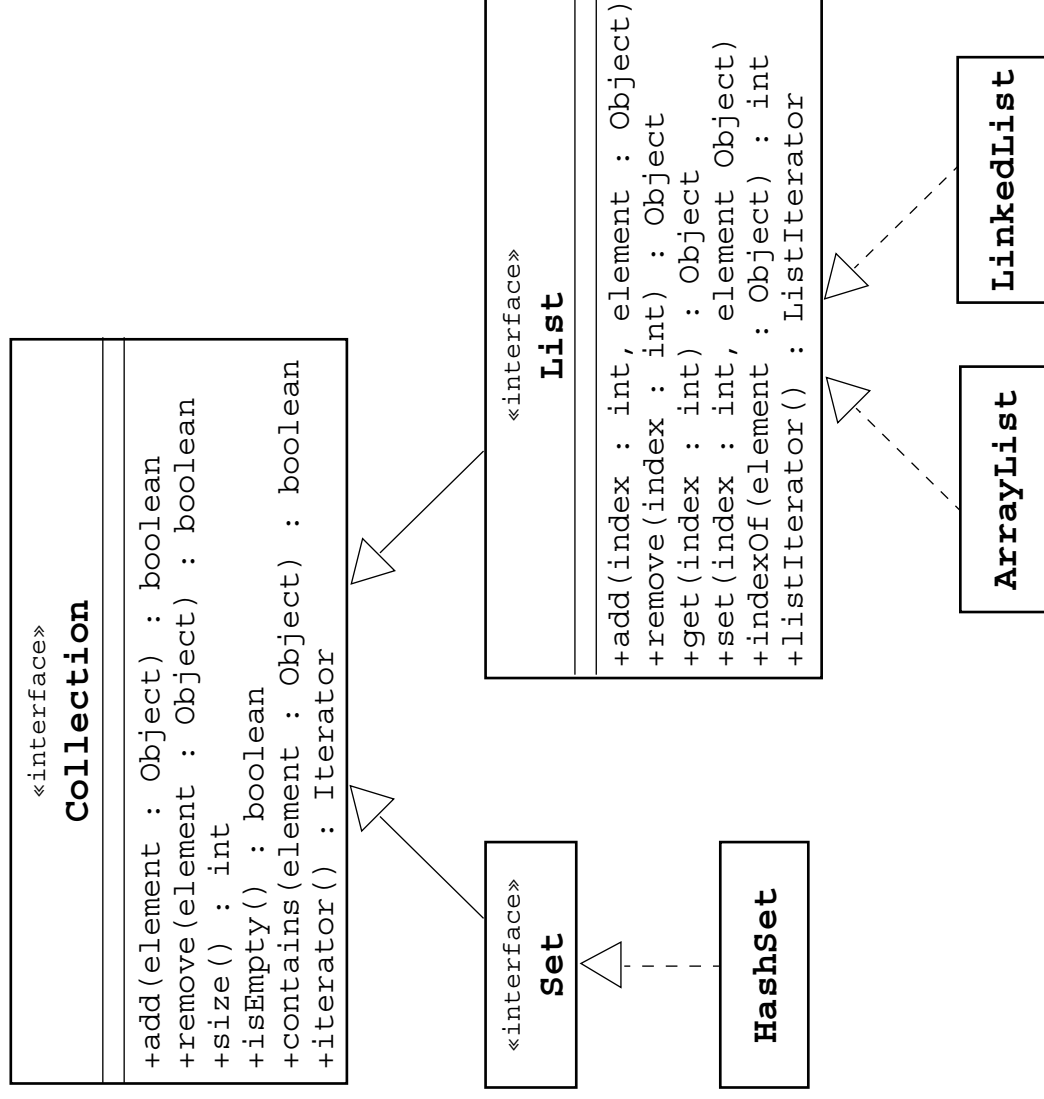

A Set Example

```
1  import java.util.*;
2
3  public class SetExample {
4      public static void main(String[] args) {
5          Set set = new HashSet();
6          set.add("one");
7          set.add("second");
8          set.add("3rd");
9          set.add(new Integer(4));
10         set.add(new Float(5.0F));
11         set.add("second");           // duplicate, not added
12         set.add(new Integer(4));     // duplicate, not added
13         System.out.println(set);
14     }
15 }
```

The output generated from this program is:

[one, second, 5.0, 3rd, 4]

A List Example

```
1 import java.util.*
2
3 public class ListExample {
4     public static void main(String[] args) {
5         List list = new ArrayList();
6         list.add("one");
7         list.add("second");
8         list.add("3rd");
9         list.add(new Integer(4));
10        list.add(new Float(5.0F));
11        list.add("second");           // duplicate, is added
12        list.add(new Integer(4));     // duplicate, is added
13        System.out.println(list);
14    }
15 }
```

The output generated from this program is:

[one, second, 3rd, 4, 5.0, second, 4]

Collections in JDK™ Version 1.1

Collections in the Java Development Kit (JDK™) include:

- The class `Vector` implements the `List` interface.
- The class `Stack` is a subclass of `Vector` and supports the `push`, `pop`, and `peek` methods.
- The class `Hashtable` implements the `Map` interface.
- The `Enumeration` interface is a variation on the `Iterator` interface.

An `enumeration` is returned by the `elements` method in `Vector`, `Stack`, and `Hashtable`.

- Classes are thread-safe, and therefore, *heavy weight*.
- These classes also support generics.

Generics

Generics are described as follows:


- Provides compile-time type safety
- Eliminates the need for casts

Before Generics


```
ArrayList list = new ArrayList();  
list.add(0, new Integer(42));  
int total = ((Integer)list.get(0)).intValue();
```

After Generics

```
ArrayList<Integer> list = new ArrayList<Integer>();  
list.add(0, new Integer(42));  
int total = list.get(0).intValue();
```



Generic Collections API

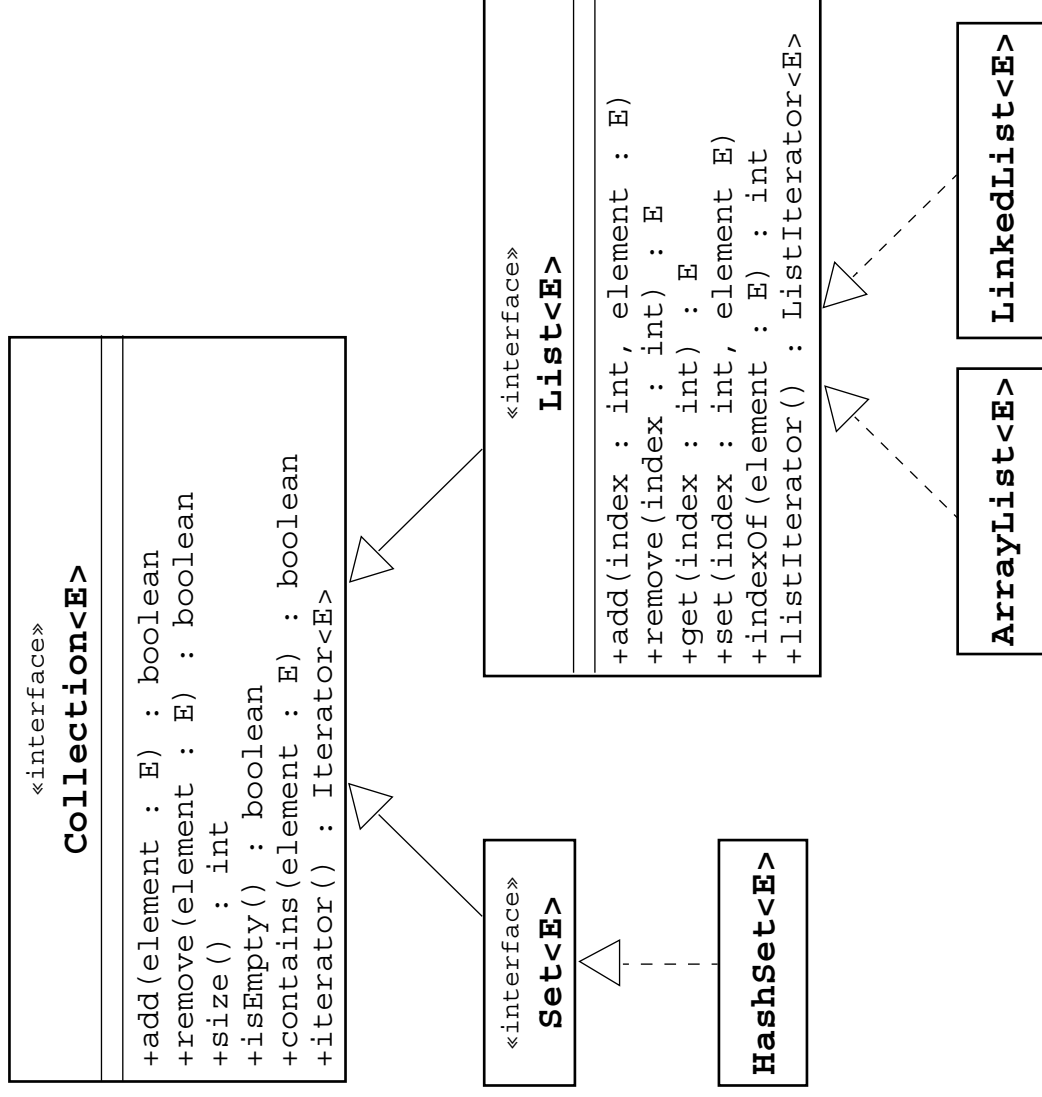

Compiler Warnings

```
1 import java.util.*;
2 public class GenericsWarning {
3     public static void main(String[] args) {
4         List list = new ArrayList();
5         list.add(0, new Integer(42));
6         int total = ((Integer)list.get(0)).intValue();
7     }
8 }
```

javac GenericsWarning.java

Note: GenericsWarning.java uses unchecked or unsafe operations.

Note: Recompile with -Xlint:unchecked for details.

javac -Xlint:unchecked GenericsWarning.java

GenericsWarning.java:7: warning: [unchecked] unchecked call to add(int,E) as a member of the raw type java.util.ArrayList
list.add(0, new Integer(42));
 ^


1 warning

Iterators

- Iteration is the process of retrieving every element in a collection.
- An Iterator of a Set is unordered.
- A ListIterator of a List can be scanned forwards (using the next method) or backwards (using the previous method).

```
List list = new ArrayList();  
// add some elements  
Iterator elements = list.iterator();  
while ( elements.hasNext() ) {  
    System.out.println(elements.next());  
}
```

The Iterator Interface Hierarchy

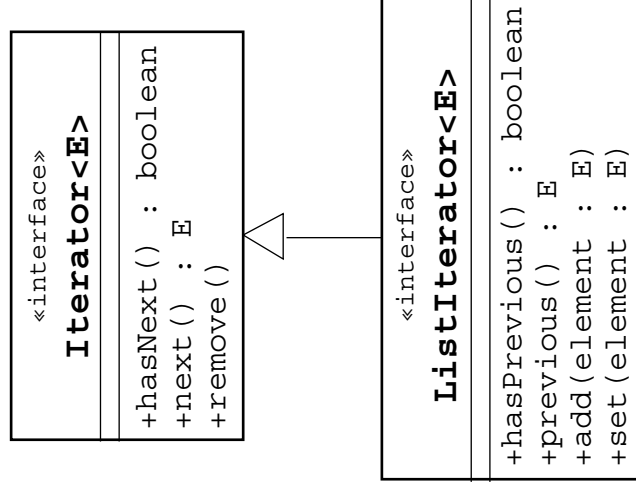

Enhanced `for` Loop

The enhanced `for` loop has the following characteristics:

- Simplified iteration over collections
- Much shorter, clearer, and safer
- Effective for arrays
- Simpler when using nested loops
- Iterator disadvantages removed

Iterators are error prone:

- Iterator variables occur three times per loop.
- This provides the opportunity for code to go wrong.

Enhanced for Loop

An enhanced for loop can look like this:

- Using iterators:

```
public void deleteAll(Collection<NameList> c) {  
    for ( Iterator<NameList> i = c.iterator() ; i.hasNext() ; ) {  
        NameList nl = i.next();  
        nl.deleteItem();  
    }  
}
```

- Using enhanced for loop in collections:

```
public void deleteAll(Collection<NameList> c) {  
    for ( NameList nl : c ) {  
        nl.deleteItem();  
    }  
}
```


Enhanced for Loop

- Using enhanced for loop in arrays:

```
public int sum(int[] array) {  
    int result = 0;  
    for ( int element : array ) {  
        result += element;  
    }  
    return result;  
}
```

- Using enhanced for loop in nested loops:

```
List<Subject> subjects=...;  
List<Teacher> teachers=...;  
List<Course> courseList = new ArrayList<Course>();  
for ( Subject subj : subjects ) {  
    for ( Teacher tchr : teachers ) {  
        courseList.add(new Course(subj, tchr));  
    }  
}
```




Sun Services

Module 10

Building Java GUIs

Objectives

- Describe the Abstract Window Toolkit (AWT) package and its components
- Define the terms *containers*, *components*, and *layout managers*, and describe how they work together to build a GUI
- Use layout managers
- Use the `FlowLayout`, `BorderLayout`, and `GridLayout` managers to achieve a desired dynamic layout
- Add components to a container
- Use the `Frame` and `Panel` containers appropriately
- Describe how complex layouts with nested containers work



Relevance

As a platform-independent programming language, how is Java technology used to make the graphical user interface (GUI) platform-independent?


Abstract Window Toolkit


The AWT performs the following:

- Provides GUI components that are used in all Java applets and applications
- Contains classes that can be composed or extended; classes can also be abstract
- Ensures that every GUI component that is displayed on the screen is a subclass of the abstract class `Component` or `MenuComponent`
- Has `Container`, which is an abstract subclass of `Component` and includes two subclasses:
 - `Panel`
 - `Window`



The java.awt Package

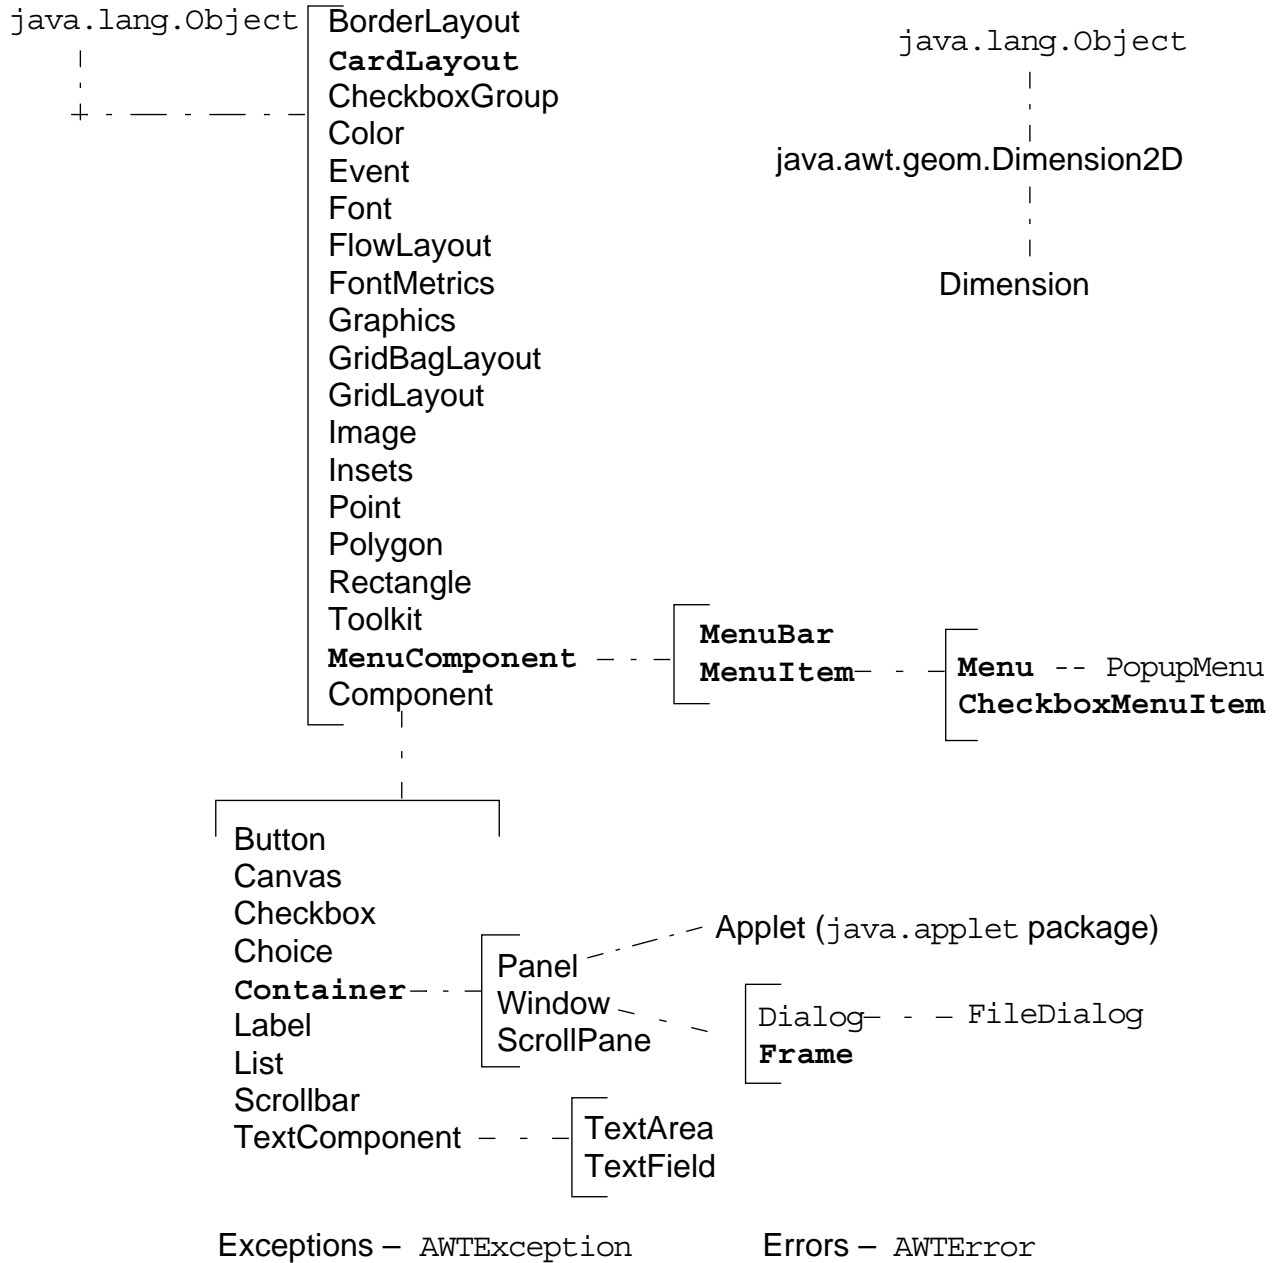



Containers

- Add components with the `add()` method.
- The two main types of containers are `Window` and `Panel`.
- A `Window` is a free floating window on the display.
- A `Panel` is a container of GUI components that must exist in the context of some other container, such as a window or applet.

Positioning Components

- The position and size of a component in a container is determined by a layout manager.
- You can control the size or position of components by disabling the layout manager.

You must then use `setLocation()`, `setSize()`, or `setBounds()` on components to locate them in the container.

Frames


Frames have the following characteristics:

- Are a subclass of `Window`
- Have title and resizing corners
- Are invisible initially; use `setVisible(true)` to expose the frame
- Have `BorderLayout` as the default layout manager
- Use the `setLayout` method to change the default layout manager

The FrameExample Class

```
1 import java.awt.*;
2
3 public class FrameExample {
4     private Frame f;
5     public FrameExample() {
6         f = new Frame("Hello Out There!");
7     }
8
9     public void launchFrame() {
10         f.setSize(170,170);
11         f.setBackground(Color.blue);
12         f.setVisible(true);
13     }
14
15     public static void main(String args[]) {
16         FrameExample guiWindow = new FrameExample();
17         guiWindow.launchFrame();
18     }
19 }
```


Example Frame

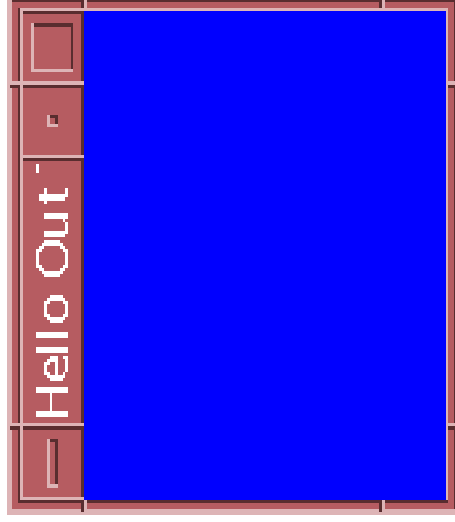

Solaris OS




Microsoft Windows



Panels

- Panels provide a space for components.
- This enables subpanels to have their own layout manager.




The FrameWithPanel Class

```
1 import java.awt.*;  
2  
3 public class FrameWithPanel {  
4     private Frame f;  
5     private Panel pan;  
6  
7     public FrameWithPanel(String title) {  
8         f = new Frame(title);  
9         pan = new Panel();  
10    }
```


The FrameWithPanel Class

```
11      public void launchFrame() {
12          f.setSize(200,200);
13          f.setBackground(Color.blue);
14          f.setLayout(null); // Use default layout
15
16
17          pan.setSize(100,100);
18          pan.setBackground(Color.yellow);
19          f.add(pan);
20          f.setVisible(true);
21      }
22
23      public static void main(String args[]) {
24          FrameWithPanel guiWindow =
25              new FrameWithPanel("Frame with Panel");
26          guiWindow.launchFrame();
27      }
28  }
```


Example Panel

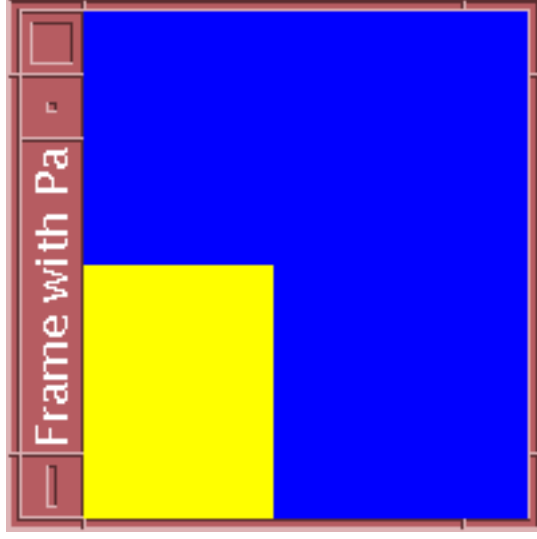

Solaris OS

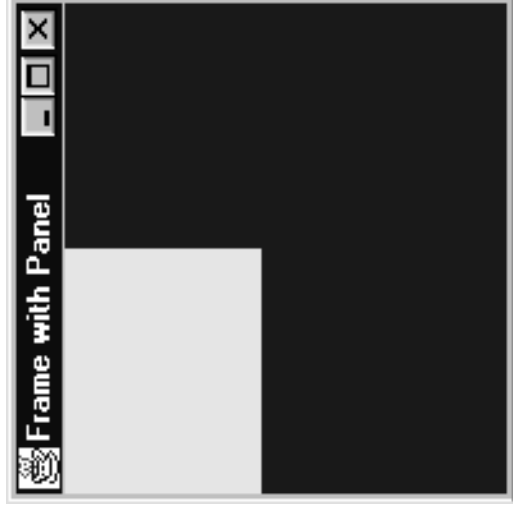


Microsoft Windows




Layout Managers

- FlowLayout
- BorderLayout
- GridLayout
- CardLayout
- GridBagLayout



Default Layout Managers

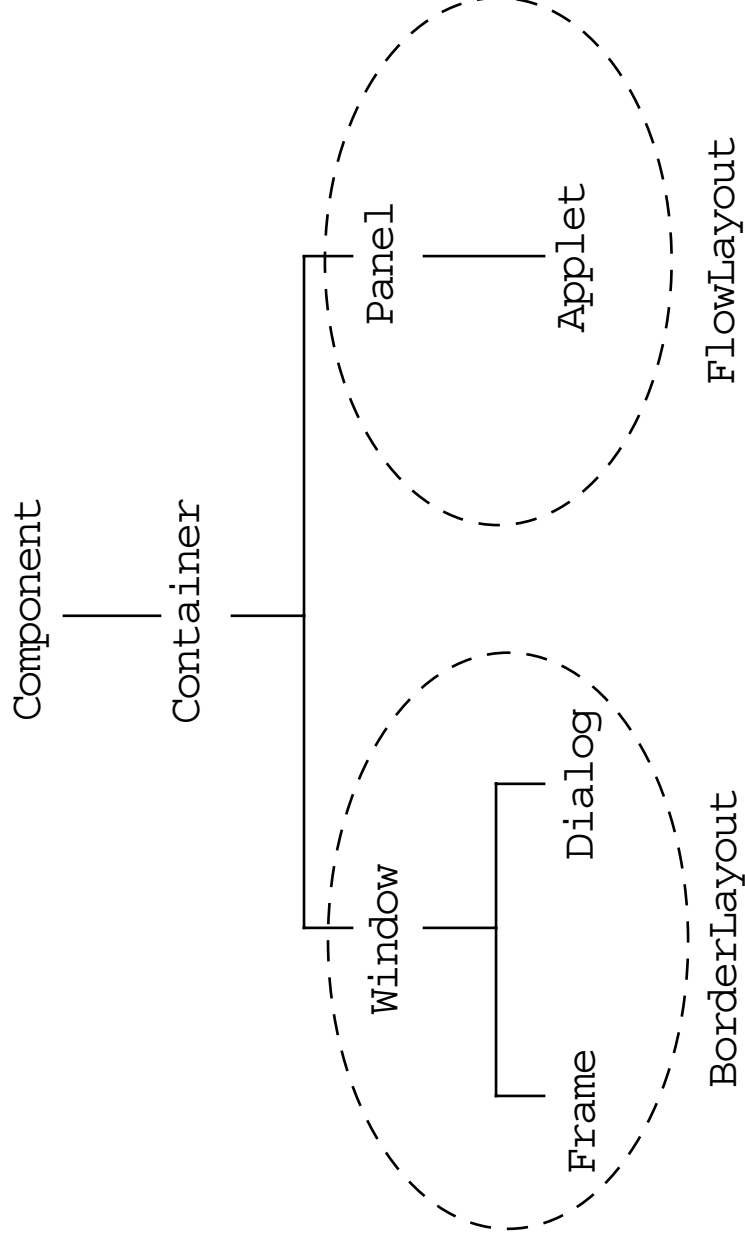

A Simple FlowLayout Example

```
1  import java.awt.*;
2
3  public class LayoutExample {
4      private Frame f;
5      private Button b1;
6      private Button b2;
7
8      public LayoutExample() {
9          f = new Frame("GUI example");
10         b1 = new Button("Press Me");
11         b2 = new Button("Don't press Me");
12     }
```

A Simple FlowLayout Example

```
13
14     public void launchFrame() {
15         f.setLayout(new FlowLayout());
16         f.add(b1);
17         f.add(b2);
18         f.pack();
19         f.setVisible(true);
20     }
21
22     public static void main(String args[]) {
23         LayoutExample guiWindow = new LayoutExample();
24         guiWindow.launchFrame();
25     }
26
27 } // end of LayoutExample class
```

Example of FlowLayout



Solaris OS




Microsoft Windows

The FlowLayout Manager


The FlowLayout manager has the following characteristics:

- Forms the default layout for the Panel class
- Adds components from left to right
- Alignment default is centered
- Uses components' preferred sizes
- Uses the constructor to tune behavior


The FlowLayout Resizing



After user or
program resizes

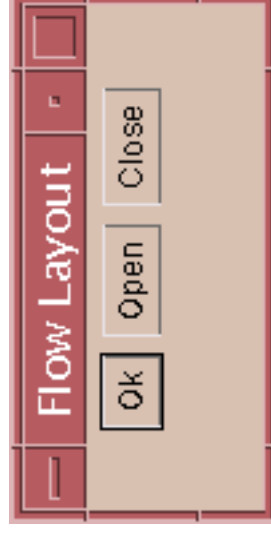


Solaris OS



The FlowExample Class

```
1  import java.awt.*;
2
3  public class FlowExample {
4      private Frame f;
5      private Button button1;
6      private Button button2;
7      private Button button3;
8
9      public FlowExample() {
10         f = new Frame("Flow Layout");
11         button1 = new Button("Ok");
12         button2 = new Button("Open");
13         button3 = new Button("Close");
14     }
```





The FlowExample Class


```
15     public void launchFrame() {
16         f.setLayout(new FlowLayout());
17         f.add(button1);
18         f.add(button2);
19         f.add(button3);
20         f.setSize(100,100);
21         f.setVisible(true);
22     }
23
24     public static void main(String args[]) {
25         FlowExample guiWindow = new FlowExample();
26         guiWindow.launchFrame();
27     }
28 }
29 }
```


The BorderLayout Manager

- The BorderLayout manager is the default layout for the `Frame` class.
- Components are added to specific regions.
- The resizing behavior is as follows:
 - North, South, and Center regions adjust horizontally
 - East, West, and Center regions adjust vertically



Organization of the Border Layout Components

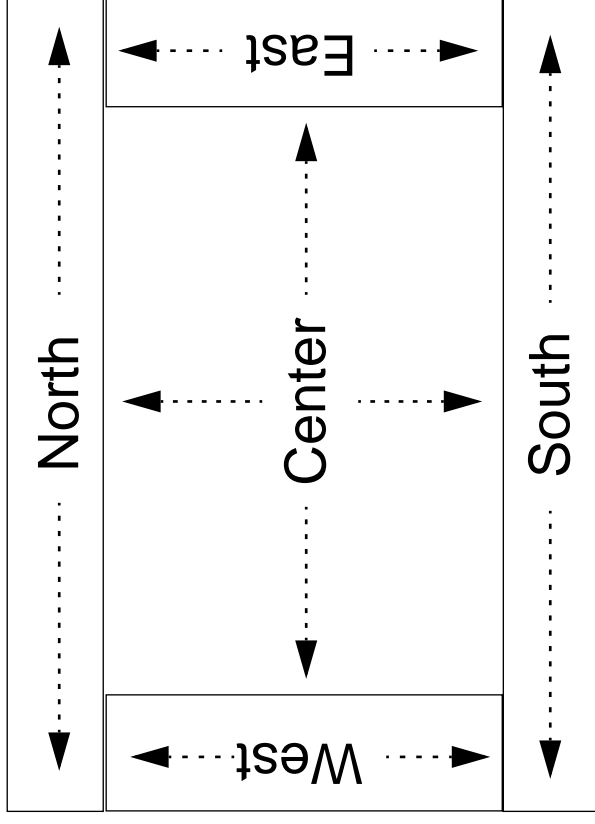




The BorderLayoutExample Class

```
1  import java.awt.*;
2
3  public class BorderLayoutExample {
4      private Frame f;
5      private Button bn, bs, bw, be, bc;
6
7      public BorderLayoutExample() {
8          f = new Frame("Border Layout");
9          bn = new Button("B1");
10         bs = new Button("B2");
11         bw = new Button("B3");
12         be = new Button("B4");
13         bc = new Button("B5");
14     }
```

The BorderLayoutExample Class


```
15     public void launchFrame() {
16         f.add(bn, BorderLayout.NORTH);
17         f.add(bs, BorderLayout.SOUTH);
18         f.add(bw, BorderLayout.WEST);
19         f.add(be, BorderLayout.EAST);
20         f.add(bc, BorderLayout.CENTER);
21         f.setSize(200,200);
22         f.setVisible(true);
23     }
24
25
26     public static void main(String args[]) {
27         BorderLayoutExample guiWindow2 = new BorderLayoutExample();
28         guiWindow2.launchFrame();
29     }
30 }
```

Example of BorderLayout

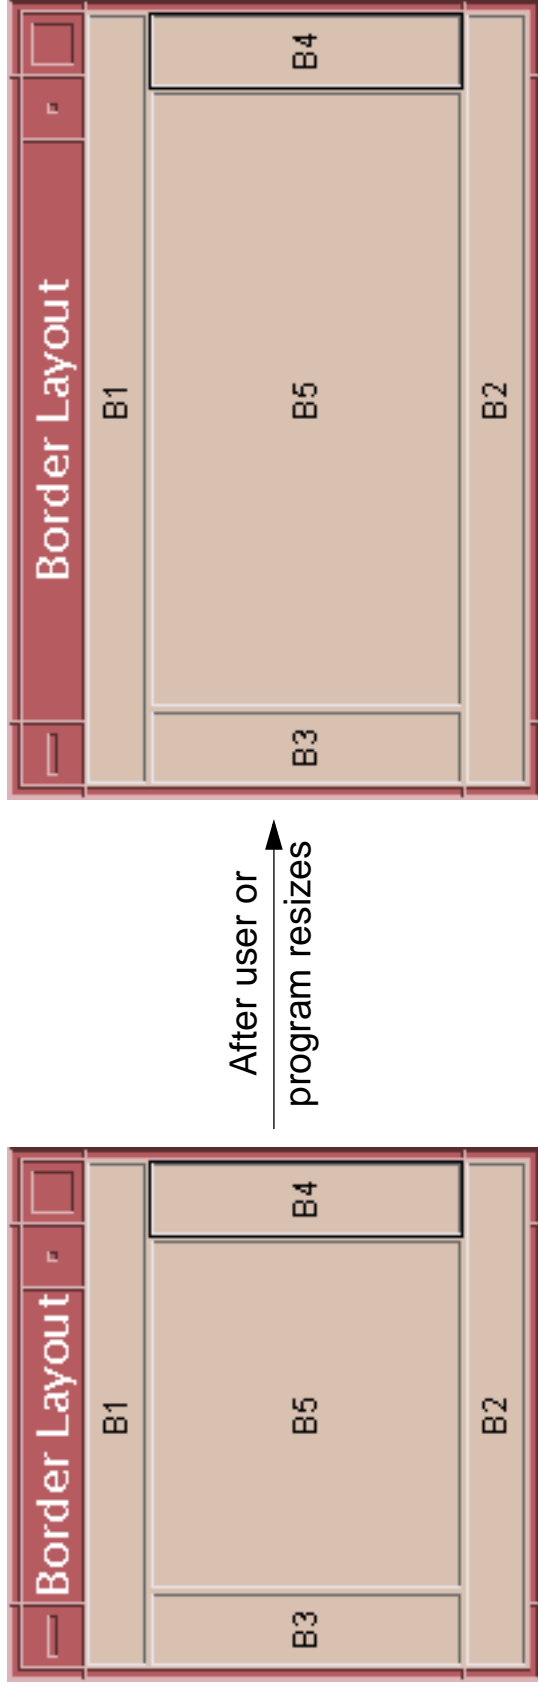

The GridLayout Manager

- Components are added from left to right, and from top to bottom.
- All regions are sized equally.
- The constructor specifies the rows and columns.



The GridExample Class

```
1 import java.awt.*;
2
3 public class GridExample {
4     private Frame f;
5     private Button b1, b2, b3, b4, b5, b6;
6
7     public GridExample() {
8         f = new Frame("Grid Example");
9         b1 = new Button("1");
10        b2 = new Button("2");
11        b3 = new Button("3");
12        b4 = new Button("4");
13        b5 = new Button("5");
14        b6 = new Button("6");
15    }
```


The GridExample Class

```
16      public void launchFrame() {
17          f.setLayout (new GridLayout (3,2));
18          f.add(b1);
19          f.add(b2);
20          f.add(b3);
21          f.add(b4);
22          f.add(b5);
23          f.add(b6);
24          f.pack();
25          f.setVisible(true);
26      }
27
28      public static void main(String args[]) {
29          GridExample grid = new GridExample();
30          grid.launchFrame();
31      }
32  }
33 }
```

Example of GridLayout



After user or
program resizes



Solaris OS




After user or
program resizes



Microsoft Windows

The ComplexLayoutExample Class


```
1  import java.awt.*;
2
3  public class ComplexLayoutExample {
4      private Frame f;
5      private Panel p;
6      private Button bw, bc;
7      private Button bfile, bhelp;
8
9      public ComplexLayoutExample() {
10         f = new Frame("GUI example 3");
11         bw = new Button("West");
12         bc = new Button("Work space region");
13         bfile = new Button("File");
14         bhelp = new Button("Help");
15     }
```





The ComplexLayoutExample Class

```
16 public void launchFrame() {
17     // Add bw and bc buttons in the frame border
18     f.add(bw, BorderLayout.WEST);
19     f.add(bc, BorderLayout.CENTER);
20     // Create panel for the buttons in the north border
21     p = new Panel();
22     p.add(bfile);
23     p.add(bhelp);
24     f.add(p, BorderLayout.NORTH);
25     // Pack the frame and make it visible
26     f.pack();
27     f.setVisible(true);
28 }
29
30 public static void main(String args[]) {
31     ComplexLayoutExample gui = new ComplexLayoutExample();
32     gui.launchFrame();
33 }
34 }
```

Combining Layout Managers

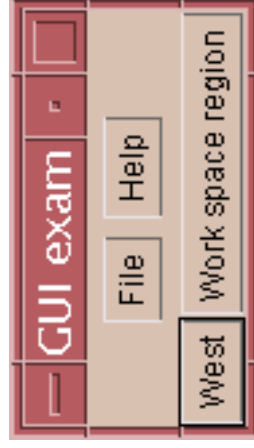


After user or
program resizes

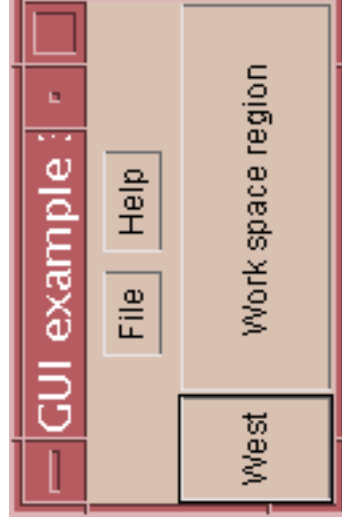


Solaris OS


Drawing in AWT

- You can draw in any `Component` (although AWT provides the `Canvas` and `Panel` classes just for this purpose).
- Typically, you create a subclass of `Canvas` or `Panel` and override the `paint` method.
- The `paint` method is called every time the component is shown (for example, if another window overlapped the component and was then removed).
- Every component has a `Graphics` object.
- The `Graphics` class implements many drawing methods.



Various Shapes Drawn by the Graphics Object

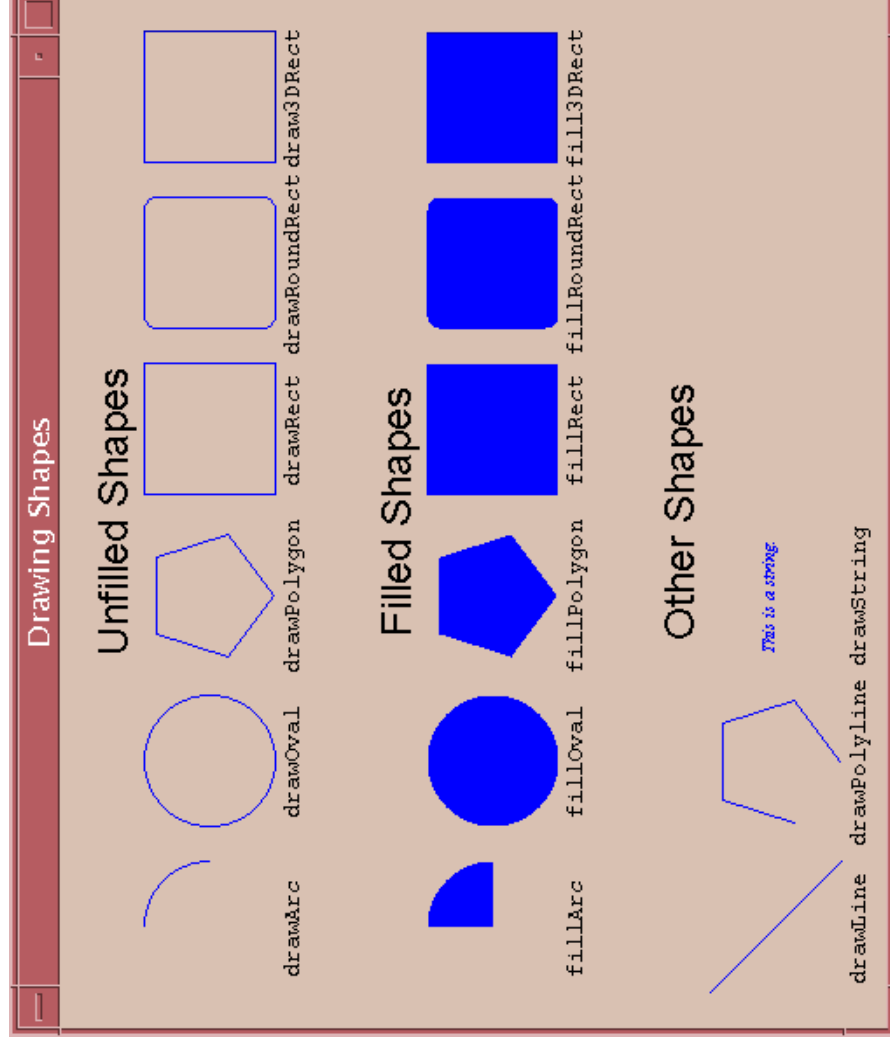




Sun Services

Module 11

GUI Event Handling

Objectives

- Define events and event handling
- Write code to handle events that occur in a GUI
- Describe the concept of adapter classes, including how and when to use them
- Determine the user action that originated the event from the event object details
- Identify the appropriate listener interface for a variety of event types
- Create the appropriate event handler methods for a variety of event types
- Understand the use of inner classes and anonymous classes in event handling




Relevance

- What parts of a GUI are required to make it useful?
- How does a graphical program handle a mouse click or any other type of user interaction?


What Is an Event?

- Events – Objects that describe what happened
- Event sources – The generator of an event
- Event handlers – A method that receives an event object, deciphers it, and processes the user's interaction

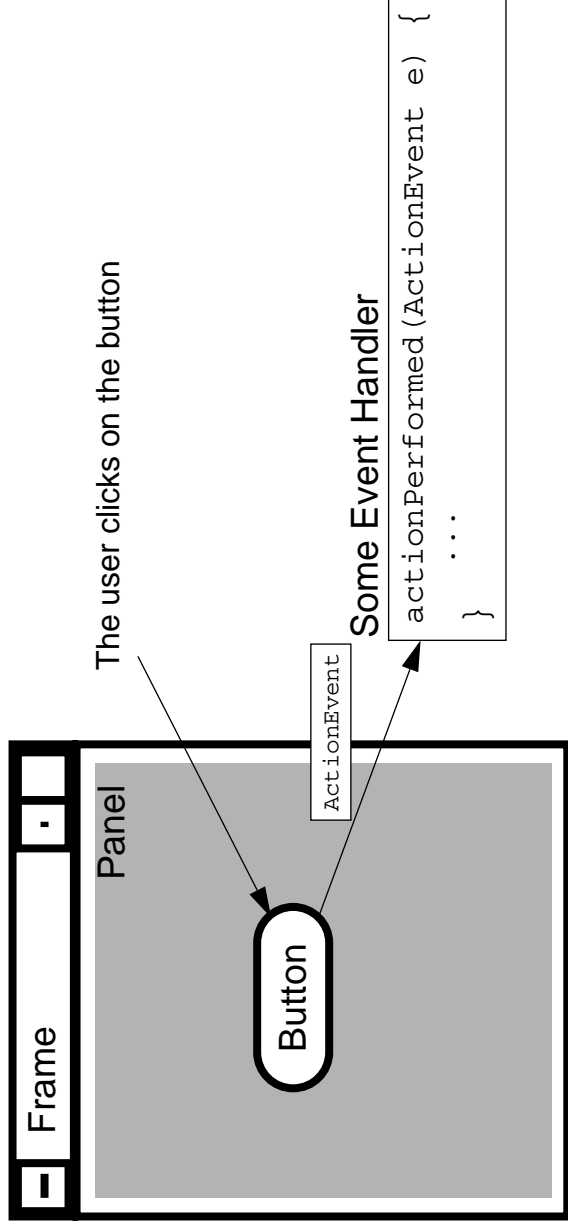

Delegation Model


- An event can be sent to many event handlers.

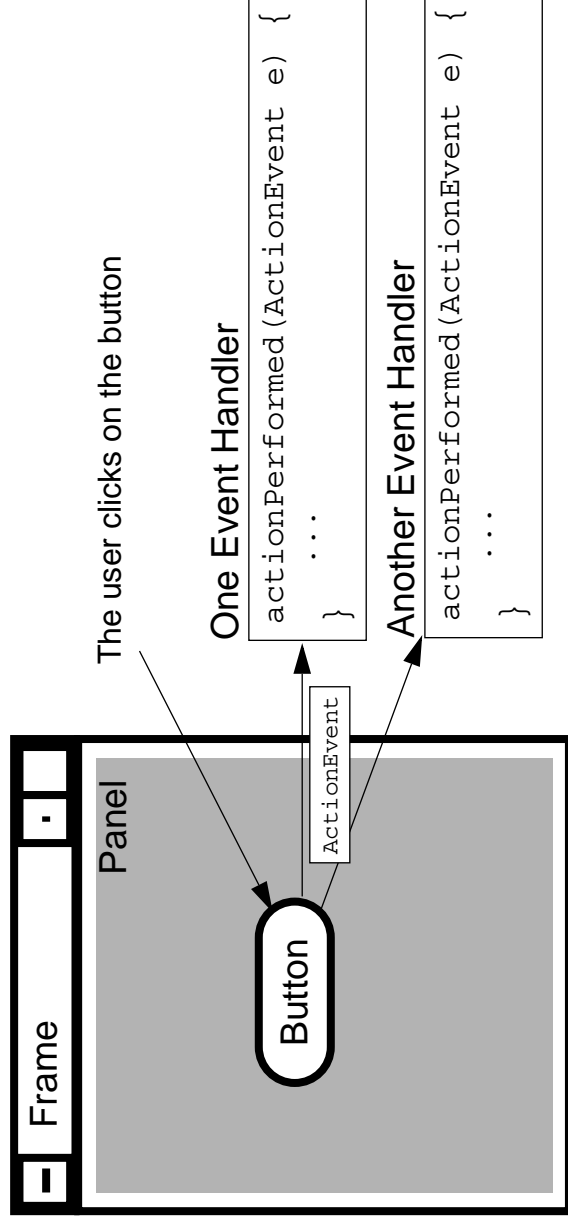

- Event handlers register with components when they are interested in events generated by that component.

Delegation Model

- Client objects (handlers) register with a GUI component that they want to observe.
- GUI components only trigger the handlers for the type of event that has occurred.
- Most components can trigger more than one type of event.
- The delegation model distributes the work among multiple classes.



A Listener Example

```
1 import java.awt.*;
2
3 public class TestButton {
4     private Frame f;
5     private Button b;
6
7     public TestButton() {
8         f = new Frame("Test");
9         b = new Button("Press Me!");
10        b.setActionCommand("ButtonPressed");
11    }
12
13    public void launchFrame() {
14        b.addActionListener(new ButtonHandler());
15        f.add(b, BorderLayout.CENTER);
16        f.pack();
17        f.setVisible(true);
18    }
```


A Listener Example

```
19      public static void main(String args[]) {
20          TestButton guiApp = new TestButton();
21          guiApp.launchFrame();
22      }
23  }
24 }
```

Code for the event listener looks like this:

```
1  import java.awt.event.*;
2
3  public class ButtonHandler implements ActionListener {
4      public void actionPerformed(ActionEvent e) {
5          System.out.println("Action occurred");
6          System.out.println("Button's command is: "
7                          + e.getActionCommand());
8      }
9  }
```

Event Categories

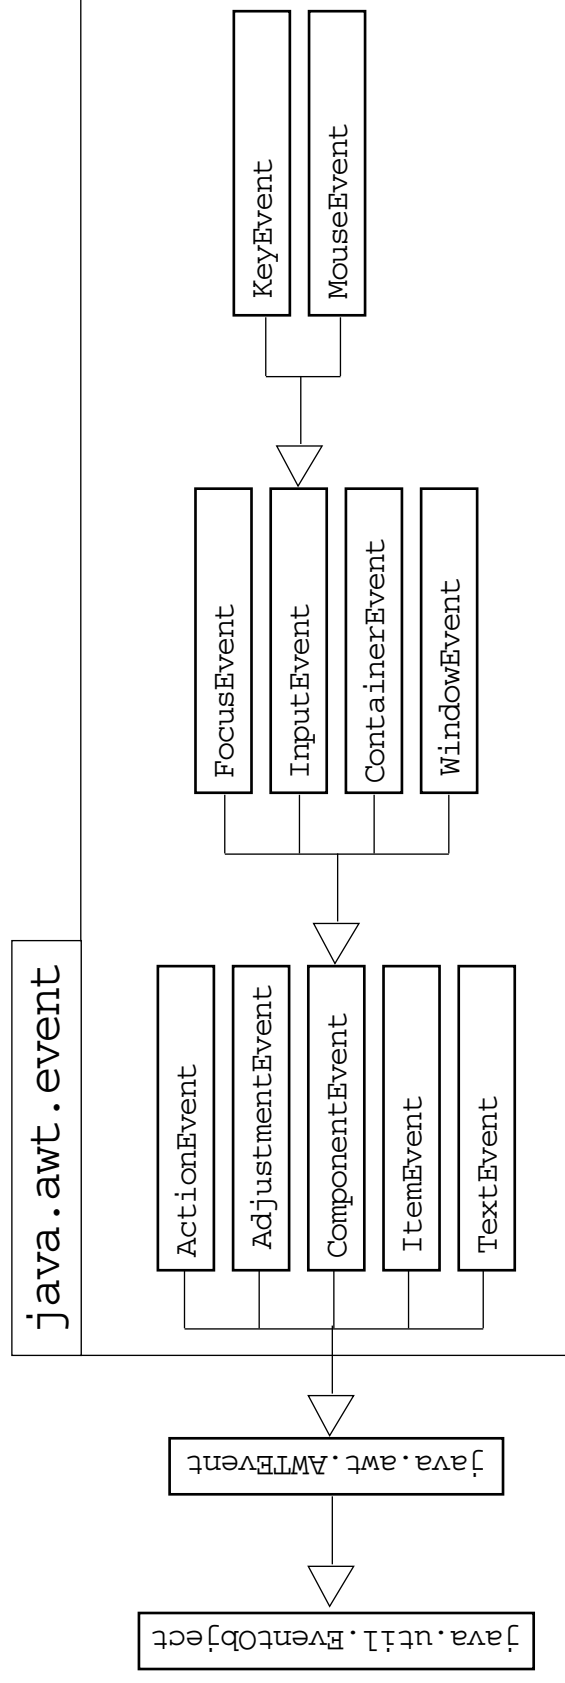

Method Categories and Interfaces


Category	Interface Name	Methods
Action	ActionListener	actionPerformed (ActionEvent)
Item	ItemListener	itemStateChanged (ItemEvent)
Mouse	MouseListener	mousePressed (MouseEvent)
		mouseReleased (MouseEvent)
		mouseEntered (MouseEvent)
		mouseExited (MouseEvent)
		mouseClicked (MouseEvent)
Mouse motion	MouseMotionListener	mouseDragged (MouseEvent)
		mouseMoved (MouseEvent)
Key	KeyListener	keyPressed (KeyEvent)
		keyReleased (KeyEvent)
		keyTyped (KeyEvent)

Method Categories and Interfaces

Category	Interface Name	Methods
Focus	FocusListener	focusGained (FocusEvent) focusLost (FocusEvent)
Adjustment	AdjustmentListener	adjustmentValueChanged (AdjustmentEvent)
Component	ComponentListener	componentMoved (ComponentEvent) componentHidden (ComponentEvent) componentResized (ComponentEvent) componentShown (ComponentEvent)


Method Categories and Interfaces

Category	Interface Name	Methods
Window	WindowListener	windowClosing(WindowEvent)
		windowOpened(WindowEvent)
		windowIconified(WindowEvent)
		windowDeiconified(WindowEvent)
		windowClosed(WindowEvent)
		windowActivated(WindowEvent)
		windowDeactivated(WindowEvent)
Container	ContainerListener	componentAdded(ContainerEvent) componentRemoved(ContainerEvent)
Text	TextListener	textValueChanged(TextEvent)




Complex Example

```
1 import java.awt.*;
2 import java.awt.event.*;
3
4 public class TwoListener
5     implements MouseMotionListener, MouseListener {
6     private Frame f;
7     private TextField tf;
8
9     public TwoListener() {
10         f = new Frame("Two listeners example");
11         tf = new TextField(30);
12     }
```




Complex Example

```
13      public void launchFrame() {
14          Label label = new Label("Click and drag the mouse");
15          // Add components to the frame
16          f.add(label, BorderLayout.NORTH);
17          f.add(tf, BorderLayout.SOUTH);
18          // Add this object as a listener
19          f.addMouseMotionListener(this);
20          f.addMouseListener(this);
21          // Size the frame and make it visible
22          f.setSize(300, 200);
23          f.setVisible(true);
24      }
```




Complex Example

```
26
27 // These are MouseMotionListener events
28 public void mouseDragged(MouseEvent e) {
29     String s = "Mouse dragging: X = " + e.getX()
30               + " Y = " + e.getY();
31     tf.setText(s);
32 }
33
34 public void mouseEntered(MouseEvent e) {
35     String s = "The mouse entered";
36     tf.setText(s);
37 }
38
39 public void mouseExited(MouseEvent e) {
40     String s = "The mouse has left the building";
41     tf.setText(s);
42 }
```



Complex Example

```
43 // Unused MouseMotionListener method.
44 // All methods of a listener must be present in the
45 // class even if they are not used.
46 public void mouseMoved(MouseEvent e) { }
47
48 // Unused MouseListener methods.
49 public void mousePressed(MouseEvent e) { }
50 public void mouseClicked(MouseEvent e) { }
51 public void mouseReleased(MouseEvent e) { }
52
53 public static void main(String args[]) {
54     TwoListener two = new TwoListener();
55     two.launchFrame();
56 }
57 }
58 }
```



Multiple Listeners

- Multiple listeners cause unrelated parts of a program to react to the same event.
- The handlers of all registered listeners are called when the event occurs.


Event Adapters

- The listener classes that you define can extend adapter classes and override only the methods that you need.
- An example is:

```
1 import java.awt.*;  
2 import java.awt.event.*;  
3  
4 public class MouseClickHandler extends MouseAdapter {  
5  
6     // We just need the mouseClicked handler, so we use  
7     // an adapter to avoid having to write all the  
8     // event handler methods  
9  
10    public void mouseClicked(MouseEvent e) {  
11        // Do stuff with the mouse click...  
12    }  
13 }
```

Event Handling Using Inner Classes

```
1 import java.awt.*;
2 import java.awt.event.*;
3 public class TestInner {
4     private Frame f;
5     private TextField tf; // used by inner class
6
7     public TestInner() {
8         f = new Frame("Inner classes example");
9         tf = new TextField(30);
10    }
11
12    class MyMouseMotionListener extends MouseMotionAdapter {
13        public void mouseDragged(MouseEvent e) {
14            String s = "Mouse dragging:  X = " + e.getX()
15                    + " Y = " + e.getY();
16            tf.setText(s);
17        }
18    }
```



Event Handling Using Inner Classes


```
19      public void launchFrame() {
20          Label label = new Label("Click and drag the mouse");
21          // Add components to the frame
22          f.add(label, BorderLayout.NORTH);
23          f.add(tf, BorderLayout.SOUTH);
24          // Add a listener that uses an Inner class
25          f.addMouseListener(new MyMouseListener());
26          f.addMouseListener(new MouseClickHandler());
27          // Size the frame and make it visible
28          f.setSize(300, 200);
29          f.setVisible(true);
30      }
31  }
32
33  public static void main(String args[]) {
34      TestInner obj = new TestInner();
35      obj.launchFrame();
36  }
37 }
```

Event Handling Using Anonymous Classes

```
1 import java.awt.*;
2 import java.awt.event.*;
3
4 public class TestAnonymous {
5     private Frame f;
6     private TextField tf;
7
8     public TestAnonymous() {
9         f = new Frame("Anonymous classes example");
10        tf = new TextField(30);
11    }
12
13    public static void main(String args[]) {
14        TestAnonymous obj = new TestAnonymous();
15        obj.launchFrame();
16    }
17 }
```

Event Handling Using Anonymous Classes


```
18  public void launchFrame() {
19      Label label = new Label("Click and drag the mouse");
20      // Add components to the frame
21      f.add(label, BorderLayout.NORTH);
22      f.add(tf, BorderLayout.SOUTH);
23      // Add a listener that uses an anonymous class
24      f.addMouseMotionListener(new MouseMotionAdapter() {
25          public void mouseDragged(MouseEvent e) {
26              String s = "Mouse dragging:  X = "+ e.getX()
27                      + " Y = " + e.getY();
28              tf.setText(s);
29          }
30      }); // <- note the closing parenthesis
31      f.addMouseListener(new MouseClickListener()); // Not shown
32      // Size the frame and make it visible
33      f.setSize(300, 200);
34      f.setVisible(true);
35      }
36 }
```



Sun Services


Module 12

GUI-Based Applications



Objectives

- Identify the key AWT components and the events that they trigger
- Describe how to construct a menu bar, menu, and menu items in a Java GUI
- Understand how to change the color and font of a component



Relevance

- You now know how to set up a Java GUI for both graphic output and interactive user input. However, only a few of the components from which GUIs can be built have been described. What other components would be useful in a GUI?
- How can you create a menu for your GUI frame?

AWT Components

Component Type	Description
Button	A named rectangular box used for receiving mouse clicks
Canvas	A panel used for drawing
Checkbox	A component enabling the user to select an item
CheckboxMenuItem	A checkbox within a menu
Choice	A pull-down static list of items
Component	The parent of all AWT components, except menu components
Container	The parent of all AWT containers
Dialog	A top-level window with a title and a border; dialogs can be modeless or modal
Frame	The base class of all GUI windows with window manager controls

AWT Components


Component Type	Description
Label	A text string component
List	A component that contains a dynamic set of items
Menu	An element under the menu bar, which contains a set of menu items
MenuItem	An item within a menu
Panel	A basic container class used most often to create complex layouts
Scrollbar	A component that enables a user to select from a range of values
ScrollPane	A container class that implements automatic horizontal and vertical scrolling for a single child component

AWT Components

Component Type	Description
TextArea	A component that enables the user to enter a block of text
TextField	A component that enables the user to enter a single line of text
Window	The base class of all GUI windows, without window manager controls

AWT Listeners

Component Type	Act	Adj	Cmp	Cnt	Foc	Itm	Key	Mou	MM	Text	Win
Button	✓		✓		✓		✓	✓	✓		
Canvas			✓		✓		✓	✓	✓		
Checkbox			✓		✓	✓	✓	✓	✓		
Checkbox - MenuItem						✓					
Choice			✓		✓	✓	✓	✓	✓		
Component			✓		✓		✓	✓	✓		
Container			✓	✓	✓		✓	✓	✓		
Dialog			✓	✓	✓		✓	✓	✓		
Frame			✓	✓	✓		✓	✓	✓		
Label			✓		✓		✓	✓	✓		



AWT Listeners


Component Type	Act	Adj	Cmp	Cnt	Foc	Itm	Key	Mou	MM	Text	Win
List	✓		✓		✓	✓	✓	✓	✓		
MenuItem	✓										
Panel			✓	✓	✓		✓	✓	✓		
Scrollbar		✓	✓		✓		✓	✓	✓		
ScrollPane			✓	✓	✓		✓	✓	✓		
TextArea			✓		✓		✓	✓	✓	✓	
TextField	✓		✓		✓		✓	✓	✓	✓	
Window			✓	✓	✓		✓	✓	✓	✓	✓

How to Create a Menu


1. Create a `MenuBar` object, and set it into a menu container, such as a `Frame`.
2. Create one or more `MenuItem` objects, and add them to the menu bar object.
3. Create one or more `MenuItem` objects, and add them to the menu object.

Creating a MenuBar


```
1 Frame f = new Frame ("MenuBar") ;  
2 MenuBar mb = new MenuBar () ;  
3 f.setMenuBar (mb) ;
```

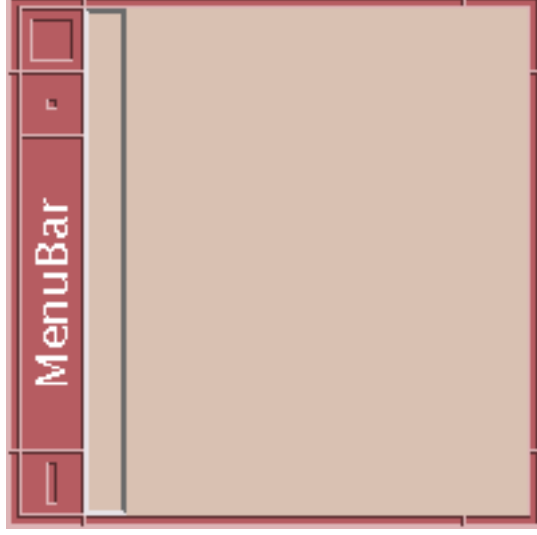

Solaris OS

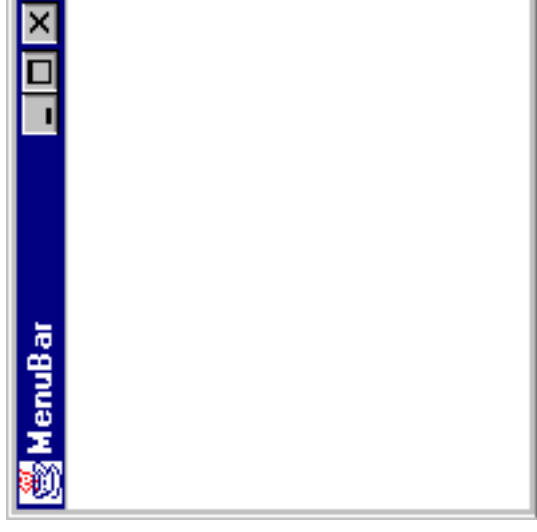


Microsoft Windows



Creating a Menu

```
1  Frame f = new Frame ("Menu" );
2  MenuBar mb = new MenuBar ( ) ;
3  Menu m1 = new Menu ("File" );
4  Menu m2 = new Menu ("Edit" );
5  Menu m3 = new Menu ("Help" );
6  mb.add(m1) ;
7  mb.add(m2) ;
8  mb.setHelpMenu (m3) ;
9  f.setMenuBar (mb) ;
```


Creating a Menu

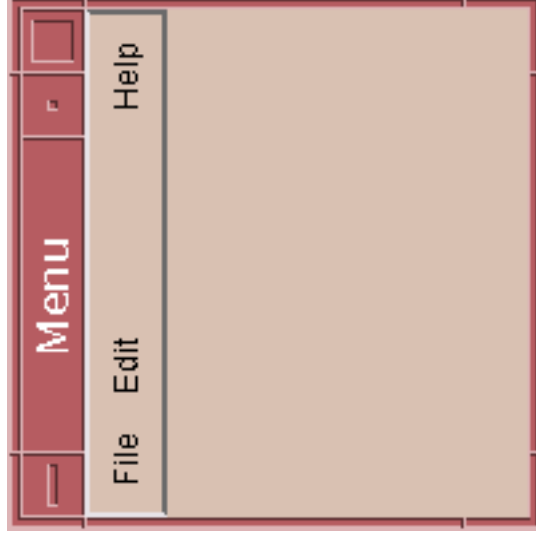

Solaris OS




Microsoft Windows


Creating a MenuItem

```
1 MenuItem mi1 = new MenuItem("New");
2 MenuItem mi2 = new MenuItem("Save");
3 MenuItem mi3 = new MenuItem("Load");
4 MenuItem mi4 = new MenuItem("Quit");
5 mi1.addActionListener(this);
6 mi2.addActionListener(this);
7 mi3.addActionListener(this);
8 mi4.addActionListener(this);
9 m1.add(mi1);
10 m1.add(mi2);
11 m1.add(mi3);
12 m1.addSeparator();
13 m1.add(mi4);
```

Creating a MenuItem

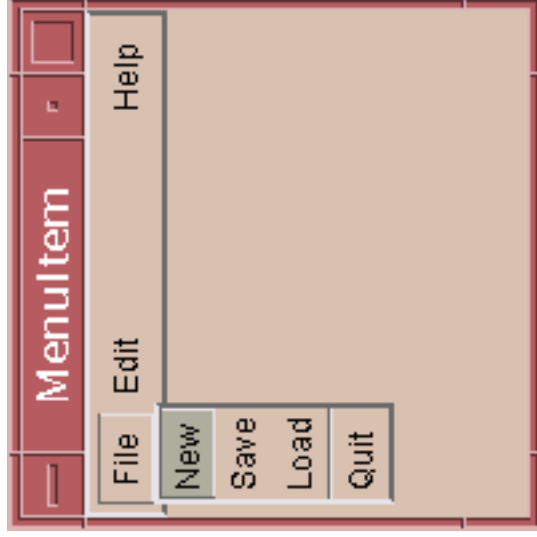

Solaris OS

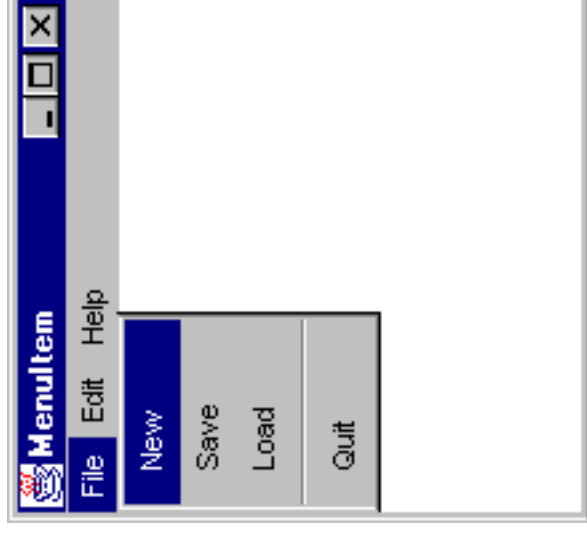


Microsoft Windows


Creating a CheckBoxMenuItem

```
1  MenuBar mb = new MenuBar();
2  Menu m1 = new Menu("File");
3  Menu m2 = new Menu("Edit");
4  Menu m3 = new Menu("Help");
5  mb.add(m1);
6  mb.add(m2);
7  mb.setHelpMenu(m3);
8  f.setMenuBar(mb);
9  ....
10 MenuItem mi2 = new MenuItem("Save");
11 mi2.addActionListener(this);
12 m1.add(mi2);
13 ....
14 CheckBoxMenuItem mi5 = new CheckBoxMenuItem("Persistent");
15 mi5.addItemListener(this);
16 m1.add(mi5);
```

Creating a CheckBoxMenuItem

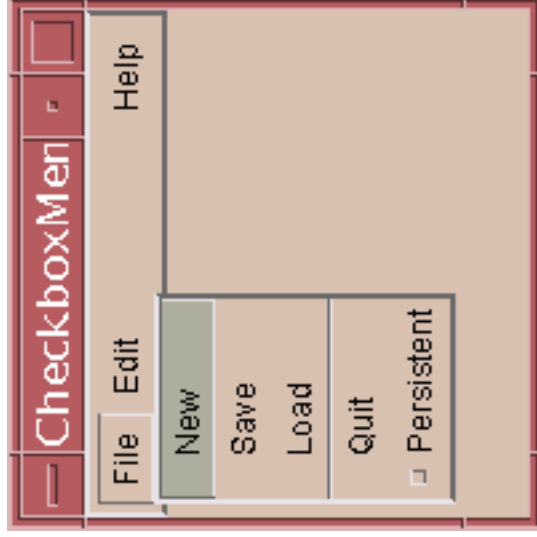

Solaris OS

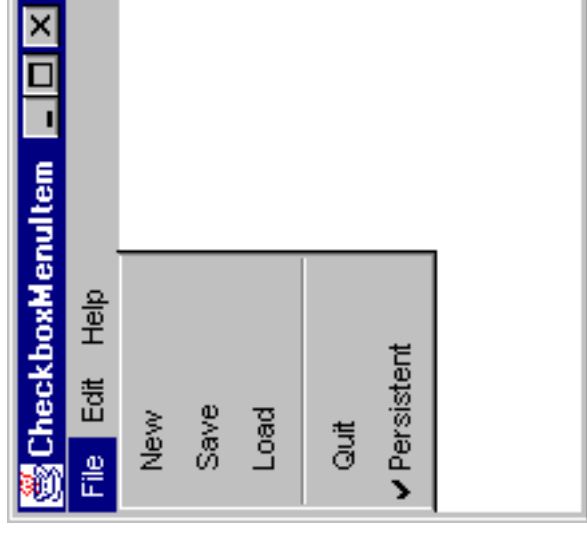

Microsoft Windows

Controlling Visual Aspects


Commands to control visual aspects of the GUI include:

- **Colors:**

```
setForeground()  
setBackground()
```


- **Example:**

```
Color purple = new Color(255, 0, 255);  
Button b = new Button("Purple");  
b.setBackground(purple);
```



J.F.C./Swing Technology

- Java Foundation Class/Swing (J.F.C./Swing) technology is a second-generation GUI toolkit.
- It builds on top of AWT, but supplants the components with *lightweight* versions.
- There are many more components, and much more complex components, including JTable, JTree, and JComboBox.




Sun Services

Module 13

Threads

Objectives

- Define a thread
- Create separate threads in a Java technology program, controlling the code and data that are used by that thread
- Control the execution of a thread and write platform-independent code with threads
- Describe the difficulties that might arise when multiple threads share data
- Use `wait` and `notify` to communicate between threads
- Use `synchronized` to protect data from corruption




Relevance

How do you get programs to perform multiple tasks concurrently?

Threads

- What are threads?
Threads are a virtual CPU.
- The three parts of a thread are:
 - CPU
 - Code
 - Data

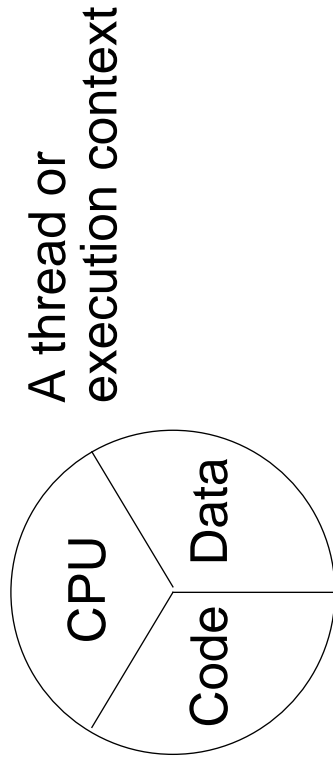


Creating the Thread


```
1 public class ThreadTester {
2     public static void main(String args[]) {
3         HelloRunner r = new HelloRunner();
4         Thread t = new Thread(r);
5         t.start();
6     }
7 }
8 class HelloRunner implements Runnable {
9     int i;
10    public void run() {
11        i = 0;
12        while (true) {
13            System.out.println("Hello " + i++);
14            if ( i == 50 ) {
15                break;
16            }
17        }
18    }
19 }
```

Creating the Thread

- Multithreaded programming has these characteristics:
 - Multiple threads are from one Runnable instance.
 - Threads share the same data and code.
- For example:

```
Thread t1 = new Thread(r);  
Thread t2 = new Thread(r);
```

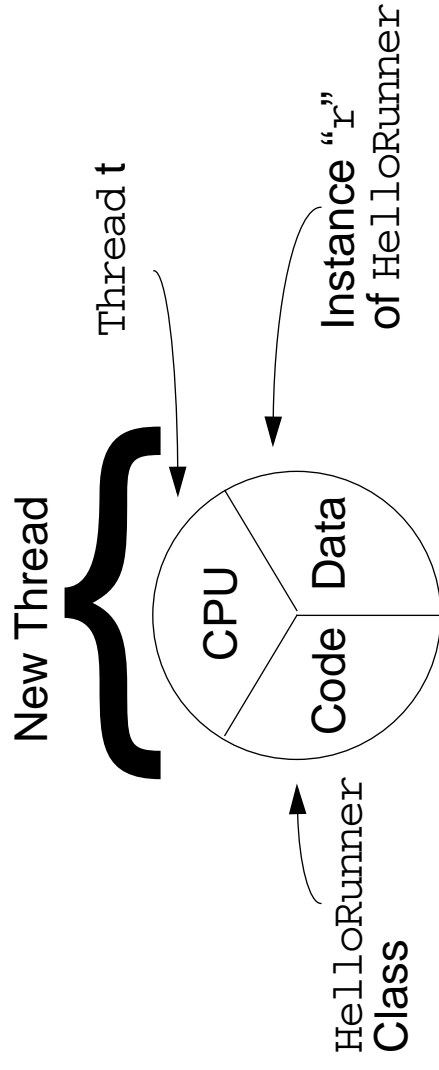




Starting the Thread


- Use the `start` method.
- Place the thread in a runnable state.

Thread Scheduling

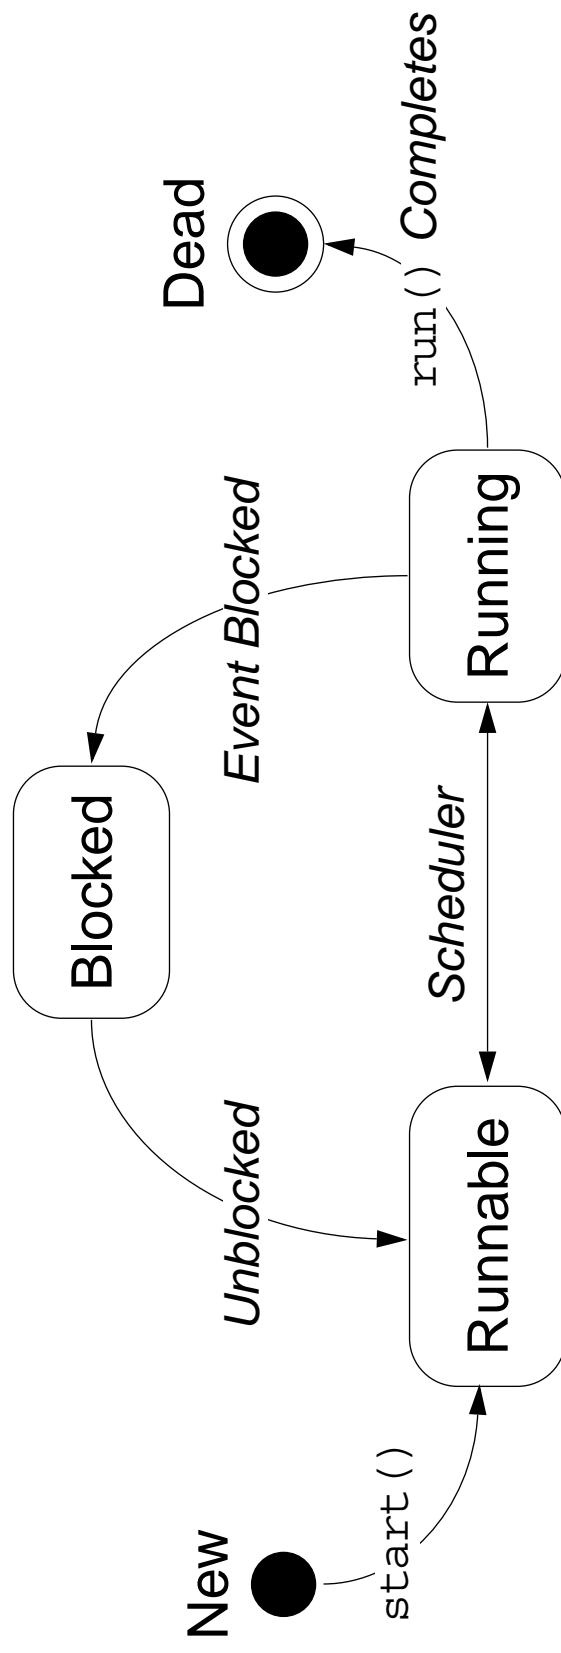


Thread Scheduling Example

```
1  public class Runner implements Runnable {
2      public void run() {
3          while (true) {
4              // do lots of interesting stuff
5              // ...
6              // Give other threads a chance
7              try {
8                  Thread.sleep(10);
9              } catch (InterruptedException e) {
10                 // This thread's sleep was interrupted
11                 // by another thread
12             }
13         }
14     }
15 }
```

Terminating a Thread

```
1  public class Runner implements Runnable {
2      private boolean timeToQuit=false;
3
4      public void run() {
5          while ( ! timeToQuit ) {
6              // continue doing work
7          }
8          // clean up before run() ends
9      }
10
11     public void stopRunning() {
12         timeToQuit=true;
13     }
14 }
```



Terminating a Thread

```
1  public class ThreadController {
2      private Runner r = new Runner();
3      private Thread t = new Thread(r);
4
5      public void startThread() {
6          t.start();
7      }
8
9      public void stopThread() {
10         // use specific instance of Runner
11         r.stopRunning();
12     }
13 }
```

Basic Control of Threads

- **Test threads:**


`isAlive()`

- **Access thread priority:**

`getPriority()`
`setPriority()`

- **Put threads on hold:**

`Thread.sleep()` *// static method*
`join()`
`Thread.yield()` *// static method*




The join Method

```
1 public static void main(String[] args) {
2     Thread t = new Thread(new Runner());
3     t.start();
4     ...
5     // Do stuff in parallel with the other thread for a while
6     ...
7     // Wait here for the other thread to finish
8     try {
9         t.join();
10    } catch (InterruptedException e) {
11        // the other thread came back early
12    }
13    ...
14    // Now continue in this thread
15    ...
16 }
```

Other Ways to Create Threads

```
1 public class MyThread extends Thread {
2     public void run() {
3         while ( true ) {
4             // do lots of interesting stuff
5             try {
6                 Thread.sleep(100);
7             } catch (InterruptedException e) {
8                 // sleep interrupted
9             }
10        }
11    }
12
13    public static void main(String args[]) {
14        Thread t = new MyThread();
15        t.start();
16    }
17 }
```



Selecting a Way to Create Threads

- Implement Runnable:
- Better object-oriented design
- Single inheritance
- Consistency
- Extend Thread:

Simpler code


Using the synchronized Keyword

```
1 public class MyStack {
2
3     int idx = 0;
4     char [] data = new char[6];
5
6     public void push(char c) {
7         data[idx] = c;
8         idx++;
9     }
10
11     public char pop() {
12         idx--;
13         return data[idx];
14     }
15 }
```

The Object Lock Flag

- Every object has a flag that is a type of *lock flag*.
- The synchronized enables interaction with the lock flag.


Object this

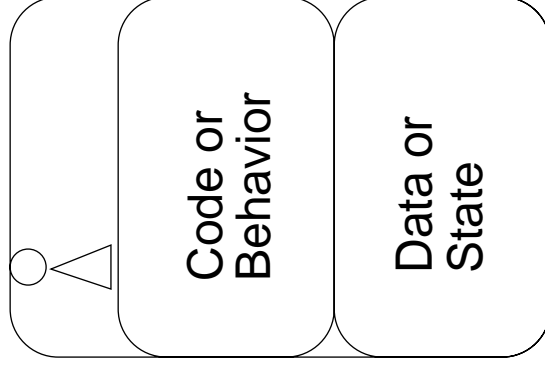

Thread before synchronized(this)

```
public void push(char c) {  
    synchronized (this) {  
        data[idx] = c;  
        idx++;  
    }  
}
```



The Object Lock Flag

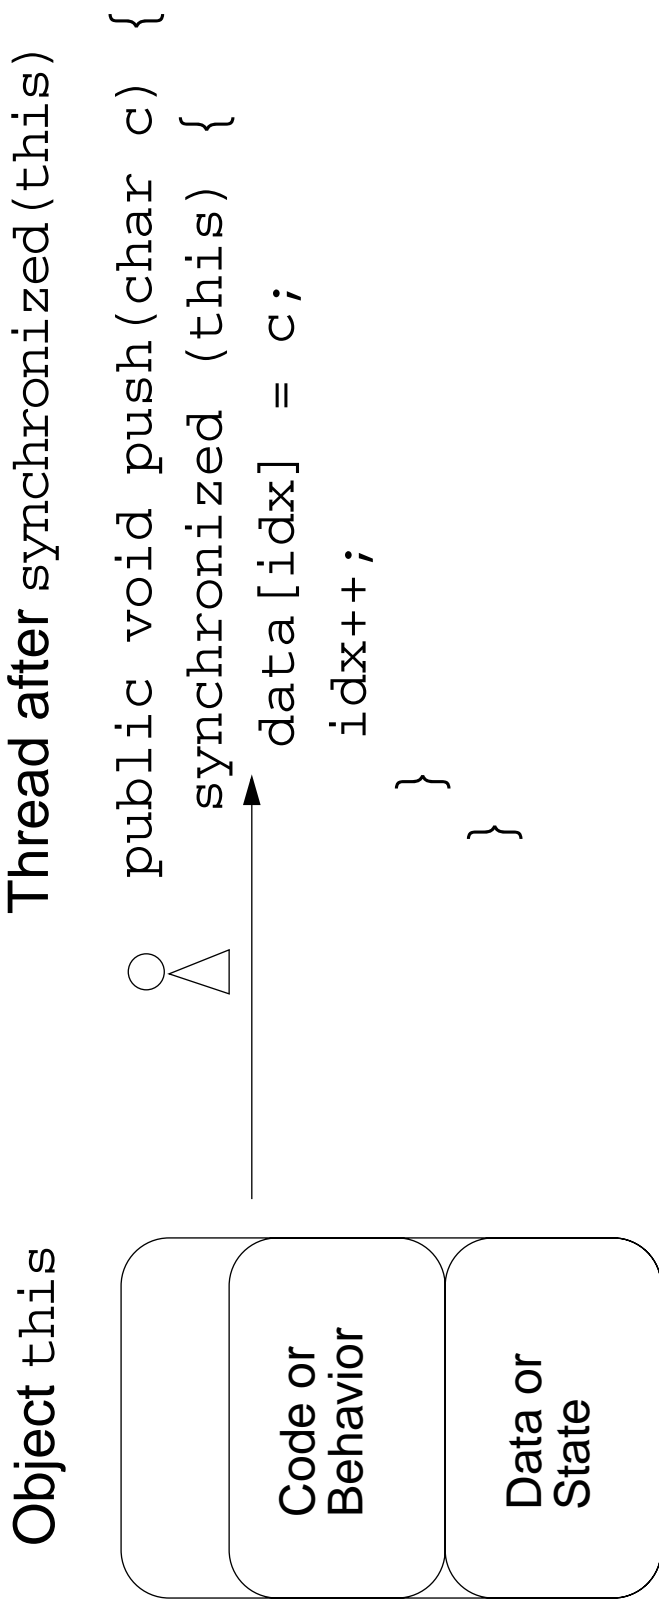

The Object Lock Flag

Object `this`
lock flag missing

Another thread, trying to
execute `synchronized(this)`

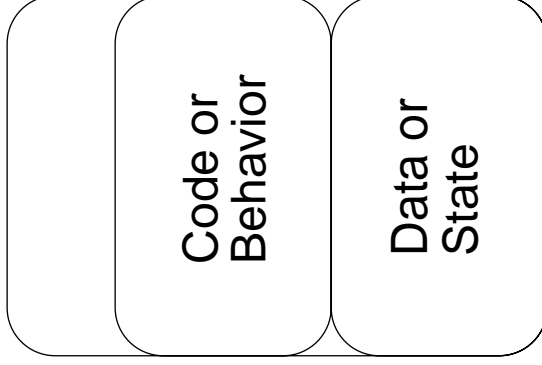

Waiting for
object lock

```
public char pop() {  
    synchronized (this) {  
        idx--;  
        return data[idx];  
    }  
}
```

Releasing the Lock Flag

The lock flag is released in the following events:

- Released when the thread passes the end of the synchronized code block
- Released automatically when a break, return, or exception is thrown by the synchronized code block

Using synchronized – Putting It Together


- *All* access to delicate data should be synchronized.
- Delicate data protected by synchronized should be `private`.

Using synchronized – Putting It Together

The following two code segments are equivalent:

```
public void push(char c) {  
    synchronized(this) {  
        // The push method code  
    }  
}  
  
public synchronized void push(char c) {  
    // The push method code  
}
```

Thread State Diagram With Synchronization

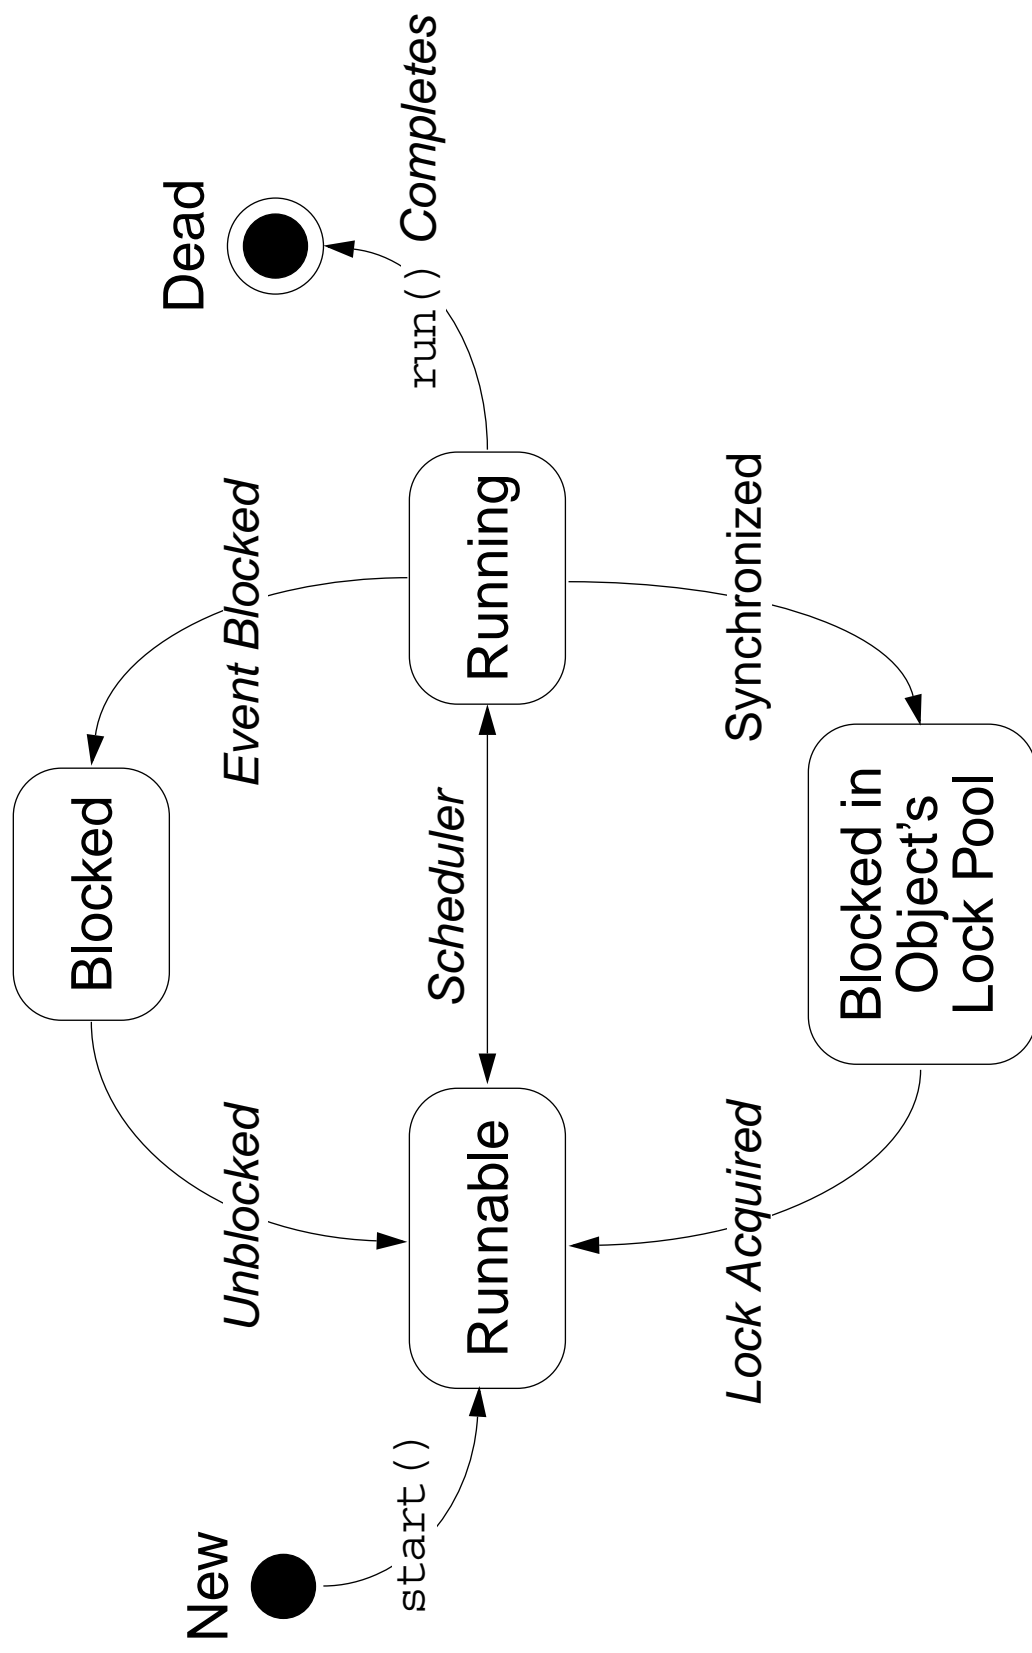


Deadlock

A deadlock has the following characteristics:

- It is two threads, each waiting for a lock from the other.
- It is not detected or avoided.
- Deadlock can be avoided by:
 - Deciding on the order to obtain locks
 - Adhering to this order throughout
 - Releasing locks in reverse order

Thread Interaction – wait and notify

- Scenario:
Consider yourself and a cab driver as two threads.
- The problem:
How do you determine when you are at your destination?
- The solution:
 - You notify the cab driver of your destination and relax.
 - The driver drives and notifies you upon arrival at your destination.




Thread Interaction

Thread interactions include:


- The `wait` and `notify` methods
- The pools:
 - Wait pool
 - Lock pool

Thread State Diagram With wait and notify

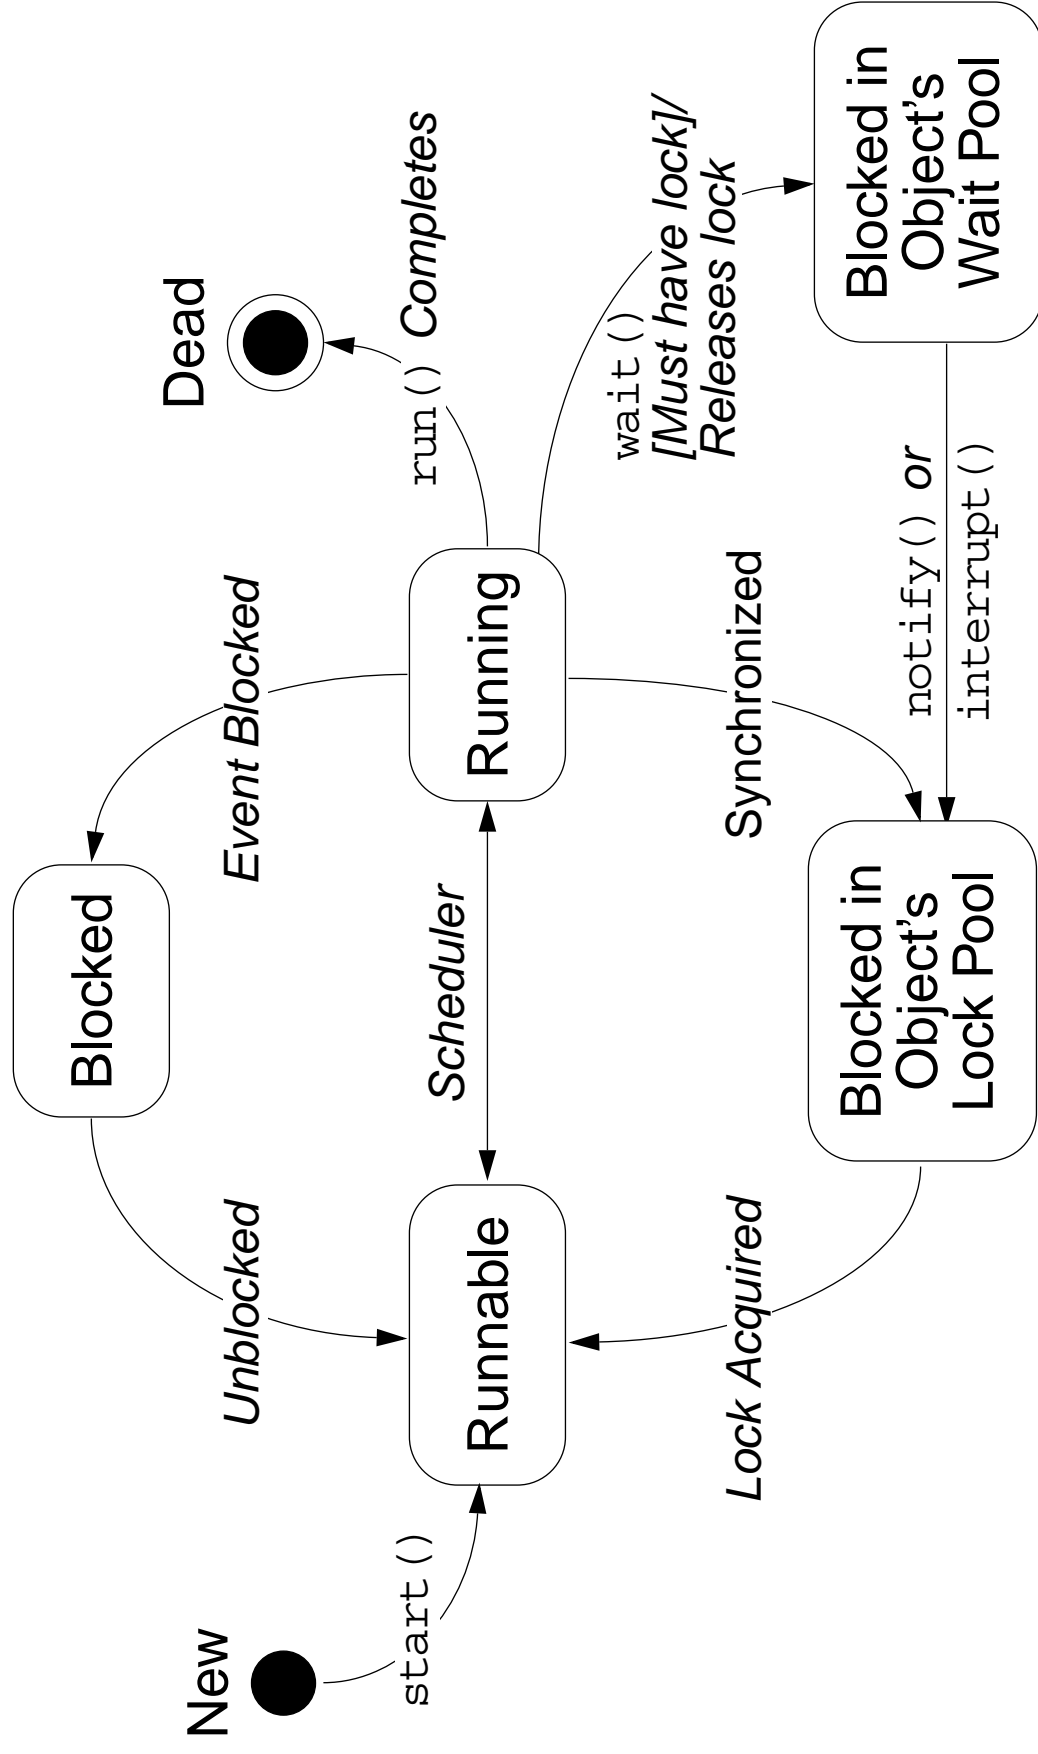


Monitor Model for Synchronization

- Leave shared data in a consistent state.
- Ensure programs cannot deadlock.
- Do not put threads expecting different notifications in the same wait pool.



The Producer Class

```
1 package mod13;
2
3 public class Producer implements Runnable {
4     private SyncStack theStack;
5     private int num;
6     private static int counter = 1;
7
8     public Producer (SyncStack s) {
9         theStack = s;
10        num = counter++;
11    }
12 }
```




The Producer Class

```
13  public void run() {
14      char c;
15
16      for (int i = 0; i < 200; i++) {
17          c = (char) (Math.random() * 26 + 'A');
18          theStack.push(c);
19          System.out.println("Producer" + num + ": " + c);
20          try {
21              Thread.sleep((int) (Math.random() * 300));
22          } catch (InterruptedException e) {
23              // ignore it
24          }
25      }
26      // END run method
27
28  } // END Producer class
```

The Consumer Class

```
1 package mod13;
2
3 public class Consumer implements Runnable {
4     private SyncStack theStack;
5     private int num;
6     private static int counter = 1;
7
8     public Consumer (SyncStack s) {
9         theStack = s;
10        num = counter++;
11    }
12 }
```




The Consumer Class

```
13 public void run() {
14     char c;
15     for (int i = 0; i < 200; i++) {
16         c = theStack.pop();
17         System.out.println("Consumer" + num + ": " + c);
18     }
19     try {
20         Thread.sleep((int) (Math.random() * 300));
21     } catch (InterruptedException e) {
22         // ignore it
23     }
24 }
25 } // END run method
26
```

The SyncStack Class


This is a sketch of the SyncStack class:

```
public class SyncStack {  
  
    private List<Character> buffer = new ArrayList<Character>(400);  
  
    public synchronized char pop() {  
        // pop code here  
    }  
  
    public synchronized void push(char c) {  
        // push code here  
    }  
}
```

The pop Method

```
9  public synchronized char pop() {
10     char c;
11     while (buffer.size() == 0) {
12         try {
13             this.wait();
14         } catch (InterruptedException e) {
15             // ignore it...
16         }
17     }
18     c = buffer.remove(buffer.size() - 1);
19     return c;
20 }
```



The push Method


```
22 public synchronized void push(char c) {  
23     this.notify();  
24     buffer.add(c);  
25 }
```

The SyncTest Class

```
1 package mod13;
2 public class SyncTest {
3     public static void main(String[] args) {
4         SyncStack stack = new SyncStack();
5         Producer p1 = new Producer(stack);
6         Thread prodT1 = new Thread (p1);
7         prodT1.start();
8         Producer p2 = new Producer(stack);
9         Thread prodT2 = new Thread (p2);
10        prodT2.start();
11
12        Consumer c1 = new Consumer (stack);
13        Thread constT1 = new Thread (c1);
14        constT1.start();
15        Consumer c2 = new Consumer (stack);
16        Thread constT2 = new Thread (c2);
17        constT2.start();
18    }
19 }
```

The SyncTest Class


```
Producer2: F
Consumer1: F
Producer2: K
Consumer2: K
Producer2: T
Producer1: N
Producer1: V
Consumer2: V
Consumer1: N
Producer2: V
Producer2: U
Consumer2: U
Consumer2: V
Producer1: F
Consumer1: F
Producer2: M
Consumer2: M
Consumer2: T
```



Sun Services


Module 14

Advanced I/O Streams



Objectives

- Describe the main features of the `java.io` package
- Construct node and processing streams, and use them appropriately
- Distinguish readers and writers from streams, and select appropriately between them



Relevance

- What mechanisms are in place within the Java programming language to read and write from sources (or sinks) other than files?
- How are international character sets supported in I/O operations?
- What are the possible sources and sinks of character and byte streams?

I/O Fundamentals

- A *stream* can be thought of as a flow of data from a source or to a sink.
- A *source* stream initiates the flow of data, also called an input stream.
- A *sink* stream terminates the flow of data, also called an output stream.
- Sources and sinks are both *node streams*.
- Types of node streams are files, memory, and pipes between threads or processes.

Fundamental Stream Classes

Stream	Byte Streams	Character Streams
Source streams	InputStream	Reader
Sink streams	OutputStream	Writer

Data Within Streams

- Java technology supports two types of streams: character and byte.
- Input and output of character data is handled by readers and writers.
- Input and output of byte data is handled by input streams and output streams:
- Normally, the term *stream* refers to a byte stream.
- The terms *reader* and *writer* refer to character streams.

The InputStream Methods

- The three basic read methods are:

```
int read()  
int read(byte[] buffer)  
int read(byte[] buffer, int offset, int length)
```

- Other methods include:

```
void close()  
int available()  
long skip(long n)  
boolean markSupported()  
void mark(int readlimit)  
void reset()
```


The OutputStream Methods

- The three basic write methods are:

```
void write(int c)
void write(byte[] buffer)
void write(byte[] buffer, int offset, int length)
```

- Other methods include:

```
void close()
void flush()
```




The Reader Methods

- The three basic read methods are:

```
int read()  
int read(char[] cbuf)  
int read(char[] cbuf, int offset, int length)
```

- Other methods include:

```
void close()  
boolean ready()  
long skip(long n)  
boolean markSupported()  
void mark(int readAheadLimit)  
void reset()
```



The `Writer` Methods

- The basic `write` methods are:

```
void write(int c)
void write(char[] cbuf)
void write(char[] cbuf, int offset, int length)
void write(String string)
void write(String string, int offset, int length)
```

- Other methods include:

```
void close()
void flush()
```

Node Streams

Type	Character Streams	Byte Streams
File	FileReader FileWriter	FileInputStream FileOutputStream
Memory: array	CharArrayReader CharArrayWriter	ByteArrayInputStream ByteArrayOutputStream
Memory: string	StringReader StringWriter	N/A
Pipe	PipedReader PipedWriter	PipedInputStream PipedOutputStream

A Simple Example

This program performs a copy file operation using a manual buffer:

```
java TestNodeStreams file1 file2

1  import java.io.*;
2
3  public class TestNodeStreams {
4      public static void main(String[] args) {
5          try {
6              FileReader input = new FileReader(args[0]);
7              FileWriter output = new FileWriter(args[1]);
8              char[] buffer = new char[128];
9              int charsRead;
10
11             // read the first buffer
12             charsRead = input.read(buffer);
```


A Simple Example

```
13      while ( charsRead != -1 ) {
14          // write the buffer out to the output file
15          output.write(buffer, 0, charsRead);
16
17          // read the next buffer
18          charsRead = input.read(buffer);
19      }
20
21      input.close();
22      output.close();
23      catch (IOException e) {
24          e.printStackTrace();
25      }
26  }
27  }
28 }
```

Buffered Streams

This program performs a copy file operation using a built-in buffer:

```
java TestBufferedStreams file1 file2


1  import java.io.*;
2
3  public class TestBufferedStreams {
4      public static void main(String[] args) {
5          try {
6              FileReader      input      = new FileReader(args[0]);
7              BufferedReader bufInput    = new BufferedReader(input);
8              FileWriter      output     = new FileWriter(args[1]);
9              BufferedWriter bufOutput   = new BufferedWriter(output);
10             String line;
11
12             // read the first line
13             line = bufInput.readLine();
```

Buffered Streams


```
14
15     while ( line != null ) {
16         // write the line out to the output file
17         bufOutput.write(line, 0, line.length());
18         bufOutput.newLine();
19         // read the next line
20         line = bufInput.readLine();
21     }
22     bufInput.close();
23     bufOutput.close();
24     } catch (IOException e) {
25         e.printStackTrace();
26     }
27 }
28 }
```

I/O Stream Chaining

Input Stream Chain

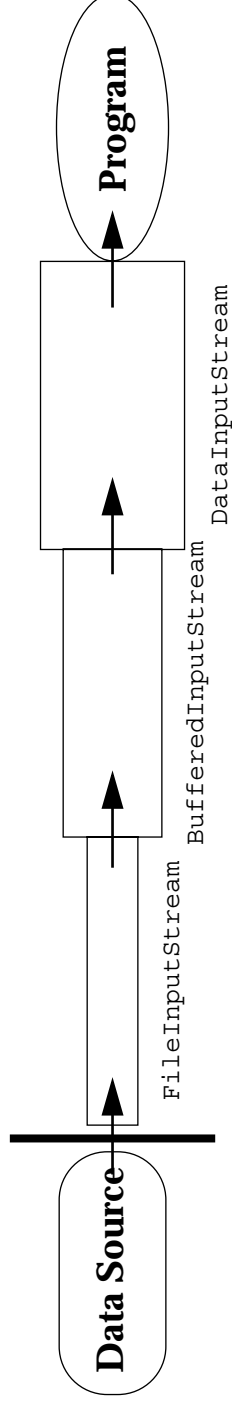

Output Stream Chain

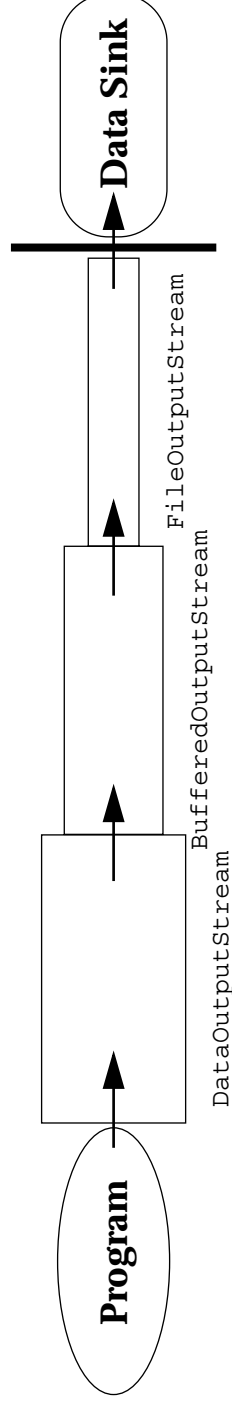


Processing Streams


Type	Character Streams	Byte Streams
Buffering	BufferedReader BufferedWriter	BufferedReader BufferedOutputStream
Filtering	<i>FilterReader</i> <i>FilterWriter</i>	<i>FilterInputStream</i> <i>FilterOutputStream</i>
Converting between bytes and character	InputStreamReader OutputStreamWriter	
Performing object serialization		ObjectInputStream ObjectOutputStream

Processing Streams


Type	Character Streams	Byte Streams
Performing data conversion		DataStream DataOutputStream
Counting	LineNumberReader	LineNumberInputStream
Peeking ahead	PushbackReader	PushbackInputStream
Printing	PrintWriter	PrintStream

The InputStream Class Hierarchy

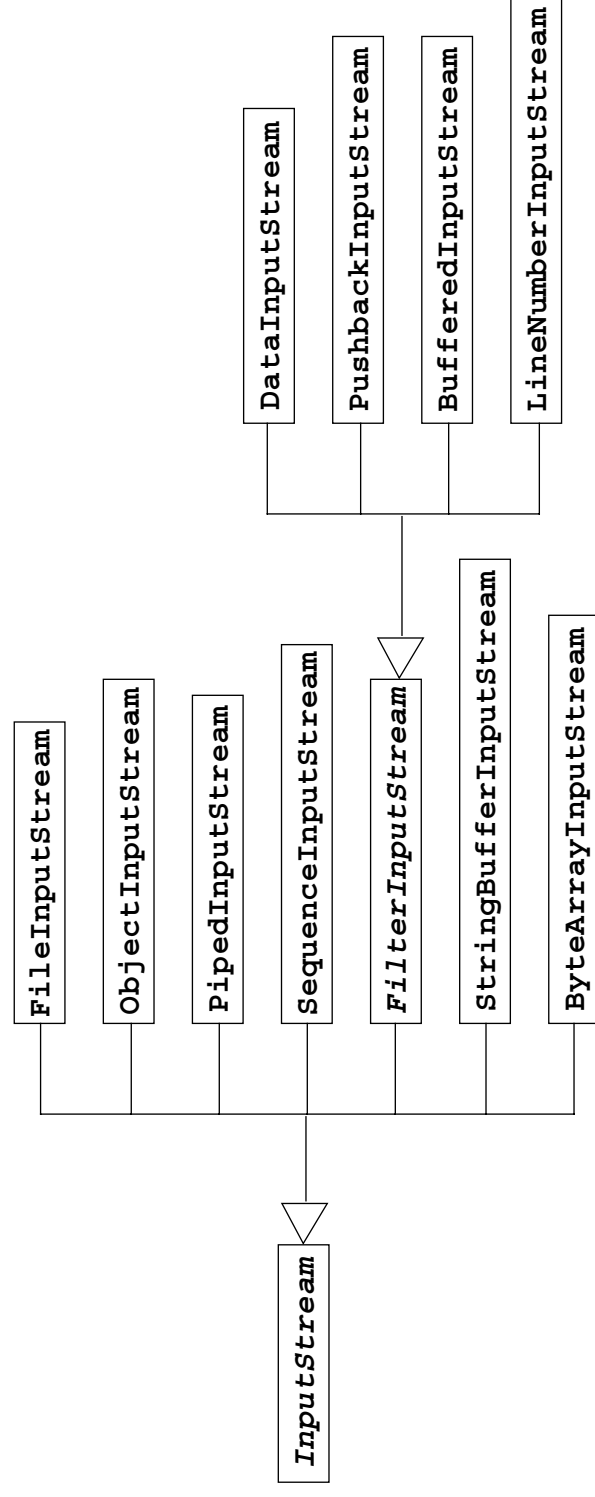





The OutputStream Class Hierarchy

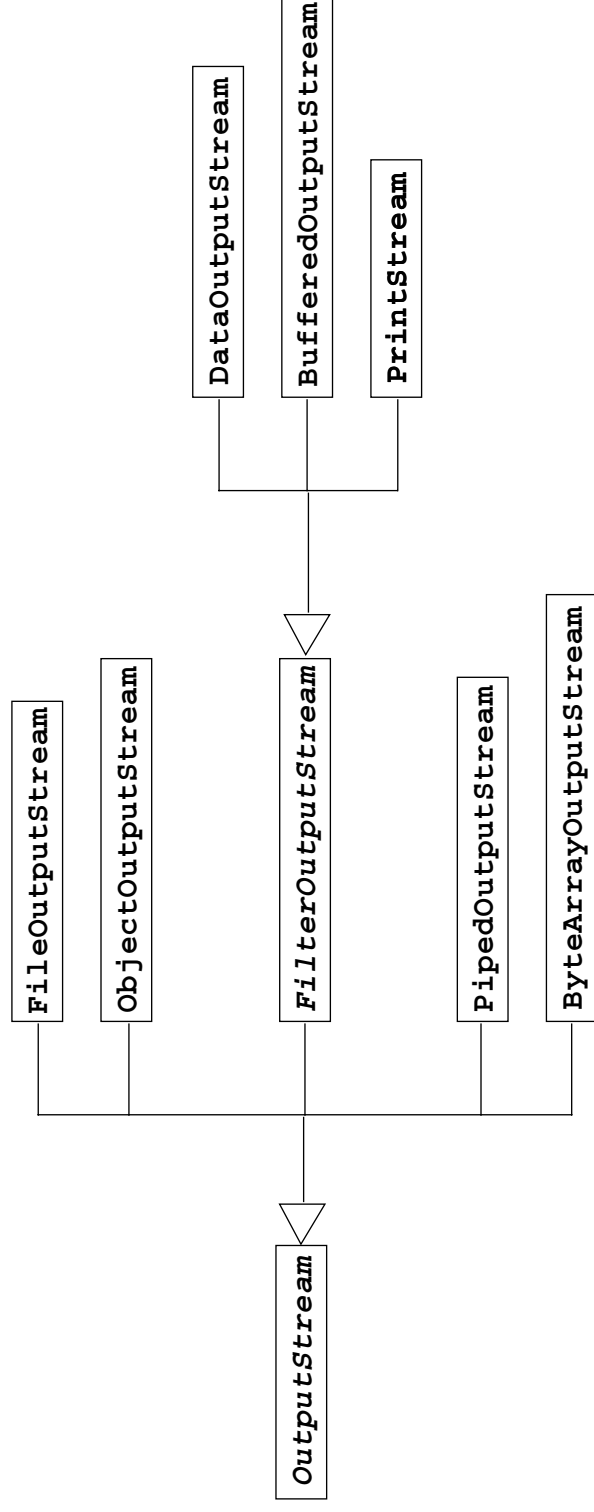



The Reader Class Hierarchy

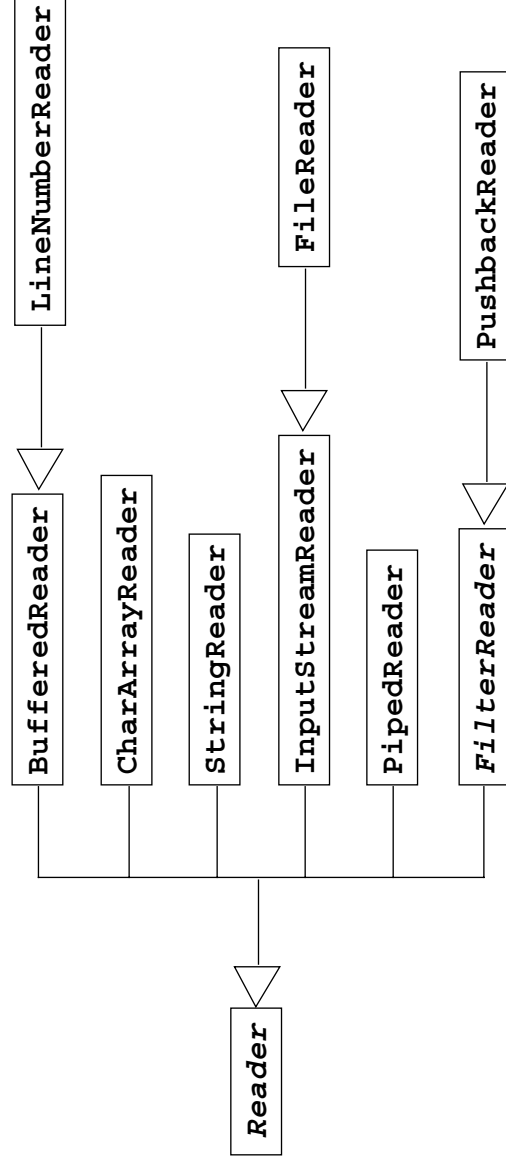



The `Writer` Class Hierarchy

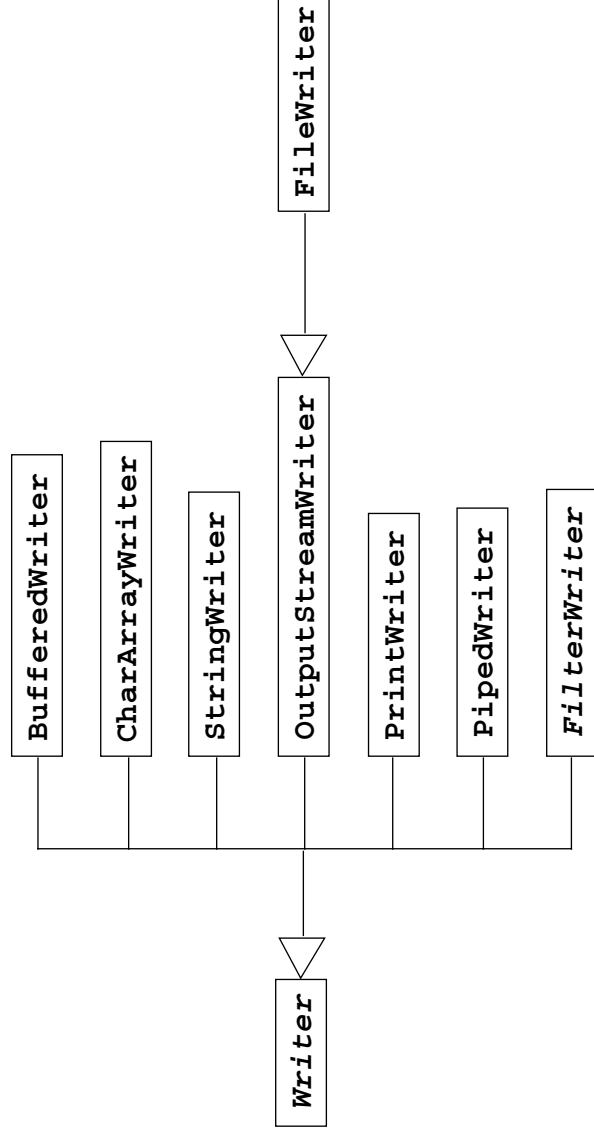




Sun Services


Module 15

Networking



Objectives

- Develop code to set up the network connection
- Understand the TCP/IP Protocol
- Use `ServerSocket` and `Socket` classes for implementation of TCP/IP clients and servers



Relevance

How can a communication link between a client machine and a server on the network be established?

Networking


This section describes networking concepts.

Sockets


- Sockets hold two streams: an input stream and an output stream.
- Each end of the socket has a pair of streams.

Setting Up the Connection

Set up of a network connection is similar to a telephone system: One end must *dial* the other end, which must be *listening*.




Networking

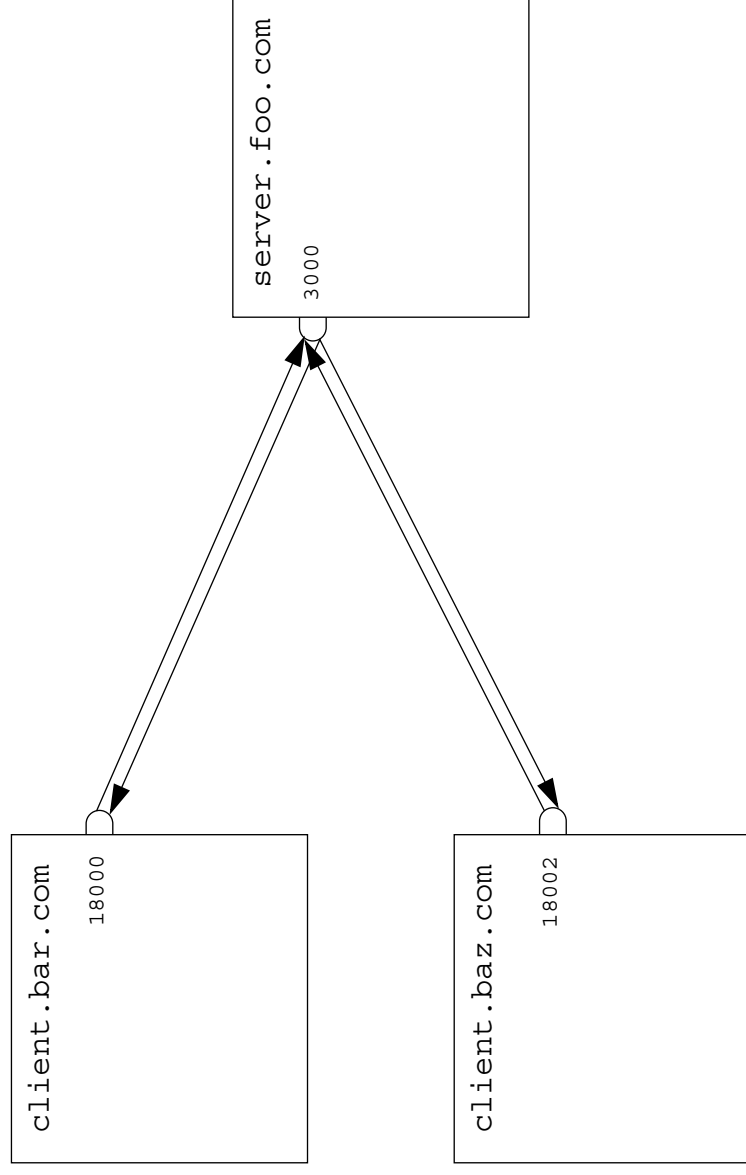

Networking With Java Technology


- To address the connection, include the following:
 - The address or name of remote machine
 - A port number to identify the purpose at the server
 - Port numbers range from 0–65535.

Java Networking Model

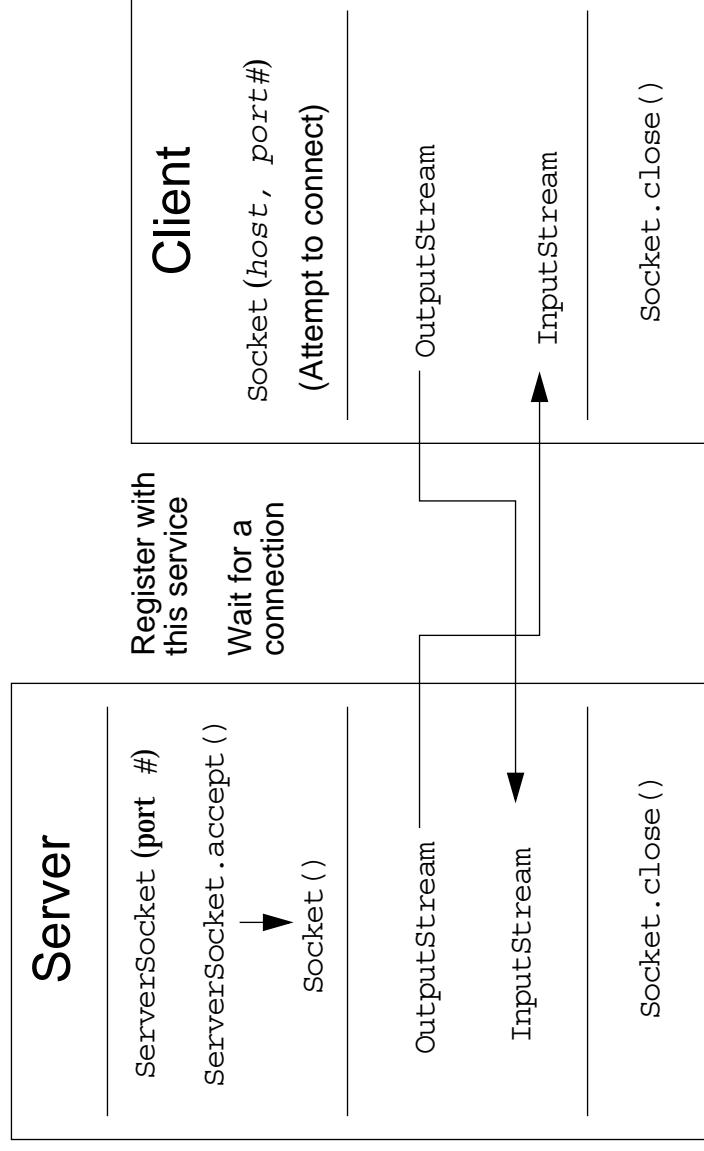

Minimal TCP/IP Server

```
1 import java.net.*;
2 import java.io.*;
3
4 public class SimpleServer {
5     public static void main(String args[]) {
6         ServerSocket s = null;
7
8         // Register your service on port 5432
9         try {
10             s = new ServerSocket(5432);
11         } catch (IOException e) {
12             e.printStackTrace();
13         }
```



Minimal TCP/IP Server

```
14
15 // Run the listen/accept loop forever
16 while (true) {
17     try {
18         // Wait here and listen for a connection
19         Socket s1 = s.accept();
20
21         // Get output stream associated with the socket
22         OutputStream s1out = s1.getOutputStream();
23         BufferedWriter bw = new BufferedWriter(
24             new OutputStreamWriter(s1out));
25
26         // Send your string!
27         bw.write("Hello Net World!\n");
```

Minimal TCP/IP Server

```
28
29      // Close the connection, but not the server socket
30      bw.close();
31      s1.close();
32
33      } catch (IOException e) {
34          e.printStackTrace();
35      } // END of try-catch
36
37      } // END of while(true)
38
39      } // END of main method
40
41  } // END of SimpleServer program
```

Minimal TCP/IP Client

```
1 import java.net.*;
2 import java.io.*;
3
4 public class SimpleClient {
5
6     public static void main(String args[]) {
7
8         try {
9             // Open your connection to a server, at port 5432
10            // localhost used here
11            Socket s1 = new Socket("127.0.0.1", 5432);
12
13            // Get an input stream from the socket
14            InputStream is = s1.getInputStream();
15            // Decorate it with a "data" input stream
16            DataInputStream dis = new DataInputStream(is);
```

Minimal TCP/IP Client

```
17
18 // Read the input and print it to the screen
19 System.out.println(dis.readUTF());
20
21 // When done, just close the stream and connection
22 dis.close();
23 s1.close();
24
25 } catch (ConnectException connExc) {
26     System.err.println("Could not connect.");
27
28 } catch (IOException e) {
29     // ignore
30 } // END of try-catch
31
32 } // END of main method
33
34 } // END of SimpleClient program
```



Java™ Programming Language

SL-275



Copyright 2006 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, U.S.A. All rights reserved.

This product or document is protected by copyright and distributed under licenses restricting its use, copying, distribution, and decompilation. No part of this product or document may be reproduced in any form by any means without prior written authorization of Sun and its licensors, if any.

Third-party software, including font technology, is copyrighted and licensed from Sun suppliers.

Sun, Sun Microsystems, the Sun Logo, Java, JavaBeans, JavaOS, JDBC, JDK, JVM, J2SE, Jini, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries.

UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Netscape Navigator is a trademark of Netscape Communications Corporation.

The OPEN LOOK and Sun Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

U.S. Government approval might be required when exporting the product.

RESTRICTED RIGHTS: Use, duplication, or disclosure by the U.S. Government is subject to restrictions of FAR 52.227-14(g)(2)(6/87) and FAR 52.227-19(6/87), or DFAR 252.227-7015 (b)(6/95) and DFAR 227.7202-3(a).

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS, AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Export Commodity Classification Number Assigned: 2 February 2002

Copyright 2006 Sun Microsystems Inc., 4150 Network Circle, Santa Clara, California 95054, Etats-Unis. Tous droits réservés.

Ce produit ou document est protégé par un copyright et distribué avec des licences qui en restreignent l'utilisation, la copie, la distribution, et la décompilation. Aucune partie de ce produit ou document ne peut être reproduite sous aucune forme, par quelque moyen que ce soit, sans l'autorisation préalable et écrite de Sun et de ses bailleurs de licence, s'il y en a.

Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun.

Sun, Sun Microsystems, the Sun Logo, Java, JavaBeans, JavaOS, JDBC, JDK, JVM, J2SE, Jini, et Solaris sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays.

UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

Netscape Navigator est une marque de Netscape Communications Corporation aux Etats-Unis et dans d'autres pays.

L'interface d'utilisation graphique OPEN LOOK et Sun™ a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui en outre se conforment aux licences écrites de Sun.

L'accord du gouvernement américain est requis avant l'exportation du produit.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFAÇON.


Course Contents

About This Course	Preface-xvi
Course Goals	Preface-xvii
Course Overview	Preface-xix
Course Map	Preface-xx
Topics Not Covered	Preface-xxi
How Prepared Are You?	Preface-xxii
Introductions	Preface-xxiii
How to Use the Icons	Preface-xxiv
Typographical Conventions and Symbols	Preface-xxv
 Getting Started	 1-1
Objectives	1-2
Relevance	1-3
What Is the Java™ Technology?	1-4
Primary Goals of the Java Technology	1-5
The Java Virtual Machine	1-8
Garbage Collection	1-11
The Java Runtime Environment	1-12
Operation of the JRE With a Just-In-Time (JIT) Compiler	1-13
JVM™ Tasks	1-14
The Class Loader	1-15
The Bytecode Verifier	1-16
A Simple Java Application	1-17
The TestGreeting Application	1-18
The Greeting Class	1-19
Compiling and Running the TestGreeting Program	1-20

Compile-Time Errors	1-21
Runtime Errors	1-22
Java Technology Runtime Environment	1-23

Object-Oriented Programming 2-1

Objectives	2-2
Relevance	2-3
Software Engineering	2-4
The Analysis and Design Phase	2-5
Abstraction	2-6
Classes as Blueprints for Objects	2-7
Declaring Java Technology Classes	2-8
Declaring Attributes	2-9
Declaring Methods	2-10
Accessing Object Members	2-11
Information Hiding	2-12
Encapsulation	2-14
Declaring Constructors	2-15
The Default Constructor	2-16
Source File Layout	2-17
Software Packages	2-18
The package Statement	2-19
The import Statement	2-20
Directory Layout and Packages	2-21
Development	2-22
Compiling Using the -d Option	2-23
Terminology Recap	2-24
Using the Java Technology API Documentation	2-25
Java Technology API Documentation With HTML3	2-26



Identifiers, Keywords, and Types	3-1
Objectives	3-2
Relevance	3-4
Comments	3-5
Semicolons, Blocks, and White Space	3-6
Identifiers	3-9
Java Programming Language Keywords	3-10
Primitive Types	3-11
Logical – boolean	3-12
Textual – char	3-13
Textual – String	3-14
Integral – byte, short, int, and long	3-15
Floating Point – float and double	3-17
Variables, Declarations, and Assignments	3-19
Java Reference Types	3-20
Constructing and Initializing Objects	3-21
Memory Allocation and Layout	3-22
Explicit Attribute Initialization	3-23
Executing the Constructor	3-24
Assigning a Variable	3-25
Assigning References	3-26
Pass-by-Value	3-27
The this Reference	3-32
Java Programming Language Coding Conventions	3-36

Expressions and Flow Control	4-1
Objectives	4-2
Relevance	4-4
Variables and Scope	4-5
Variable Scope Example	4-6

Variable Initialization	4-7
Initialization Before Use Principle	4-8
Operator Precedence	4-9
Logical Operators	4-10
Bitwise Logical Operators	4-11
Right-Shift Operators >> and >>>	4-12
Left-Shift Operator <<	4-13
Shift Operator Examples	4-14
String Concatenation With +	4-15
Casting	4-16
Promotion and Casting of Expressions	4-17
Simple if, else Statements	4-18
Complex if, else Statements	4-19
Switch Statements	4-21
Looping Statements	4-24
Special Loop Flow Control	4-27
The break Statement	4-28
The continue Statement	4-29
Using break Statements with Labels	4-30
Using continue Statements with Labels	4-31

Arrays	5-1
Objectives	5-2
Relevance	5-3
Declaring Arrays	5-4
Creating Arrays	5-5
Creating Reference Arrays	5-7
Initializing Arrays	5-9
Multidimensional Arrays	5-10
Array Bounds	5-12

Using the Enhanced for Loop	5-13
Array Resizing	5-14
Copying Arrays	5-15

Class Design	6-1
Objectives	6-2
Relevance	6-3
Subclassing	6-4
Single Inheritance	6-7
Access Control	6-9
Overriding Methods	6-10
Overridden Methods Cannot Be Less Accessible	6-12
Invoking Overridden Methods	6-13
Polymorphism	6-15
Virtual Method Invocation	6-17
Heterogeneous Collections	6-18
Polymorphic Arguments	6-19
The instanceof Operator	6-20
Casting Objects	6-21
Overloading Methods	6-23
Methods Using Variable Arguments	6-24
Overloading Constructors	6-25
Constructors Are Not Inherited	6-27
Invoking Parent Class Constructors	6-28
Constructing and Initializing Objects: A Slight Reprise	6-30
Constructor and Initialization Examples	6-31
The Object Class	6-34
The equals Method	6-35
An equals Example	6-36
The toString Method	6-40

Wrapper Classes	6-41
Autoboxing of Primitive Types	6-43

Advanced Class Features	7-1
Objectives	7-2
Relevance	7-3
The <code>static</code> Keyword	7-4
Class Attributes	7-5
Class Methods	7-7
Static Initializers	7-10
The <code>final</code> Keyword	7-12
Final Variables	7-13
Blank Final Variables	7-14
Old-Style Enumerated Type Idiom	7-15
The New Enumerated Type	7-19
Advanced Enumerated Types	7-23
Static Imports	7-25
Abstract Classes	7-27
The Solution	7-31
Interfaces	7-34
The Flyer Example	7-35
Multiple Interface Example	7-42
Uses of Interfaces	7-44

Exceptions and Assertions	8-1
Objectives	8-2
Relevance	8-3
Exceptions and Assertions	8-4
Exceptions	8-5
Exception Example	8-6

The try-catch Statement	8-7
Call Stack Mechanism	8-10
The finally Clause	8-11
Exception Categories	8-12
Common Exceptions	8-13
The Handle or Declare Rule	8-14
Method Overriding and Exceptions	8-15
Creating Your Own Exceptions	8-17
Handling a User-Defined Exception	8-18
Assertions	8-20
Recommended Uses of Assertions	8-21
Internal Invariants	8-22
Control Flow Invariants	8-23
Postconditions and Class Invariants	8-24
Controlling Runtime Evaluation of Assertions	8-25

Text-Based Applications	9-1
Objectives	9-2
Relevance	9-3
Command-Line Arguments	9-4
System Properties	9-6
The Properties Class	9-7
Console I/O	9-10
Writing to Standard Output	9-11
Reading From Standard Input	9-12
Simple Formatted Output	9-14
Simple Formatted Input	9-15
Files and File I/O	9-16
Creating a New File Object	9-17
The File Tests and Utilities	9-18

File Stream I/O	9-20
File Output Example	9-23
The Collections API	9-25
A Set Example	9-27
A List Example	9-28
Collections in JDK™ Version 1.1	9-29
Generics	9-30
Generic Collections API	9-31
Compiler Warnings	9-32
Iterators	9-33
The Iterator Interface Hierarchy	9-34
Enhanced for Loop	9-35

Building Java GUIs	10-1
Objectives	10-2
Relevance	10-3
Abstract Window Toolkit	10-4
The java.awt Package	10-5
Containers	10-6
Positioning Components	10-7
Frames	10-8
The FrameExample Class	10-9
Example Frame	10-10
Panels	10-11
The FrameWithPanel Class	10-12
Layout Managers	10-15
Default Layout Managers	10-16
A Simple FlowLayout Example	10-17
The FlowLayout Manager	10-20
The FlowExample Class	10-22

The BorderLayout Manager	10-24
Organization of the Border Layout Components	10-25
The BorderExample Class	10-26
Example of BorderLayout	10-28
The GridLayout Manager	10-29
The GridExample Class	10-30
Example of GridLayout	10-32
The ComplexLayoutExample Class	10-33
Drawing in AWT	10-36
Various Shapes Drawn by the Graphics Object	10-37

GUI Event Handling	11-1
Objectives	11-2
Relevance	11-3
What Is an Event?	11-4
Delegation Model	11-5
A Listener Example	11-7
Event Categories	11-9
Method Categories and Interfaces	11-10
Complex Example	11-13
Multiple Listeners	11-17
Event Adapters	11-18
Event Handling Using Inner Classes	11-19
Event Handling Using Anonymous Classes	11-21


GUI-Based Applications	12-1
Objectives	12-2
Relevance	12-3
AWT Components	12-4
AWT Listeners	12-7

How to Create a Menu	12-9
Creating a MenuBar	12-10
Creating a Menu	12-11
Creating a MenuItem	12-13
Creating a CheckBoxMenuItem	12-15
Controlling Visual Aspects	12-17
J.F.C./Swing Technology	12-18


Threads	13-1
Objectives	13-2
Relevance	13-3
Threads	13-4
Creating the Thread	13-5
Starting the Thread	13-7
Thread Scheduling	13-8
Thread Scheduling Example	13-9
Terminating a Thread	13-10
Basic Control of Threads	13-12
The join Method	13-13
Other Ways to Create Threads	13-14
Selecting a Way to Create Threads	13-15
Using the synchronized Keyword	13-16
The Object Lock Flag	13-17
Releasing the Lock Flag	13-20
Using synchronized – Putting It Together	13-21
Thread State Diagram With Synchronization	13-23
Deadlock	13-24
Thread Interaction – wait and notify	13-25
Thread Interaction	13-26
Thread State Diagram With wait and notify	13-27

Monitor Model for Synchronization	13-28
The Producer Class	13-29
The Consumer Class	13-31
The SyncStack Class	13-33
The pop Method	13-34
The push Method	13-35
The SyncTest Class	13-36
The SyncTest Class	13-37

Advanced I/O Streams	14-1
Objectives	14-2
Relevance	14-3
I/O Fundamentals	14-4
Fundamental Stream Classes	14-5
Data Within Streams	14-6
The InputStream Methods	14-7
The OutputStream Methods	14-8
The Reader Methods	14-9
The Writer Methods	14-10
Node Streams	14-11
A Simple Example	14-12
Buffered Streams	14-14
I/O Stream Chaining	14-16
Processing Streams	14-17
The InputStream Class Hierarchy	14-19
The OutputStream Class Hierarchy	14-20
The Reader Class Hierarchy	14-21
The Writer Class Hierarchy	14-22



Networking	15-1
Objectives	15-2
Relevance	15-3
Networking	15-4
Networking With Java Technology	15-6
Java Networking Model	15-7
Minimal TCP/IP Server	15-8
Minimal TCP/IP Client	15-11



Sun Services


Preface

About This Course

Course Goals

This course provides you with knowledge and skills to:

- Create Java™ technology applications that leverage the object-oriented features of the Java language, such as encapsulation, inheritance, and polymorphism
- Execute a Java technology application from the command-line
- Use Java technology data types and expressions
- Use Java technology flow control constructs
- Use arrays and other data collections
- Implement error-handling techniques using exception handling




Course Goals

- Create an event-driven graphical user interface (GUI) by using Java technology GUI components: panels, buttons, labels, text fields, and text areas
- Implement input/output (I/O) functionality to read from and write to data and text files
- Create multithreaded programs
- Create a simple Transmission Control Protocol/Internet Protocol (TCP/IP) client that communicates through sockets

Course Overview


This course describes the following areas:

- The syntax of the Java programming language
- Object-oriented concepts as they apply to the Java programming language
- GUI programming
- Multithreading
- Networking




Course Map


The Java Programming Language Basics

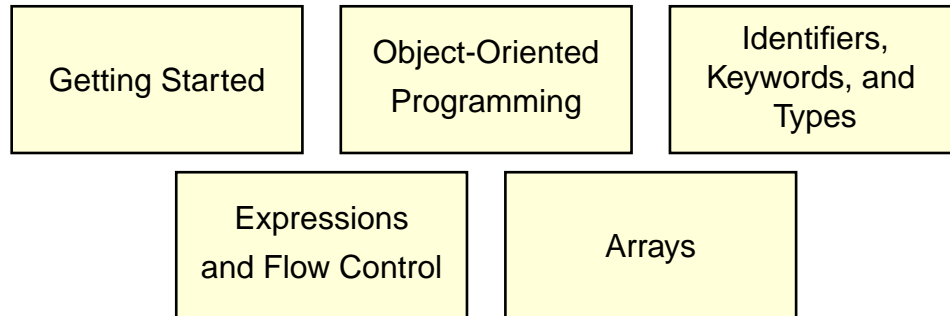


More Object-Oriented Programming

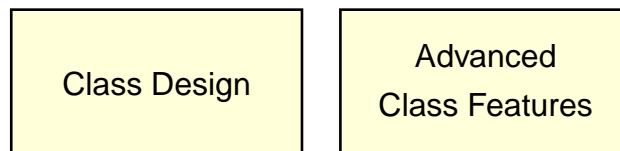


Building Applications

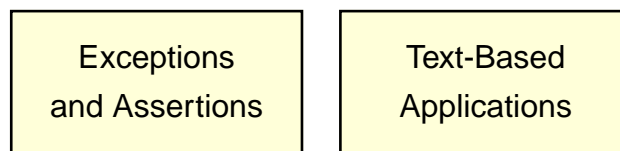


Developing Graphical User Interfaces

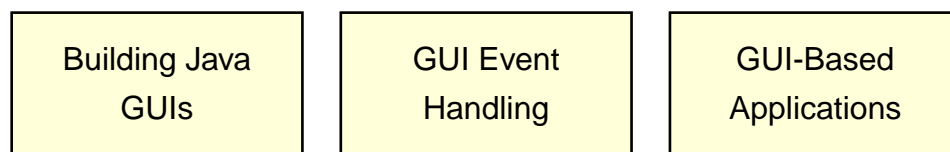

Advanced Java Programming

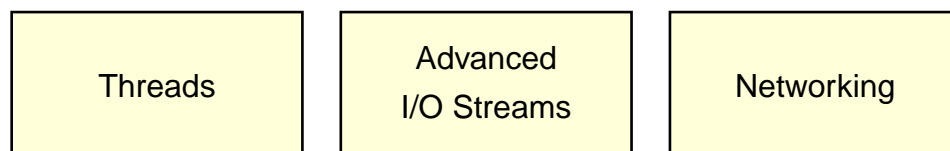




Topics Not Covered

- Object-oriented analysis and design – Covered in OO-226: *Object-Oriented Application Analysis and Design Using UML*
- General programming concepts – Covered in SL-110: *Fundamentals of the Java™ Programming Language*

How Prepared Are You?

Before attending this course, you should have completed SL-110: *Fundamentals of the JavaTM Programming Language*, or have:

- Created and compiled programs with C or C++
- Created and edited text files using a text editor
- Used a World Wide Web (WWW) browser, such as Netscape NavigatorTM



Introductions

- Name
- Company affiliation
- Title, function, and job responsibility
- Experience related to topics presented in this course
- Reasons for enrolling in this course
- Expectations for this course

How to Use the Icons

Additional resources



Discussion



Note



Caution



Visual Aid



Typographical Conventions and Symbols

- `Courier` is used for the names of commands, files, directories, programming code, programming constructs, and on-screen computer output.
- **`Courier`** **bold** is used for characters and numbers that you type, and for each line of programming code that is referenced in a textual description.
- *`Courier italics`* is used for variables and command-line placeholders that are replaced with a real name or value.
- ***`Courier italics bold`*** is used to represent variables whose values are to be entered by the student as part of an activity.


Typographical Conventions and Symbols

- *Palatino italics* is used for book titles, new words or terms, or words that are emphasized.

Additional Conventions

Java programming language examples use the following additional conventions:


- `Courier` is used for the class names, methods, and keywords.
- Methods are not followed by parentheses unless a formal or actual parameter list is shown.
- Line breaks occur where there are separations, conjunctions, or white space in the code.
- If a command on the Solaris[™] Operating System (Solaris OS) is different from the Microsoft Windows platform, both commands are shown.



Sun Services

Module 1


Getting Started



Objectives

- Describe the key features of Java technology
- Write, compile, and run a simple Java technology application
- Describe the function of the Java Virtual Machine (JVM™)
- Define garbage collection
- List the three tasks performed by the Java platform that handle code security

NOTE: The terms “Java Virtual Machine” and “JVM” mean a Virtual Machine for the Java™ platform.



Relevance

- Is the Java programming language a complete language or is it useful only for writing programs for the Web?
- Why do you need another programming language?
- How does the Java technology platform improve on other language platforms?

What Is the Java™ Technology?

- Java technology is:
 - A programming language
 - A development environment
 - An application environment
 - A deployment environment
- It is similar in syntax to C++.
- It is used for developing both *applets* and *applications*.

Primary Goals of the Java Technology

- Provides an easy-to-use language by:
 - Avoiding many pitfalls of other languages
 - Being object-oriented
 - Enabling users to create streamlined and clear code
- Provides an interpreted environment for:
 - Improved speed of development
 - Code portability

Primary Goals of the Java Technology

- Enables users to run more than one thread of activity
- Loads classes dynamically; that is, at the time they are actually needed
- Supports changing programs dynamically during runtime by loading classes from disparate sources
- Furnishes better security

Primary Goals of the Java Technology

The following features fulfill these goals:

- The Java Virtual Machine (JVM™)¹
- Garbage collection
- The Java Runtime Environment (JRE)
- JVM tool interface

1. The terms "Java Virtual Machine" and "JVM" mean a Virtual Machine for the Java platform

The Java Virtual Machine

- Provides hardware platform specifications
- Reads compiled byte codes that are platform-independent
- Is implemented as software or hardware
- Is implemented in a Java technology development tool or a Web browser

The Java Virtual Machine

JVM provides definitions for the:

- Instruction set (central processing unit [CPU])
- Register set
- Class file format
- Stack
- Garbage-collected heap
- Memory area
- Fatal error reporting
- High-precision timing support

The Java Virtual Machine


- The majority of type checking is done when the code is compiled.
- Implementation of the JVM approved by Sun Microsystems must be able to run any compliant class file.
- The JVM executes on multiple operating environments.

Garbage Collection


- Allocated memory that is no longer needed should be deallocated.
- In other languages, deallocation is the programmer's responsibility.
- The Java programming language provides a system-level thread to track memory allocation.
- Garbage collection has the following characteristics:
 - Checks for and frees memory no longer needed
 - Is done automatically
 - Can vary dramatically across JVM implementations


The Java Runtime Environment

The Java application environment performs as follows:

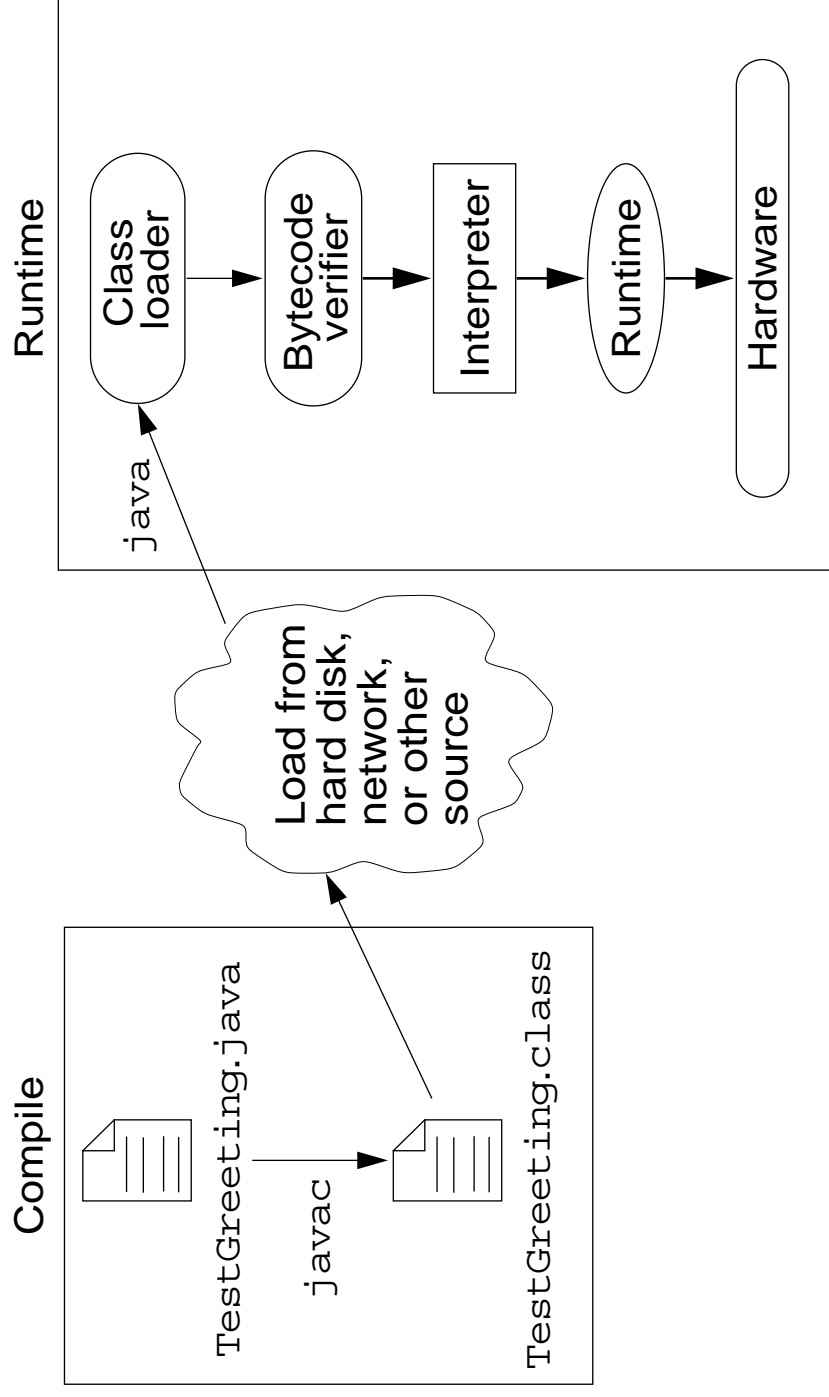

Operation of the JRE With a Just-In-Time Compiler

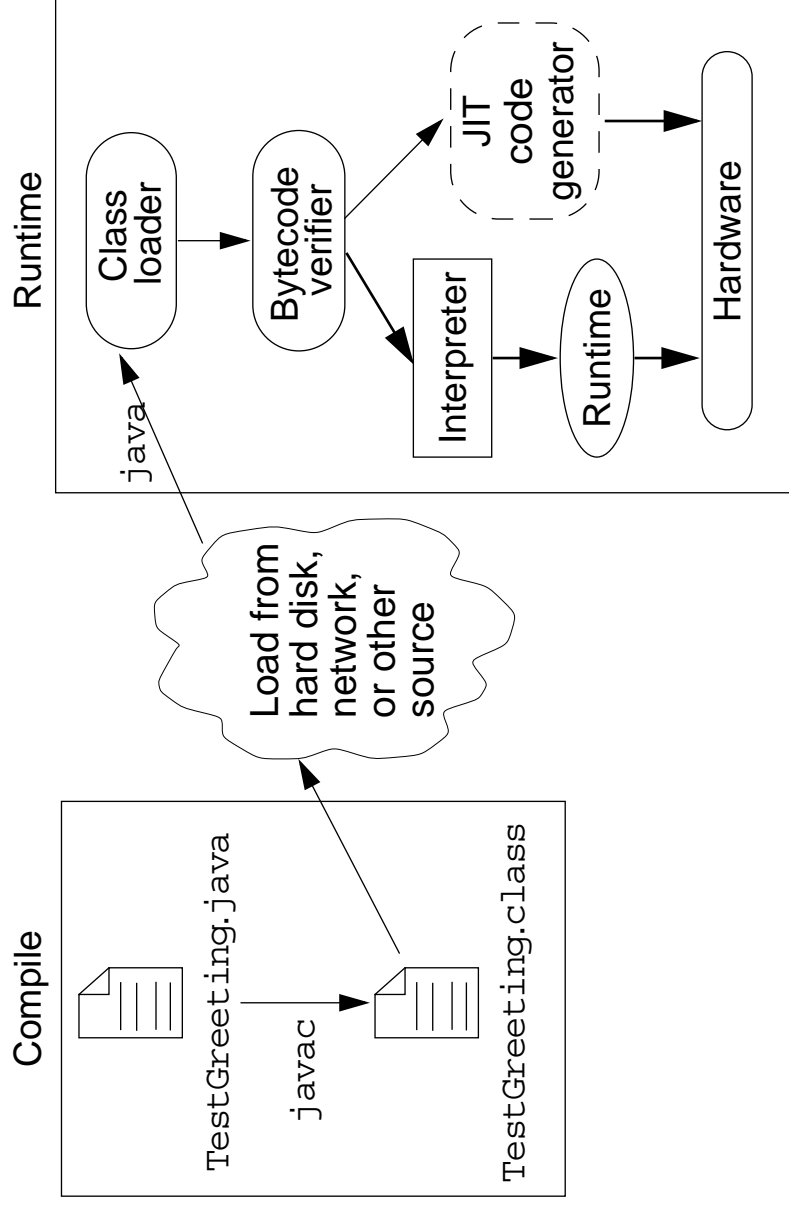




JVM™ Tasks

The JVM performs three main tasks:

- Loads code
- Verifies code
- Executes code



The Class Loader

- Loads all classes necessary for the execution of a program
- Maintains classes of the local file system in separate *namespaces*
- Prevents spoofing

The Bytecode Verifier

Ensures that:

- The code adheres to the JVM specification.
- The code does not violate system integrity.
- The code causes no operand stack overflows or underflows.
- The parameter types for all operational code are correct.
- No illegal data conversions (the conversion of integers to pointers) have occurred.


A Simple Java Application

The TestGreeting.java Application

```
1 //  
2 // Sample "Hello World" application  
3 //  
4 public class TestGreeting {  
5     public static void main (String[] args) {  
6         Greeting hello = new Greeting();  
7         hello.greet();  
8     }  
9 }
```


The Greeting.java Class

```
1 public class Greeting {  
2     public void greet() {  
3         System.out.println("hi");  
4     }  
5 }
```



The TestGreeting Application

- Comment lines
- Class declaration
- The `main` method
- Method body




The Greeting Class

- Class declaration
- The greet method


Compiling and Running the TestGreeting Program

- Compile TestGreeting.java:
`javac TestGreeting.java`
- The Greeting.java is compiled automatically.
- Run the application by using the following command:
`java TestGreeting`
- Locate common compile and runtime errors.



Compile-Time Errors


- javac: Command not found
- Greeting.java:4: cannot resolve symbol
symbol : method println (java.lang.String)
location: class java.io.PrintStream
System.out.println("hi");
^
- TestGreet.java:4: Public class TestGreeting
must be defined in a file called
"TestGreeting.java".




Runtime Errors

- Can't find class TestGreeting
- Exception in thread "main"
`java.lang.NoSuchMethodError: main`

Java Technology Runtime Environment

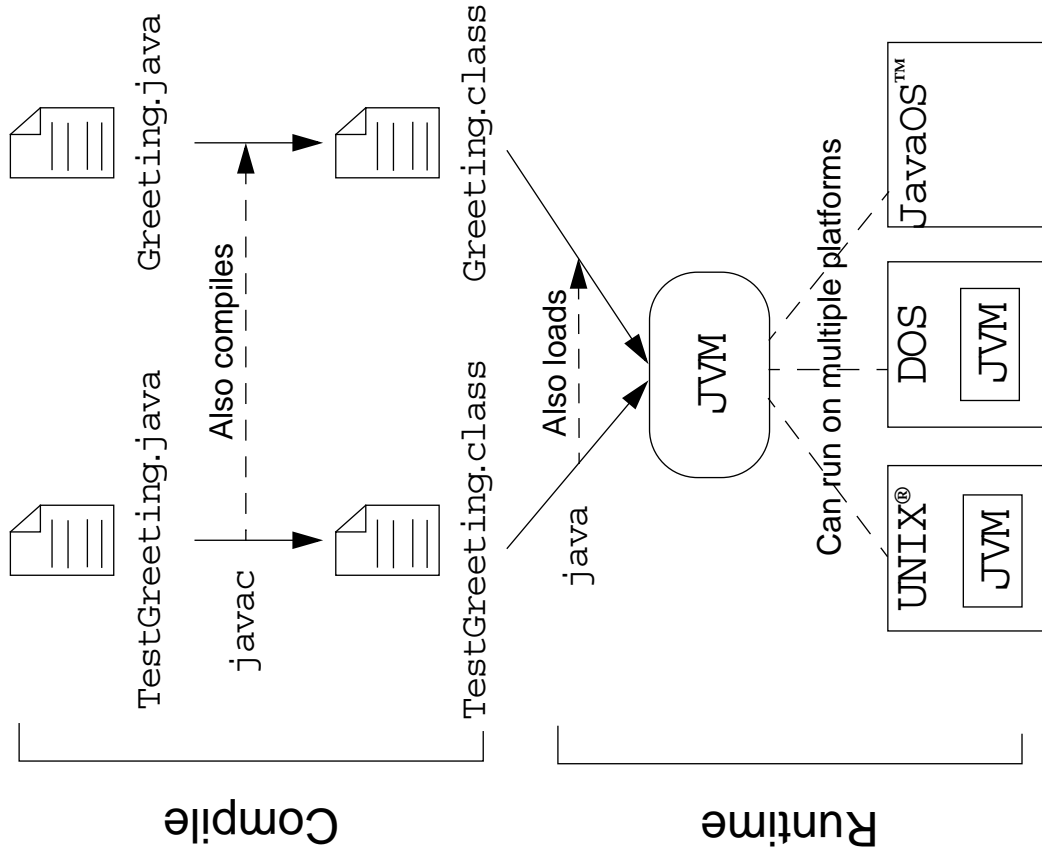




Sun Services

Module 2

Object-Oriented Programming


Objectives

- Define modeling concepts: *abstraction*, *encapsulation*, and *packages*
- Discuss why you can reuse Java technology application code
- Define *class*, *member*, *attribute*, *method*, *constructor*, and *package*
- Use the access modifiers `private` and `public` as appropriate for the guidelines of encapsulation
- Invoke a method on a particular object
- Use the Java technology application programming interface (API) online documentation



Relevance

- What is your understanding of software analysis and design?
- What is your understanding of design and code reuse?
- What features does the Java programming language possess that make it an object-oriented language?
- Define the term *object-oriented*.



Software Engineering

Toolkits / Frameworks / Object APIs (1990s–Up)				
Java 2 SDK	AWT / J.F.C./Swing	Jini™	JavaBeans™	JDBC™

Object-Oriented Languages (1980s–Up)				
SELF	Smalltalk	Common Lisp	Object System	Eiffel C++ Java

Libraries / Functional APIs (1960s–Early 1980s)				
NASTRAN	TCP/IP	ISAM	X-Windows	OpenLook

High-Level Languages (1950s–Up)			Operating Systems (1960s–Up)	
Fortran	LISP	C COBOL	OS/360 UNIX	MacOS Microsoft Windows

Machine Code (Late 1940s–Up)				
------------------------------	--	--	--	--

The Analysis and Design Phase

- Analysis describes *what* the system needs to do:
Modeling the real-world, including actors and activities, objects, and behaviors
- Design describes *how* the system does it:
 - Modeling the relationships and interactions between objects and actors in the system
 - Finding useful abstractions to help simplify the problem or solution

Abstraction

- Functions – Write an algorithm once to be used in many situations
- Objects – Group a related set of attributes and behaviors into a class
- Frameworks and APIs – Large groups of objects that support a complex activity; Frameworks can be used as is or be modified to extend the basic behavior

Classes as Blueprints for Objects

- In manufacturing, a blueprint describes a device from which many physical devices are constructed.
- In software, a class is a description of an object:
 - A class describes the data that each object includes.
 - A class describes the behaviors that each object exhibits.
- In Java technology, classes support three key features of object-oriented programming (OOP):
 - Encapsulation
 - Inheritance
 - Polymorphism

Declaring Java Technology Classes

- Basic syntax of a Java class:

```
<modifier>* class <class_name> {  
    <attribute_declaration>*  
    <constructor_declaration>*  
    <method_declaration>*  
}
```

- Example:

```
1 public class Vehicle {  
2     private double maxLoad;  
3     public void setMaxLoad(double value) {  
4         maxLoad = value;  
5     }  
6 }
```


Declaring Attributes

- Basic syntax of an attribute:

`<modifier>* <type> <name> [= <initial_value>] ;`

- Examples:

```
1 public class Foo {  
2     private int x;  
3     private float y = 10000.0F;  
4     private String name = "Bates Motel";  
5 }
```

Declaring Methods

- Basic syntax of a method:

```
<modifier>* <return_type> <name> ( <argument>* ) {  
    <statement>*  
}
```

- Examples:

```
1 public class Dog {  
2     private int weight;  
3     public int getWeight() {  
4         return weight;  
5     }  
6     public void setWeight(int newWeight) {  
7         if ( newWeight > 0 ) {  
8             weight = newWeight;  
9         }  
10    }  
11 }
```

Accessing Object Members

- The *dot* notation is: `<object>.<member>`
- This is used to access object members, including attributes and methods.
- Examples of dot notation are:

```
d.setWeight(42);  
d.weight = 42; // only permissible if weight is public
```

Information Hiding

The problem:

MyDate
+day : int
+month : int
+year : int

Client code has direct access to internal data (d refers to a MyDate object):

```
d.day = 32;  
// invalid day  
  
d.month = 2; d.day = 30;  
// plausible but wrong  
  
d.day = d.day + 1;  
// no check for wrap around
```

Information Hiding

The solution:

MyDate
-day : int -month : int -year : int
+getDay() : int +getMonth() : int +getYear() : int +setDay(int) : boolean +setMonth(int) : boolean +setYear(int) : boolean

Verify days in month


Client code must use setters and getters to access internal data:

```
MyDate d = new MyDate();

d.setDay(32);
// invalid day, returns false

d.setMonth(2);
d.setDay(30);
// plausible but wrong,
// setDay returns false


d.setDay(d.getDay() + 1);
// this will return false if wrap around
// needs to occur
```



Encapsulation

- Hides the implementation details of a class
- Forces the user to use an interface to access data
- Makes the code more maintainable

MyDate
-date : long
+getDay() : int +getMonth() : int +getYear() : int +setDay(int) : boolean +setMonth(int) : boolean +setYear(int) : boolean -isValid(int) : boolean




Declaring Constructors

- Basic syntax of a constructor:

```
[<modifier>] <class_name> ( <argument>* ) {  
    <statement>*  
}
```

- Example:

```
1 public class Dog {  
2  
3     private int weight;  
4  
5     public Dog() {  
6         weight = 42;  
7     }  
8 }
```



The Default Constructor

- There is always at least one constructor in every class.
- If the writer does not supply any constructors, the default constructor is present automatically:
 - The default constructor takes no arguments
 - The default constructor body is empty
- The default enables you to create object instances with `new Xxx ()` without having to write a constructor.

Source File Layout


- Basic syntax of a Java source file is:

*[<package_declaration>]
<import_declaration>*
<class_declaration>+*
- For example, the `VehicleCapacityReport.java` file is:

```
1 package shipping.reports;  
2  
3 import shipping.domain.*;  
4 import java.util.List;  
5 import java.io.*;  
6  
7 public class VehicleCapacityReport {  
8     private List vehicles;  
9     public void generateReport(Writer output) {...}  
10 }
```

Software Packages

- Packages help manage large software systems.
- Packages can contain classes and sub-packages.

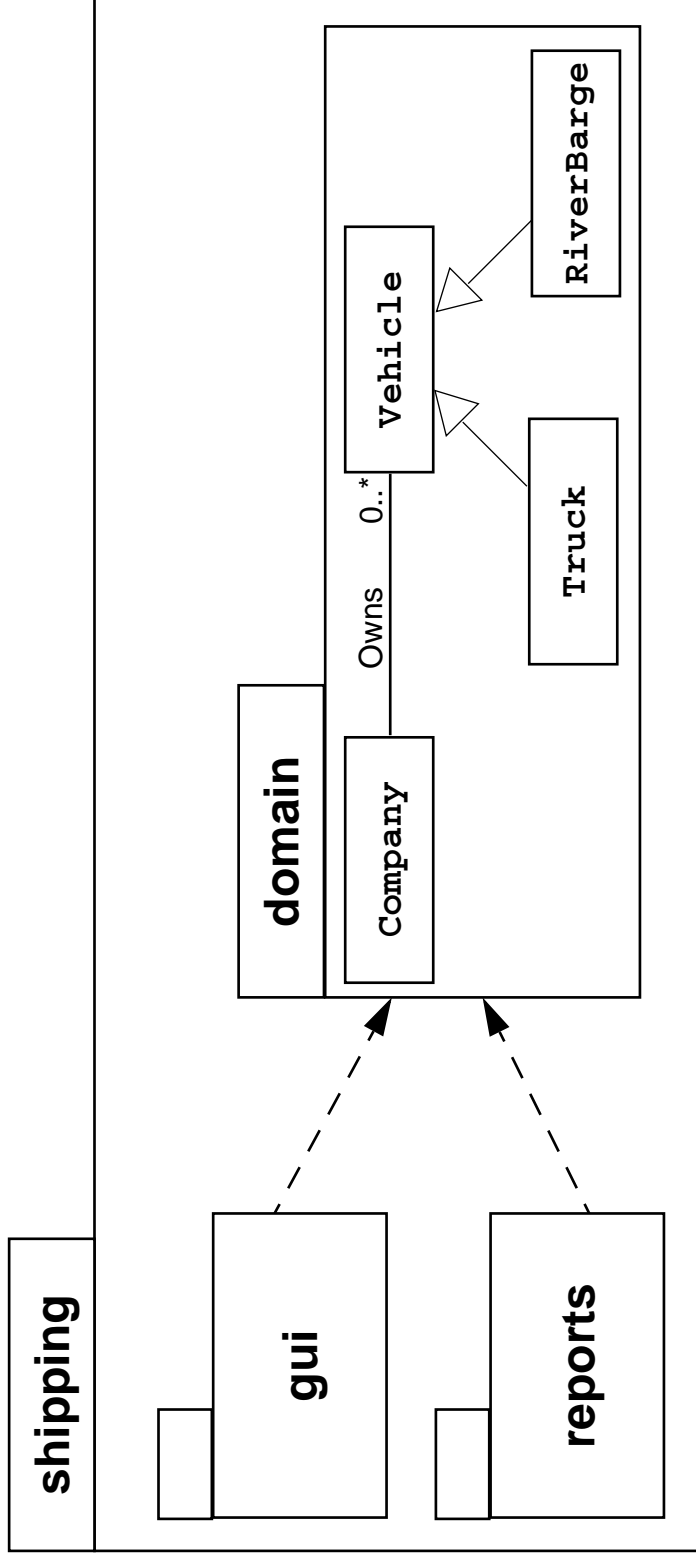

The package Statement

- Basic syntax of the package statement is:
`package <top_pkg_name>[.<sub_pkg_name>]*;`
- Examples of the statement are:
`package shipping.gui.reportscreens;`
- Specify the package declaration at the beginning of the source file.
- Only one package declaration per source file.
- If no package is declared, then the class is placed into the default package.
- Package names must be hierarchical and separated by dots.

The import Statement

- Basic syntax of the import statement is:

```
import <pkg_name>[.<sub_pkg_name>]*.<class_name>;  
OR  
import <pkg_name>[.<sub_pkg_name>]*.*;
```


- Examples of the statement are:


```
import java.util.List;  
import java.io.*;  
import shipping.gui.reportscreens.*;
```

- The import statement does the following:
 - Precedes all class declarations
 - Tells the compiler where to find classes


Directory Layout and Packages


- Packages are stored in the directory tree containing the package name.
- An example is the shipping application packages.

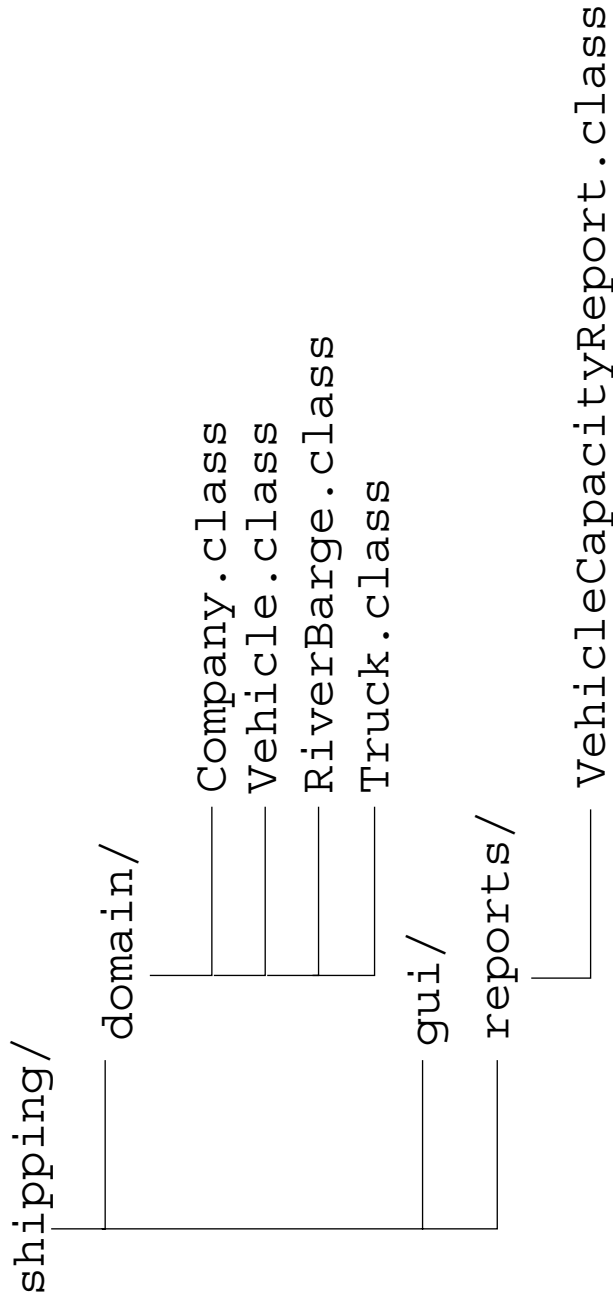



Development

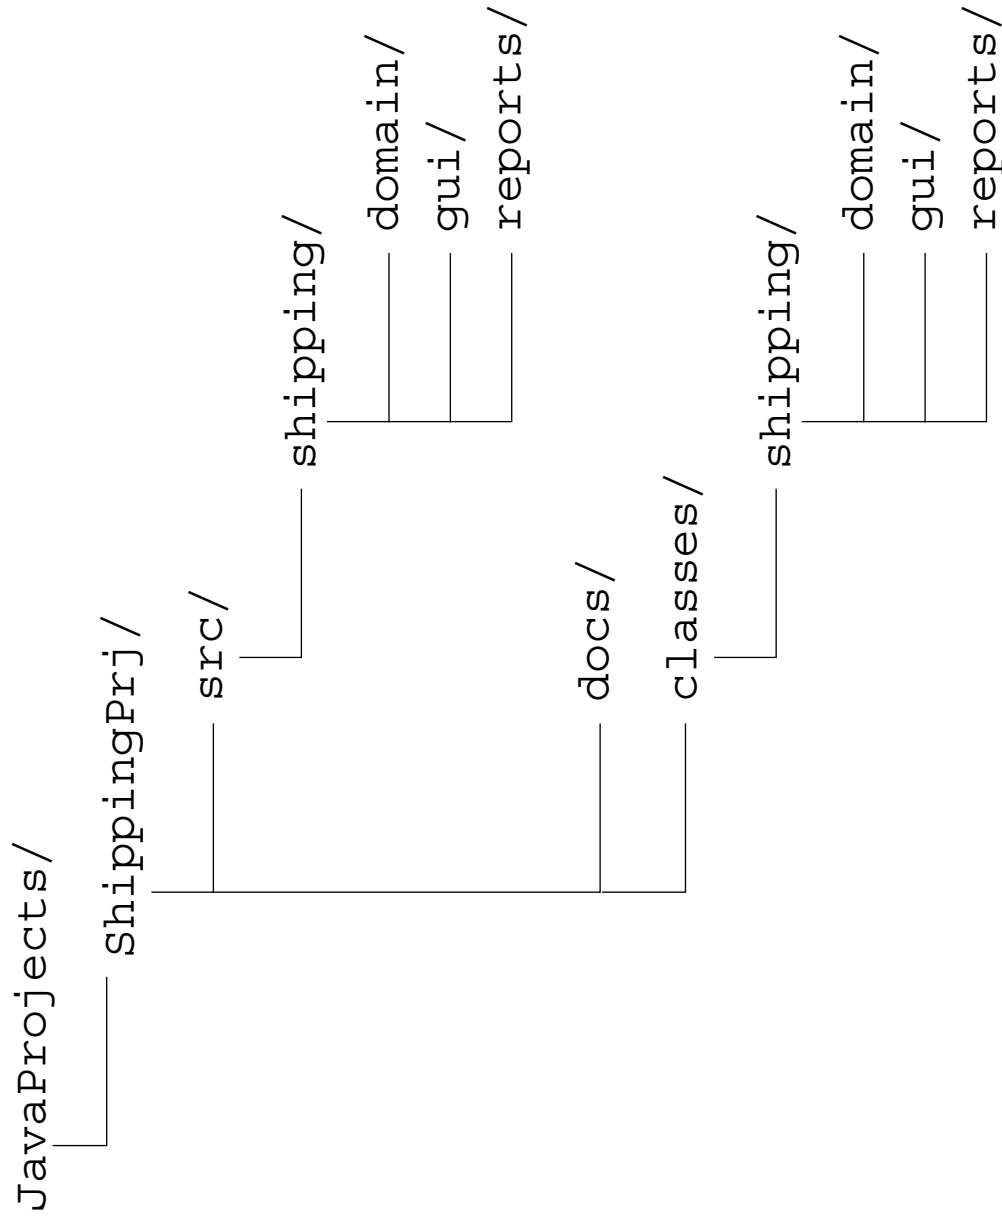



Compiling Using the -d Option


```
cd JavaProjects/ShippingPrj/src  
javac -d ../classes shipping/domain/*.java
```

Terminology Recap

- Class – The source-code blueprint for a run-time object
- Object – An instance of a class; also known as *instance*
- Attribute – A data element of an object; also known as *data member*, *instance variable*, and *data field*
- Method – A behavioral element of an object; also known as *algorithm*, *function*, and *procedure*
- Constructor – A *method-like* construct used to initialize a new object
- Package – A grouping of classes and sub-packages

Using the Java Technology API Documentation

- A set of Hypertext Markup Language (HTML) files provides information about the API.
- A frame describes a package and contains hyperlinks to information describing each class in that package.
- A class document includes the class hierarchy, a description of the class, a list of member variables, a list of constructors, and so on.



Java Technology API Documentation With HTML3


The screenshot shows a web browser window titled "Object (Java 2 Platform SE 5.0) – Web Browser". The address bar shows the file path: `file:///opt/java/docs/api/index.html`. The browser has a menu bar (File, Edit, View, Go, Bookmarks, Tools, Window, Help) and a toolbar with navigation buttons. Below the toolbar is a bookmarks bar with links like "Java Store", "Apple Training", "Admin", "SES", "Java", "Tomcat", "Java Web Tech", and "Personal".

The main content area displays the "Java™ 2 Platform Standard Ed. 5.0" API documentation for the `java.lang.Object` class. The left sidebar lists various packages and classes, including `java.applet`, `java.awt`, `java.awt.color`, `java.awt.datatransfer`, `java.awt.dnd`, `java.awt.event`, `java.awt.font`, and `java.awt.geom`. The main content area has tabs for "Overview", "Package", "Class", "Use", "Tree", "Deprecated", "Index", and "Help". The "Class" tab is selected, showing the "Class Object" page.

The page content includes the following sections:

- Overview**: A brief description of the `Object` class, stating it is the root of the class hierarchy.
- Constructor Summary**: A table listing the `Object()` constructor.
- Method Summary**: A table listing various methods of the `Object` class, including `clone()`, `equals()`, `finalize()`, `getClass()`, `hashCode()`, `notify()`, and `notifyAll()`.


The status bar at the bottom shows the file path: `file:///opt/java/docs/api/java/lang/Object.html`.



Sun Services


Module 3

Identifiers, Keywords, and Types




Objectives

- Use comments in a source program
- Distinguish between valid and invalid identifiers
- Recognize Java technology keywords
- List the eight primitive types
- Define literal values for numeric and textual types
- Define the terms *primitive variable* and *reference variable*




Objectives

- Declare variables of class type
- Construct an object using `new`
- Describe default initialization
- Describe the significance of a reference variable
- State the consequences of assigning variables of class type



Relevance

- Do you know the primitive Java types?
- Can you describe the difference between variables holding primitive values as compared with object references?



Comments

The three permissible styles of comment in a Java technology program are:

```
// comment on one line
```

```
/* comment on one  
 * or more lines  
 */
```

```
/** documentation comment  
 * can also span one or more lines  
 */
```

Semicolons, Blocks, and White Space

- A *statement* is one or more lines of code terminated by a semicolon (;):

```
totals = a + b + c  
        + d + e + f;
```

- A *block* is a collection of statements bound by opening and closing braces:

```
{  
    x = y + 1;  
    y = x + 1;  
}
```



Semicolons, Blocks, and White Space

- A *class* definition uses a special block:

```
public class MyDate {  
    private int day;  
    private int month;  
    private int year;  
}
```

- You can nest block statements.

```
while ( i < large ) {  
    a = a + i;  
    // nested block  
    if ( a == max ) {  
        b = b + a;  
        a = 0;  
    }  
    i = i + 1;  
}
```



Semicolons, Blocks, and White Space

- Any amount of *white space* is permitted in a Java program.

For example:

```
{int x;x=23*54;}
```

is equivalent to:

```
{  
    int x;  
  
    x = 23 * 54;  
}
```

Identifiers

Identifiers have the following characteristics:

- Are names given to a variable, class, or method
- Can start with a Unicode letter, underscore (`_`), or dollar sign (`$`)
- Are case-sensitive and have no maximum length
- Examples:

```
identifier  
userName  
user_name  
_sys_var1  
$change
```

Java Programming Language Keywords

abstract	continue	for	new	switch
assert	default	goto	package	synchronized
boolean	do	if	private	this
break	double	implements	protected	throw
byte	else	import	public	throws
case	enum	instanceof	return	transient
catch	extends	int	short	try
char	final	interface	static	void
class	finally	long	strictfp	volatile
const	float	native	super	while

Reserved literal words: null, true, and false

Primitive Types

The Java programming language defines eight primitive types:

- Logical – boolean
- Textual – char
- Integral – byte, short, int, and long
- Floating – double and float

Logical – boolean

The boolean primitive has the following characteristics:

- The boolean data type has two literals, `true` and `false`.
- For example, the statement:

```
boolean truth = true;
```

declares the variable `truth` as boolean type and assigns it a value of `true`.

Textual – char

The textual `char` primitive has the following characteristics:

- Represents a 16-bit Unicode character
- Must have its literal enclosed in single quotes (' ')
- Uses the following notations:

<code>'a'</code>	The letter a
<code>'\t'</code>	The tab character
<code>'\u????'</code>	A specific Unicode character, <code>????</code> , is replaced with exactly four hexadecimal digits . For example, <code>'\u03A6'</code> is the Greek letter phi [Φ].

Textual – String

The textual String type has the following characteristics:

- Is not a primitive data type; it is a class
- Has its literal enclosed in double quotes (" ")

"The quick brown fox jumps over the lazy dog."

- Can be used as follows:

```
String greeting = "Good Morning !! \n";  
String errorMessage = "Record Not Found !";
```


Integral – byte, short, int, and long

The integral primitives have the following characteristics:

- Integral primitives use three forms: Decimal, octal, or hexadecimal

2	The decimal form for the integer 2.
077	The leading 0 indicates an octal value.
0xBAAC	The leading 0x indicates a hexadecimal value.

- Literals have a default type of `int`.
- Literals with the suffix `L` or `l` are of type `long`.

Integral – byte, short, int, and long

- Integral data types have the following ranges:

Integer Length	Name or Type	Range
8 bits	byte	-2^7 to $2^7 - 1$
16 bits	short	-2^{15} to $2^{15} - 1$
32 bits	int	-2^{31} to $2^{31} - 1$
64 bits	long	-2^{63} to $2^{63} - 1$

Floating Point – float and double

The floating point primitives have the following characteristics:


- Floating-point literal includes either a decimal point or one of the following:
 - **E** or **e** (add exponential value)
 - **F** or **f** (float)
 - **D** or **d** (double)

3.14	A simple floating-point value (a double)
6.02E23	A large floating-point value
2.718F	A simple float size value
123.4E+306D	A large double value with redundant D

Floating Point – float and double

- Literals have a default type of double.
- Floating-point data types have the following sizes:

Float Length	Name or Type
32 bits	float
64 bits	double



Variables, Declarations, and Assignments

```
1  public class Assign {
2      public static void main (String args []) {
3          // declare integer variables
4          int x, y;
5          // declare and assign floating point
6          float z = 3.414f;
7          // declare and assign double
8          double w = 3.1415;
9          // declare and assign boolean
10         boolean truth = true;
11         // declare character variable
12         char c;
13         // declare String variable
14         String str;
15         // declare and assign String variable
16         String str1 = "bye";
17         // assign value to char variable
18         c = 'A';
19         // assign value to String variable
20         str = "Hi out there!";
21         // assign values to int variables
22         x = 6;
23         y = 1000;
24     }
25 }
```

Java Reference Types

- In Java technology, beyond primitive types all others are reference types.
- A *reference variable* contains a *handle* to an object.
- For example:


```
1 public class MyDate {  
2     private int day = 1;  
3     private int month = 1;  
4     private int year = 2000;  
5     public MyDate(int day, int month, int year) { ... }  
6     public String toString() { ... }  
7 }
```

```
1 public class TestMyDate {  
2     public static void main(String[] args) {  
3         MyDate today = new MyDate(22, 7, 1964);  
4     }  
5 }
```

Constructing and Initializing Objects

- Calling `new XYZ()` performs the following actions:
 - a. Memory is allocated for the object.
 - b. Explicit attribute initialization is performed.
 - c. A constructor is executed.
 - d. The object reference is returned by the `new` operator.
- The reference to the object is assigned to a variable.
- An example is:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```



Memory Allocation and Layout

- A declaration allocates storage only for a reference:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```


my_birth	????
----------	------

- Use the new operator to allocate space for `MyDate`:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

my_birth	????
----------	------

day	0
month	0
year	0




Explicit Attribute Initialization

- Initialize the attributes as follows:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

my_birth	???
day	1
month	1
year	2000

- The default values are taken from the attribute declaration in the class.




Executing the Constructor

- Execute the matching constructor as follows:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

my_birth	???
day	22
month	7
year	1964


- In the case of an overloaded constructor, the first constructor can call another.




Assigning a Variable

- Assign the newly created object to the reference variable as follows:

```
MyDate my_birth = new MyDate(22, 7, 1964);
```

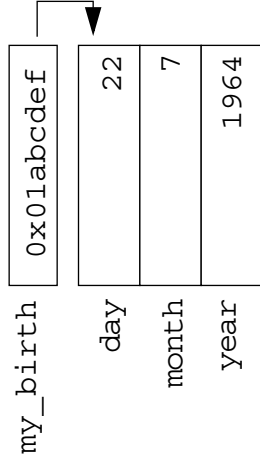




Assigning References


- Two variables refer to a single object:


```
1 int x = 7;  
2 int y = x;  
3 MyDate s = new MyDate(22, 7, 1964);  
4 MyDate t = s;
```

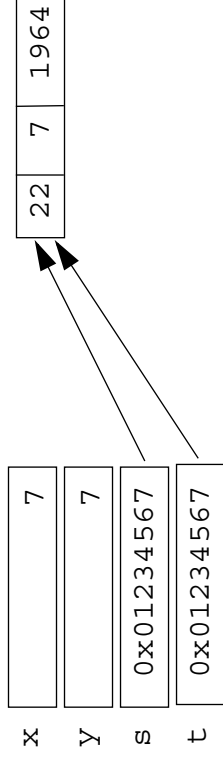

- Reassignment makes two variables point to two objects:

```
5 t = new MyDate(22, 12, 1964);
```

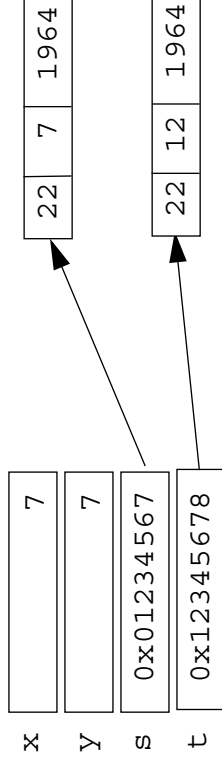




Pass-by-Value

- In a single virtual machine, the Java programming language only passes arguments by value.
- When an object instance is passed as an argument to a method, the value of the argument is a *reference* to the object.
- The *contents* of the object can be changed in the called method, but the original object reference is never changed.

Pass-by-Value

```
1 public class PassTest {  
2  
3     // Methods to change the current values  
4     public static void changeInt(int value) {  
5         value = 55;  
6     }  
7     public static void changeObjectRef(MyDate ref) {  
8         ref = new MyDate(1, 1, 2000);  
9     }  
10    public static void changeObjectAttr(MyDate ref) {  
11        ref.setDay(4);  
12    }  
}
```




Pass-by-Value

```
13
14     public static void main(String args[]) {
15         MyDate date;
16         int val;
17
18         // Assign the int
19         val = 11;
20         // Try to change it
21         changeInt(val);
22         // What is the current value?
23         System.out.println("Int value is: " + val);
```

The result of this output is:

Int value is: 11



Pass-by-Value

```
24
25      // Assign the date
26      date = new MyDate(22, 7, 1964);
27      // Try to change it
28      changeObjectRef(date);
29      // What is the current value?
30      System.out.println("MyDate: " + date);
```

The result of this output is:

MyDate: 22-7-1964

Pass-by-Value

```
31
32      // Now change the day attribute
33      // through the object reference
34      changeObjectAttr(date);
35      // What is the current value?
36      System.out.println("MyDate: " + date);
37  }
38 }
```

The result of this output is:

MyDate: 4-7-1964


The `this` Reference

Here are a few uses of the `this` keyword:

- To resolve ambiguity between instance variables and parameters
- To pass the current object as a parameter to another method or constructor

The `this` Reference

```
1  public class MyDate {
2      private int day = 1;
3      private int month = 1;
4      private int year = 2000;
5
6      public MyDate(int day, int month, int year) {
7          this.day = day;
8          this.month = month;
9          this.year = year;
10     }
11     public MyDate(MyDate date) {
12         this.day = date.day;
13         this.month = date.month;
14         this.year = date.year;
15     }
```



The `this` Reference

```
16
17     public MyDate addDays(int moreDays) {
18         MyDate newDate = new MyDate(this);
19         newDate.day = newDate.day + moreDays;
20         // Not Yet Implemented: wrap around code...
21         return newDate;
22     }
23     public String toString() {
24         return "\"" + day + "-" + month + "-" + year;
25     }
26 }
```

The this Reference

```
1 public class TestMyDate {
2     public static void main(String[] args) {
3         MyDate my_birth = new MyDate(22, 7, 1964);
4         MyDate the_next_week = my_birth.addDays(7);
5
6         System.out.println(the_next_week);
7     }
8 }
```

Java Programming Language Coding Conventions

- **Packages:**
`com.example.domain;`
- **Classes, interfaces, and enum types:**
`SavingsAccount`
- **Methods:**
`getAccount ()`
- **Variables:**
`currentCustomer`
- **Constants:**
`HEAD_COUNT`

Java Programming Language Coding Conventions

- Control structures:


```
if ( condition ) {  
    statement1;  
} else {  
    statement2;  
}
```

- Spacing:

- Use one statement per line.
- Use two or four spaces for indentation.

- Comments:


- Use `//` to comment inline code.
- Use `/**` documentation `*/` for class members.



Sun Services


Module 4

Expressions and Flow Control




Objectives

- Distinguish between instance and local variables
- Describe how to initialize instance variables
- Identify and correct a Possible reference before assignment compiler error
- Recognize, describe, and use Java software operators
- Distinguish between legal and illegal assignments of primitive types



Objectives

- Identify boolean expressions and their requirements in control constructs
- Recognize assignment compatibility and required casts in fundamental types
- Use if, switch, for, while, and do constructions and the labeled forms of break and continue as flow control structures in a program



Relevance

- What types of variables are useful to programmers?
- Can multiple classes have variables with the same name and, if so, what is their scope?
- What types of control structures are used in other languages? What methods do these languages use to control flow?

Variables and Scope

Local variables are:

- Variables that are defined inside a method and are called *local*, *automatic*, *temporary*, or *stack* variables
- Variables that are created when the method is executed and are destroyed when the method is exited

Variable initialization comprises the following:

- Local variables require explicit initialization.
- Instance variables are initialized automatically.

Variable Scope Example

```

public class ScopeExample {
    private int i=1;


    public void firstMethod() {
        int i=4, j=5;


        this.i = i + j;
        secondMethod(7);
    }
    public void secondMethod(int i) {
        int j=8;
        this.i = i + j;
    }
}

public class TestScoping {
    public static void main(String[] args) {
        ScopeExample scope = new ScopeExample();

        scope.firstMethod();
    }
}

```

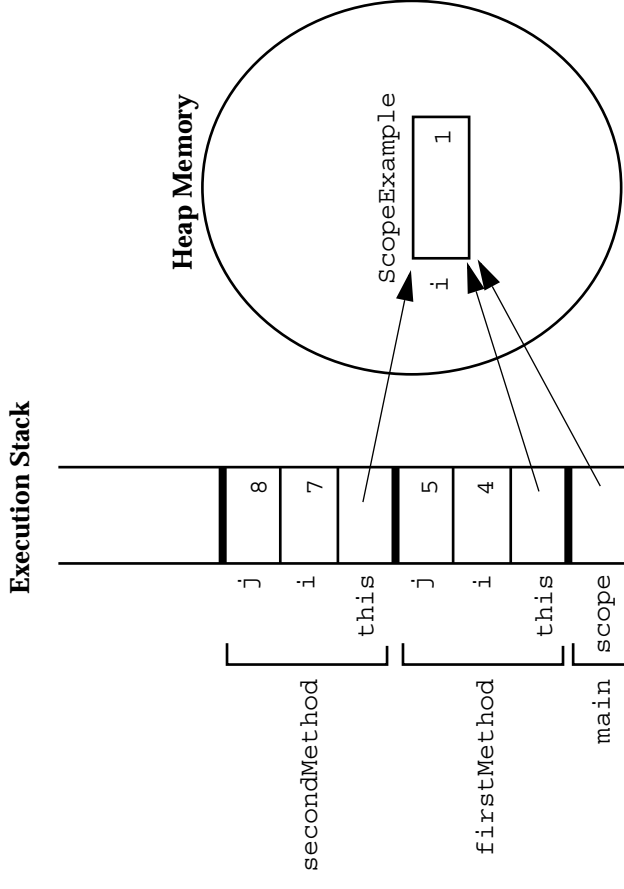



Variable Initialization

Variable	Value
byte	0
short	0
int	0
long	0L
float	0.0F
double	0.0D
char	'\u0000'
boolean	false
All reference types	null

Initialization Before Use Principle

The compiler will verify that local variables have been initialized before used.

```
3    public void doComputation() {
4        int x = (int) (Math.random() * 100);
5        int y;
6        int z;
7        if (x > 50) {
8            y = 9;
9        }
10       z = y + x; // Possible use before initialization
11    }
```

javac TestInitBeforeUse.java

```
TestInitBeforeUse.java:10: variable y might not have been initialized
    z = y + x; // Possible use before initialization
        ^
1 error
```

Operator Precedence

Operators	Associative
++ -- + unary - unary ~ ! (<i><data_type></i>)	R to L
* /	L to R
+ -	L to R
<< >> >>>	L to R
< > <= >= instanceof	L to R
== !=	L to R
&	L to R
^	L to R
	L to R
&&	L to R
	L to R
<i><boolean_expr> ? <expr1> : <expr2></i>	R to L
= *= /= %= += -= <=> >> >>= &= ^= =	R to L

Logical Operators

- The boolean operators are:

!	-	NOT	&	-	AND
	-	OR	^	-	XOR

- The short-circuit boolean operators are:

&&	-	AND		-	OR
----	---	-----	--	---	----

- You can use these operators as follows:

```
MyDate d = reservation.getDepartureDate();
if ( (d != null) && (d.day > 31) {
    // do something with d
}
```

Bitwise Logical Operators

- The integer *bitwise* operators are:

~ - Complement & - AND
 ^ - XOR | - OR

- Byte-sized examples include:

~	0	1	0	0	1	1	1	1
	1	0	1	1	0	0	0	0
	0	1	0	0	1	1	1	1
	0	0	1	0	1	1	0	1
&	0	1	0	0	1	1	1	1
	0	0	0	0	1	1	0	1

^	0	1	0	0	1	1	1	1
	0	1	0	0	1	1	1	1
	0	0	1	0	1	1	0	1
	0	1	0	0	1	1	1	1
	0	1	0	0	1	1	1	1
	0	1	1	0	1	1	1	1


Right-Shift Operators \gg and \ggg

- *Arithmetic or signed* right shift (\gg) operator:

- Examples are:

128	$\gg 1$	returns	$128/2^1$	=	64
256	$\gg 4$	returns	$256/2^4$	=	16
-256	$\gg 4$	returns	$-256/2^4$	=	-16

- The sign bit is copied during the shift.
- *Logical or unsigned right-shift* (\ggg) operator:
- This operator is used for bit patterns.
- The sign bit is not copied during the shift.



Left-Shift Operator <<

- Left-shift (<<) operator works as follows:

128 << 1 returns 128 * 2^1 = 256
16 << 2 returns 16 * 2^2 = 64

Shift Operator Examples

1357 =

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	1	1	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

-1357 =

1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	1	0	0	1	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

1357 >> 5 =

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

-1357 >> 5 =

1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

1357 >>> 5 =

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

-1357 >>> 5 =

0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

1357 << 5 =

0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	1	1	0	1	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

-1357 << 5 =

1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	0	1	1	0	0	1	1	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

String Concatenation With +

- The + operator works as follows:
 - Performs String concatenation
 - Produces a new String:

```
String salutation = "Dr.";
String name = "Pete" + " " + "Seymour";
String title = salutation + " " + name;
```
- One argument must be a String object.
- Non-strings are converted to String objects automatically.

Casting

- If information might be lost in an assignment, the programmer must confirm the assignment with a cast.
- The assignment between `long` and `int` requires an explicit cast.

```
long bigValue = 99L;
int squashed = bigValue;           // Wrong, needs a cast
int squashed = (int) bigValue;     // OK

int squashed = 99L;
int squashed = (int) 99L;          // Wrong, needs a cast
int squashed = 99;                 // OK, but...
int squashed = 99;                 // default integer literal
```

Promotion and Casting of Expressions

- Variables are promoted automatically to a longer form (such as `int` to `long`).
- Expression is *assignment-compatible* if the variable type is at least as large (the same number of bits) as the expression type.

```
long bigval = 6;           // 6 is an int type, OK
int smallval = 99L;        // 99L is a long, illegal

double z = 12.414F;        // 12.414F is float, OK
float z1 = 12.414;         // 12.414 is double, illegal
```


Simple if, else Statements

The if statement syntax:

```
if ( <boolean_expression> )  
    <statement_or_block>
```

Example:

```
if ( x < 10 )  
    System.out.println("Are you finished yet?");
```

or (*recommended*):

```
if ( x < 10 ) {  
    System.out.println("Are you finished yet?");  
}
```

Complex if, else Statements

The if-else statement syntax:

```
if ( <boolean_expression> )  
    <statement_or_block>  
else  
    <statement_or_block>
```

Example:

```
if ( x < 10 ) {  
    System.out.println("Are you finished yet?");  
} else {  
    System.out.println("Keep working...");  
}
```

Complex if, else Statements

The if-else-if statement syntax:

```
if ( <boolean_expression> )  
    <statement_or_block>  
else if ( <boolean_expression> )  
    <statement_or_block>
```

Example:

```
int count = getCount(); // a method defined in the class  
if (count < 0) {  
    System.out.println("Error: count value is negative.");  
} else if (count > getMaxCount()) {  
    System.out.println("Error: count value is too big.");  
} else {  
    System.out.println("There will be " + count +  
        " people for lunch today.");  
}
```

Switch Statements

The switch statement syntax:

```
switch ( <expression> ) {  
    case <constant1>:  
        <statement_or_block>*  
        [break;]  
    case <constant2>:  
        <statement_or_block>*  
        [break;]  
    default:  
        <statement_or_block>*  
        [break;]  
}
```

Switch Statements

A switch statement example:

```
switch ( carModel ) {  
    case DELUXE:  
        addAirConditioning();  
        addRadio();  
        addWheels();  
        addEngine();  
        break;  
    case STANDARD:  
        addRadio();  
        addWheels();  
        addEngine();  
        break;  
    default:  
        addWheels();  
        addEngine();  
}
```

Switch Statements

This switch statement is equivalent to the previous example:

```
switch ( carModel ) {  
    case DELUXE:  
        addAirConditioning();  
    case STANDARD:  
        addRadio();  
    default:  
        addWheels();  
        addEngine();  
}
```

Without the break statements, the execution falls through each subsequent case clause.

Looping Statements

The for loop:

```
for ( <init_expr>; <test_expr>; <alter_expr> )  
    <statement_or_block>
```

Example:

```
for ( int i = 0; i < 10; i++ )  
    System.out.println(i + " squared is " + (i*i));
```

or (*recommended*):

```
for ( int i = 0; i < 10; i++ ) {  
    System.out.println(i + " squared is " + (i*i));  
}
```

Looping Statements

The while loop:

```
while ( <test_expr> )  
    <statement_or_block>
```

Example:

```
int i = 0;  
while ( i < 10 ) {  
    System.out.println(i + " squared is " + (i*i));  
    i++;  
}
```



Looping Statements

The do/while loop:

```
do
    <statement_or_block>
while ( <test_expr> );
```

Example:

```
int i = 0;
do {
    System.out.println(i + " squared is " + (i*i));
    i++;
} while ( i < 10 );
```



Special Loop Flow Control

- The **break** [*<label>]* ; command
- The **continue** [*<label>]* ; command
- The *<label>* : *<statement>* command, where *<statement>* should be a loop

The break Statement

```
1  do {  
2      statement;  
3      if ( condition ) {  
4          break;  
5      }  
6      statement;  
7  } while ( test_expr );
```

The `continue` Statement


```
1  do {  
2      statement;  
3      if ( condition ) {  
4          continue;  
5      }  
6      statement;  
7  } while ( test_expr );
```

Using break Statements with Labels

```
1  outer:
2      do {
3          statement1;
4          do {
5              statement2;
6              if ( condition ) {
7                  break outer;
8              }
9              statement3;
10         } while ( test_expr );
11         statement4;
12     } while ( test_expr );
```

Using `continue` Statements with Labels


```
1  test:
2    do {
3        statement1;
4    } do {
5        statement2;
6        if ( condition ) {
7            continue test;
8        }
9        statement3;
10       } while ( test_expr );
11       statement4;
12   } while ( test_expr );
```



Sun Services


Module 5

Arrays




Objectives

- Declare and create arrays of primitive, class, or array types
- Explain why elements of an array are initialized
- Explain how to initialize the elements of an array
- Determine the number of elements in an array
- Create a multidimensional array
- Write code to copy array values from one array to another



Relevance

What is the purpose of an array?



Declaring Arrays

- Group data objects of the same type.
- Declare arrays of primitive or class types:

```
char s[] ;  
Point p[] ;
```

```
char [] s;  
Point [] p;
```

- Create space for a reference.
- An array is an object; it is created with `new`.


Creating Arrays

Use the new keyword to create an array object.

For example, a primitive (char) array:

```
1 public char[] createArray() {  
2     char[] s;  
3  
4     s = new char[26];  
5     for ( int i=0; i<26; i++ ) {  
6         s[i] = (char) ( 'A' + i );  
7     }  
8  
9     return s;  
10 }
```

Creating an Array of Character Primitives

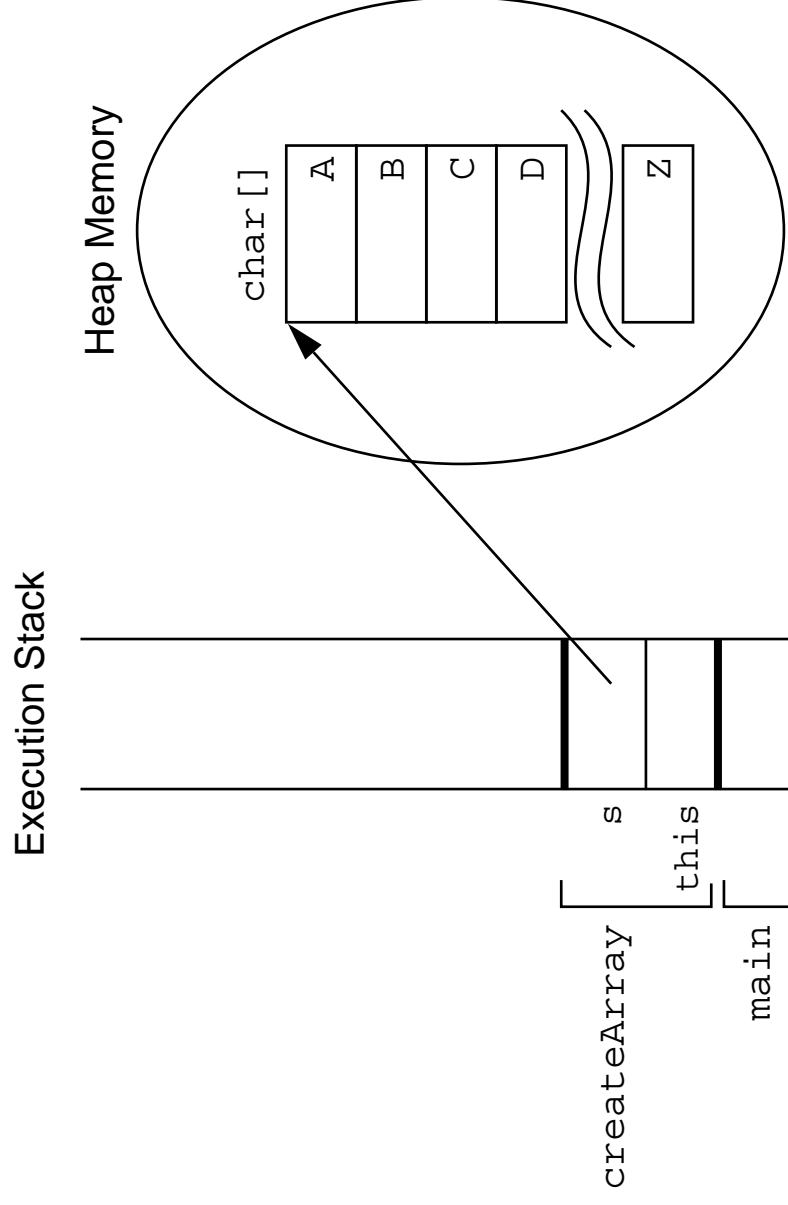


Creating Reference Arrays

Another example, an object array:

```
1  public Point[] createArray() {  
2      Point[] p;  
3  
4      p = new Point[10];  
5      for ( int i=0; i<10; i++ ) {  
6          p[i] = new Point(i, i+1);  
7      }  
8  
9      return p;  
10 }
```

Creating an Array of Character Primitives With Point Objects

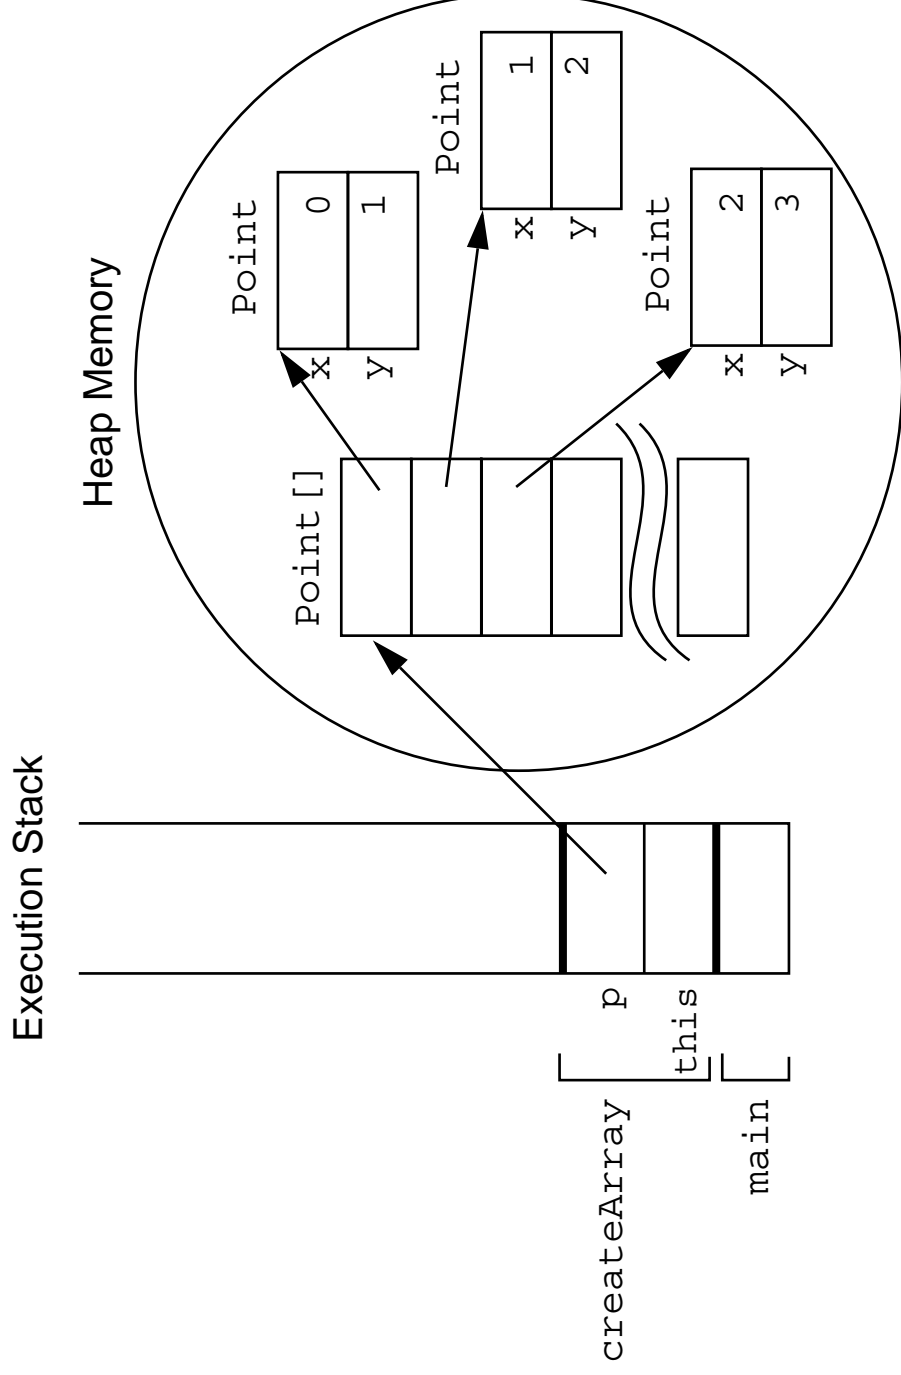

Initializing Arrays

- Initialize an array element.
- Create an array with initial values.

```
String[] names;  
names = new String[3];  
names[0] = "Georgianna";  
names[1] = "Jen";  
names[2] = "Simon";  
  
String[] names = {  
    "Georgianna",  
    "Jen",  
    "Simon"  
};
```

```
MyDate[] dates;  
dates = new MyDate[3];  
dates[0] = new MyDate(22, 7, 1964);  
dates[1] = new MyDate(1, 1, 2000);  
dates[2] = new MyDate(22, 12, 1964);  
  
MyDate[] dates = {  
    new MyDate(22, 7, 1964),  
    new MyDate(1, 1, 2000),  
    new MyDate(22, 12, 1964)  
};
```

Multidimensional Arrays

Arrays of arrays:

```
int [] [] twoDim = new int [4] [] ;  
twoDim[0] = new int [5] ;  
twoDim[1] = new int [5] ;
```

```
int [] [] twoDim = new int [] [4] ; // illegal
```



Multidimensional Arrays

- Non-rectangular arrays of arrays:

```
twoDim[0] = new int[2];  
twoDim[1] = new int[4];  
twoDim[2] = new int[6];  
twoDim[3] = new int[8];
```

- Array of four arrays of five integers each:

```
int[][] twoDim = new int[4][5];
```



Array Bounds

All array subscripts begin at 0:

```
public void printElements(int[] list) {  
    for (int i = 0; i < list.length; i++) {  
        System.out.println(list[i]);  
    }  
}
```

Using the Enhanced for Loop

Java 2 Platform, Standard Edition (J2SE™) version 5.0 introduced an enhanced for loop for iterating over arrays:


```
public void printElements(int[] list) {  
    for ( int element : list ) {  
        System.out.println(element);  
    }  
}
```

The for loop can be read as *for each* element *in* list *do*.

Array Resizing

- You cannot resize an array.
- You can use the same reference variable to refer to an entirely new array, such as:


```
int[] myArray = new int [6];  
myArray = new int [10];
```



Copying Arrays

The `System.arraycopy()` method to copy arrays is:


```
1 //original array
2 int[] myArray = { 1, 2, 3, 4, 5, 6 };
3
4 // new larger array
5 int[] hold = { 10, 9, 8, 7, 6, 5, 4, 3, 2, 1 };
6
7 // copy all of the myArray array to the hold
8 // array, starting with the 0th index
9 System.arraycopy(myArray, 0, hold, 0, myArray.length);
```



Sun Services


Module 6

Class Design



Objectives

- Define *inheritance, polymorphism, overloading, overriding, and virtual method invocation*
- Use the access modifiers protected and the default (*package-friendly*)
- Describe the concepts of constructor and method overloading
- Describe the complete object construction and initialization operation



Relevance

How does the Java programming language support object inheritance?

Subclassing

The Employee class is shown here.

Employee
+name : String = ""
+salary : double
+birthDate : Date
+getDetails() : String

```
public class Employee {  
    public String name = "";  
    public double salary;  
    public Date birthDate;  
  
    public String getDetails() {...}  
}
```


Subclassing

The Manager class is shown here.

Manager
+name : String = ""
+salary : double
+birthDate : Date
+department : String
+getDetails() : String

```
public class Manager {  
    public String name = "";  
    public double salary;  
    public Date birthDate;  
    public String department;  
  
    public String getDetails() {...}  
}
```


Class Diagrams for Employee and Manager Using Inheritance

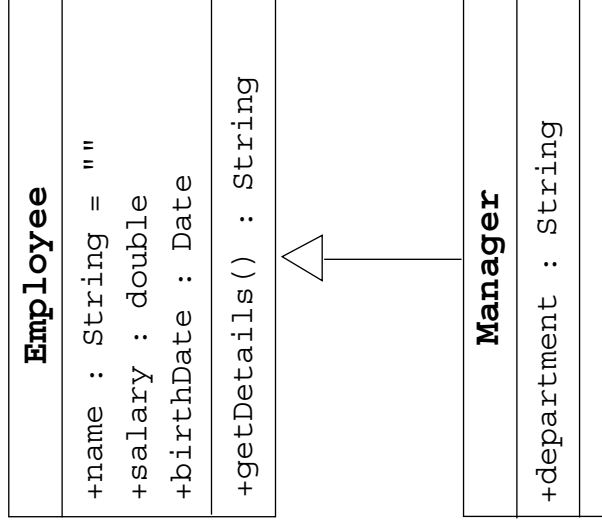

```
public class Employee {
    public String name = "";
    public double salary;
    public Date birthDate;

    public String getDetails() {...}
}


public class Manager extends Employee {
    public String department;
}
```




Single Inheritance

- When a class inherits from only one class, it is called *single inheritance*.
- *Interfaces* provide the benefits of multiple inheritance without drawbacks.
- Syntax of a Java class is as follows:

```
<modifier> class <name> [extends <superclass>] {  
    <declaration>*  
}
```



Single Inheritance

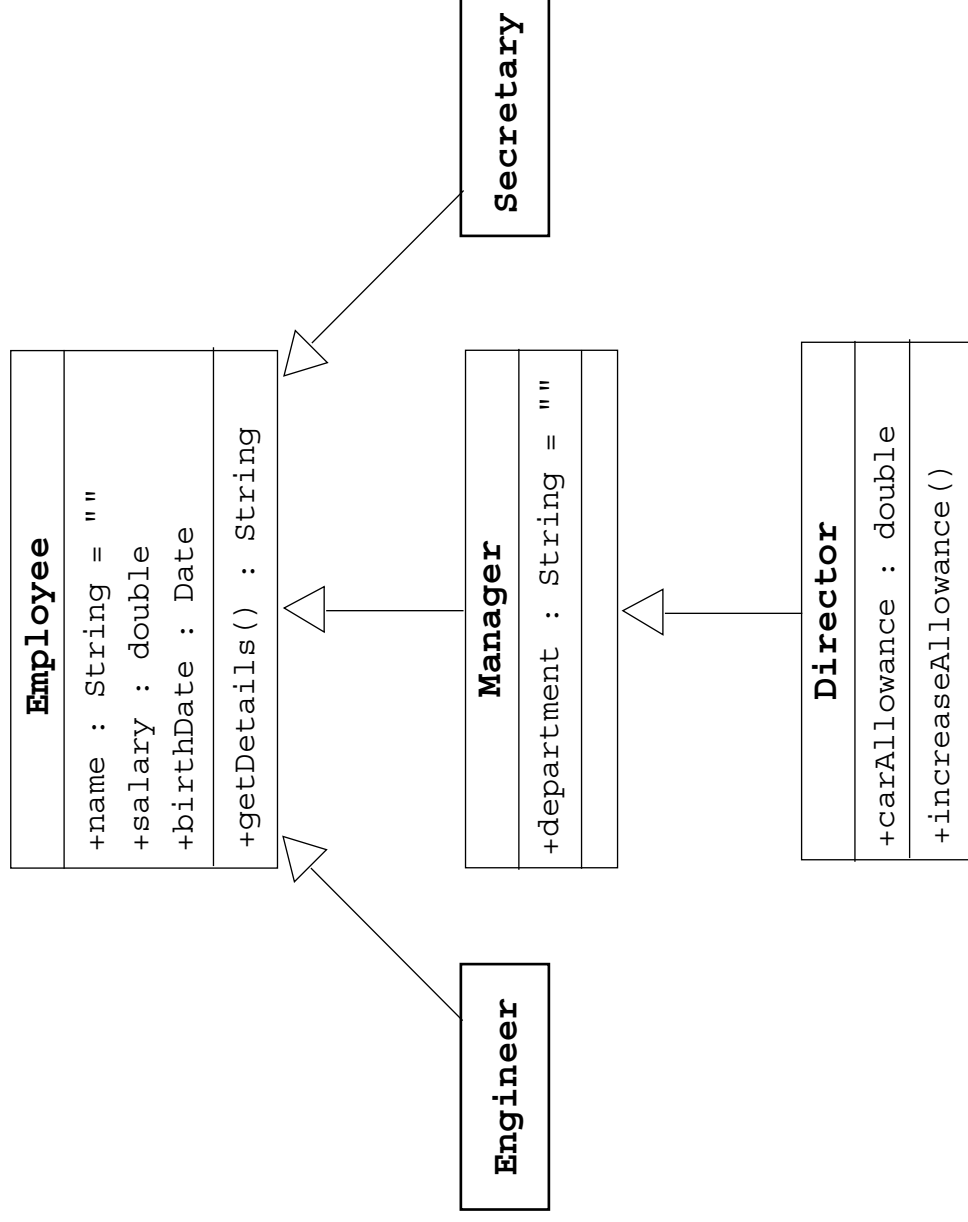

Access Control

Access modifiers on class member declarations are listed here.

Modifier	Same Class	Same Package	Subclass	Universe
private	Yes			
default	Yes	Yes		
protected	Yes	Yes	Yes	
public	Yes	Yes	Yes	Yes

Overriding Methods

- A subclass can modify behavior inherited from a parent class.
- A subclass can create a method with different functionality than the parent's method but with the same:
 - Name
 - Return type¹
 - Argument list

1. In J2SE version 5, the return type can be a subclass of the overridden return type.

Overriding Methods

```
1 public class Employee {
2     protected String name;
3     protected double salary;
4     protected Date birthDate;
5
6     public String getDetails() {
7         return "Name: " + name + "\n" +
8             "Salary: " + salary;
9     }
10 }

```

```
1 public class Manager extends Employee {
2     protected String department;
3
4     public String getDetails() {
5         return "Name: " + name + "\n" +
6             "Salary: " + salary + "\n" +
7             "Manager of: " + department;
8     }
9 }

```


Overridden Methods Cannot Be Less Accessible

```
1 public class Parent {
2     public void doSomething() {}
3 }

1 public class Child extends Parent {
2     private void doSomething() {} // illegal
3 }

1 public class UseBoth {
2     public void doOtherThing() {
3         Parent p1 = new Parent();
4         Parent p2 = new Child();
5         p1.doSomething();
6         p2.doSomething();
7     }
8 }
```

Invoking Overridden Methods


A subclass method may invoke a superclass method using the `super` keyword:

- The keyword `super` is used in a class to refer to its superclass.
- The keyword `super` is used to refer to the members of superclass, both data attributes and methods.
- Behavior invoked does not have to be in the superclass; it can be further up in the hierarchy.

Invoking Overridden Methods


```
1 public class Employee {
2     private String name;
3     private double salary;
4     private Date birthDate;
5
6     public String getDetails() {
7         return "Name: " + name + "\nSalary: " + salary;
8     }
9 }
```

```
1 public class Manager extends Employee {
2     private String department;
3
4     public String getDetails() {
5         // call parent method
6         return super.getDetails()
7             + "\nDepartment: " + department;
8     }
9 }
```



Polymorphism

- *Polymorphism* is the ability to have many different forms; for example, the `Manager` class has access to methods from `Employee` class.
- An object has only one form.
- A reference variable can refer to objects of different forms.



Polymorphism

```
Employee e = new Manager(); // legal


// illegal attempt to assign Manager attribute
e.department = "Sales";
// the variable is declared as an Employee type,
// even though the Manager object has that attribute
```

Virtual Method Invocation

- Virtual method invocation is performed as follows:

```
Employee e = new Manager();  
e.getDetails();
```

- Compile-time type and runtime type invocations have the following characteristics:
 - The method name must be a member of the declared variable type; in this case `Employee` has a method called `getDetails`.
 - The method implementation used is based on the runtime object's type; in this case the `Manager` class has an implementation of the `getDetails` method.



Heterogeneous Collections

- Collections of objects with the same class type are called *homogeneous* collections. For example:

```
MyDate[] dates = new MyDate[2];  
dates[0] = new MyDate(22, 12, 1964);  
dates[1] = new MyDate(22, 7, 1964);
```

- Collections of objects with different class types are called *heterogeneous* collections. For example:

```
Employee [] staff = new Employee[1024];  
staff[0] = new Manager();  
staff[1] = new Employee();  
staff[2] = new Engineer();
```

Polymorphic Arguments


Because a Manager is an Employee, the following is valid:

```
public class TaxService {  
    public TaxRate findTaxRate(Employee e) {  
        // calculate the employee's tax rate  
    }  
}  
  
// Meanwhile, elsewhere in the application class  
TaxService taxSvc = new TaxService();  
Manager m = new Manager();  
TaxRate t = taxSvc.findTaxRate(m);
```


The instanceof Operator


```
public class Employee extends Object
public class Manager extends Employee
public class Engineer extends Employee
-----

public void doSomething(Employee e) {
    if ( e instanceof Manager ) {
        // Process a Manager
    } else if ( e instanceof Engineer ) {
        // Process an Engineer
    } else {
        // Process any other type of Employee
    }
}
```




Casting Objects

```
public void doSomething(Employee e) {  
    if ( e instanceof Manager ) {  
        Manager m = (Manager) e;  
        System.out.println( "This is the manager of "  
                             + m.getDepartment() );  
    }  
    // rest of operation  
}
```



Casting Objects

- Use instanceof to test the type of an object.
- Restore full functionality of an object by casting.
- Check for proper casting using the following guidelines:
 - Casts *upward* in the hierarchy are done implicitly.
 - *Downward* casts must be to a subclass and checked by the compiler.
 - The object type is checked at runtime when runtime errors can occur.



Overloading Methods

- Use overloading as follows:

```
public void println(int i)
public void println(float f)
public void println(String s)
```

- Argument lists *must* differ.
- Return types *can* be different.

Methods Using Variable Arguments

- Methods using *variable arguments* permit multiple number of arguments in methods.

For example:

```
public class Statistics {  
    public float average(int... nums) {  
        int sum = 0;  
        for ( int x : nums ) {  
            sum += x;  
        }  
        return ((float) sum) / nums.length;  
    }  
}
```

- The *vararg* parameter is treated as an array. For example:

```
float gradePointAverage = stats.average(4, 3, 4);  
float averageAge = stats.average(24, 32, 27, 18);
```

Overloading Constructors

- As with methods, constructors can be overloaded.


An example is:

```
public Employee(String name, double salary, Date DoB)
public Employee(String name, double salary)
public Employee(String name, Date DoB)
```

- Argument lists *must* differ.
- You can use the `this` reference at the first line of a constructor to call another constructor.

Overloading Constructors

```
1  public class Employee {
2      private static final double BASE_SALARY = 15000.00;
3      private String name;
4      private double salary;
5      private Date   birthDate;
6
7      public Employee(String name, double salary, Date DoB) {
8          this.name = name;
9          this.salary = salary;
10         this.birthDate = DoB;
11     }
12     public Employee(String name, double salary) {
13         this(name, salary, null);
14     }
15     public Employee(String name, Date DoB) {
16         this(name, BASE_SALARY, DoB);
17     }
18     // more Employee code...
19 }
```



Constructors Are Not Inherited

- A subclass inherits all methods and variables from the superclass (parent class).
- A subclass does not inherit the constructor from the superclass.
- Two ways to include a constructor are:
 - Use the default constructor.
 - Write one or more explicit constructors.

Invoking Parent Class Constructors

- To invoke a parent constructor, you must place a call to `super` in the first line of the constructor.
- You can call a specific parent constructor by the arguments that you use in the call to `super`.
- If no `this` or `super` call is used in a constructor, then the compiler adds an implicit call to `super()` that calls the parent no argument constructor (which could be the *default* constructor).

If the parent class defines constructors, but does not provide a no-argument constructor, then a compiler error message is issued.

Invoking Parent Class Constructors


```
1 public class Manager extends Employee {
2     private String department;
3
4     public Manager(String name, double salary, String dept) {
5         super(name, salary);
6         department = dept;
7     }
8     public Manager(String name, String dept) {
9         super(name);
10        department = dept;
11    }
12    public Manager(String dept) { // This code fails: no super()
13        department = dept;
14    }
15    //more Manager code...
16 }
```

Constructing and Initializing Objects: A Slight Reprise

Memory is allocated and default initialization occurs.

Instance variable initialization uses these steps recursively:

1. Bind constructor parameters.
2. If explicit `this()`, call recursively, and then skip to Step 5.
3. Call recursively the implicit or explicit `super` call, except for `Object`.
4. Execute the explicit instance variable initializers.
5. Execute the body of the current constructor.



Constructor and Initialization Examples

```
1  public class Object {  
2      public Object() {}  
3  }
```

```
1  public class Employee extends Object {  
2      private String name;  
3      private double salary = 15000.00;  
4      private Date    birthDate;  
5  
6      public Employee(String n, Date DoB) {  
7          // implicit super();  
8          name = n;  
9          birthDate = DoB;  
10     }  
11     public Employee(String n) {  
12         this(n, null);  
13     }  
14 }
```

```
1  public class Manager extends Employee {  
2      private String department;  
3  
4      public Manager(String n, String d) {  
5          super(n);  
6          department = d;  
7      }  
8  }
```

Constructor and Initialization Examples

- 0 Basic initialization
 - 0.1 Allocate memory for the complete `Manager` object
 - 0.2 Initialize all instance variables to their default values (0 or null)
- 1 Call constructor: `Manager ("Joe Smith", "Sales")`
 - 1.1 Bind constructor parameters: `n="Joe Smith", d="Sales"`
 - 1.2 No explicit `this()` call
 - 1.3 Call `super(n)` for `Employee(String)`
 - 1.3.1 Bind constructor parameters: `n="Joe Smith"`
 - 1.3.2 Call `this(n, null)` for `Employee(String, Date)`
 - 1.3.2.1 Bind constructor parameters: `n="Joe Smith", DoB=null`
 - 1.3.2.2 No explicit `this()` call
 - 1.3.2.3 Call `super()` for `Object()`
 - 1.3.2.3.1 No binding necessary
 - 1.3.2.3.2 No `this()` call
 - 1.3.2.3.3 No `super()` call (`Object` is the root)
 - 1.3.2.3.4 No explicit variable initialization for `Object`
 - 1.3.2.3.5 No method body to call

Constructor and Initialization Examples

- 1.3.2.4 Initialize explicit Employee variables: `salary=15000.00;`
- 1.3.2.5 Execute body: `name="Joe Smith"; date=null;`
- 1.3.3 - 1.3.4 Steps skipped
- 1.3.5 Execute body: No body in `Employee (String)`
- 1.4 No explicit initializers for Manager
- 1.5 Execute body: `department="Sales"`

The Object Class

- The Object class is the root of all classes in Java.
- A class declaration with no extends clause implies extends Object. For example:

```
public class Employee {  
    ...  
}
```


is equivalent to:

```
public class Employee extends Object {  
    ...  
}
```

- Two important methods are:
 - equals
 - toString


The equals Method

- The == operator determines if two references are identical to each other (that is, refer to the same object).
- The equals method determines if objects are *equal* but not necessarily identical.
- The Object implementation of the equals method uses the == operator.
- User classes can override the equals method to implement a domain-specific test for equality.
- Note: You should override the hashCode method if you override the equals method.



An equals Example

```
1 public class MyDate {
2     private int day;
3     private int month;
4     private int year;
5
6     public MyDate(int day, int month, int year) {
7         this.day = day;
8         this.month = month;
9         this.year = year;
10    }
```



An equals Example

```
11
12  public boolean equals(Object o) {
13      boolean result = false;
14      if ( (o != null) && (o instanceof MyDate) ) {
15          MyDate d = (MyDate) o;
16          if ( (day == d.day) && (month == d.month)
17              && (year == d.year) ) {
18              result = true;
19          }
20      }
21      return result;
22  }
23
24  public int hashCode() {
25      return (day ^ month ^ year);
26  }
27 }
```

An equals Example

```
1  class TestEquals {
2      public static void main(String[] args) {
3          MyDate date1 = new MyDate(14, 3, 1976);
4          MyDate date2 = new MyDate(14, 3, 1976);
5
6          if ( date1 == date2 ) {
7              System.out.println("date1 is identical to date2");
8          } else {
9              System.out.println("date1 is not identical to date2");
10         }
11
12         if ( date1.equals(date2) ) {
13             System.out.println("date1 is equal to date2");
14         } else {
15             System.out.println("date1 is not equal to date2");
16         }
```

An equals Example

```
17
18 System.out.println("set date2 = date1;");
19 date2 = date1;
20
21 if ( date1 == date2 ) {
22     System.out.println("date1 is identical to date2");
23 } else {
24     System.out.println("date1 is not identical to date2");
25 }
26 }
27 }
```

This example generates the following output:

```
date1 is not identical to date2
date1 is equal to date2
set date2 = date1;
date1 is identical to date2
```

The `toString` Method

The `toString` method has the following characteristics:

- This method converts an object to a `String`.
- Use this method during string concatenation.
- Override this method to provide information about a user-defined object in readable format.
- Use the wrapper class's `toString` static method to convert primitive types to a `String`.

Wrapper Classes

Look at primitive data elements as objects.

Primitive Data Type	Wrapper Class
boolean	Boolean
byte	Byte
char	Character
short	Short
int	Integer
long	Long
float	Float
double	Double

Wrapper Classes

An example of a wrapper class is:

```
int pInt = 420;  
Integer wInt = new Integer(pInt); // this is called boxing  
int p2 = wInt.intValue(); // this is called unboxing
```

Other methods are:

```
int x = Integer.valueOf(str).intValue();  
int x = Integer.parseInt(str);
```


Autoboxing of Primitive Types

Autoboxing has the following description:

- Conversion of primitive types to the object equivalent
- Wrapper classes not always needed
- Example:

```
int pInt = 420;  
Integer wInt = pInt; // this is called autoboxing  
int p2 = wInt; // this is called autounboxing
```


- Language feature used most often when dealing with collections
- Wrapped primitives also usable in arithmetic expressions
- Performance loss when using autoboxing



Sun Services


Module 7

Advanced Class Features



Objectives

- Create static variables, methods, and initializers
- Create final classes, methods, and variables
- Create and use enumerated types
- Use the static import statement
- Create abstract classes and methods
- Create and use an interface




Relevance

- How can you create a constant?
- How can you declare data that is shared by all instances of a given class?
- How can you keep a class or method from being subclassed or overridden?


The static Keyword

- The `static` keyword is used as a modifier on variables, methods, and nested classes.
- The `static` keyword declares the attribute or method is associated with the class as a whole rather than any particular instance of that class.
- Thus static members are often called *class members*, such as *class attributes* or *class methods*.



Class Attributes

Class attributes are shared among all instances of a class:

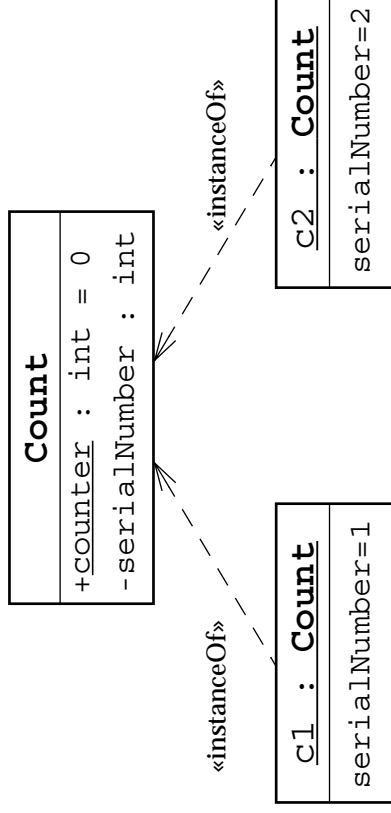

```
1 public class Count {
2     private int serialNumber;
3     public static int counter = 0;
4
5     public Count() {
6         counter++;
7         serialNumber = counter;
8     }
9 }
```

Class Attributes

If the static member is `public`:

```
1 public class Count1 {  
2     private int serialNumber;  
3     public static int counter = 0;  
4     public Count1() {  
5         counter++;  
6         serialNumber = counter;  
7     }  
8 }
```

it can be accessed from outside the class without an instance:

```
1 public class OtherClass {  
2     public void incrementNumber() {  
3         Count1.counter++;  
4     }  
5 }
```

Class Methods

You can create static methods:

```
1 public class Count2 {  
2     private int serialNumber;  
3     private static int counter = 0;  
4  
5     public static int getTotalCount() {  
6         return counter;  
7     }  
8  
9     public Count2() {  
10        counter++;  
11        serialNumber = counter;  
12    }  
13 }
```

Class Methods

You can invoke static methods without any instance of the class to which it belongs:

```
1 public class TestCounter {
2     public static void main(String[] args) {
3         System.out.println("Number of counter is "
4                             + Count2.getTotalCount());
5         Count2 counter = new Count2();
6         System.out.println("Number of counter is "
7                             + Count2.getTotalCount());
8     }
9 }
```


The output of the TestCounter program is:

```
Number of counter is 0
Number of counter is 1
```


Class Methods

Static methods cannot access instance variables:

```
1 public class Count3 {
2     private int serialNumber;
3     private static int counter = 0;
4
5     public static int getSerialNumber() {
6         return serialNumber; // COMPILER ERROR!
7     }
8 }
```



Static Initializers

- A class can contain code in a *static block* that does not exist within a method body.
- Static block code executes once only, when the class is loaded.
- Usually, a static block is used to initialize static (class) attributes.


Static Initializers

```
1 public class Count4 {
2     public static int counter;
3     static {
4         counter = Integer.getInteger("myApp.Count4.counter").intValue();
5     }
6 }
```

```
1 public class TestStaticInit {
2     public static void main(String[] args) {
3         System.out.println("counter = "+ Count4.counter);
4     }
5 }
```

The output of the TestStaticInit program is:

```
java -DmyApp.Count4.counter=47 TestStaticInit
counter = 47
```




The `final` Keyword

- You cannot subclass a `final` class.
- You cannot override a `final` method.
- A `final` variable is a constant.
- You can set a `final` variable once only, but that assignment can occur independently of the declaration; this is called a *blank final variable*.
 - A blank `final` instance attribute must be set in every constructor.
 - A blank `final` method variable must be set in the method body before being used.

Final Variables

Constants are static final variables.

```
public class Bank {  
    private static final double  DEFAULT_INTEREST_RATE = 3.2;  
    ... // more declarations  
}
```



Blank Final Variables

```
1 public class Customer {
2
3     private final long customerId;
4
5     public Customer() {
6         customerId = createID();
7     }
8
9     public long getID() {
10         return customerId;
11     }
12
13     private long createID() {
14         return ... // generate new ID
15     }
16
17     // more declarations
18
19 }
```

Old-Style Enumerated Type Idiom

Enumerated types are a common idiom in programming.

```
1 package cards.domain;
2
3 public class PlayingCard {
4
5     // pseudo enumerated type
6     public static final int SUIT_SPADES    = 0;
7     public static final int SUIT_HEARTS   = 1;
8     public static final int SUIT_CLUBS    = 2;
9     public static final int SUIT_DIAMONDS = 3;
10
11     private int suit;
12     private int rank;
13
14     public PlayingCard(int suit, int rank) {
15         this.suit = suit;
16         this.rank = rank;
17     }
```

Old-Style Enumerated Type Idiom

```
22 public String getSuitName() {
23     String name = "";
24     switch ( suit ) {
25         case SUIT_SPADES:
26             name = "Spades";
27             break;
28         case SUIT_HEARTS:
29             name = "Hearts";
30             break;
31         case SUIT_CLUBS:
32             name = "Clubs";
33             break;
34         case SUIT_DIAMONDS:
35             name = "Diamonds";
36             break;
37         default:
38             System.err.println("Invalid suit.");
39     }
40     return name;
41 }
```


Old-Style Enumerated Type Idiom

Old-style idiom is not type-safe:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4
5 public class TestPlayingCard {
6     public static void main(String[] args) {
7
8         PlayingCard card1
9             = new PlayingCard(PlayingCard.SUIT_SPADES, 2);
10        System.out.println("card1 is the " + card1.getRank()
11                           + " of " + card1.getSuitName());
12
13        // You can create a playing card with a bogus suit.
14        PlayingCard card2 = new PlayingCard(47, 2);
15        System.out.println("card2 is the " + card2.getRank()
16                           + " of " + card2.getSuitName());
17    }
18 }
```

Old-Style Enumerated Type Idiom

This enumerated type idiom has several problems:

- Not type-safe
- No namespace
- Brittle character
- Uninformative printed values

The New Enumerated Type


Now you can create type-safe enumerated types:

```
1 package cards.domain;  
2  
3 public enum Suit {  
4     SPADES,  
5     HEARTS,  
6     CLUBS,  
7     DIAMONDS  
8 }
```

The New Enumerated Type

Using enumerated types is easy:

```
1 package cards.domain;
2
3 public class PlayingCard {
4
5     private Suit suit;
6     private int rank;
7
8     public PlayingCard(Suit suit, int rank) {
9         this.suit = suit;
10        this.rank = rank;
11    }
12
13    public Suit getSuit() {
14        return suit;
15    }
```



The New Enumerated Type

```
16 public String getSuitName() {
17     String name = "";
18     switch ( suit ) {
19         case SPADES:
20             name = "Spades";
21             break;
22         case HEARTS:
23             name = "Hearts";
24             break;
25         case CLUBS:
26             name = "Clubs";
27             break;
28         case DIAMONDS:
29             name = "Diamonds";
30             break;
31         default:
32             // No need for error checking as the Suit
33             // enum is finite.
34     }
35     return name;
36 }
```

The New Enumerated Type

Enumerated types are type-safe:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4 import cards.domain.Suit;
5
6 public class TestPlayingCard {
7     public static void main(String[] args) {
8
9         PlayingCard card1
10             = new PlayingCard(Suit.SPADES, 2);
11         System.out.println("card1 is the " + card1.getRank()
12                             + " of " + card1.getSuitName());
13
14         // PlayingCard card2 = new PlayingCard(47, 2);
15         // This will not compile.
16     }
17 }
```

Advanced Enumerated Types

Enumerated types can have attributes and methods:

```
1 package cards.domain;
2
3 public enum Suit {
4     SPADES ("Spades"),
5     HEARTS ("Hearts"),
6     CLUBS ("Clubs"),
7     DIAMONDS ("Diamonds");
8
9     private final String name;
10
11     private Suit(String name) {
12         this.name = name;
13     }
14
15     public String getName() {
16         return name;
17     }
18 }
```

Advanced Enumerated Types

Public methods on enumerated types are accessible:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4 import cards.domain.Suit;
5
6 public class TestPlayingCard {
7     public static void main(String[] args) {
8
9         PlayingCard card1
10             = new PlayingCard(Suit.SPADES, 2);
11         System.out.println("card1 is the " + card1.getRank()
12                             + " of " + card1.getSuit().getName());
13
14         // NewPlayingCard card2 = new NewPlayingCard(47, 2);
15         // This will not compile.
16     }
17 }
```


Static Imports

- A *static import* imports the static members from a class:

```
import static <pkg_list>.<class_name>.<member_name>;  
OR  
import static <pkg_list>.<class_name>.*;
```

- A static import imports members individually or collectively:

```
import static cards.domain.Suit.SPADES;  
OR  
import static cards.domain.Suit.*;
```

- There is no need to qualify the static constants:
`PlayingCard card1 = new PlayingCard(SPADES, 2);`
- *Use this feature sparingly.*


Static Imports

An example of a static import is:

```
1 package cards.tests;
2
3 import cards.domain.PlayingCard;
4 import static cards.domain.Suit.*;
5
6 public class TestPlayingCard {
7     public static void main(String[] args) {
8
9         PlayingCard card1 = new PlayingCard(SPADES, 2);
10        System.out.println("card1 is the " + card1.getRank()
11                           + " of " + card1.getSuit().getName());
12
13        // NewPlayingCard card2 = new NewPlayingCard(47, 2);
14        // This will not compile.
15    }
16 }
```

Abstract Classes

The design of the Shipping system looks like this:

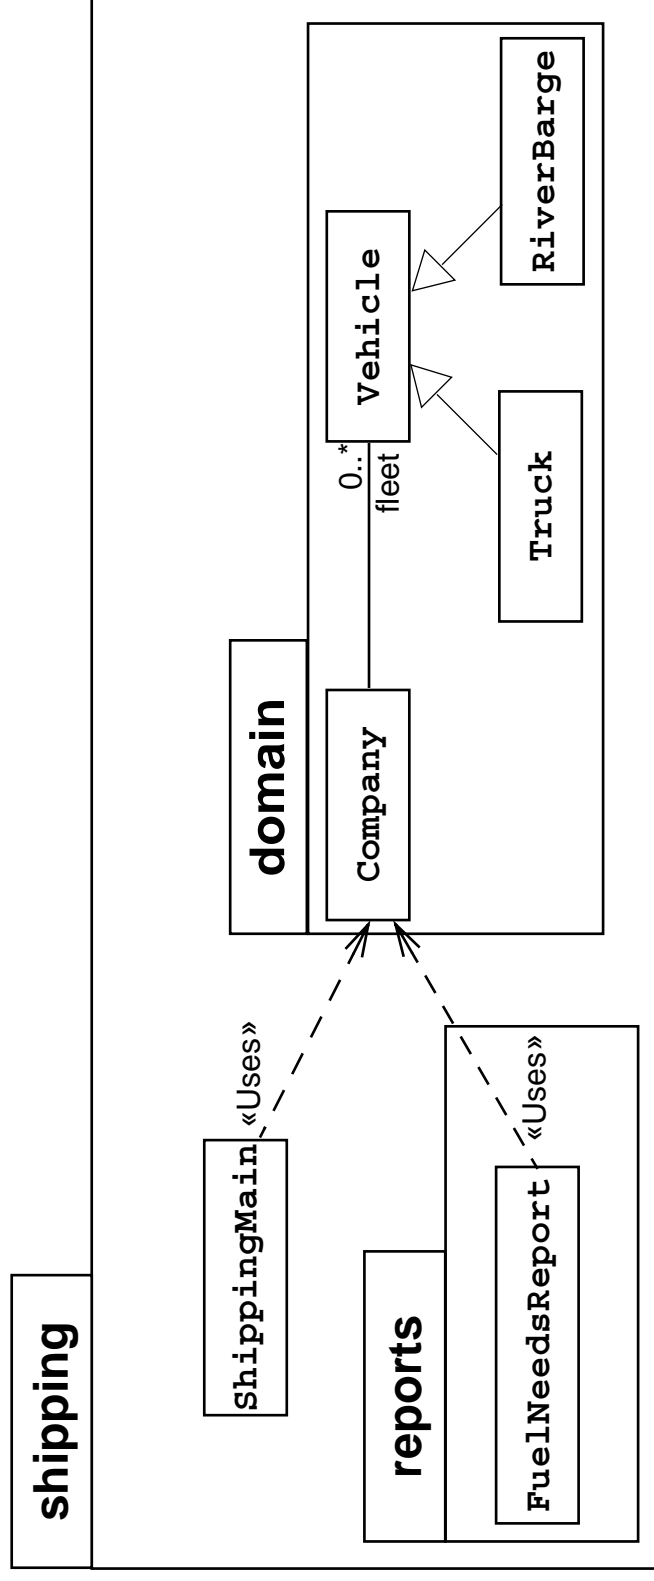


Abstract Classes

Fleet initialization code is shown here:

```
1 public class ShippingMain {
2     public static void main(String[] args) {
3         Company c = new Company();
4
5         // populate the company with a fleet of vehicles
6         c.addVehicle( new Truck(10000.0) );
7         c.addVehicle( new Truck(15000.0) );
8         c.addVehicle( new RiverBarge(500000.0) );
9         c.addVehicle( new Truck(9500.0) );
10        c.addVehicle( new RiverBarge(750000.0) );
11
12        FuelNeedsReport report = new FuelNeedsReport(c);
13        report.generateText(System.out);
14    }
15 }
```

Abstract Classes

```
1 public class FuelNeedsReport {
2     private Company company;
3
4     public FuelNeedsReport (Company company) {
5         this.company = company;
6     }
7
8     public void generateText (PrintStream output) {
9         Vehicle1 v;
10        double fuel;
11        double total_fuel = 0.0;
12
13        for ( int i = 0; i < company.getFleetSize(); i++ ) {
14            v = company.getVehicle(i);
15        }
```




Abstract Classes

```
16 // Calculate the fuel needed for this trip
17 fuel = v.calcTripDistance() / v.calcFuelEfficiency();
18
19 output.println("Vehicle " + v.getName() + " needs "
20               + fuel + " liters of fuel.");
21 total_fuel += fuel;
22 }
23 output.println("Total fuel needs is " + total_fuel + " liters.");
24 }
25 }
```

The Solution

An abstract class models a class of objects in which the full implementation is not known but is supplied by the concrete subclasses.

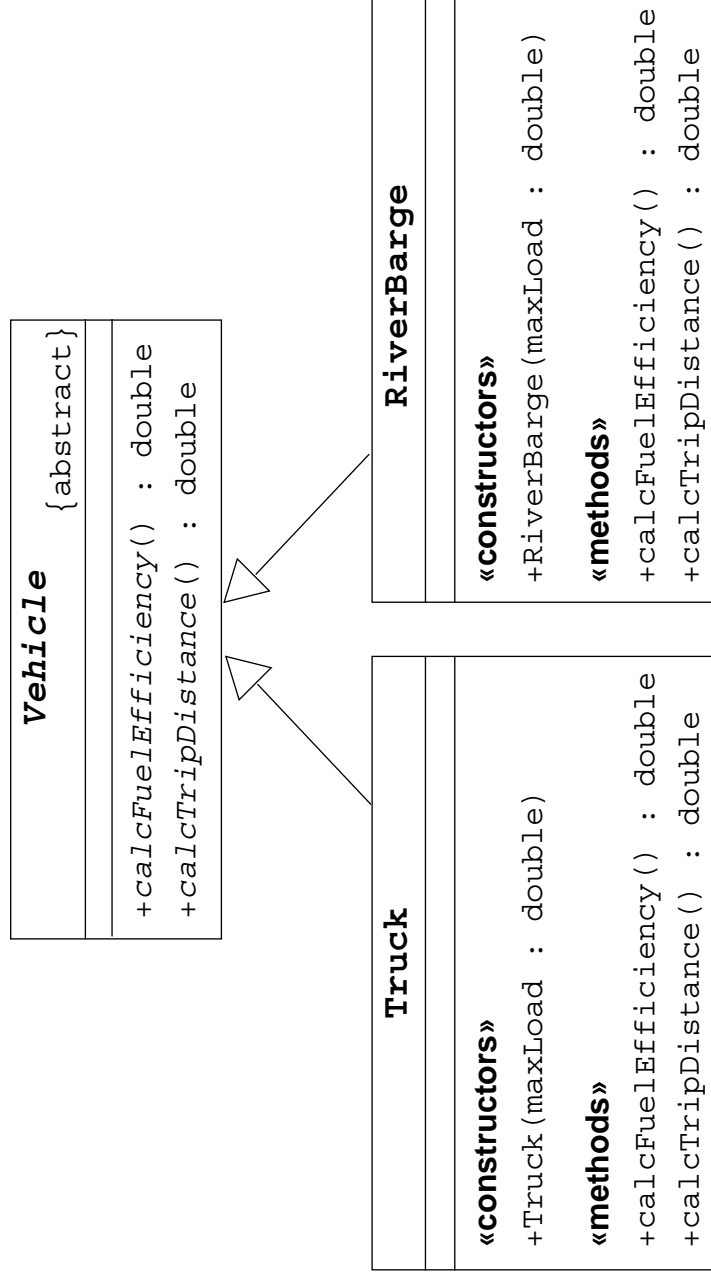

The Solution

The declaration of the `Vehicle` class is:

```
1 public abstract class Vehicle {  
2     public abstract double calcFuelEfficiency();  
3     public abstract double calcTripDistance();  
4 }
```

The `Truck` class must create an implementation:

```
1 public class Truck extends Vehicle {  
2     public Truck(double maxLoad) {...}  
3     public double calcFuelEfficiency() {  
4         /* calculate the fuel consumption of a truck at a given load */  
5     }  
6     public double calcTripDistance() {  
7         /* calculate the distance of this trip on highway */  
8     }  
9 }
```


The Solution


Likewise, the `RiverBarge` class must create an implementation:

```
1 public class RiverBarge extends Vehicle {
2     public RiverBarge(double maxLoad) {...}
3     public double calcFuelEfficiency() {
4         /* calculate the fuel efficiency of a river barge */
5     }
6     public double calcTripDistance() {
7         /* calculate the distance of this trip along the river-ways */
8     }
9 }
```


Interfaces

- A *public interface* is a contract between *client code* and the class that implements that interface.
- A Java *interface* is a formal declaration of such a contract in which all methods contain no implementation.
- Many unrelated classes can implement the same interface.
- A class can implement many unrelated interfaces.
- Syntax of a Java class is as follows:

```
<modifier> class <name> [extends <superclass>]  
    [implements <interface> [, <interface>* ] ] {  
    <member_declaration>*  
}
```




The Flyer Example

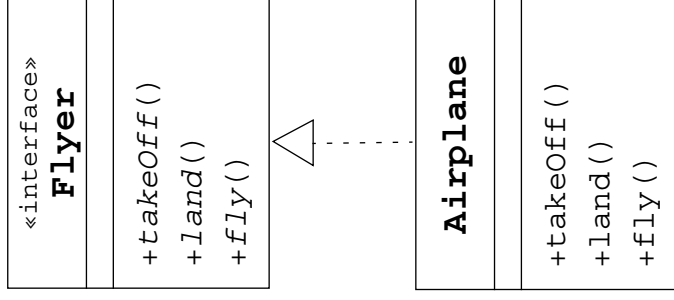


```
public interface Flyer {
    public void takeOff();
    public void land();
    public void fly();
}
```


The Flyer Example

```
public class Airplane implements Flyer {  
    public void takeOff() {  
        // accelerate until lift-off  
        // raise landing gear  
    }  
    public void land() {  
        // lower landing gear  
        // decelerate and lower flaps until touch-down  
        // apply brakes  
    }  
    public void fly() {  
        // keep those engines running  
    }  
}
```




The Flyer Example

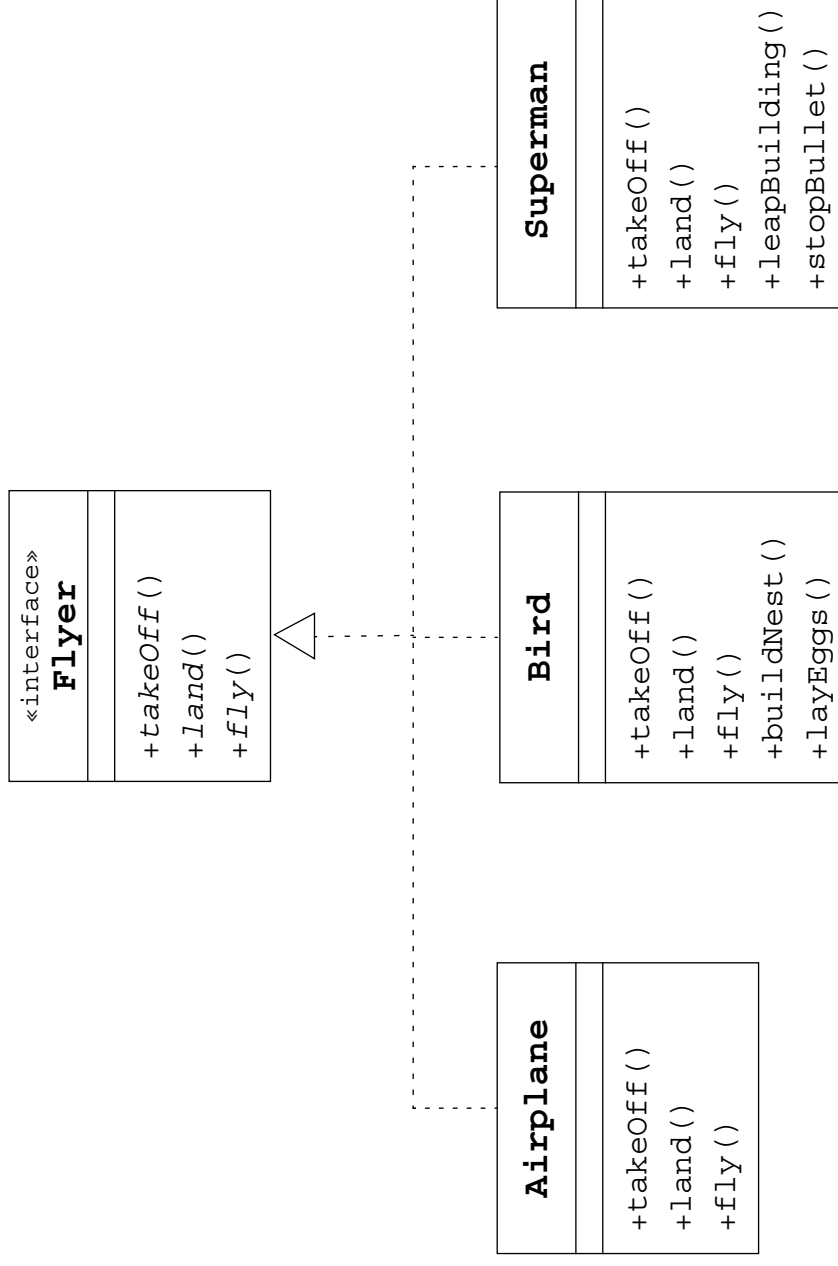




The Flyer Example

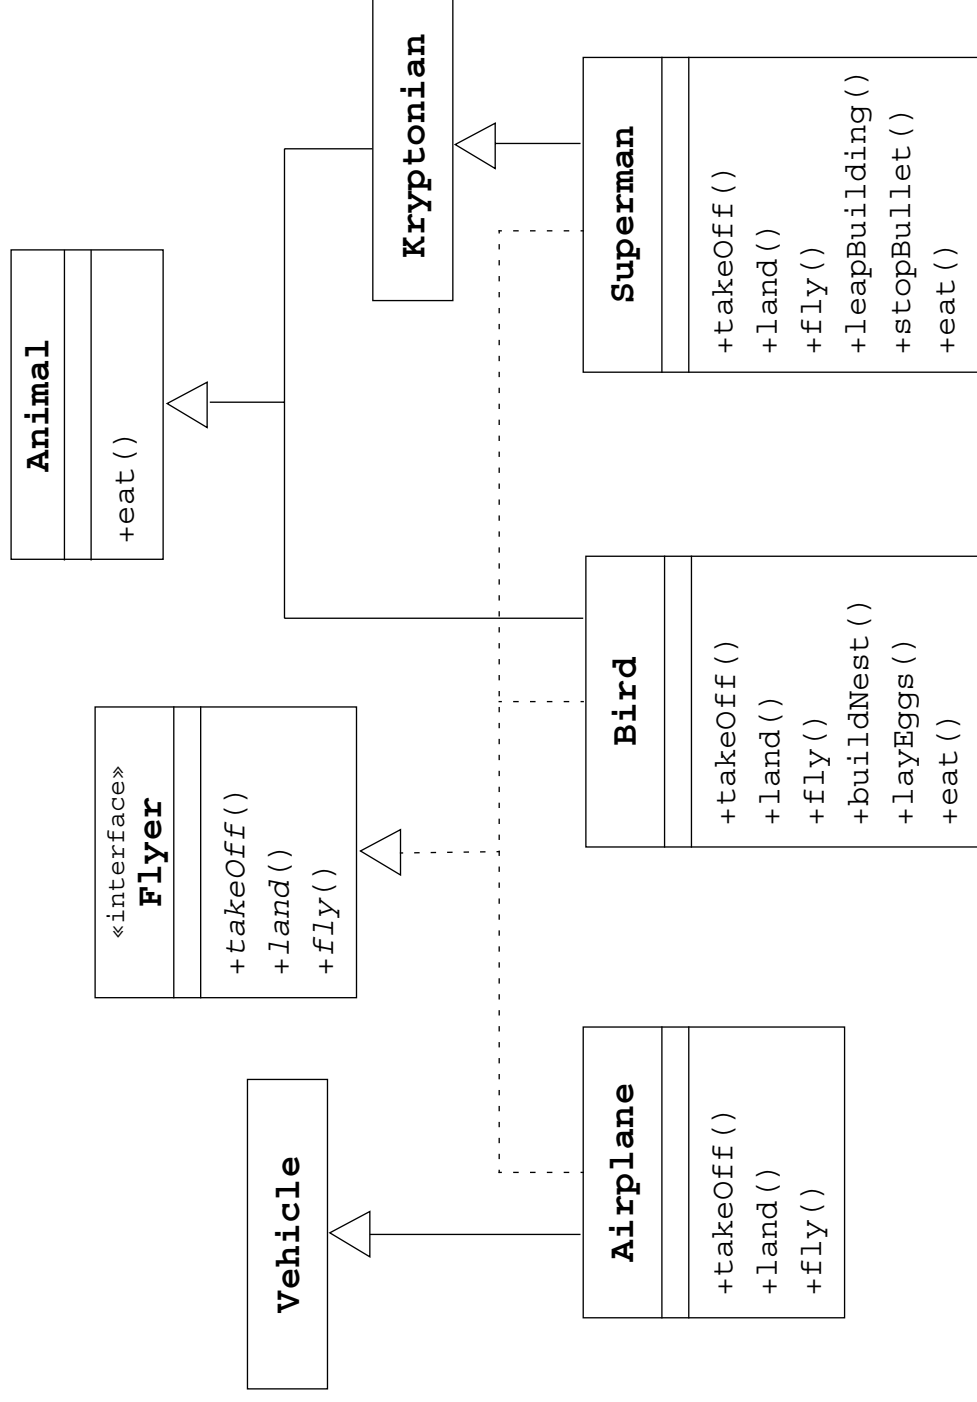


The Flyer Example

```
public class Bird extends Animal implements Flyer {  
    public void takeOff() { /* take-off implementation */ }  
    public void land() { /* landing implementation */ }  
    public void fly() { /* fly implementation */ }  
    public void buildNest() { /* nest building behavior */ }  
    public void layEggs() { /* egg laying behavior */ }  
    public void eat() { /* override eating behavior */ }  
}
```



The Flyer Example

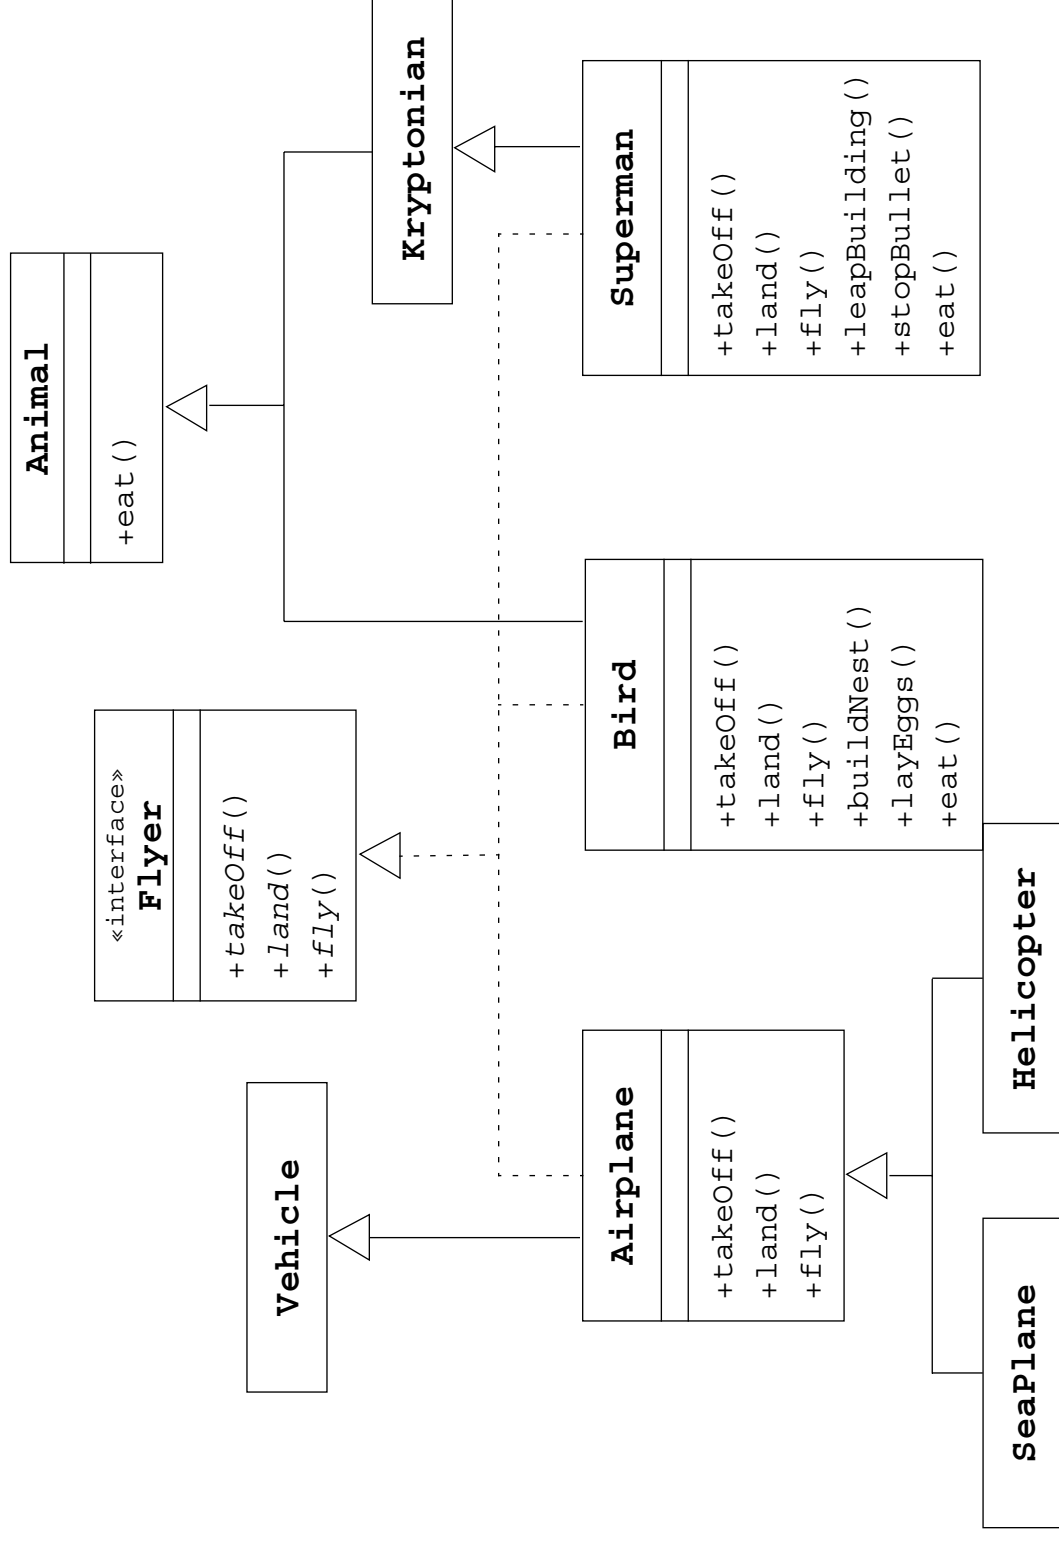


The Flyer Example

```
public class Airport {
    public static void main(String[] args) {
        Airport metropolisAirport = new Airport();
        Helicopter copter = new Helicopter();
        SeaPlane sPlane = new SeaPlane();

        metropolisAirport.givePermissionToLand(copter);
        metropolisAirport.givePermissionToLand(sPlane);
    }

    private void givePermissionToLand(Flyer f) {
        f.land();
    }
}
```

Multiple Interface Example

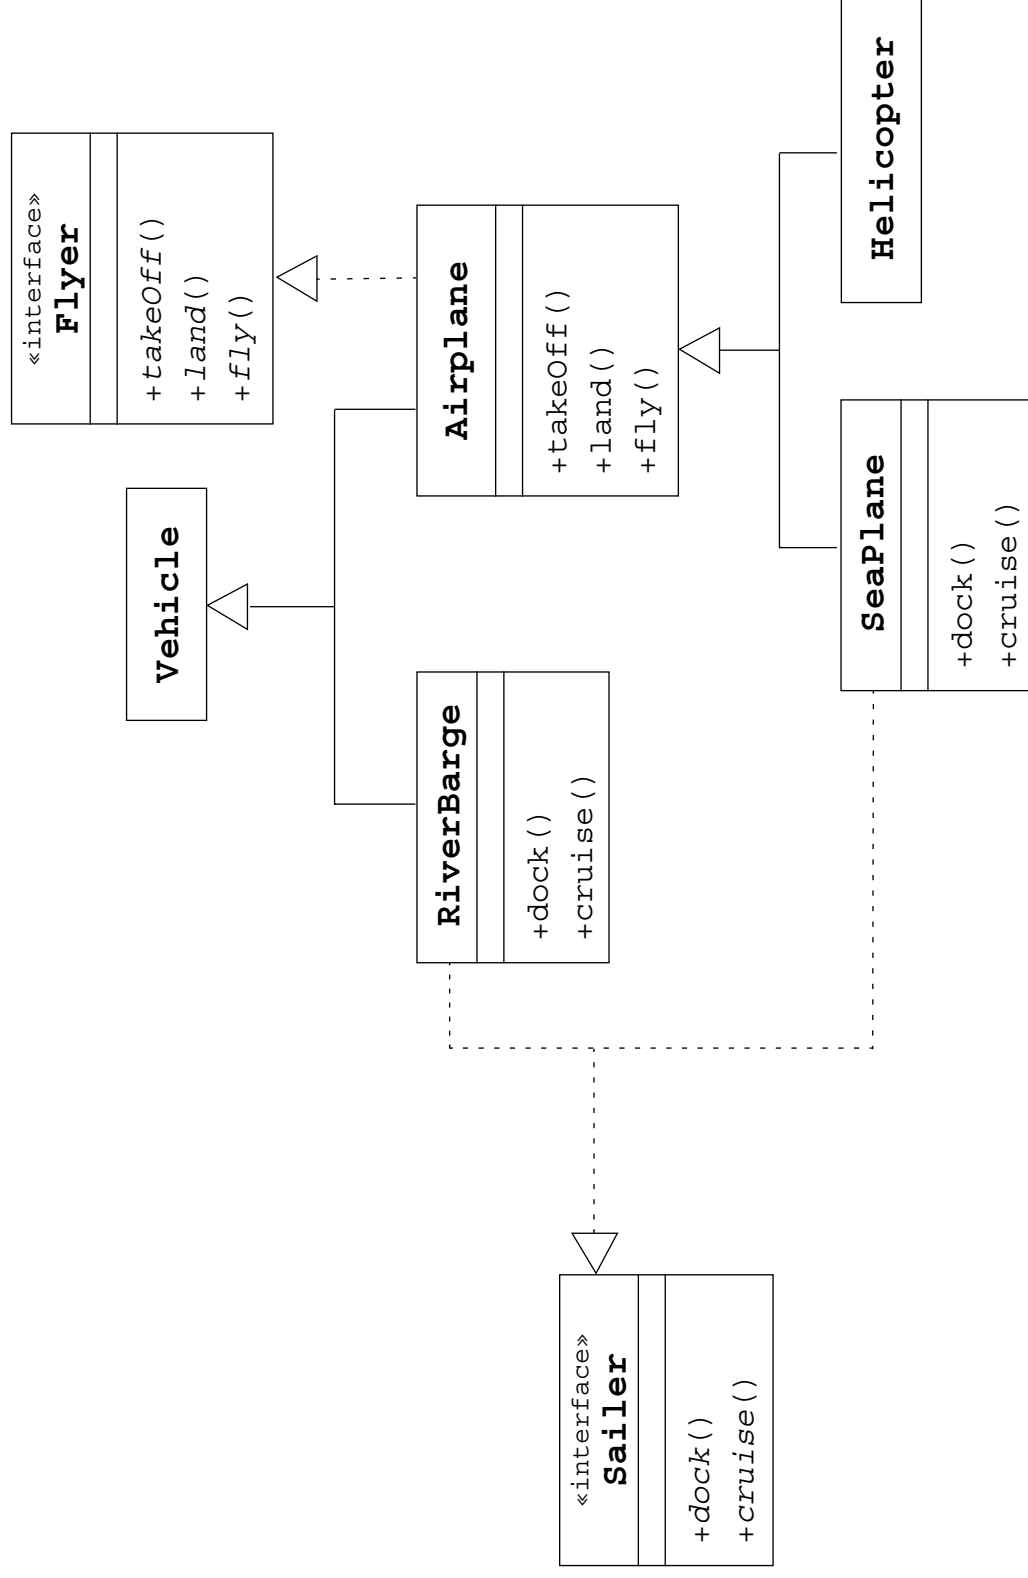


Multiple Interface Example

```
public class Harbor {  
    public static void main(String[] args) {  
        Harbor bostonHarbor = new Harbor();  
        RiverBarge barge = new RiverBarge();  
        SeaPlane sPlane = new SeaPlane();  
  
        bostonHarbor.givePermissionToDock(barge);  
        bostonHarbor.givePermissionToDock(sPlane);  
    }  
  
    private void givePermissionToDock(Sailer s) {  
        s.dock();  
    }  
}
```

Uses of Interfaces

Interface uses include the following:

- Declaring methods that one or more classes are expected to implement
- Determining an object's programming interface without revealing the actual body of the class
- Capturing similarities between unrelated classes without forcing a class relationship
- Simulating multiple inheritance by declaring a class that implements several interfaces




Sun Services

Module 8

Exceptions and Assertions


Objectives

- Define exceptions
- Use try, catch, and finally statements
- Describe exception categories
- Identify common exceptions
- Develop programs to handle your own exceptions
- Use assertions
- Distinguish appropriate and inappropriate uses of assertions
- Enable assertions at runtime



Relevance

- In most programming languages, how do you resolve runtime errors?
- If you make assumptions about the way your code works, and those assumptions are wrong, what might happen?
- Is it always necessary or desirable to expend CPU power testing assertions in production programs?



Exceptions and Assertions

- Exceptions handle unexpected situations – Illegal argument, network failure, or file not found
- Assertions document and test programming assumptions – *This can never be negative here*
- Assertion tests can be removed entirely from code at runtime, so the code is not slowed down at all.

Exceptions

- Conditions that can readily occur in a correct program are *checked exceptions*.
These are represented by the `Exception` class.
- Severe problems that normally are treated as fatal or situations that probably reflect program bugs are *unchecked exceptions*.
Fatal situations are represented by the `Error` class.
Probable bugs are represented by the `RuntimeException` class.
- The API documentation shows checked exceptions that can be thrown from a method.

Exception Example

```
1 public class AddArguments {
2     public static void main(String args[]) {
3         int sum = 0;
4         for ( String arg : args ) {
5             sum += Integer.parseInt(arg);
6         }
7         System.out.println("Sum = " + sum);
8     }
9 }
```

```
java AddArguments 1 2 3 4
Sum = 10
```

```
java AddArguments 1 two 3.0 4
Exception in thread "main" java.lang.NumberFormatException: For input string: "two"
    at java.lang.NumberFormatException.forInputString(NumberFormatException.java:48)
    at java.lang.Integer.parseInt(Integer.java:447)
    at java.lang.Integer.parseInt(Integer.java:497)
    at AddArguments.main(AddArguments.java:5)
```

The try-catch Statement

```
1 public class AddArguments2 {
2     public static void main(String args[]) {
3         try {
4             int sum = 0;
5             for ( String arg : args ) {
6                 sum += Integer.parseInt(arg);
7             }
8             System.out.println("Sum = " + sum);
9         } catch (NumberFormatException nfe) {
10            System.err.println("One of the command-line "
11                               + "arguments is not an integer.");
12        }
13    }
14 }
```

java AddArguments2 1 two 3.0 4

One of the command-line arguments is not an integer.

The try-catch Statement

```
1 public class AddArguments3 {
2     public static void main(String args[]) {
3         int sum = 0;
4         for ( String arg : args ) {
5             try {
6                 sum += Integer.parseInt(arg);
7             } catch (NumberFormatException nfe) {
8                 System.err.println "[" + arg + "]" is not an integer"
9                     + " and will not be included in the sum.");
10            }
11        }
12        System.out.println("Sum = " + sum);
13    }
14 }
```

java AddArguments3 1 two 3.0 4

[two] is not an integer and will not be included in the sum.


[3.0] is not an integer and will not be included in the sum.

Sum = 5

The try-catch Statement

A try-catch statement can use multiple catch clauses:

```
try {  
    // code that might throw one or more exceptions  
} catch (MyException e1) {  
    // code to execute if a MyException exception is thrown  
}  
catch (MyOtherException e2) {  
    // code to execute if a MyOtherException exception is thrown  
}  
catch (Exception e3) {  
    // code to execute if any other exception is thrown  
}
```




Call Stack Mechanism

- If an exception is not handled in the current `try-catch` block, it is thrown to the caller of that method.
- If the exception gets back to the main method and is not handled there, the program is terminated abnormally.


The finally Clause


The finally clause defines a block of code that *always* executes.

```
1  try {  
2      startFaucet () ;  
3      waterLawn () ;  
4  } catch (BrokenPipeException e) {  
5      logProblem(e) ;  
6  } finally {  
7      stopFaucet () ;  
8  }
```



Exception Categories

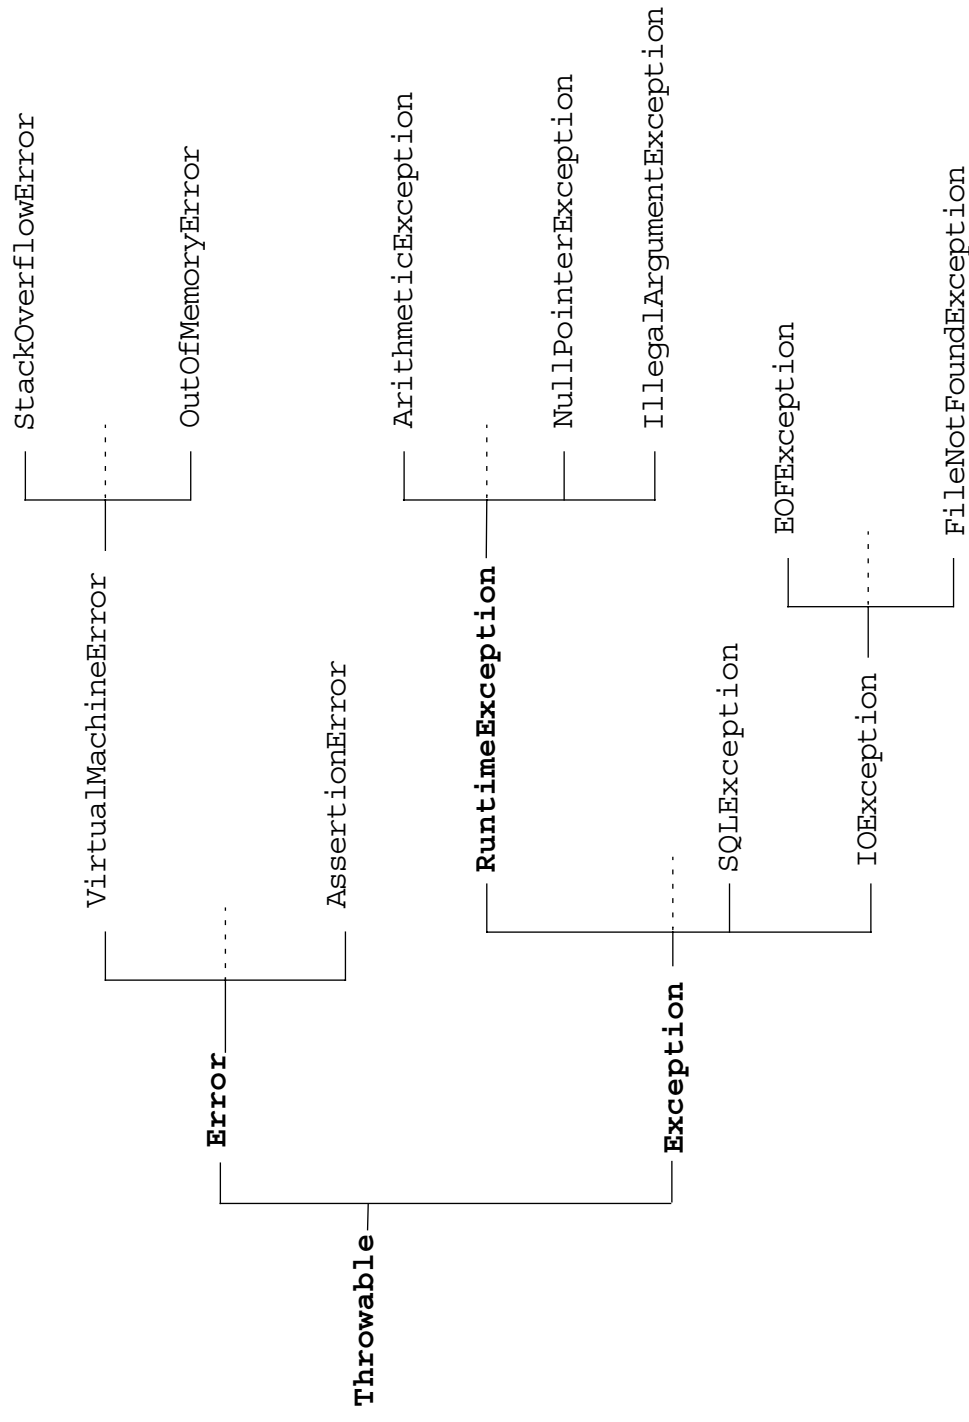



Common Exceptions

- `NullPointerException`
- `FileNotFoundException`
- `NumberFormatException`
- `ArithmeticException`
- `SecurityException`

The Handle or Declare Rule

Use the handle or declare rule as follows:

- Handle the exception by using the try-catch-finally block.
- Declare that the code causes an exception by using the throws clause.

```
void trouble() throws IOException { ... }  
void trouble() throws IOException, MyException { ... }
```

Other Principles

- You do not need to declare runtime exceptions or errors.
- You can choose to handle runtime exceptions.

Method Overriding and Exceptions

The overriding method can throw:

- No exceptions
- One or more of the exceptions thrown by the overridden method
- One or more subclasses of the exceptions thrown by the overridden method

The overriding method cannot throw:

- Additional exceptions not thrown by the overridden method
- Superclasses of the exceptions thrown by the overridden method

Method Overriding and Exceptions

```
1 public class TestA {
2     public void methodA() throws IOException {
3         // do some file manipulation
4     }
5 }
```

```
1 public class TestB1 extends TestA {
2     public void methodA() throws EOFException {
3         // do some file manipulation
4     }
5 }
```

```
1 public class TestB2 extends TestA {
2     public void methodA() throws Exception { // WRONG
3         // do some file manipulation
4     }
5 }
```

Creating Your Own Exceptions

```
1 public class ServerTimedOutException extends Exception {
2     private int port;
3
4     public ServerTimedOutException(String message, int port) {
5         super(message);
6         this.port = port;
7     }
8
9     public int getPort() {
10         return port;
11     }
12 }
```

Use the `getMessage` method, inherited from the `Exception` class, to get the reason for which the exception was made.

Handling a User-Defined Exception


A method can throw a user-defined, checked exception:

```
1 public void connectMe(String serverName)
2     throws ServerTimedOutException {
3     boolean successful;
4     int portToConnect = 80;
5
6     successful = open(serverName, portToConnect);
7
8     if ( ! successful ) {
9         throw new ServerTimedOutException("Could not connect",
10                                     portToConnect);
11     }
12 }
```

Handling a User-Defined Exception

Another method can use a `try-catch` block to capture user-defined exceptions:

```
1  public void findServer () {
2      try {
3          connectMe (defaultServer);
4      } catch (ServerTimedOutException e) {
5          System.out.println("Server timed out, trying alternative");
6          try {
7              connectMe (alternativeServer);
8          } catch (ServerTimedOutException e1) {
9              System.out.println("Error: " + e1.getMessage() +
10                             " connecting to port " + e1.getPort());
11          }
12      }
13  }
```



Assertions

- Syntax of an assertion is:

```
assert <boolean_expression> ;  
assert <boolean_expression> : <detail_expression> ;
```
- If <boolean_expression> evaluates false, then an `AssertionError` is thrown.
- The second argument is converted to a string and used as descriptive text in the `AssertionError` message.

Recommended Uses of Assertions

Use assertions to document and verify the assumptions and internal logic of a single method:

- Internal invariants
- Control flow invariants
- Postconditions and class invariants

Inappropriate Uses of Assertions

- Do not use assertions to check the parameters of a public method.
- Do not use methods in the assertion check that can cause side-effects.

Internal Invariants

The problem is:

```
1  if (x > 0) {  
2      // do this  
3  } else {  
4      // do that  
5  }
```

The solution is:

```
1  if (x > 0) {  
2      // do this  
3  } else {  
4      assert ( x == 0 );  
5      // do that, unless x is negative  
6  }
```

Control Flow Invariants

For example:

```
1  switch (suit) {  
2      case Suit.CLUBS: // ...  
3          break;  
4      case Suit.DIAMONDS: // ...  
5          break;  
6      case Suit.HEARTS: // ...  
7          break;  
8      case Suit.SPADES: // ...  
9          break;  
10     default: assert false : "Unknown playing card suit";  
11         break;  
12 }
```

Postconditions and Class Invariants

For example:

```
1  public Object pop() {
2      int size = this.getElementCount();
3      if (size == 0) {
4          throw new RuntimeException("Attempt to pop from empty stack");
5      }
6
7      Object result = /* code to retrieve the popped element */ ;
8
9      // test the postcondition
10     assert (this.getElementCount() == size - 1);
11
12     return result;
13 }
```

Controlling Runtime Evaluation of Assertions


- If assertion checking is disabled, the code runs as fast as if the check was never there.
- Assertion checks are disabled by default. Enable assertions with the following commands:

```
java -enableassertions MyProgram
```

or:

```
java -ea MyProgram
```

- Assertion checking can be controlled on class, package, and package hierarchy bases, see: <docs/guide/language/assert.html>




Sun Services

Module 9

Text-Based Applications

Objectives

- Write a program that uses command-line arguments and system properties
- Write a program that reads from *standard input*
- Describe the C-type formatted input and output
- Write a program that can create, read, and write files
- Describe the basic hierarchy of collections in the Java 2 Software Development Kit (Java 2 SDK)
- Write a program that uses sets and lists
- Write a program to iterate over a collection
- Write a program that uses generic collections



Relevance

- It is often the case that certain elements of a program should not be hard-coded, such as file names or the name of a database. How can a program be coded to supply these elements at runtime?
- Simple arrays are far too static for most collections (that is, a fixed number of elements). What Java technology features exist to support more flexible collections?
- Besides computation, what are key elements of any text-based application?

Command-Line Arguments

- Any Java technology application can use command-line arguments.
- These string arguments are placed on the command line to launch the Java interpreter, after the class name:

```
java TestArgs arg1 arg2 "another arg"
```

- Each command-line argument is placed in the `args` array that is passed to the static `main` method:


```
public static void main(String[] args)
```

Command-Line Arguments

```
1 public class TestArgs {
2     public static void main(String[] args) {
3         for ( int i = 0; i < args.length; i++ ) {
4             System.out.println("args[" + i + "]" is ' " + args[i] + "'");
5         }
6     }
7 }
```


Example execution:

```
java TestArgs arg1 arg2 "another arg"
args[0] is 'arg1'
args[1] is 'arg2'
args[2] is 'another arg'
```



System Properties

- System properties are a feature that replaces the concept of *environment variables* (which are platform-specific).
- The `System.getProperties` method returns a `Properties` object.
- The `getProperty` method returns a `String` representing the value of the named property.
- Use the `-D` option to include a new property.



The Properties Class

- The `Properties` class implements a mapping of names to values (a `String` to `String` map).
- The `propertyNames` method returns an `Enumeration` of all property names.
- The `getProperty` method returns a `String` representing the value of the named property.
- You can also read and write a properties collection into a file using `load` and `store`.

The Properties Class

```
1 import java.util.Properties;
2 import java.util.Enumeration;
3
4 public class TestProperties {
5     public static void main(String[] args) {
6         Properties props = System.getProperties();
7         Enumeration propNames = props.propertyNames();
8
9         while ( propNames.hasMoreElements() ) {
10             String propName = (String) propNames.nextElement();
11             String property = props.getProperty(propName);
12             System.out.println("property '" + propName
13                               + "' is '" + property + "'");
14         }
15     }
16 }
```

The Properties Class

Here is an example test run of this program:

```
java -DmyProp=theValue TestProperties
```

Here is the (partial) output:

```
property 'java.version' is '1.5.0-rc'  
property 'java.compiler' is 'NONE'  
property 'path.separator' is ':'  
property 'file.separator' is '/'  
property 'user.home' is '/home/basham'  
property 'java.specification.vendor' is 'Sun Microsystems Inc.'  
property 'user.language' is 'en'  
property 'user.name' is 'basham'  
property 'myProp' is 'theValue'
```

Console I/O

- The variable `System.out` enables you to write to *standard output*.
It is an object of type `PrintStream`.
- The variable `System.in` enables you to read from *standard input*.
It is an object of type `InputStream`.
- The variable `System.err` enables you to write to *standard error*.
It is an object of type `PrintStream`.

Writing to Standard Output

- The `println` methods print the argument and a newline character (`\n`).
- The `print` methods print the argument without a newline character.
- The `print` and `println` methods are overloaded for most primitive types (`boolean`, `char`, `int`, `long`, `float`, and `double`) and for `char[]`, `Object`, and `String`.
- The `print (Object)` and `println (Object)` methods call the `toString` method on the argument.

Reading From Standard Input

```
1 import java.io.*;
2
3 public class KeyboardInput {
4     public static void main (String args[]) {
5         String s;
6         // Create a buffered reader to read
7         // each line from the keyboard.
8         InputStreamReader ir
9             = new InputStreamReader(System.in);
10        BufferedReader in = new BufferedReader(ir);
11
12        System.out.println("Unix: Type ctrl-d to exit." +
13                           "\nWindows: Type ctrl-z to exit");
```

Reading From Standard Input

```
14  try {
15      // Read each input line and echo it to the screen.
16      s = in.readLine();
17      while ( s != null ) {
18          System.out.println("Read: " + s);
19          s = in.readLine();
20      }
21
22      // Close the buffered reader.
23      in.close();
24  } catch (IOException e) { // Catch any IO exceptions.
25      e.printStackTrace();
26  }
27  }
28 }
```

Simple Formatted Output

- You can use the formatting functionality as follows


```
out.printf("name count\n");  
String s = String.format("%s %5d%n", user, total);
```
- Common formatting codes are listed in this table.

Code	Description
%s	Formats the argument as a string, usually by calling the <code>toString</code> method on the object.
%d %o %x	Formats an integer, as a decimal, octal, or hexadecimal value.
%f %g	Formats a floating point number. The <code>%g</code> code uses scientific notation.
%n	Inserts a newline character to the string or stream.
%%	Inserts the <code>%</code> character to the string or stream.

Simple Formatted Input

- The Scanner API provides a formatted input function.
- A Scanner can be used with console input streams as well as file or network streams.
- You can read console input as follows:

```
1 import java.io.*;
2 import java.util.Scanner;
3 public class ScanTest {
4     public static void main(String [] args) {
5         Scanner s = new Scanner(System.in);
6         String param = s.next();
7         System.out.println("the param 1" + param);
8         int value = s.nextInt();
9         System.out.println("second param" + value);
10        s.close();
11    }
12 }
```



Files and File I/O

The `java.io` package enables you to do the following:

- Create `File` objects
- Manipulate `File` objects
- Read and write to file streams

Creating a New `File` Object

The `File` class provides several utilities:

- `File myFile;`
- `myFile = new File("myfile.txt");`
- `myFile = new File("MyDocs", "myfile.txt");`

Directories are treated just like files in Java; the `File` class supports methods for retrieving an array of files in the directory, as follows:

```
File myDir = new File("MyDocs");  
myFile = new File(myDir, "myfile.txt");
```

The File Tests and Utilities

- **File information:**

```
String getName()  
String getPath()  
String getAbsolutePath()  
String getParent()  
long lastModified()  
long length()
```

- **File modification:**

```
boolean renameTo(File newName)  
boolean delete()
```


- **Directory utilities:**

```
boolean mkdir()  
String[] list()
```

The File Tests and Utilities

- File tests:

```
boolean exists()  
boolean canWrite()  
boolean canRead()  
boolean isFile()  
boolean isDirectory()  
boolean isAbsolute();
```

File Stream I/O

- For file input:
 - Use the `FileReader` class to read characters.
 - Use the `BufferedReader` class to use the `readLine` method.
- For file output:
 - Use the `FileWriter` class to write characters.
 - Use the `PrintWriter` class to use the `print` and `println` methods.

File Stream I/O

A file input example is:

```
1 import java.io.*;
2 public class ReadFile {
3     public static void main (String[] args) {
4         // Create file
5         File file = new File(args[0]);
6
7         try {
8             // Create a buffered reader
9             // to read each line from a file.
10            BufferedReader in
11                = new BufferedReader(new FileReader(file));
12            String s;
13        }
```

File Stream I/O

```
14 // Read each line from the file and echo it to the screen.
15 s = in.readLine();
16 while ( s != null ) {
17     System.out.println("Read: " + s);
18     s = in.readLine();
19 }
20 // Close the buffered reader
21 in.close();
22
23 } catch (FileNotFoundException e1) {
24     // If this file does not exist
25     System.err.println("File not found: " + file);
26
27 } catch (IOException e2) {
28     // Catch any other IO exceptions.
29     e2.printStackTrace();
30 }
31 }
32 }
```

File Output Example

```
1 import java.io.*;
2
3 public class WriteFile {
4     public static void main (String[] args) {
5         // Create file
6         File file = new File(args[0]);
7
8         try {
9             // Create a buffered reader to read each line from standard in.
10            InputStream isr
11                = new InputStreamReader(System.in);
12            BufferedReader in
13                = new BufferedReader(isr);
14            // Create a print writer on this file.
15            PrintWriter out
16                = new PrintWriter(new FileWriter(file));
17            String s;
```


File Output Example

```
18
19     System.out.print("Enter file text. ");
20     System.out.println("[Type ctrl-d to stop.]");
21
22     // Read each input line and echo it to the screen.
23     while ((s = in.readLine()) != null) {
24         out.println(s);
25     }
26
27     // Close the buffered reader and the file print writer.
28     in.close();
29     out.close();
30
31     } catch (IOException e) {
32         // Catch any IO exceptions.
33         e.printStackTrace();
34     }
35 }
36 }
```

The Collections API

- A *collection* is a single object representing a group of objects known as its elements.
- The Collections API contains interfaces that group objects as one of the following:
 - `Collection` – A group of objects called elements; any specific ordering (or lack of) and allowance of duplicates is specified by each implementation
 - `Set` – An unordered collection; no duplicates are permitted
 - `List` – An ordered collection; duplicates are permitted

The Collections API

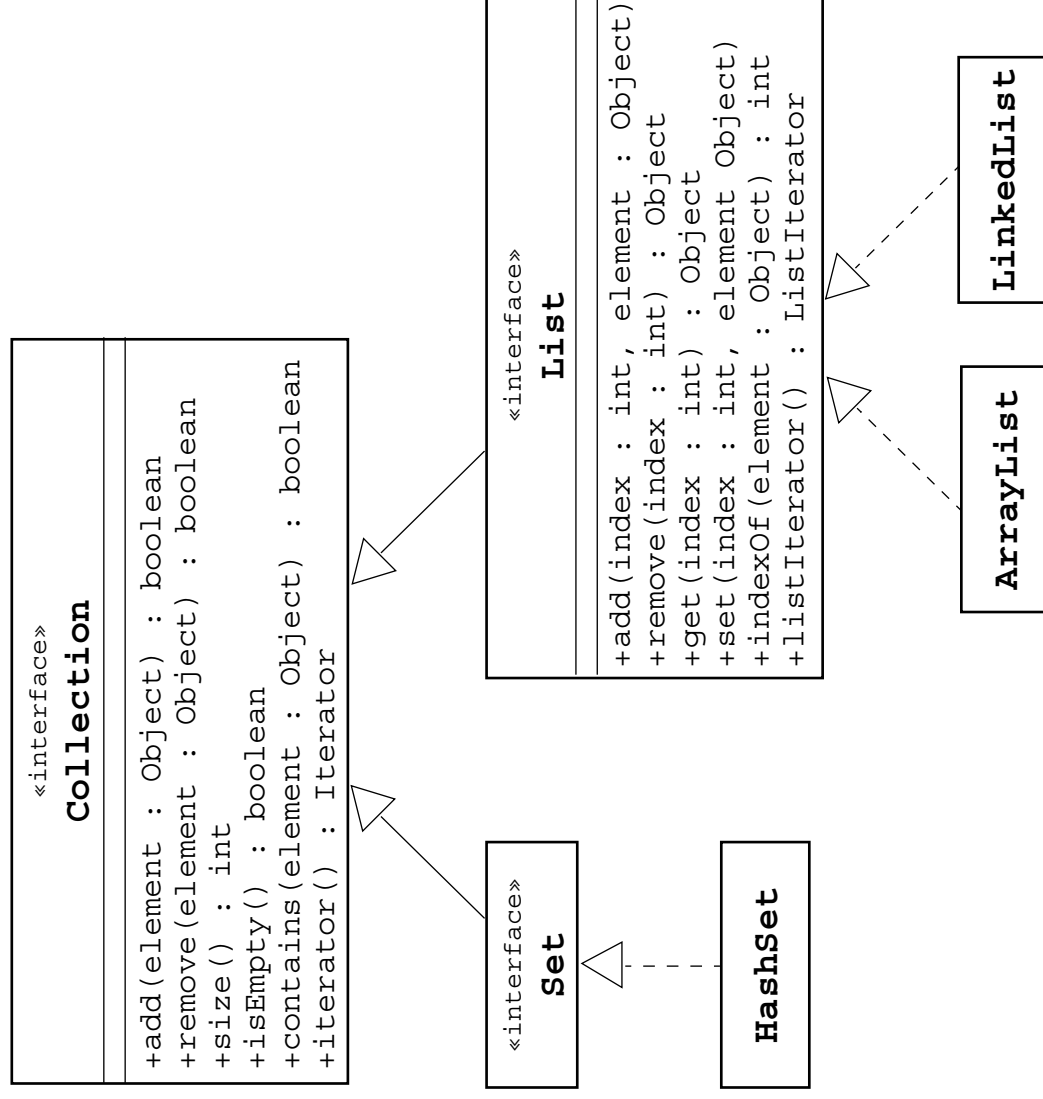

A Set Example

```
1  import java.util.*;
2
3  public class SetExample {
4      public static void main(String[] args) {
5          Set set = new HashSet();
6          set.add("one");
7          set.add("second");
8          set.add("3rd");
9          set.add(new Integer(4));
10         set.add(new Float(5.0F));
11         set.add("second");           // duplicate, not added
12         set.add(new Integer(4));     // duplicate, not added
13         System.out.println(set);
14     }
15 }
```

The output generated from this program is:

[one, second, 5.0, 3rd, 4]

A List Example

```
1  import java.util.*
2
3  public class ListExample {
4      public static void main(String[] args) {
5          List list = new ArrayList();
6          list.add("one");
7          list.add("second");
8          list.add("3rd");
9          list.add(new Integer(4));
10         list.add(new Float(5.0F));
11         list.add("second");           // duplicate, is added
12         list.add(new Integer(4));     // duplicate, is added
13         System.out.println(list);
14     }
15 }
```

The output generated from this program is:

[one, second, 3rd, 4, 5.0, second, 4]

Collections in JDK™ Version 1.1

Collections in the Java Development Kit (JDK™) include:

- The class `Vector` implements the `List` interface.
- The class `Stack` is a subclass of `Vector` and supports the `push`, `pop`, and `peek` methods.
- The class `Hashtable` implements the `Map` interface.
- The `Enumeration` interface is a variation on the `Iterator` interface.

An `enumeration` is returned by the `elements` method in `Vector`, `Stack`, and `Hashtable`.

- Classes are thread-safe, and therefore, *heavy weight*.
- These classes also support generics.

Generics

Generics are described as follows:


- Provides compile-time type safety
- Eliminates the need for casts

Before Generics


```
ArrayList list = new ArrayList();  
list.add(0, new Integer(42));  
int total = ((Integer)list.get(0)).intValue();
```

After Generics

```
ArrayList<Integer> list = new ArrayList<Integer>();  
list.add(0, new Integer(42));  
int total = list.get(0).intValue();
```



Generic Collections API

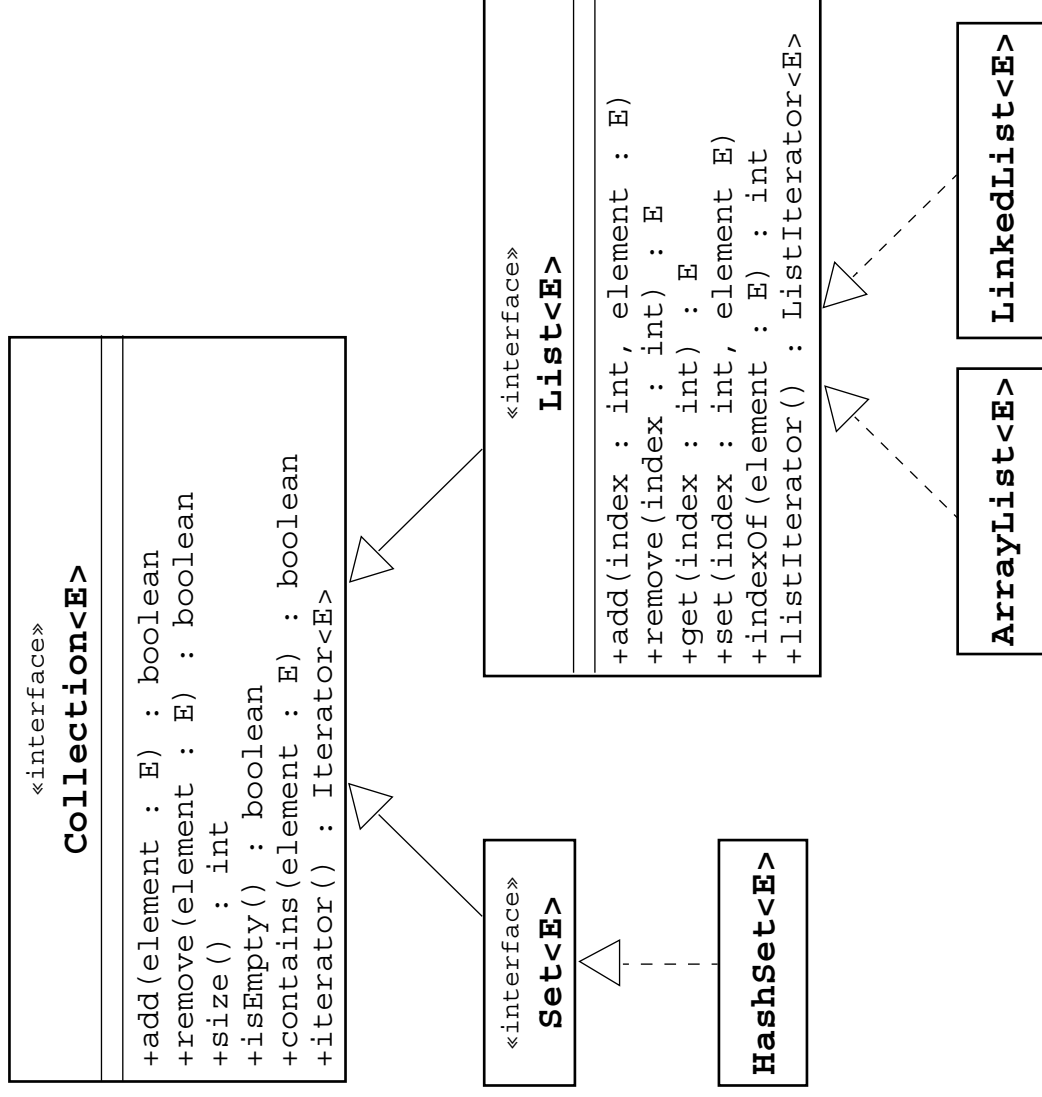

Compiler Warnings

```
1 import java.util.*;
2 public class GenericsWarning {
3     public static void main(String[] args) {
4         List list = new ArrayList();
5         list.add(0, new Integer(42));
6         int total = ((Integer)list.get(0)).intValue();
7     }
8 }
```

javac GenericsWarning.java


Note: GenericsWarning.java uses unchecked or unsafe operations.

Note: Recompile with -Xlint:unchecked for details.

javac -Xlint:unchecked GenericsWarning.java

GenericsWarning.java:7: warning: [unchecked] unchecked call to add(int,E) as a member of the raw type java.util.ArrayList
list.add(0, new Integer(42));
 ^

1 warning




Iterators

- Iteration is the process of retrieving every element in a collection.
- An Iterator of a Set is unordered.
- A ListIterator of a List can be scanned forwards (using the next method) or backwards (using the previous method).

```
List list = new ArrayList();  
// add some elements  
Iterator elements = list.iterator();  
while ( elements.hasNext() ) {  
    System.out.println(elements.next());  
}
```

The Iterator Interface Hierarchy

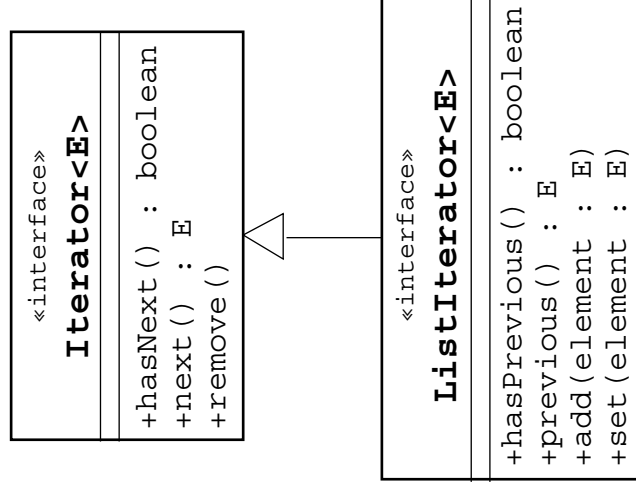

Enhanced `for` Loop

The enhanced `for` loop has the following characteristics:

- Simplified iteration over collections
- Much shorter, clearer, and safer
- Effective for arrays
- Simpler when using nested loops
- Iterator disadvantages removed

Iterators are error prone:

- Iterator variables occur three times per loop.
- This provides the opportunity for code to go wrong.

Enhanced for Loop

An enhanced for loop can look like this:

- Using iterators:

```
public void deleteAll(Collection<NameList> c) {  
    for ( Iterator<NameList> i = c.iterator() ; i.hasNext() ; ) {  
        NameList nl = i.next();  
        nl.deleteItem();  
    }  
}
```

- Using enhanced for loop in collections:

```
public void deleteAll(Collection<NameList> c) {  
    for ( NameList nl : c ) {  
        nl.deleteItem();  
    }  
}
```


Enhanced for Loop

- Using enhanced for loop in arrays:

```
public int sum(int[] array) {  
    int result = 0;  
    for ( int element : array ) {  
        result += element;  
    }  
    return result;  
}
```

- Using enhanced for loop in nested loops:

```
List<Subject> subjects=...;  
List<Teacher> teachers=...;  
List<Course> courseList = new ArrayList<Course>();  
for ( Subject subj : subjects ) {  
    for ( Teacher tchr : teachers ) {  
        courseList.add(new Course(subj, tchr));  
    }  
}
```




Sun Services

Module 10

Building Java GUIs

Objectives

- Describe the Abstract Window Toolkit (AWT) package and its components
- Define the terms *containers*, *components*, and *layout managers*, and describe how they work together to build a GUI
- Use layout managers
- Use the `FlowLayout`, `BorderLayout`, and `GridLayout` managers to achieve a desired dynamic layout
- Add components to a container
- Use the `Frame` and `Panel` containers appropriately
- Describe how complex layouts with nested containers work




Relevance

As a platform-independent programming language, how is Java technology used to make the graphical user interface (GUI) platform-independent?


Abstract Window Toolkit


The AWT performs the following:

- Provides GUI components that are used in all Java applets and applications
- Contains classes that can be composed or extended; classes can also be abstract
- Ensures that every GUI component that is displayed on the screen is a subclass of the abstract class `Component` or `MenuComponent`
- Has `Container`, which is an abstract subclass of `Component` and includes two subclasses:
 - `Panel`
 - `Window`



The java.awt Package

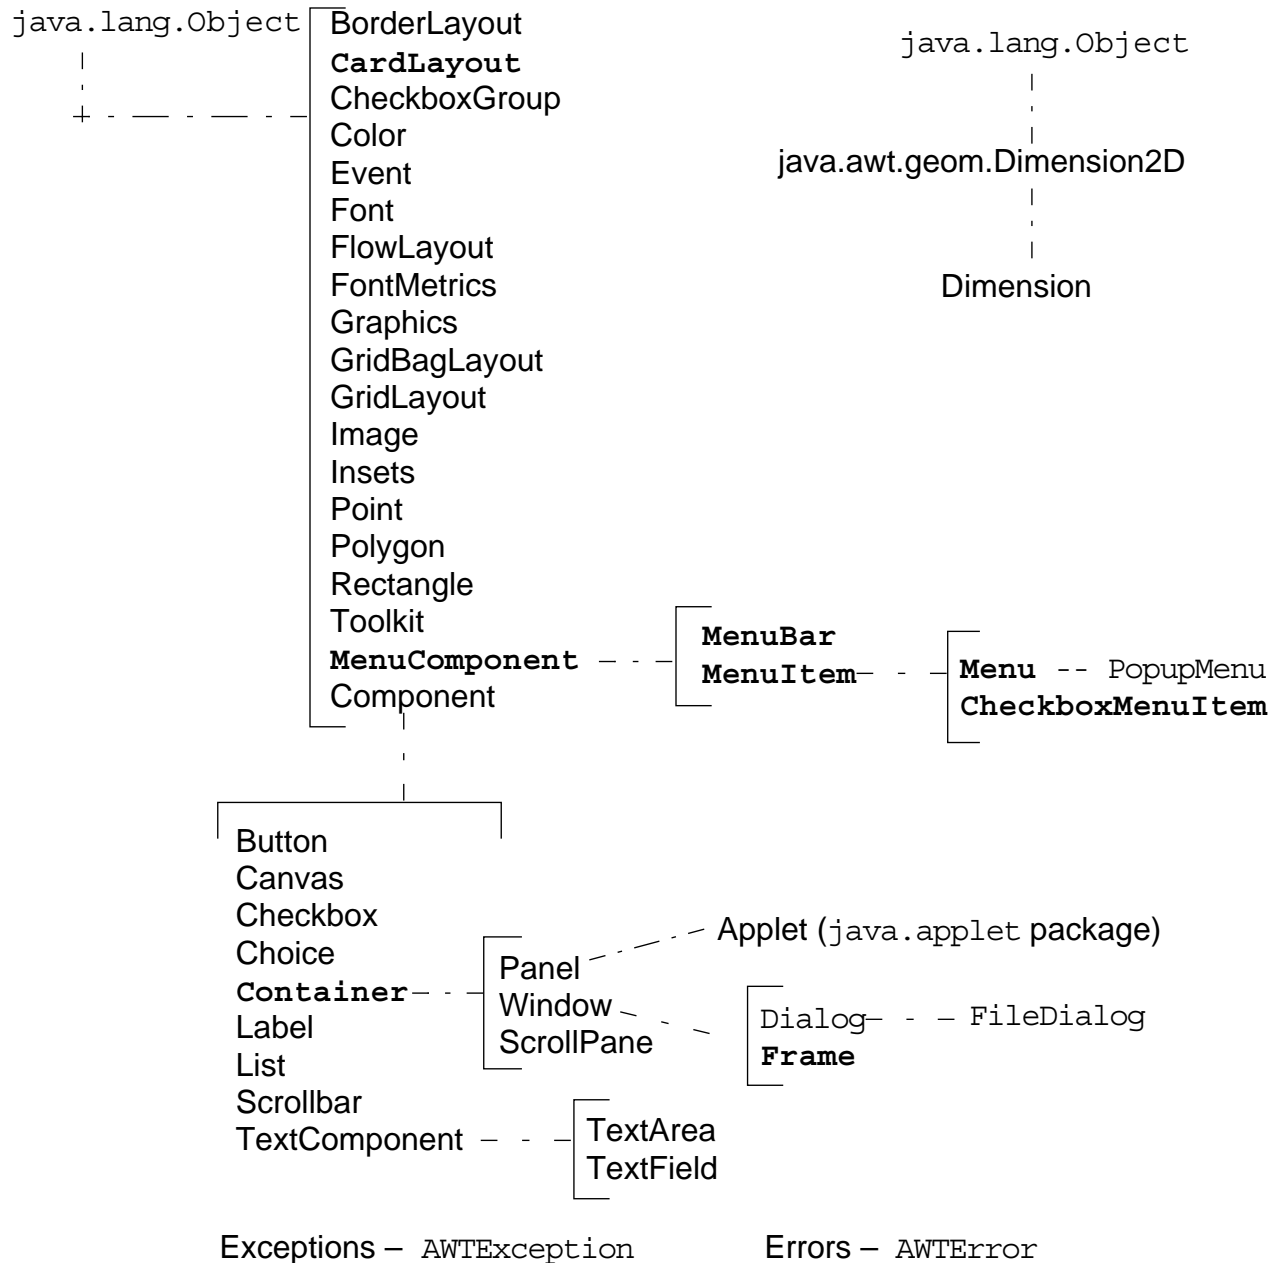



Containers

- Add components with the `add()` method.
- The two main types of containers are `Window` and `Panel`.
- A `Window` is a free floating window on the display.
- A `Panel` is a container of GUI components that must exist in the context of some other container, such as a window or applet.

Positioning Components

- The position and size of a component in a container is determined by a layout manager.
- You can control the size or position of components by disabling the layout manager.

You must then use `setLocation()`, `setSize()`, or `setBounds()` on components to locate them in the container.

Frames


Frames have the following characteristics:

- Are a subclass of `Window`
- Have title and resizing corners
- Are invisible initially; use `setVisible(true)` to expose the frame
- Have `BorderLayout` as the default layout manager
- Use the `setLayout` method to change the default layout manager

The FrameExample Class

```
1  import java.awt.*;
2
3  public class FrameExample {
4      private Frame f;
5      public FrameExample() {
6          f = new Frame("Hello Out There!");
7      }
8
9      public void launchFrame() {
10         f.setSize(170,170);
11         f.setBackground(Color.blue);
12         f.setVisible(true);
13     }
14
15     public static void main(String args[]) {
16         FrameExample guiWindow = new FrameExample();
17         guiWindow.launchFrame();
18     }
19 }
```


Example Frame

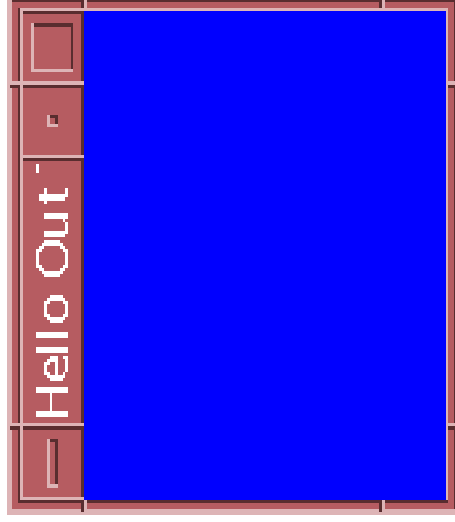

Solaris OS




Microsoft Windows



Panels

- Panels provide a space for components.
- This enables subpanels to have their own layout manager.




The FrameWithPanel Class

```
1 import java.awt.*;  
2  
3 public class FrameWithPanel {  
4     private Frame f;  
5     private Panel pan;  
6  
7     public FrameWithPanel(String title) {  
8         f = new Frame(title);  
9         pan = new Panel();  
10    }
```


The FrameWithPanel Class

```
11      public void launchFrame() {
12          f.setSize(200,200);
13          f.setBackground(Color.blue);
14          f.setLayout(null); // Use default layout
15
16          pan.setSize(100,100);
17          pan.setBackground(Color.yellow);
18          f.add(pan);
19          f.setVisible(true);
20      }
21
22      public static void main(String args[]) {
23          FrameWithPanel guiWindow =
24              new FrameWithPanel("Frame with Panel");
25          guiWindow.launchFrame();
26      }
27  }
28  }
```


Example Panel

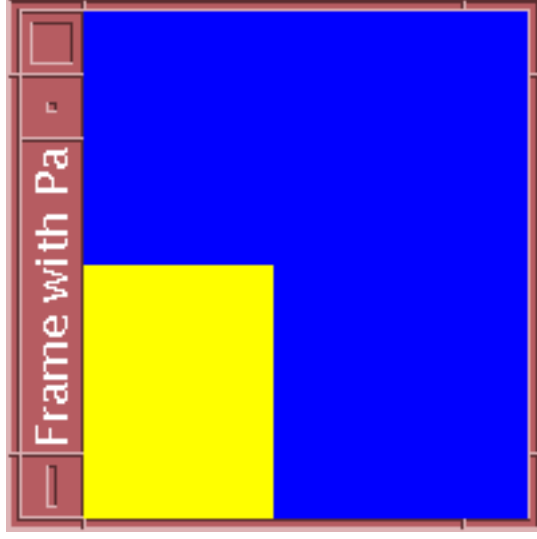

Solaris OS

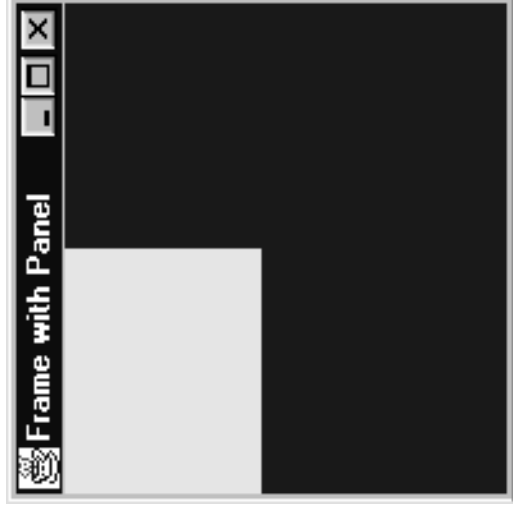


Microsoft Windows




Layout Managers

- FlowLayout
- BorderLayout
- GridLayout
- CardLayout
- GridBagLayout



Default Layout Managers

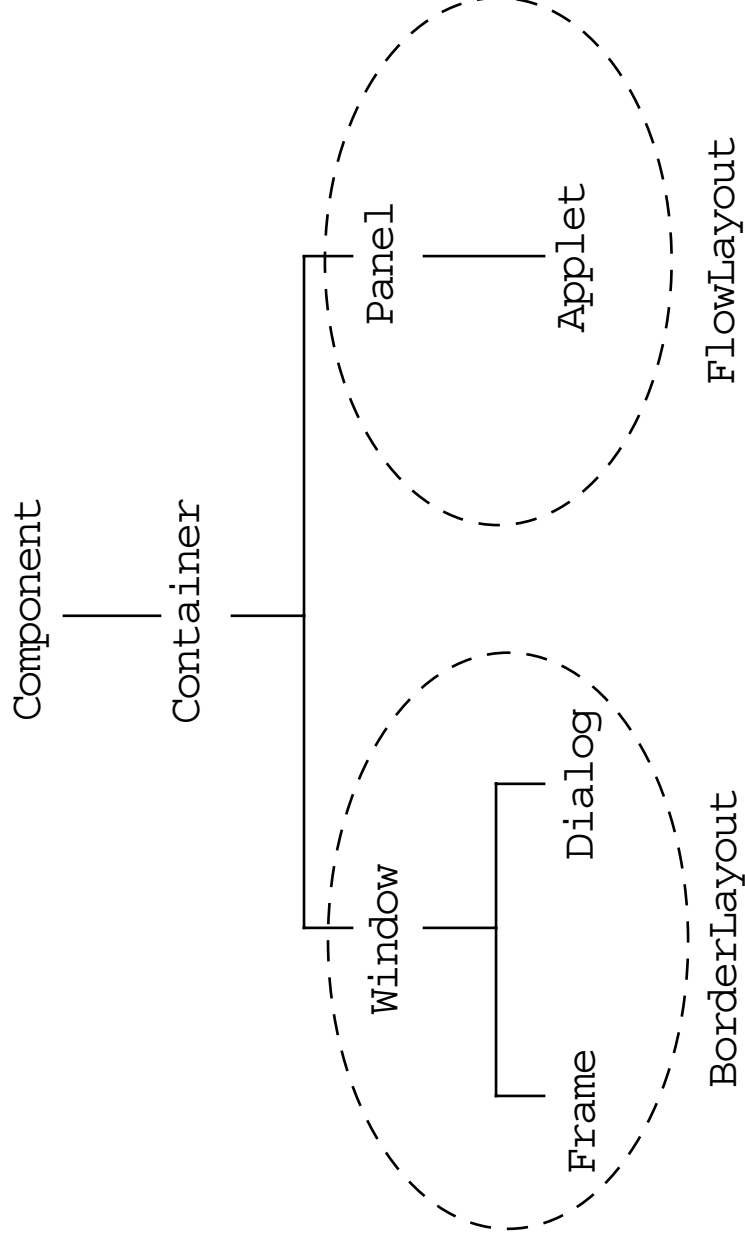

A Simple FlowLayout Example

```
1  import java.awt.*;
2
3  public class LayoutExample {
4      private Frame f;
5      private Button b1;
6      private Button b2;
7
8      public LayoutExample() {
9          f = new Frame("GUI example");
10         b1 = new Button("Press Me");
11         b2 = new Button("Don't press Me");
12     }
```

A Simple FlowLayout Example

```
13      public void launchFrame() {
14          f.setLayout(new FlowLayout());
15          f.add(b1);
16          f.add(b2);
17          f.pack();
18          f.setVisible(true);
19      }
20
21      public static void main(String args[]) {
22          LayoutExample guiWindow = new LayoutExample();
23          guiWindow.launchFrame();
24      }
25
26      } // end of LayoutExample class
27  }
```

Example of FlowLayout



Solaris OS




Microsoft Windows

The FlowLayout Manager


The FlowLayout manager has the following characteristics:

- Forms the default layout for the Panel class
- Adds components from left to right
- Alignment default is centered
- Uses components' preferred sizes
- Uses the constructor to tune behavior


The FlowLayout Resizing



After user or
program resizes

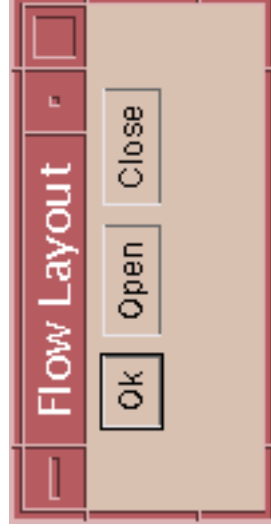

Solaris OS



The FlowExample Class


```
1  import java.awt.*;
2
3  public class FlowExample {
4      private Frame f;
5      private Button button1;
6      private Button button2;
7      private Button button3;
8
9      public FlowExample() {
10         f = new Frame("Flow Layout");
11         button1 = new Button("Ok");
12         button2 = new Button("Open");
13         button3 = new Button("Close");
14     }
```


The FlowExample Class


```
15     public void launchFrame() {
16         f.setLayout(new FlowLayout());
17         f.add(button1);
18         f.add(button2);
19         f.add(button3);
20         f.setSize(100,100);
21         f.setVisible(true);
22     }
23
24     public static void main(String args[]) {
25         FlowExample guiWindow = new FlowExample();
26         guiWindow.launchFrame();
27     }
28 }
29 }
```


The BorderLayout Manager

- The BorderLayout manager is the default layout for the `Frame` class.
- Components are added to specific regions.
- The resizing behavior is as follows:
 - North, South, and Center regions adjust horizontally
 - East, West, and Center regions adjust vertically



Organization of the Border Layout Components

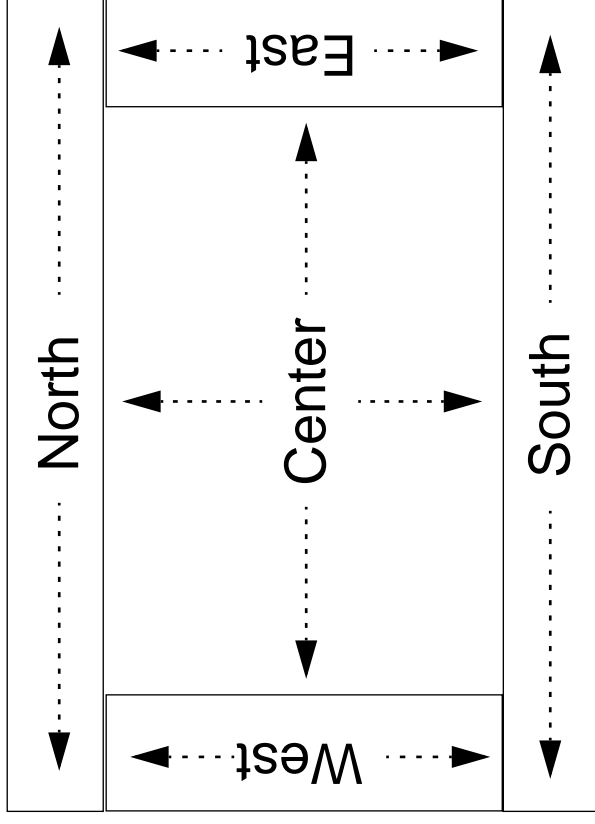




The BorderLayoutExample Class

```
1  import java.awt.*;
2
3  public class BorderLayoutExample {
4      private Frame f;
5      private Button bn, bs, bw, be, bc;
6
7      public BorderLayoutExample() {
8          f = new Frame("Border Layout");
9          bn = new Button("B1");
10         bs = new Button("B2");
11         bw = new Button("B3");
12         be = new Button("B4");
13         bc = new Button("B5");
14     }
```

The BorderLayoutExample Class

```
15     public void launchFrame() {
16         f.add(bn, BorderLayout.NORTH);
17         f.add(bs, BorderLayout.SOUTH);
18         f.add(bw, BorderLayout.WEST);
19         f.add(be, BorderLayout.EAST);
20         f.add(bc, BorderLayout.CENTER);
21         f.setSize(200,200);
22         f.setVisible(true);
23     }
24
25     public static void main(String args[]) {
26         BorderLayoutExample guiWindow2 = new BorderLayoutExample();
27         guiWindow2.launchFrame();
28     }
29 }
30 }
```


Example of BorderLayout

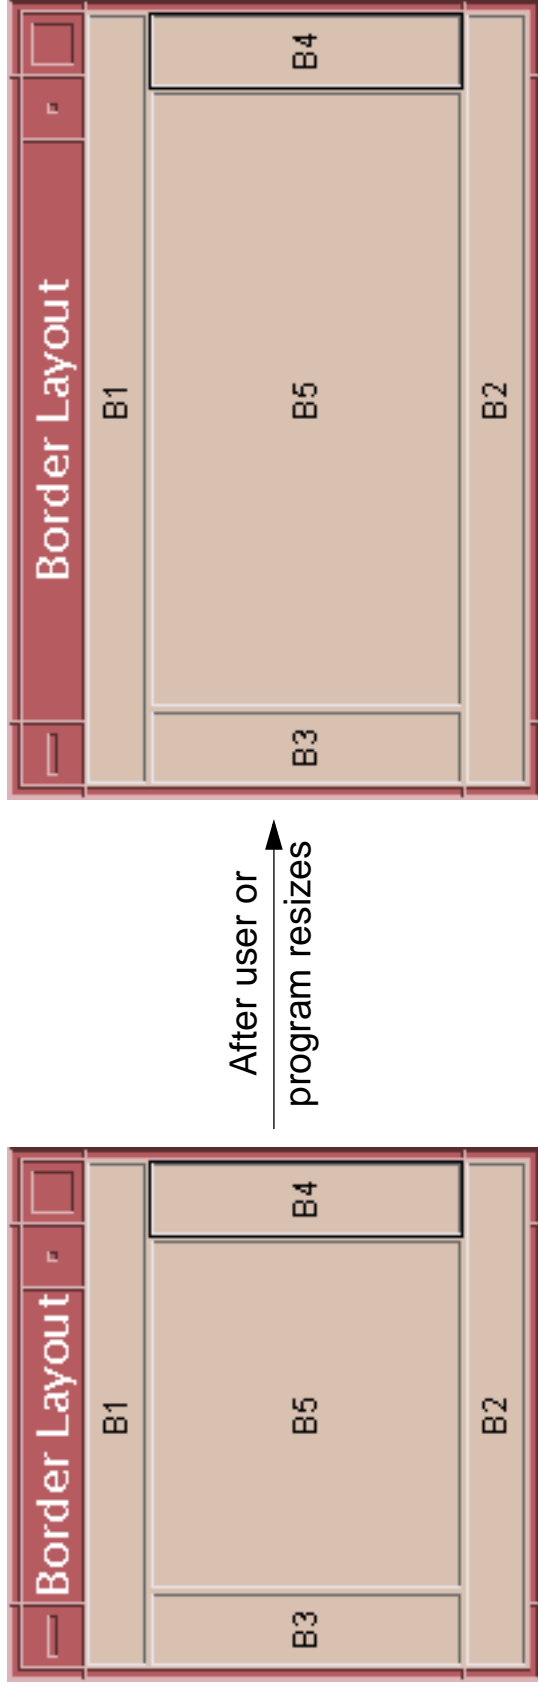

Solaris OS

The GridLayout Manager

- Components are added from left to right, and from top to bottom.
- All regions are sized equally.
- The constructor specifies the rows and columns.



The GridExample Class

```
1  import java.awt.*;
2
3  public class GridExample {
4      private Frame f;
5      private Button b1, b2, b3, b4, b5, b6;
6
7      public GridExample() {
8          f = new Frame("Grid Example");
9          b1 = new Button("1");
10         b2 = new Button("2");
11         b3 = new Button("3");
12         b4 = new Button("4");
13         b5 = new Button("5");
14         b6 = new Button("6");
15     }
```


The GridExample Class

```
16      public void launchFrame() {
17          f.setLayout (new GridLayout (3,2));
18          f.add(b1);
19          f.add(b2);
20          f.add(b3);
21          f.add(b4);
22          f.add(b5);
23          f.add(b6);
24          f.pack();
25          f.setVisible(true);
26      }
27
28
29      public static void main(String args[]) {
30          GridExample grid = new GridExample();
31          grid.launchFrame();
32      }
33 }
```

Example of GridLayout



After user or
program resizes



Solaris OS



After user or
program resizes



Microsoft Windows


The ComplexLayoutExample Class

```
1  import java.awt.*;
2
3  public class ComplexLayoutExample {
4      private Frame f;
5      private Panel p;
6      private Button bw, bc;
7      private Button bfile, bhelp;
8
9      public ComplexLayoutExample() {
10         f = new Frame("GUI example 3");
11         bw = new Button("West");
12         bc = new Button("Work space region");
13         bfile = new Button("File");
14         bhelp = new Button("Help");
15     }
```



The ComplexLayoutExample Class

```
16 public void launchFrame() {
17     // Add bw and bc buttons in the frame border
18     f.add(bw, BorderLayout.WEST);
19     f.add(bc, BorderLayout.CENTER);
20     // Create panel for the buttons in the north border
21     p = new Panel();
22     p.add(bfile);
23     p.add(bhelp);
24     f.add(p, BorderLayout.NORTH);
25     // Pack the frame and make it visible
26     f.pack();
27     f.setVisible(true);
28 }
29
30 public static void main(String args[]) {
31     ComplexLayoutExample gui = new ComplexLayoutExample();
32     gui.launchFrame();
33 }
34 }
```

Combining Layout Managers

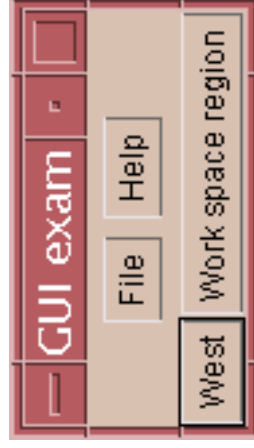


After user or
program resizes

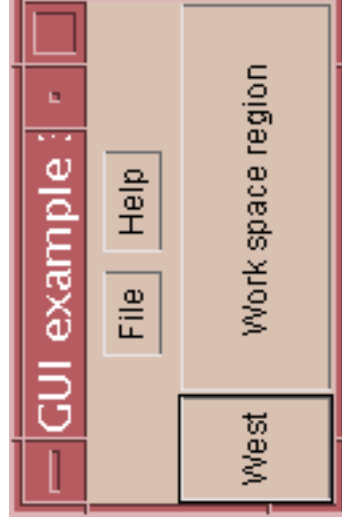


Solaris OS


Drawing in AWT

- You can draw in any `Component` (although AWT provides the `Canvas` and `Panel` classes just for this purpose).
- Typically, you create a subclass of `Canvas` or `Panel` and override the `paint` method.
- The `paint` method is called every time the component is shown (for example, if another window overlapped the component and was then removed).
- Every component has a `Graphics` object.
- The `Graphics` class implements many drawing methods.



Various Shapes Drawn by the Graphics Object

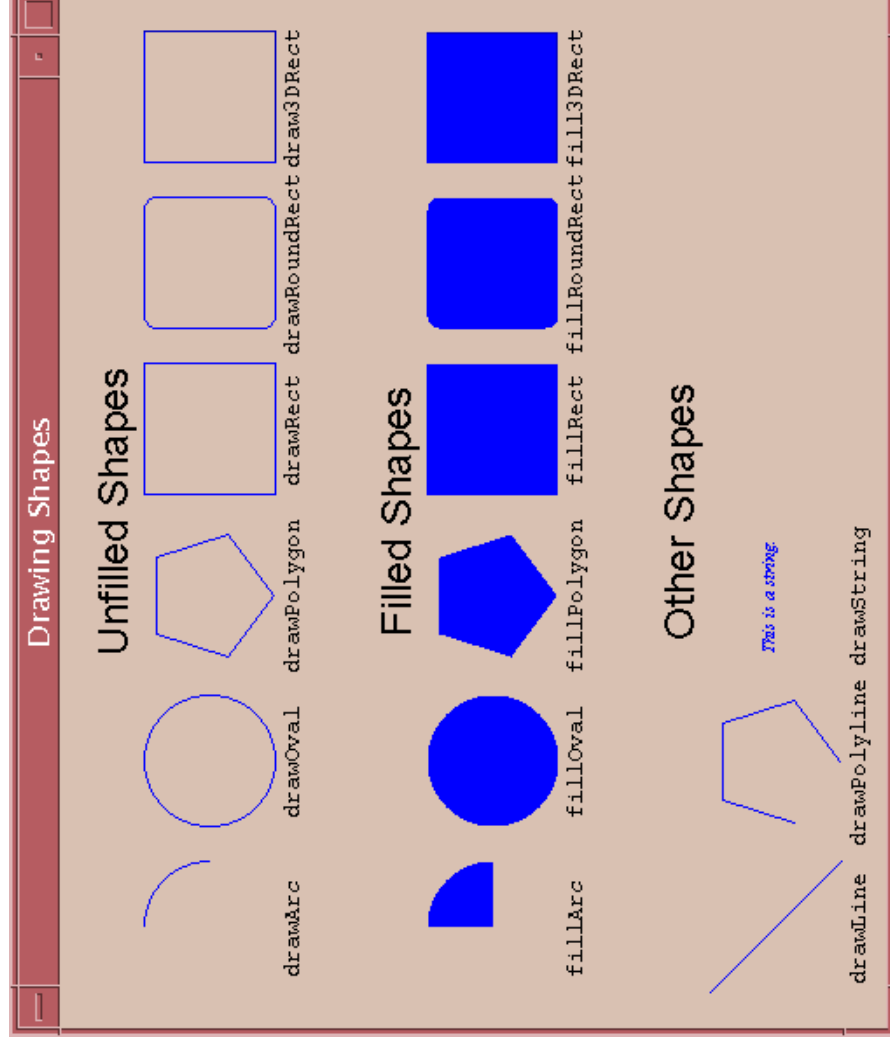




Sun Services

Module 11

GUI Event Handling

Objectives

- Define events and event handling
- Write code to handle events that occur in a GUI
- Describe the concept of adapter classes, including how and when to use them
- Determine the user action that originated the event from the event object details
- Identify the appropriate listener interface for a variety of event types
- Create the appropriate event handler methods for a variety of event types
- Understand the use of inner classes and anonymous classes in event handling




Relevance

- What parts of a GUI are required to make it useful?
- How does a graphical program handle a mouse click or any other type of user interaction?


What Is an Event?

- Events – Objects that describe what happened
- Event sources – The generator of an event
- Event handlers – A method that receives an event object, deciphers it, and processes the user's interaction

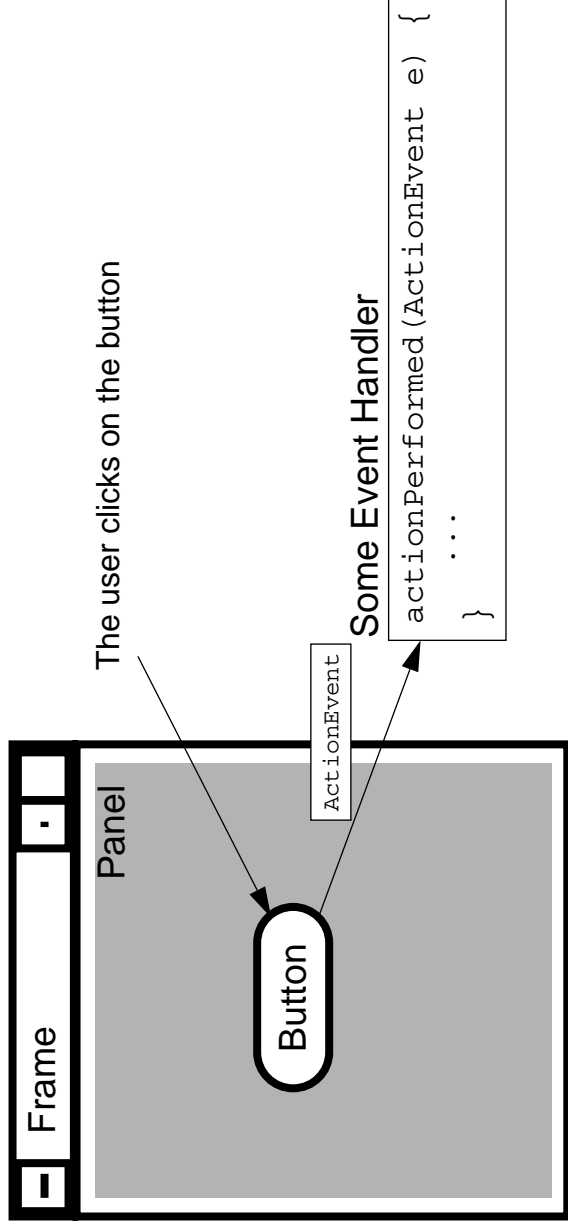

Delegation Model


- An event can be sent to many event handlers.

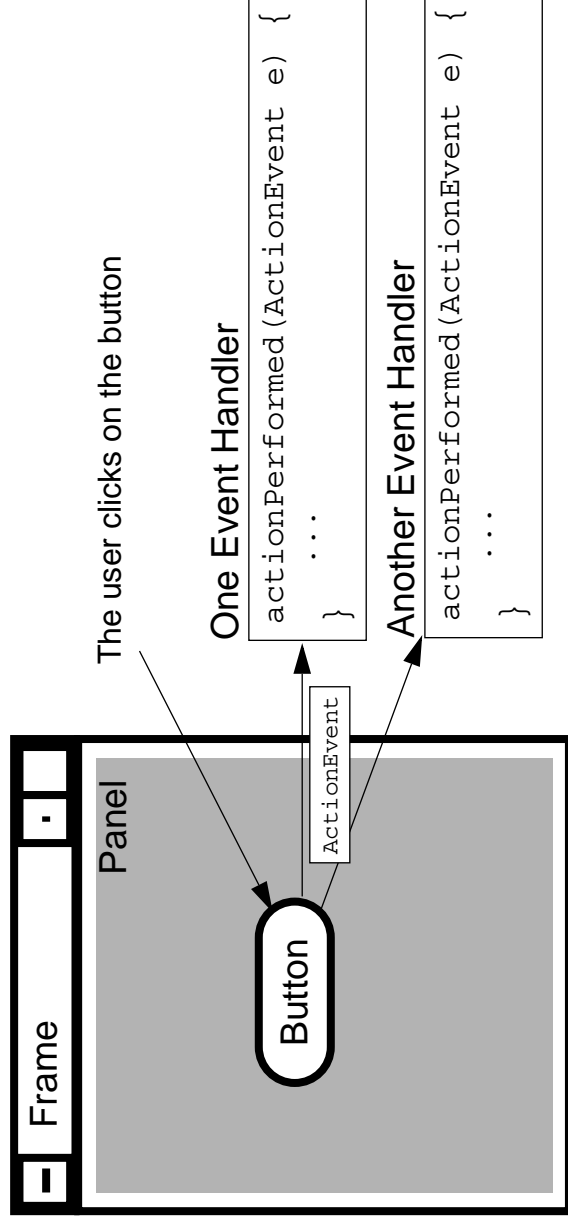

- Event handlers register with components when they are interested in events generated by that component.

Delegation Model

- Client objects (handlers) register with a GUI component that they want to observe.
- GUI components only trigger the handlers for the type of event that has occurred.
- Most components can trigger more than one type of event.
- The delegation model distributes the work among multiple classes.



A Listener Example

```
1  import java.awt.*;
2
3  public class TestButton {
4      private Frame f;
5      private Button b;
6
7      public TestButton() {
8          f = new Frame("Test");
9          b = new Button("Press Me!");
10         b.setActionCommand("ButtonPressed");
11     }
12
13     public void launchFrame() {
14         b.addActionListener(new ButtonHandler());
15         f.add(b, BorderLayout.CENTER);
16         f.pack();
17         f.setVisible(true);
18     }
```


A Listener Example

```
19      public static void main(String args[]) {
20          TestButton guiApp = new TestButton();
21          guiApp.launchFrame();
22      }
23  }
24 }
```

Code for the event listener looks like this:

```
1  import java.awt.event.*;
2
3  public class ButtonHandler implements ActionListener {
4      public void actionPerformed(ActionEvent e) {
5          System.out.println("Action occurred");
6          System.out.println("Button's command is: "
7                          + e.getActionCommand());
8      }
9  }
```

Event Categories

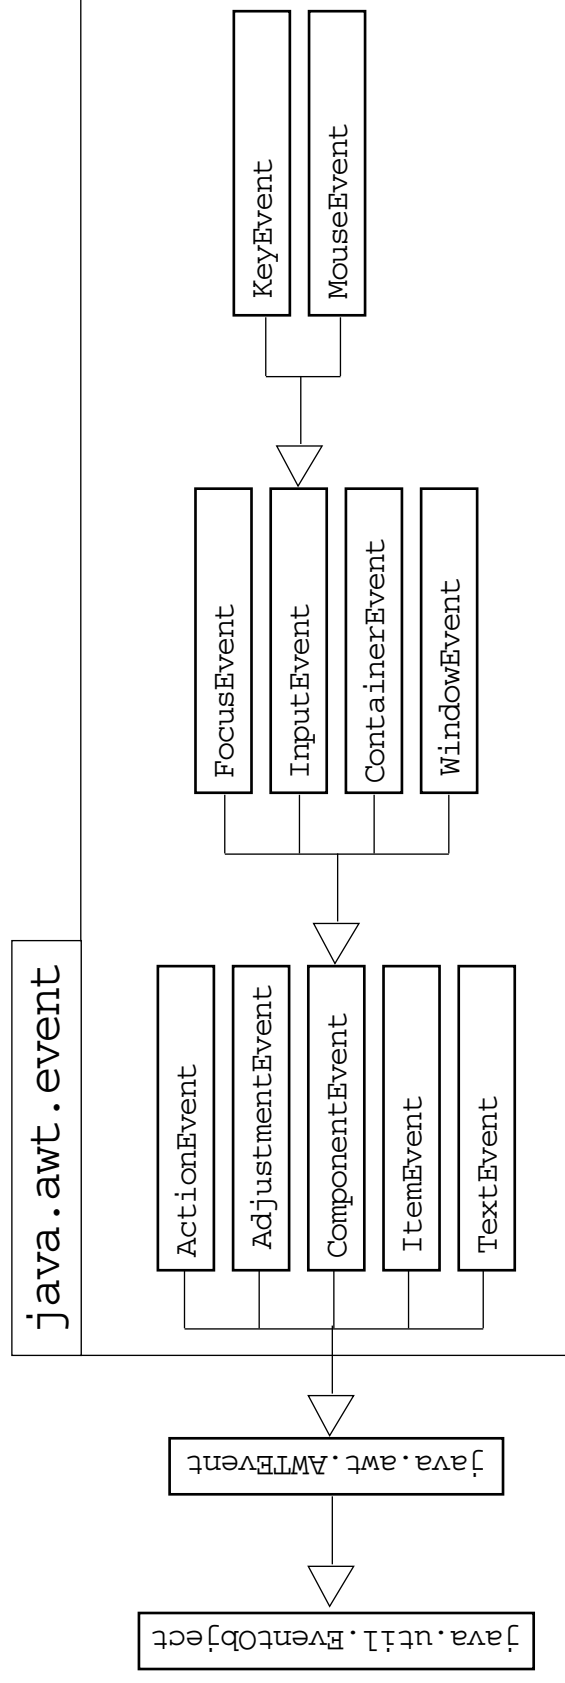

Method Categories and Interfaces


Category	Interface Name	Methods
Action	ActionListener	actionPerformed (ActionEvent)
Item	ItemListener	itemStateChanged (ItemEvent)
Mouse	MouseListener	mousePressed (MouseEvent)
		mouseReleased (MouseEvent)
		mouseEntered (MouseEvent)
		mouseExited (MouseEvent)
		mouseClicked (MouseEvent)
Mouse motion	MouseMotionListener	mouseDragged (MouseEvent)
		mouseMoved (MouseEvent)
Key	KeyListener	keyPressed (KeyEvent)
		keyReleased (KeyEvent)
		keyTyped (KeyEvent)

Method Categories and Interfaces

Category	Interface Name	Methods
Focus	FocusListener	focusGained (FocusEvent) focusLost (FocusEvent)
Adjustment	AdjustmentListener	adjustmentValueChanged (AdjustmentEvent)
Component	ComponentListener	componentMoved (ComponentEvent) componentHidden (ComponentEvent) componentResized (ComponentEvent) componentShown (ComponentEvent)


Method Categories and Interfaces

Category	Interface Name	Methods
Window	WindowListener	windowClosing(WindowEvent)
		windowOpened(WindowEvent)
		windowIconified(WindowEvent)
		windowDeiconified(WindowEvent)
		windowClosed(WindowEvent)
		windowActivated(WindowEvent)
		windowDeactivated(WindowEvent)
Container	ContainerListener	componentAdded(ContainerEvent) componentRemoved(ContainerEvent)
Text	TextListener	textValueChanged(TextEvent)




Complex Example

```
1 import java.awt.*;
2 import java.awt.event.*;
3
4 public class TwoListener
5     implements MouseMotionListener, MouseListener {
6     private Frame f;
7     private TextField tf;
8
9     public TwoListener() {
10         f = new Frame("Two listeners example");
11         tf = new TextField(30);
12     }
```




Complex Example

```
13
14     public void launchFrame() {
15         Label label = new Label("Click and drag the mouse");
16         // Add components to the frame
17         f.add(label, BorderLayout.NORTH);
18         f.add(tf, BorderLayout.SOUTH);
19         // Add this object as a listener
20         f.addMouseMotionListener(this);
21         f.addMouseListener(this);
22         // Size the frame and make it visible
23         f.setSize(300, 200);
24         f.setVisible(true);
25     }
```




Complex Example

```
26
27 // These are MouseMotionListener events
28 public void mouseDragged(MouseEvent e) {
29     String s = "Mouse dragging: X = " + e.getX()
30               + " Y = " + e.getY();
31     tf.setText(s);
32 }
33
34 public void mouseEntered(MouseEvent e) {
35     String s = "The mouse entered";
36     tf.setText(s);
37 }
38
39 public void mouseExited(MouseEvent e) {
40     String s = "The mouse has left the building";
41     tf.setText(s);
42 }
```



Complex Example

```
43      // Unused MouseMotionListener method.
44      // All methods of a listener must be present in the
45      // class even if they are not used.
46      public void mouseMoved(MouseEvent e) { }
47
48      // Unused MouseListener methods.
49      public void mousePressed(MouseEvent e) { }
50      public void mouseClicked(MouseEvent e) { }
51      public void mouseReleased(MouseEvent e) { }
52
53      public static void main(String args[]) {
54          TwoListener two = new TwoListener();
55          two.launchFrame();
56      }
57
58 }
```



Multiple Listeners

- Multiple listeners cause unrelated parts of a program to react to the same event.
- The handlers of all registered listeners are called when the event occurs.


Event Adapters

- The listener classes that you define can extend adapter classes and override only the methods that you need.
- An example is:

```
1 import java.awt.*;  
2 import java.awt.event.*;  
3  
4 public class MouseClickHandler extends MouseAdapter {  
5  
6     // We just need the mouseClicked handler, so we use  
7     // an adapter to avoid having to write all the  
8     // event handler methods  
9  
10    public void mouseClicked(MouseEvent e) {  
11        // Do stuff with the mouse click...  
12    }  
13 }
```

Event Handling Using Inner Classes

```
1 import java.awt.*;
2 import java.awt.event.*;
3 public class TestInner {
4     private Frame f;
5     private TextField tf; // used by inner class
6
7     public TestInner() {
8         f = new Frame("Inner classes example");
9         tf = new TextField(30);
10    }
11
12    class MyMouseMotionListener extends MouseMotionAdapter {
13        public void mouseDragged(MouseEvent e) {
14            String s = "Mouse dragging:  X = "+ e.getX()
15                      + " Y = " + e.getY();
16            tf.setText(s);
17        }
18    }
```



Event Handling Using Inner Classes


```
19      public void launchFrame() {
20          Label label = new Label("Click and drag the mouse");
21          // Add components to the frame
22          f.add(label, BorderLayout.NORTH);
23          f.add(tf, BorderLayout.SOUTH);
24          // Add a listener that uses an Inner class
25          f.addMouseListener(new MyMouseMotionListener());
26          f.addMouseListener(new MouseClickHandler());
27          // Size the frame and make it visible
28          f.setSize(300, 200);
29          f.setVisible(true);
30      }
31  }
32
33  public static void main(String args[]) {
34      TestInner obj = new TestInner();
35      obj.launchFrame();
36  }
37 }
```

Event Handling Using Anonymous Classes

```
1 import java.awt.*;
2 import java.awt.event.*;
3
4 public class TestAnonymous {
5     private Frame f;
6     private TextField tf;
7
8     public TestAnonymous() {
9         f = new Frame("Anonymous classes example");
10        tf = new TextField(30);
11    }
12
13    public static void main(String args[]) {
14        TestAnonymous obj = new TestAnonymous();
15        obj.launchFrame();
16    }
17 }
```

Event Handling Using Anonymous Classes


```
18 public void launchFrame() {
19     Label label = new Label("Click and drag the mouse");
20     // Add components to the frame
21     f.add(label, BorderLayout.NORTH);
22     f.add(tf, BorderLayout.SOUTH);
23     // Add a listener that uses an anonymous class
24     f.addMouseListener(new MouseMotionAdapter() {
25         public void mouseDragged(MouseEvent e) {
26             String s = "Mouse dragging:  X = "+ e.getX()
27                     + " Y = " + e.getY();
28             tf.setText(s);
29         }
30     }); // <- note the closing parenthesis
31     f.addMouseListener(new MouseClickListener()); // Not shown
32     // Size the frame and make it visible
33     f.setSize(300, 200);
34     f.setVisible(true);
35     }
36 }
```



Sun Services


Module 12

GUI-Based Applications



Objectives

- Identify the key AWT components and the events that they trigger
- Describe how to construct a menu bar, menu, and menu items in a Java GUI
- Understand how to change the color and font of a component



Relevance

- You now know how to set up a Java GUI for both graphic output and interactive user input. However, only a few of the components from which GUIs can be built have been described. What other components would be useful in a GUI?
- How can you create a menu for your GUI frame?

AWT Components

Component Type	Description
Button	A named rectangular box used for receiving mouse clicks
Canvas	A panel used for drawing
Checkbox	A component enabling the user to select an item
CheckboxMenuItem	A checkbox within a menu
Choice	A pull-down static list of items
Component	The parent of all AWT components, except menu components
Container	The parent of all AWT containers
Dialog	A top-level window with a title and a border; dialogs can be modeless or modal
Frame	The base class of all GUI windows with window manager controls

AWT Components


Component Type	Description
Label	A text string component
List	A component that contains a dynamic set of items
Menu	An element under the menu bar, which contains a set of menu items
MenuItem	An item within a menu
Panel	A basic container class used most often to create complex layouts
Scrollbar	A component that enables a user to select from a range of values
ScrollPane	A container class that implements automatic horizontal and vertical scrolling for a single child component

AWT Components

Component Type	Description
TextArea	A component that enables the user to enter a block of text
TextField	A component that enables the user to enter a single line of text
Window	The base class of all GUI windows, without window manager controls

AWT Listeners

Component Type	Act	Adj	Cmp	Cnt	Foc	Itm	Key	Mou	MM	Text	Win
Button	✓		✓		✓		✓	✓	✓		
Canvas			✓		✓		✓	✓	✓		
Checkbox			✓		✓	✓	✓	✓	✓		
Checkbox - MenuItem						✓					
Choice			✓		✓	✓	✓	✓	✓		
Component			✓		✓		✓	✓	✓		
Container			✓	✓	✓		✓	✓	✓		
Dialog			✓	✓	✓		✓	✓	✓		
Frame			✓	✓	✓		✓	✓	✓		
Label			✓		✓		✓	✓	✓		



AWT Listeners


Component Type	Act	Adj	Cmp	Cnt	Foc	Itm	Key	Mou	MM	Text	Win
List	✓		✓		✓	✓	✓	✓	✓		
MenuItem	✓										
Panel			✓	✓	✓		✓	✓	✓		
Scrollbar		✓	✓		✓		✓	✓	✓		
ScrollPane			✓	✓	✓		✓	✓	✓		
TextArea			✓		✓		✓	✓	✓	✓	
TextField	✓		✓		✓		✓	✓	✓	✓	
Window			✓	✓	✓		✓	✓	✓	✓	✓

How to Create a Menu

1. Create a `MenuBar` object, and set it into a menu container, such as a `Frame`.
2. Create one or more `MenuItem` objects, and add them to the menu bar object.
3. Create one or more `MenuItem` objects, and add them to the menu object.

Creating a MenuBar

```
1 Frame f = new Frame ("MenuBar") ;  
2 MenuBar mb = new MenuBar () ;  
3 f.setMenuBar (mb) ;
```

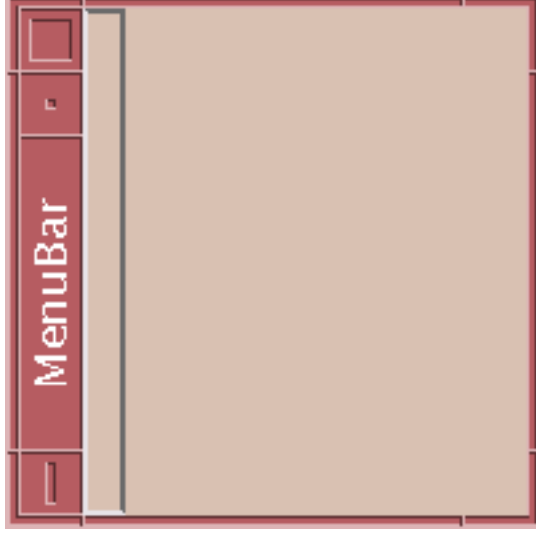


Solaris OS



Microsoft Windows


Creating a Menu

```
1  Frame f = new Frame ("Menu" );
2  MenuBar mb = new MenuBar ( ) ;
3  Menu m1 = new Menu ("File" );
4  Menu m2 = new Menu ("Edit" );
5  Menu m3 = new Menu ("Help" );
6  mb.add(m1) ;
7  mb.add(m2) ;
8  mb.setHelpMenu (m3) ;
9  f.setMenuBar (mb) ;
```

Sun Services

Creating a Menu

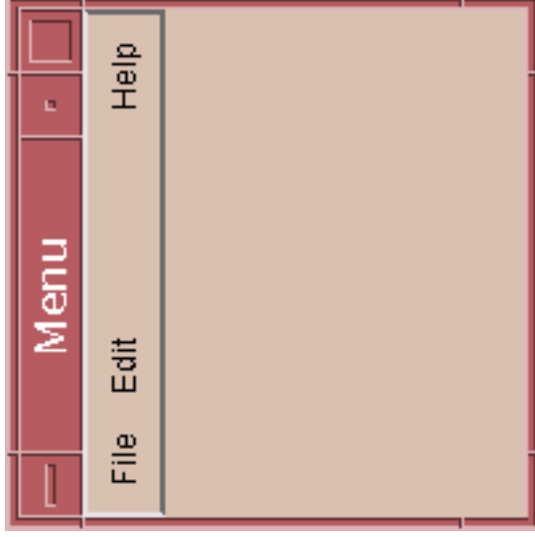

Solaris OS




Microsoft Windows


Creating a MenuItem

```
1 MenuItem mi1 = new MenuItem("New");
2 MenuItem mi2 = new MenuItem("Save");
3 MenuItem mi3 = new MenuItem("Load");
4 MenuItem mi4 = new MenuItem("Quit");
5 mi1.addActionListener(this);
6 mi2.addActionListener(this);
7 mi3.addActionListener(this);
8 mi4.addActionListener(this);
9 m1.add(mi1);
10 m1.add(mi2);
11 m1.add(mi3);
12 m1.addSeparator();
13 m1.add(mi4);
```

Creating a MenuItem

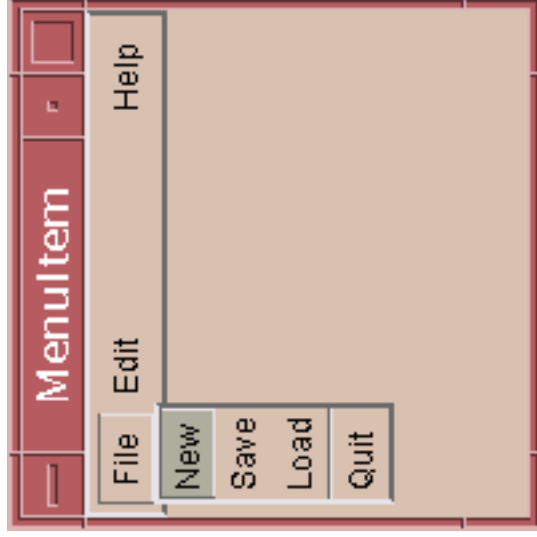

Solaris OS

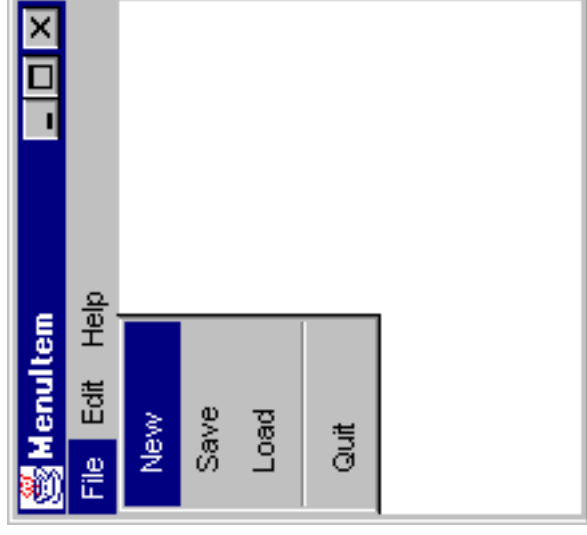


Microsoft Windows


Creating a CheckBoxMenuItem

```
1  MenuBar mb = new MenuBar();
2  Menu m1 = new Menu("File");
3  Menu m2 = new Menu("Edit");
4  Menu m3 = new Menu("Help");
5  mb.add(m1);
6  mb.add(m2);
7  mb.setHelpMenu(m3);
8  f.setMenuBar(mb);
9  ....
10 MenuItem mi2 = new MenuItem("Save");
11 mi2.addActionListener(this);
12 m1.add(mi2);
13 ....
14 CheckBoxMenuItem mi5 = new CheckBoxMenuItem("Persistent");
15 mi5.addItemListener(this);
16 m1.add(mi5);
```

Creating a CheckBoxMenuItem

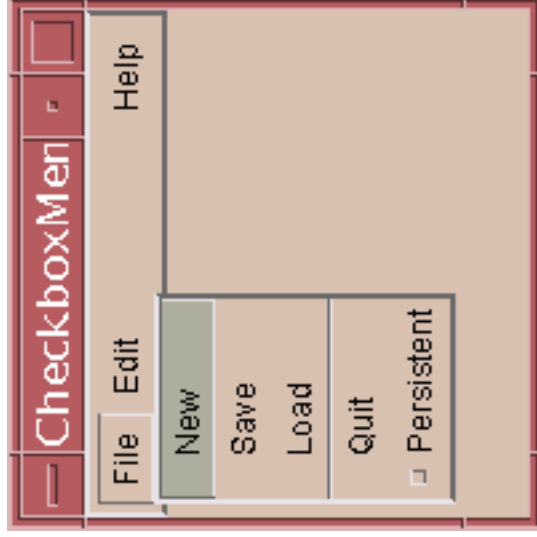

Solaris OS

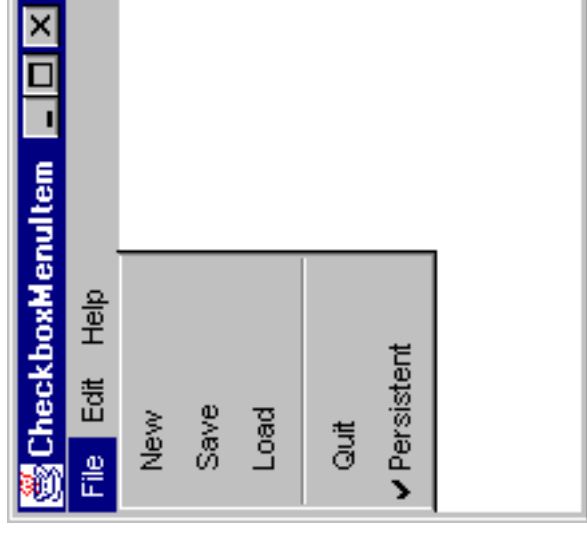

Microsoft Windows

Controlling Visual Aspects


Commands to control visual aspects of the GUI include:

- **Colors:**

```
setForeground()  
setBackground()
```


- **Example:**

```
Color purple = new Color(255, 0, 255);  
Button b = new Button("Purple");  
b.setBackground(purple);
```



J.F.C./Swing Technology

- Java Foundation Class/Swing (J.F.C./Swing) technology is a second-generation GUI toolkit.
- It builds on top of AWT, but supplants the components with *lightweight* versions.
- There are many more components, and much more complex components, including JTable, JTree, and JComboBox.




Sun Services

Module 13

Threads

Objectives

- Define a thread
- Create separate threads in a Java technology program, controlling the code and data that are used by that thread
- Control the execution of a thread and write platform-independent code with threads
- Describe the difficulties that might arise when multiple threads share data
- Use `wait` and `notify` to communicate between threads
- Use `synchronized` to protect data from corruption




Relevance

How do you get programs to perform multiple tasks concurrently?


Threads

- What are threads?
Threads are a virtual CPU.
- The three parts of a thread are:
 - CPU
 - Code
 - Data

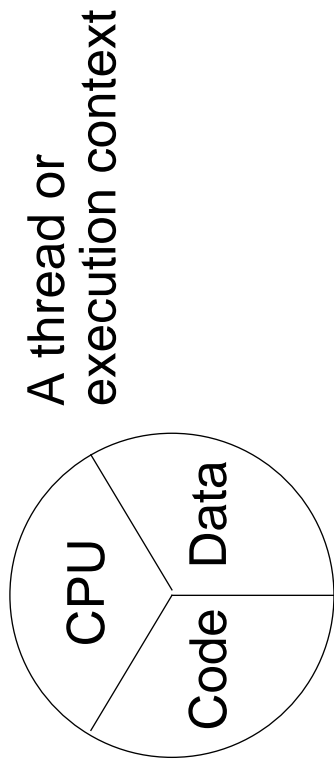

Creating the Thread


```
1 public class ThreadTester {
2     public static void main(String args[]) {
3         HelloRunner r = new HelloRunner();
4         Thread t = new Thread(r);
5         t.start();
6     }
7 }
8 class HelloRunner implements Runnable {
9     int i;
10    public void run() {
11        i = 0;
12        while (true) {
13            System.out.println("Hello " + i++);
14            if ( i == 50 ) {
15                break;
16            }
17        }
18    }
19 }
```




Creating the Thread

- Multithreaded programming has these characteristics:
 - Multiple threads are from one Runnable instance.
 - Threads share the same data and code.
- For example:

```
Thread t1 = new Thread(r);  
Thread t2 = new Thread(r);
```

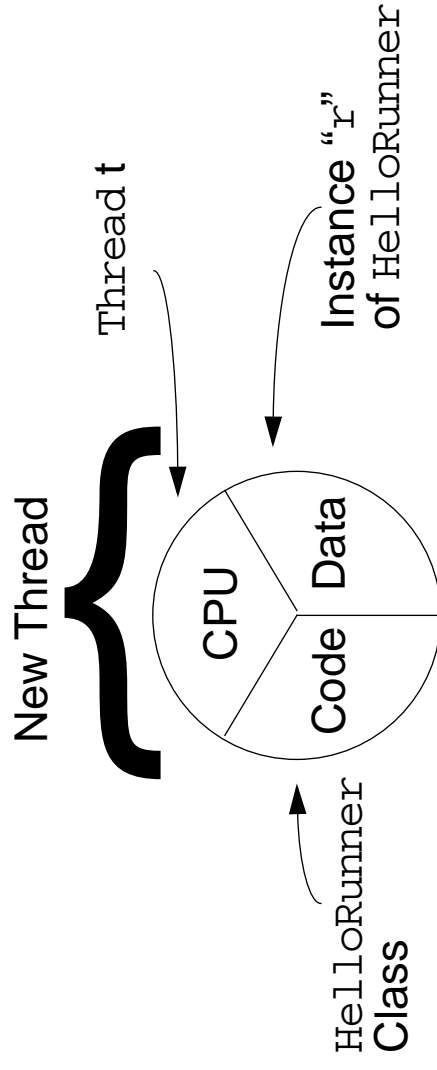




Starting the Thread


- Use the `start` method.
- Place the thread in a runnable state.

Thread Scheduling

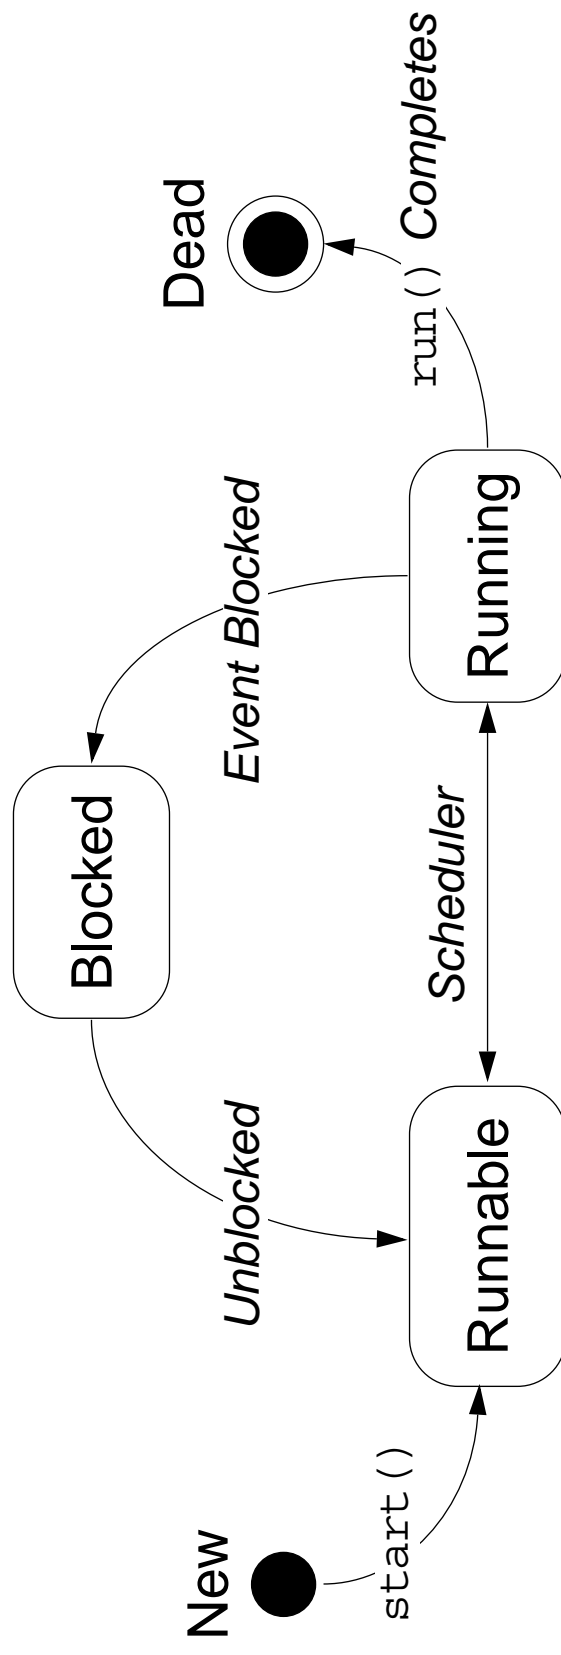


Thread Scheduling Example

```
1 public class Runner implements Runnable {
2     public void run() {
3         while (true) {
4             // do lots of interesting stuff
5             // ...
6             // Give other threads a chance
7             try {
8                 Thread.sleep(10);
9             } catch (InterruptedException e) {
10                // This thread's sleep was interrupted
11                // by another thread
12            }
13        }
14    }
15 }
```

Terminating a Thread

```
1  public class Runner implements Runnable {
2      private boolean timeToQuit=false;
3
4      public void run() {
5          while ( ! timeToQuit ) {
6              // continue doing work
7          }
8          // clean up before run() ends
9      }
10
11     public void stopRunning() {
12         timeToQuit=true;
13     }
14 }
```



Terminating a Thread

```
1 public class ThreadController {
2     private Runner r = new Runner();
3     private Thread t = new Thread(r);
4
5     public void startThread() {
6         t.start();
7     }
8
9     public void stopThread() {
10         // use specific instance of Runner
11         r.stopRunning();
12     }
13 }
```

Basic Control of Threads

- Test threads:


`isAlive()`

- Access thread priority:

`getPriority()`
`setPriority()`

- Put threads on hold:

`Thread.sleep()` *// static method*
`join()`
`Thread.yield()` *// static method*




The join Method

```
1 public static void main(String[] args) {
2     Thread t = new Thread(new Runner());
3     t.start();
4     ...
5     // Do stuff in parallel with the other thread for a while
6     ...
7     // Wait here for the other thread to finish
8     try {
9         t.join();
10    } catch (InterruptedException e) {
11        // the other thread came back early
12    }
13    ...
14    // Now continue in this thread
15    ...
16 }
```

Other Ways to Create Threads

```
1 public class MyThread extends Thread {
2     public void run() {
3         while ( true ) {
4             // do lots of interesting stuff
5             try {
6                 Thread.sleep(100);
7             } catch (InterruptedException e) {
8                 // sleep interrupted
9             }
10        }
11    }
12}

13 public static void main(String args[]) {
14     Thread t = new MyThread();
15     t.start();
16 }
17 }
```



Selecting a Way to Create Threads

- Implement Runnable:
- Better object-oriented design
- Single inheritance
- Consistency
- Extend Thread:

Simpler code


Using the synchronized Keyword

```
1  public class MyStack {
2
3      int idx = 0;
4      char [] data = new char[6];
5
6      public void push(char c) {
7          data[idx] = c;
8          idx++;
9      }
10
11     public char pop() {
12         idx--;
13         return data[idx];
14     }
15 }
```

The Object Lock Flag

- Every object has a flag that is a type of *lock flag*.
- The synchronized enables interaction with the lock flag.


Object this

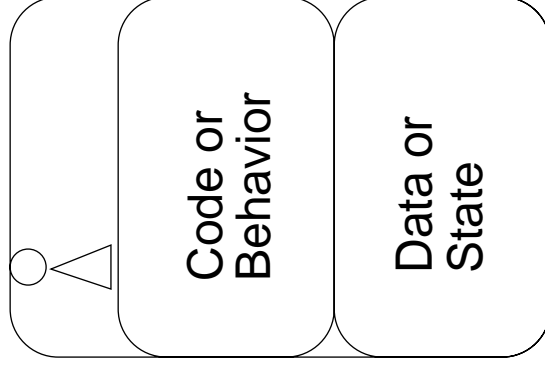

Thread before synchronized(this)

public void push(char c) {
 synchronized (this) {
 data[idx] = c;
 idx++;
 }
}


The Object Lock Flag

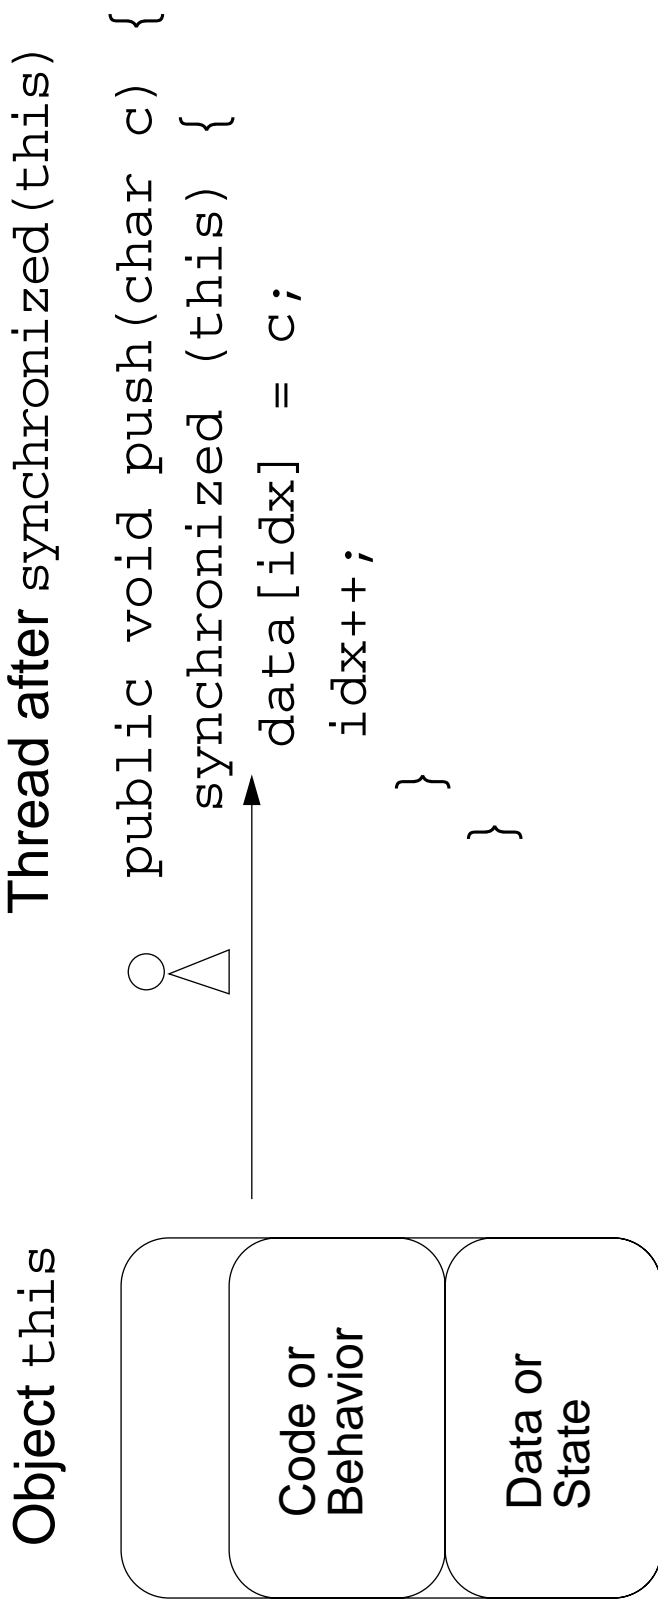

The Object Lock Flag

Object `this`
lock flag missing

Another thread, trying to
execute `synchronized(this)`

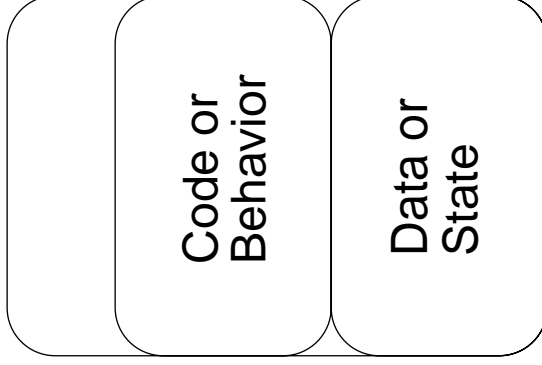

Waiting for
object lock

```
public char pop() {  
    synchronized (this) {  
        idx--;  
        return data[idx];  
    }  
}
```

Releasing the Lock Flag

The lock flag is released in the following events:

- Released when the thread passes the end of the synchronized code block
- Released automatically when a break, return, or exception is thrown by the synchronized code block

Using synchronized – Putting It Together


- *All* access to delicate data should be synchronized.
- Delicate data protected by synchronized should be `private`.

Using synchronized – Putting It Together

The following two code segments are equivalent:

```
public void push(char c) {  
    synchronized(this) {  
        // The push method code  
    }  
}  
  
public synchronized void push(char c) {  
    // The push method code  
}
```


Thread State Diagram With Synchronization

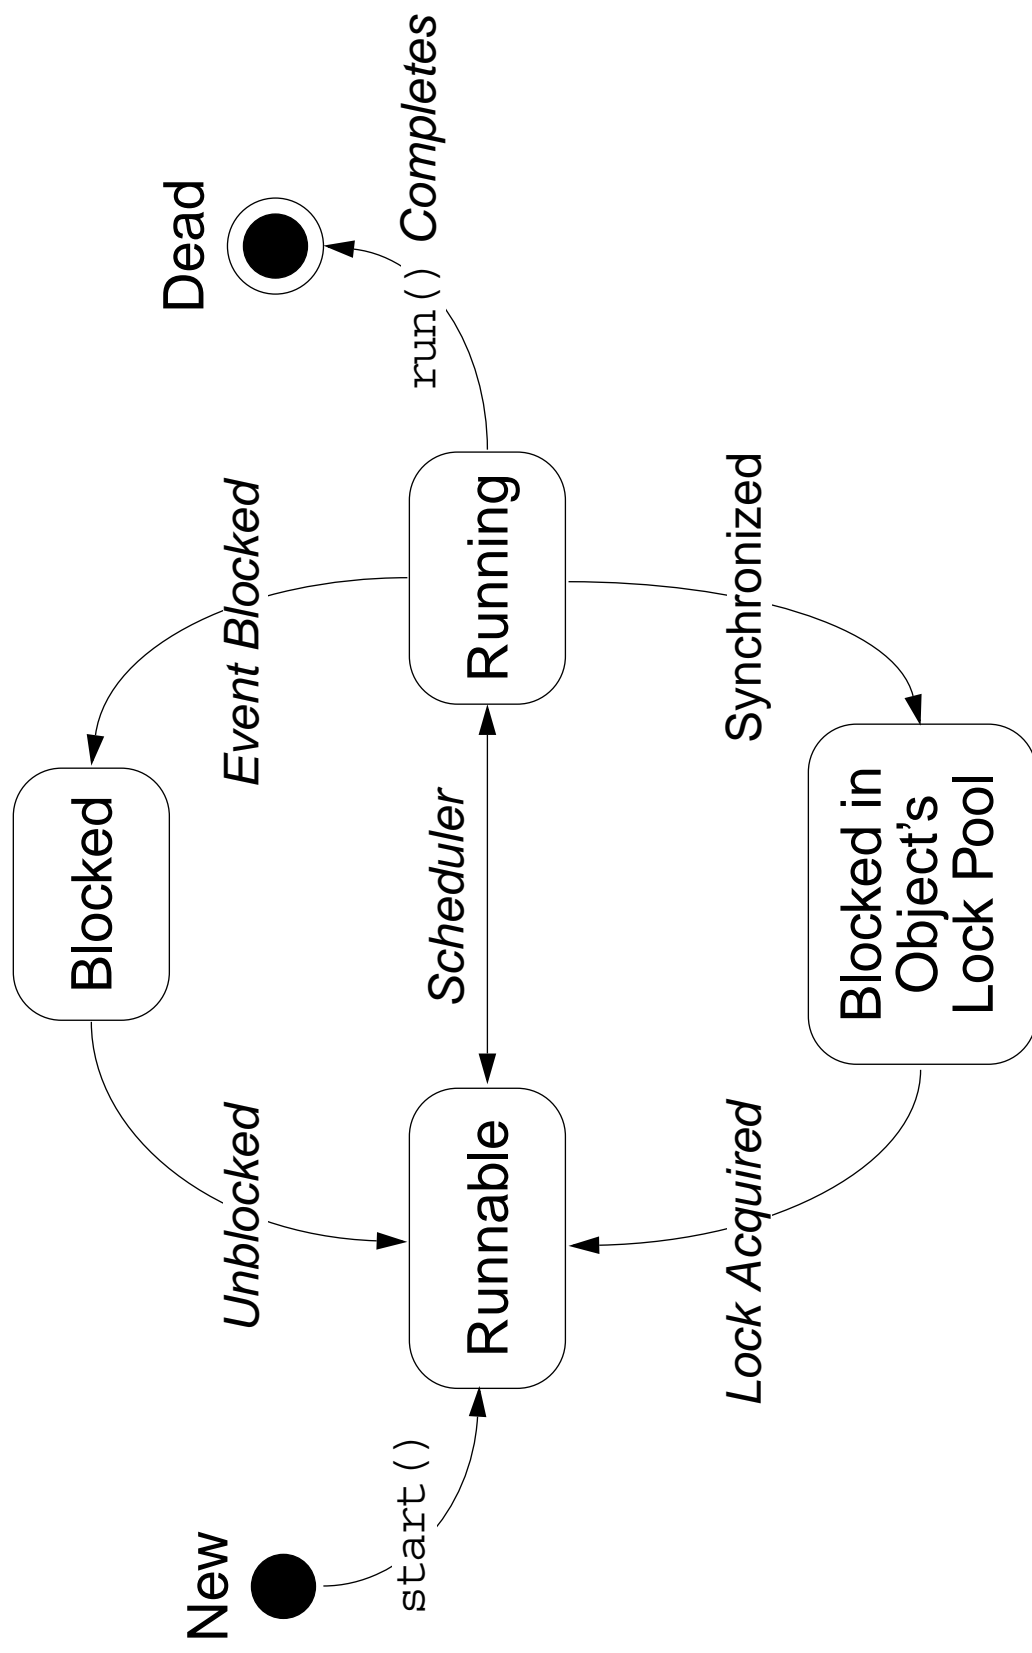

Deadlock

A deadlock has the following characteristics:

- It is two threads, each waiting for a lock from the other.
- It is not detected or avoided.
- Deadlock can be avoided by:
 - Deciding on the order to obtain locks
 - Adhering to this order throughout
 - Releasing locks in reverse order



Thread Interaction – wait and notify


- Scenario:
Consider yourself and a cab driver as two threads.
- The problem:
How do you determine when you are at your destination?
- The solution:
 - You notify the cab driver of your destination and relax.
 - The driver drives and notifies you upon arrival at your destination.

Thread Interaction

Thread interactions include:

- The `wait` and `notify` methods
- The pools:
 - Wait pool
 - Lock pool

Thread State Diagram With wait and notify

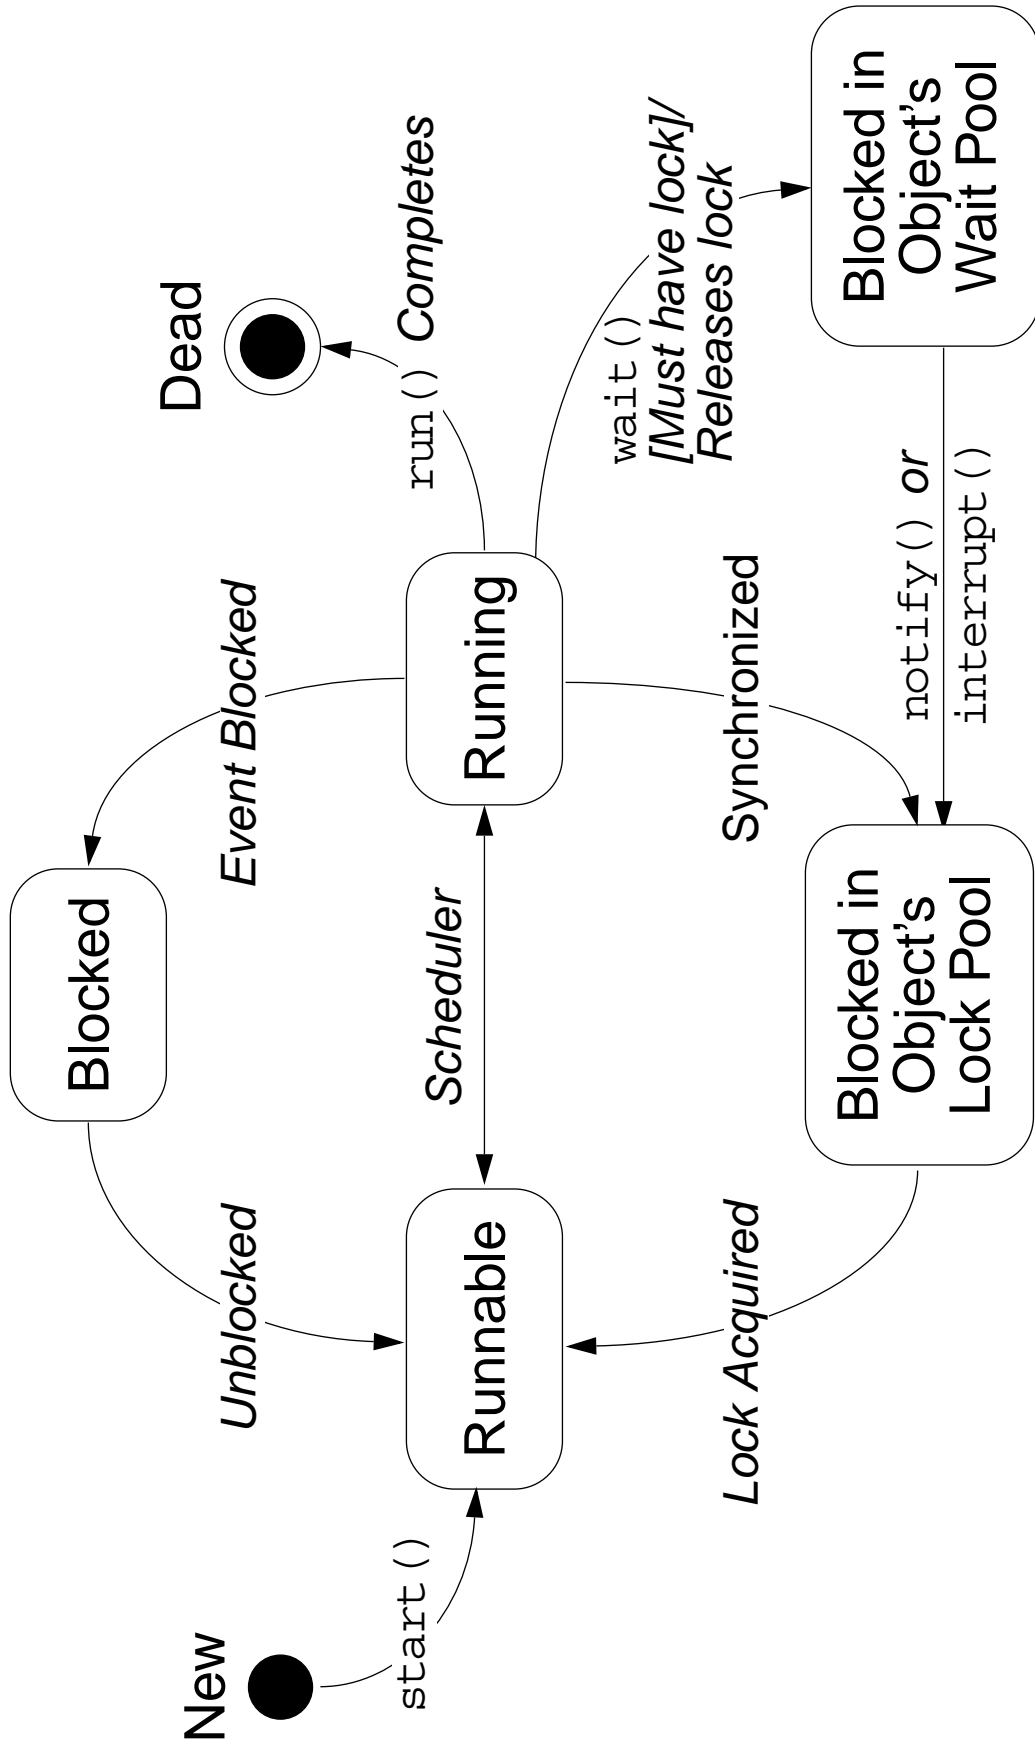


Monitor Model for Synchronization

- Leave shared data in a consistent state.
- Ensure programs cannot deadlock.
- Do not put threads expecting different notifications in the same wait pool.


The Producer Class

```
1 package mod13;
2
3 public class Producer implements Runnable {
4     private SyncStack theStack;
5     private int num;
6     private static int counter = 1;
7
8     public Producer (SyncStack s) {
9         theStack = s;
10        num = counter++;
11    }
12 }
```




The Producer Class

```
13  public void run() {
14      char c;
15
16      for (int i = 0; i < 200; i++) {
17          c = (char) (Math.random() * 26 + 'A');
18          theStack.push(c);
19          System.out.println("Producer" + num + ": " + c);
20          try {
21              Thread.sleep((int) (Math.random() * 300));
22          } catch (InterruptedException e) {
23              // ignore it
24          }
25      }
26      // END run method
27
28  } // END Producer class
```



The Consumer Class

```
1 package mod13;
2
3 public class Consumer implements Runnable {
4     private SyncStack theStack;
5     private int num;
6     private static int counter = 1;
7
8     public Consumer (SyncStack s) {
9         theStack = s;
10        num = counter++;
11    }
12 }
```




The Consumer Class

```
13 public void run() {
14     char c;
15     for (int i = 0; i < 200; i++) {
16         c = theStack.pop();
17         System.out.println("Consumer" + num + ": " + c);
18     }
19     try {
20         Thread.sleep((int) (Math.random() * 300));
21     } catch (InterruptedException e) {
22         // ignore it
23     }
24 }
25 } // END run method
26
```

The SyncStack Class


This is a sketch of the SyncStack class:

```
public class SyncStack {  
  
    private List<Character> buffer = new ArrayList<Character>(400);  
  
    public synchronized char pop() {  
        // pop code here  
    }  
  
    public synchronized void push(char c) {  
        // push code here  
    }  
}
```

The pop Method

```
9  public synchronized char pop() {
10     char c;
11     while (buffer.size() == 0) {
12         try {
13             this.wait();
14         } catch (InterruptedException e) {
15             // ignore it...
16         }
17     }
18     c = buffer.remove(buffer.size() - 1);
19     return c;
20 }
```



The push Method


```
22 public synchronized void push(char c) {  
23     this.notify();  
24     buffer.add(c);  
25 }
```

The SyncTest Class

```
1 package mod13;
2 public class SyncTest {
3     public static void main(String[] args) {
4         SyncStack stack = new SyncStack();
5         Producer p1 = new Producer(stack);
6         Thread prodT1 = new Thread (p1);
7         prodT1.start();
8         Producer p2 = new Producer(stack);
9         Thread prodT2 = new Thread (p2);
10        prodT2.start();
11
12        Consumer c1 = new Consumer (stack);
13        Thread constT1 = new Thread (c1);
14        constT1.start();
15        Consumer c2 = new Consumer (stack);
16        Thread constT2 = new Thread (c2);
17        constT2.start();
18    }
19 }
```

The SyncTest Class


```
Producer2: F
Consumer1: F
Producer2: K
Consumer2: K
Producer2: T
Producer1: N
Producer1: V
Consumer2: V
Consumer1: N
Producer2: V
Producer2: U
Consumer2: U
Consumer2: V
Producer1: F
Consumer1: F
Producer2: M
Consumer2: M
Consumer2: T
```



Sun Services


Module 14

Advanced I/O Streams




Objectives

- Describe the main features of the `java.io` package
- Construct node and processing streams, and use them appropriately
- Distinguish readers and writers from streams, and select appropriately between them



Relevance

- What mechanisms are in place within the Java programming language to read and write from sources (or sinks) other than files?
- How are international character sets supported in I/O operations?
- What are the possible sources and sinks of character and byte streams?



I/O Fundamentals

- A *stream* can be thought of as a flow of data from a source or to a sink.
- A *source* stream initiates the flow of data, also called an input stream.
- A *sink* stream terminates the flow of data, also called an output stream.
- Sources and sinks are both *node streams*.
- Types of node streams are files, memory, and pipes between threads or processes.

Fundamental Stream Classes

Stream	Byte Streams	Character Streams
Source streams	InputStream	Reader
Sink streams	OutputStream	Writer

Data Within Streams

- Java technology supports two types of streams: character and byte.
- Input and output of character data is handled by readers and writers.
- Input and output of byte data is handled by input streams and output streams:
- Normally, the term *stream* refers to a byte stream.
- The terms *reader* and *writer* refer to character streams.


The InputStream Methods

- The three basic read methods are:

```
int read()  
int read(byte[] buffer)  
int read(byte[] buffer, int offset, int length)
```

- Other methods include:

```
void close()  
int available()  
long skip(long n)  
boolean markSupported()  
void mark(int readlimit)  
void reset()
```




The OutputStream Methods

- The three basic write methods are:

```
void write(int c)
void write(byte[] buffer)
void write(byte[] buffer, int offset, int length)
```

- Other methods include:

```
void close()
void flush()
```




The Reader Methods

- The three basic read methods are:

```
int read()  
int read(char[] cbuf)  
int read(char[] cbuf, int offset, int length)
```

- Other methods include:

```
void close()  
boolean ready()  
long skip(long n)  
boolean markSupported()  
void mark(int readAheadLimit)  
void reset()
```




The `Writer` Methods

- The basic `write` methods are:

```
void write(int c)
void write(char[] cbuf)
void write(char[] cbuf, int offset, int length)
void write(String string)
void write(String string, int offset, int length)
```

- Other methods include:

```
void close()
void flush()
```



Node Streams

Type	Character Streams	Byte Streams
File	FileReader FileWriter	FileInputStream FileOutputStream
Memory: array	CharArrayReader CharArrayWriter	ByteArrayInputStream ByteArrayOutputStream
Memory: string	StringReader StringWriter	N/A
Pipe	PipedReader PipedWriter	PipedInputStream PipedOutputStream

A Simple Example

This program performs a copy file operation using a manual buffer:

```
java TestNodeStreams file1 file2

1  import java.io.*;
2
3  public class TestNodeStreams {
4      public static void main(String[] args) {
5          try {
6              FileReader input = new FileReader(args[0]);
7              FileWriter output = new FileWriter(args[1]);
8              char[] buffer = new char[128];
9              int charsRead;
10
11             // read the first buffer
12             charsRead = input.read(buffer);
```


A Simple Example

```
13      while ( charsRead != -1 ) {
14          // write the buffer out to the output file
15          output.write(buffer, 0, charsRead);
16      }
17
18      // read the next buffer
19      charsRead = input.read(buffer);
20  }
21
22  input.close();
23  output.close();
24  } catch (IOException e) {
25      e.printStackTrace();
26  }
27  }
28 }
```

Buffered Streams

This program performs a copy file operation using a built-in buffer:

```
java TestBufferedStreams file1 file2


1  import java.io.*;
2
3  public class TestBufferedStreams {
4      public static void main(String[] args) {
5          try {
6              FileReader      input      = new FileReader(args[0]);
7              BufferedReader bufInput    = new BufferedReader(input);
8              FileWriter      output     = new FileWriter(args[1]);
9              BufferedWriter bufOutput   = new BufferedWriter(output);
10             String line;
11
12             // read the first line
13             line = bufInput.readLine();
```

Buffered Streams


```
14
15     while ( line != null ) {
16         // write the line out to the output file
17         bufOutput.write(line, 0, line.length());
18         bufOutput.newLine();
19         // read the next line
20         line = bufInput.readLine();
21     }
22     bufInput.close();
23     bufOutput.close();
24     } catch (IOException e) {
25         e.printStackTrace();
26     }
27 }
28 }
```

I/O Stream Chaining

Input Stream Chain

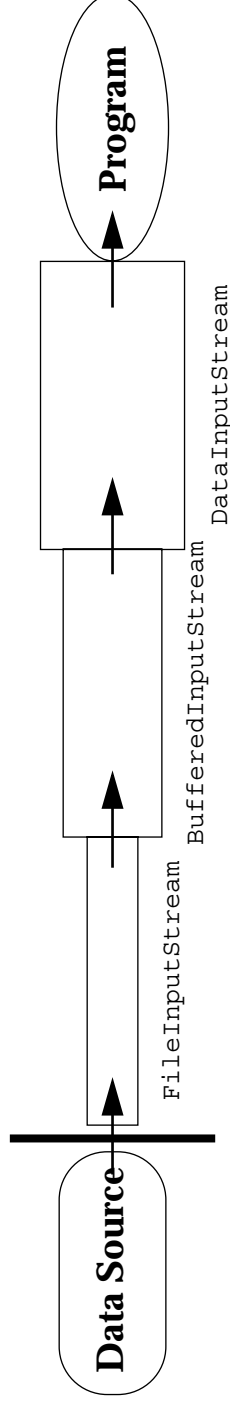

Output Stream Chain

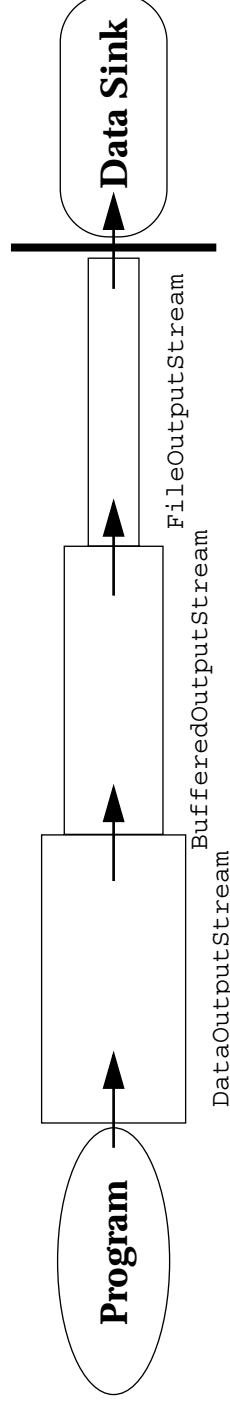


Processing Streams


Type	Character Streams	Byte Streams
Buffering	BufferedReader BufferedWriter	BufferedReader BufferedOutputStream
Filtering	<i>FilterReader</i> <i>FilterWriter</i>	<i>FilterInputStream</i> <i>FilterOutputStream</i>
Converting between bytes and character	InputStreamReader OutputStreamWriter	
Performing object serialization		ObjectInputStream ObjectOutputStream

Processing Streams


Type	Character Streams	Byte Streams
Performing data conversion		DataInputStream DataOutputStream
Counting	LineNumberReader	LineNumberInputStream
Peeking ahead	PushbackReader	PushbackInputStream
Printing	PrintWriter	PrintStream

The InputStream Class Hierarchy

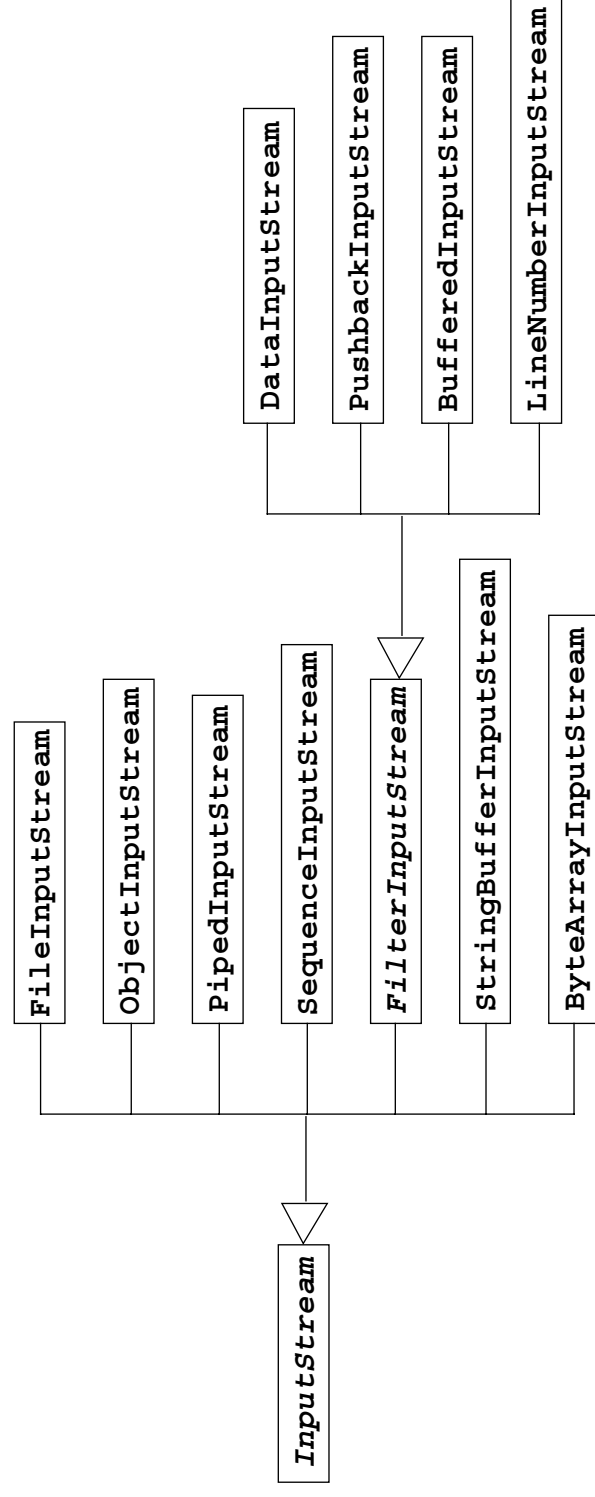





The OutputStream Class Hierarchy

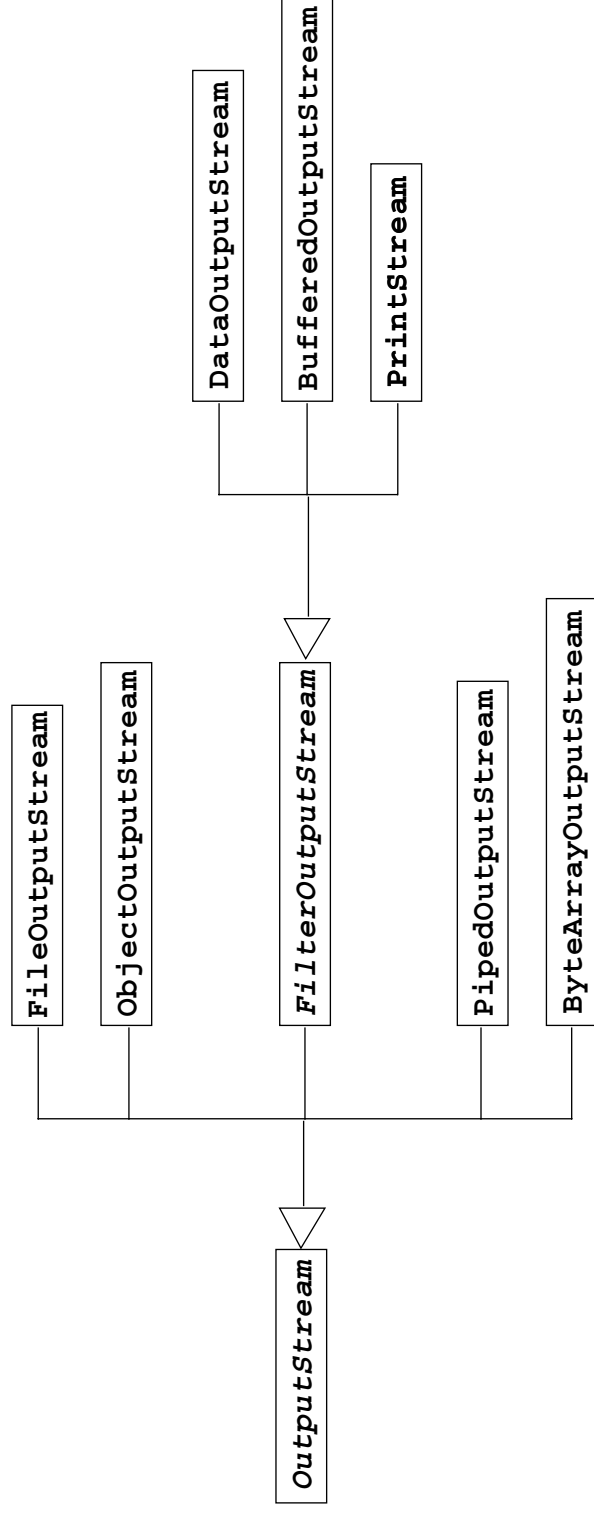



The Reader Class Hierarchy

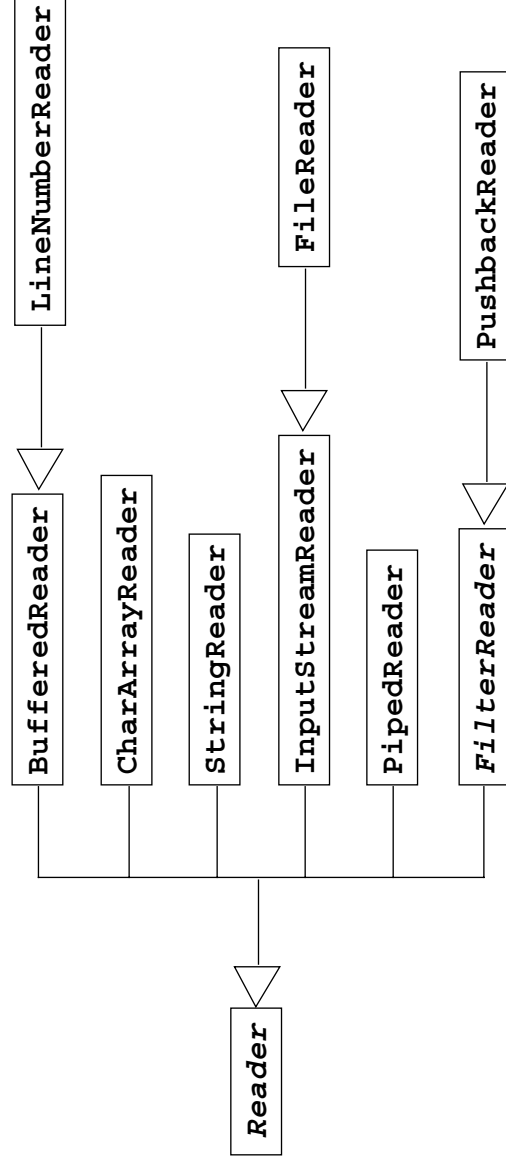



The `Writer` Class Hierarchy

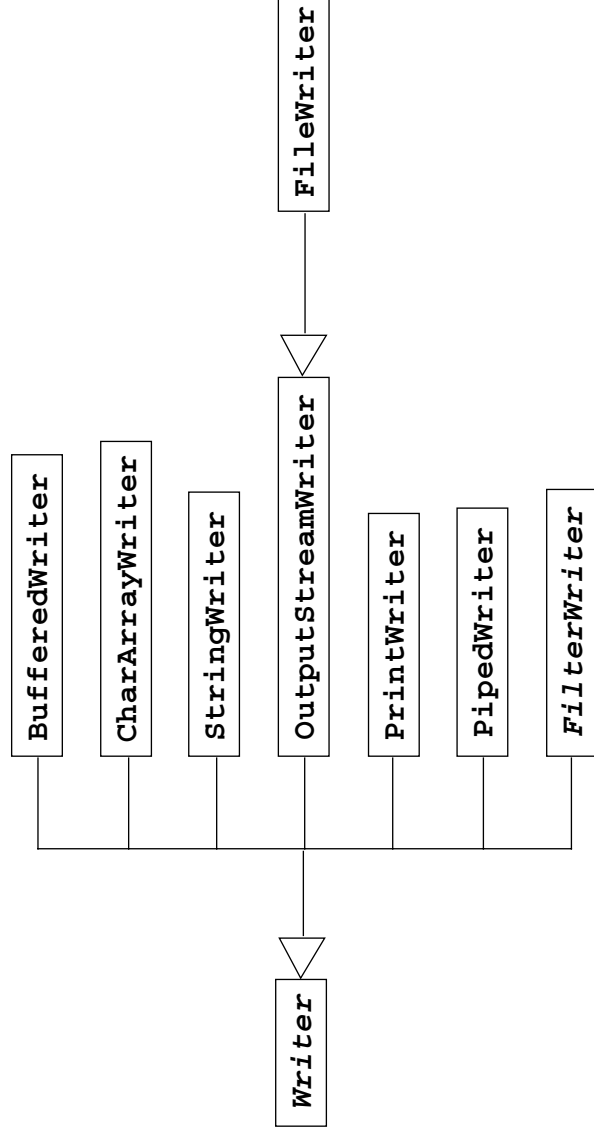




Sun Services


Module 15

Networking



Objectives

- Develop code to set up the network connection
- Understand the TCP/IP Protocol
- Use `ServerSocket` and `Socket` classes for implementation of TCP/IP clients and servers



Relevance

How can a communication link between a client machine and a server on the network be established?

Networking


This section describes networking concepts.

Sockets


- Sockets hold two streams: an input stream and an output stream.
- Each end of the socket has a pair of streams.

Setting Up the Connection

Set up of a network connection is similar to a telephone system: One end must *dial* the other end, which must be *listening*.




Networking

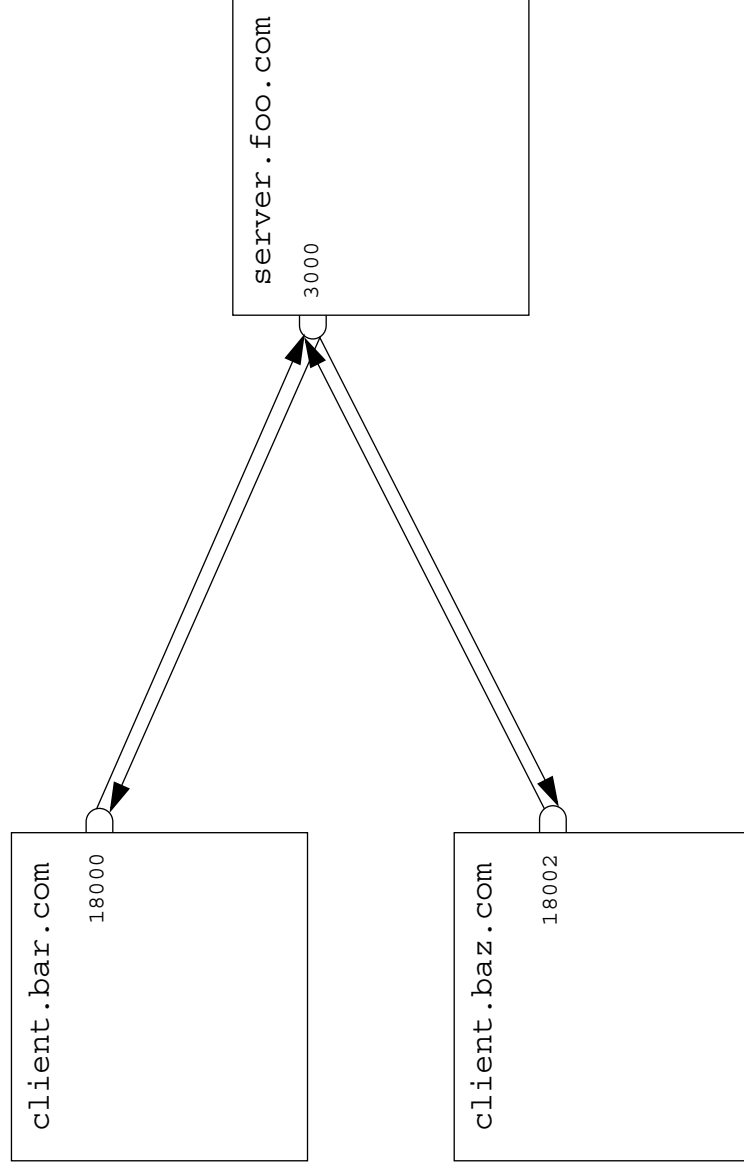

Networking With Java Technology


- To address the connection, include the following:
 - The address or name of remote machine
 - A port number to identify the purpose at the server
 - Port numbers range from 0–65535.

Java Networking Model

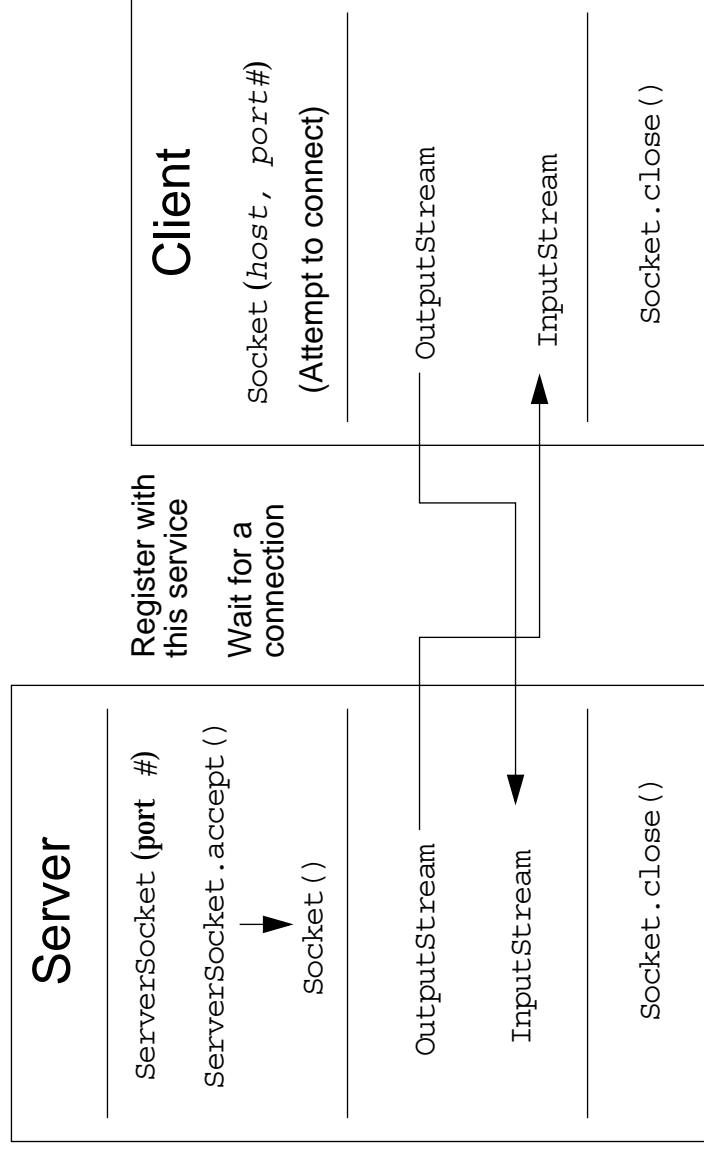

Minimal TCP/IP Server

```
1 import java.net.*;
2 import java.io.*;
3
4 public class SimpleServer {
5     public static void main(String args[]) {
6         ServerSocket s = null;
7
8         // Register your service on port 5432
9         try {
10             s = new ServerSocket(5432);
11         } catch (IOException e) {
12             e.printStackTrace();
13         }
```



Minimal TCP/IP Server

```
14
15 // Run the listen/accept loop forever
16 while (true) {
17     try {
18         // Wait here and listen for a connection
19         Socket s1 = s.accept();
20
21         // Get output stream associated with the socket
22         OutputStream s1out = s1.getOutputStream();
23         BufferedWriter bw = new BufferedWriter(
24             new OutputStreamWriter(s1out));
25
26         // Send your string!
27         bw.write("Hello Net World!\n");
```

Minimal TCP/IP Server

```
28
29      // Close the connection, but not the server socket
30      bw.close();
31      s1.close();
32
33      } catch (IOException e) {
34          e.printStackTrace();
35      } // END of try-catch
36
37      } // END of while(true)
38
39      } // END of main method
40
41  } // END of SimpleServer program
```

Minimal TCP/IP Client

```
1 import java.net.*;
2 import java.io.*;
3
4 public class SimpleClient {
5
6     public static void main(String args[]) {
7
8         try {
9             // Open your connection to a server, at port 5432
10            // localhost used here
11            Socket s1 = new Socket("127.0.0.1", 5432);
12
13            // Get an input stream from the socket
14            InputStream is = s1.getInputStream();
15            // Decorate it with a "data" input stream
16            DataInputStream dis = new DataInputStream(is);
```

Minimal TCP/IP Client

```
17
18 // Read the input and print it to the screen
19 System.out.println(dis.readUTF());
20
21 // When done, just close the stream and connection
22 dis.close();
23 s1.close();
24
25 } catch (ConnectException connExc) {
26     System.err.println("Could not connect.");
27
28 } catch (IOException e) {
29     // ignore
30 } // END of try-catch
31
32 } // END of main method
33
34 } // END of SimpleClient program
```