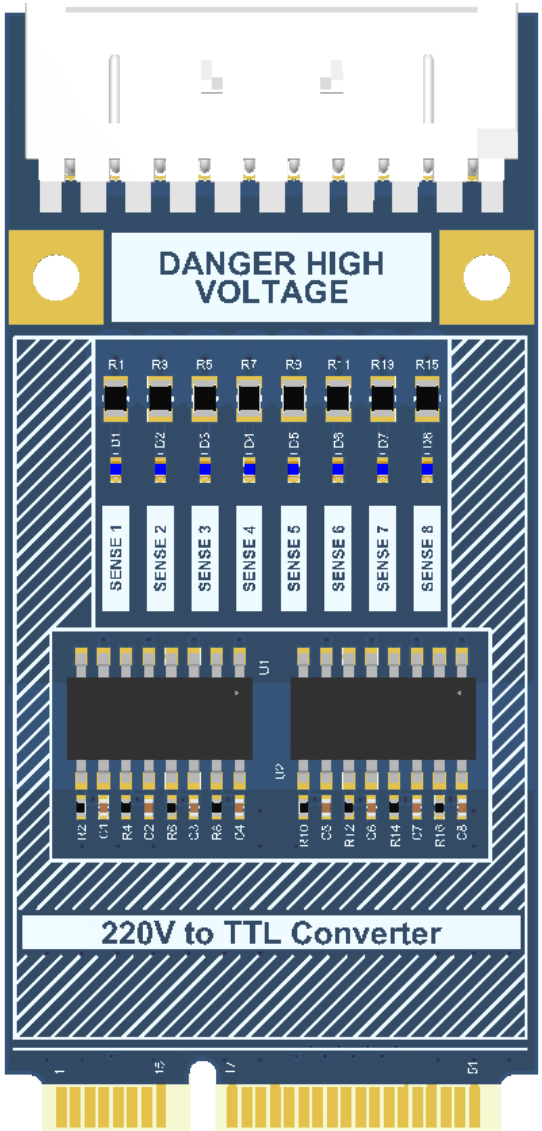
DANGER HIGH VOLTAGE
R1
R3
R5
R7
R9
R13
R15
SENSE 1
SENSE 2
SENSE 3
SENSE 4
SENSE 5
SENSE 6
SENSE 7
SENSE 8
U1
U2
220V to TTL Converter

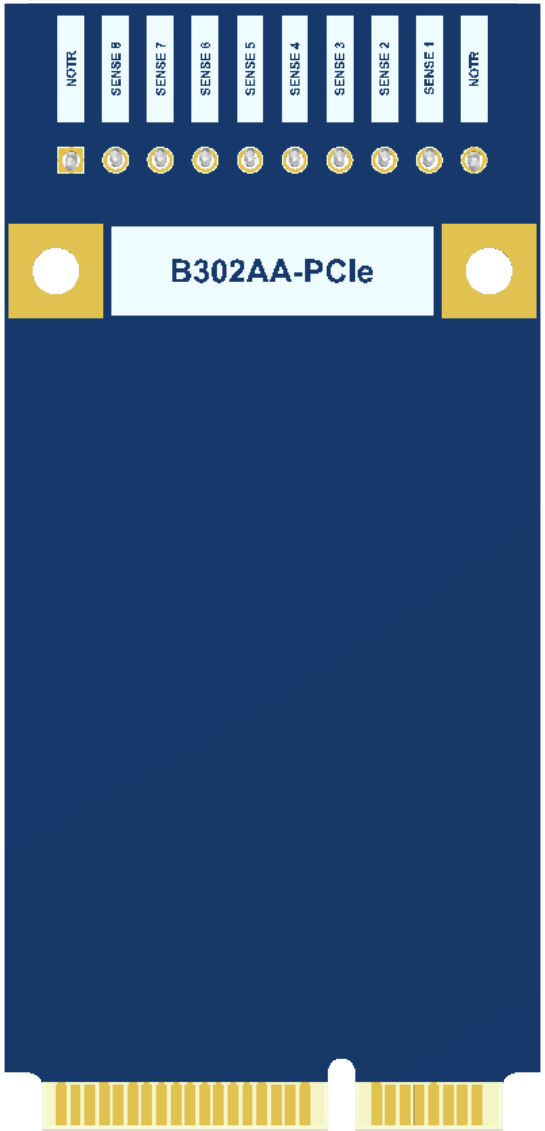
NOTR
SENSE 8
SENSE 7
SENSE 6
SENSE 5
SENSE 4
SENSE 3
SENSE 2
SENSE 1
NOTR
B302AA-PCIe

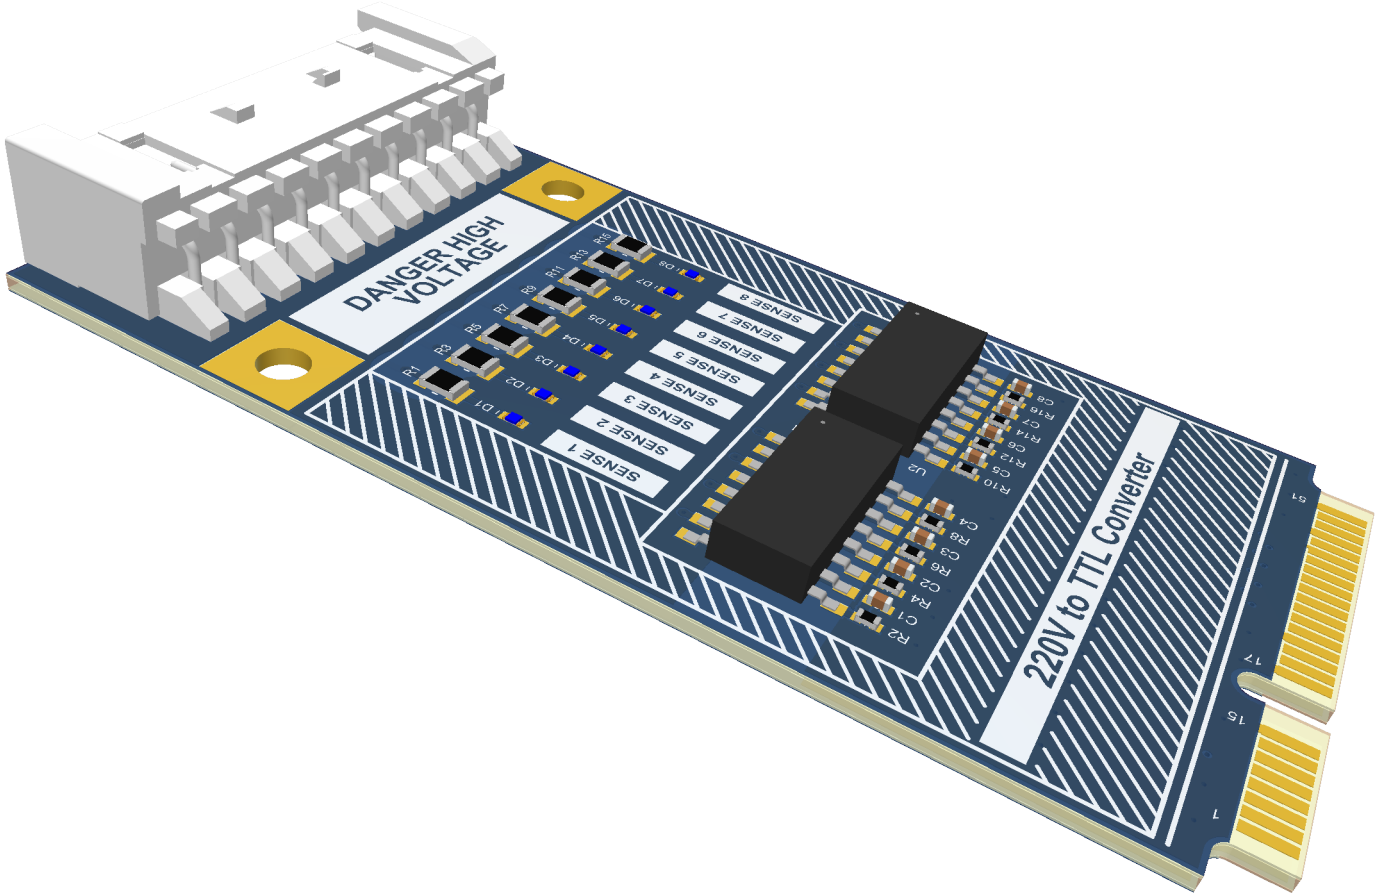
DANGER HIGH VOLTAGE
SENSE 1
SENSE 2
SENSE 3
SENSE 4
SENSE 5
SENSE 6
SENSE 7
SENSE 8
220V to TTL Converter

Layer Stack Legend

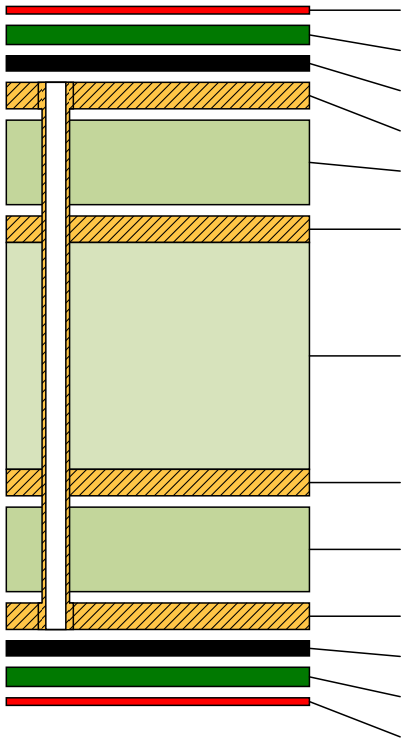

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.03mm	SM-001	Solder Mask	GTS
Nickel, Gold	Top Surface Finish	0.02mm		Surface Finish	
CF-004	**Top Layer**	**0.04mm**		**Signal**	**GTL**
Prepreg		*0.11mm*	*PP-015*	*Dielectric*	
CF-004	**Inner Layer 1**	**0.04mm**		**Signal**	**G1**
Core		*0.61mm*	*Core-038*	*Dielectric*	
CF-004	**Inner Layer 2**	**0.04mm**		**Signal**	**G2**
Prepreg		*0.11mm*	*PP-015*	*Dielectric*	
CF-004	**Bottom Layer**	**0.04mm**		**Signal**	**GBL**
Nickel, Gold	Bottom Surface Finish	0.02mm		Surface Finish	
Surface Material	Bottom Solder	0.03mm	SM-001	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 1.06mm

Bill Of Materials

Designator	Quantity	Manufacturer Name	Manufacturer Part Number
C1, C2, C3, C4, C5, C6, C7, C8	8	KEMET	C0402C475M9PACTU
D1, D2, D3, D4, D5, D6, D7, D8	8	ROHM Semiconductor	SML-P12MTT86R
J2	1	Molex	53426-1010
R1, R3, R5, R7, R9, R11, R13, R15	8	Vishay Dale	CRCW0805220KJNEAHP
R2, R4, R6, R8, R10, R12, R14, R16	8	Vishay	CRCW040247K0FKED
U1, U2	2	Vishay Semiconductors	TCMT4100

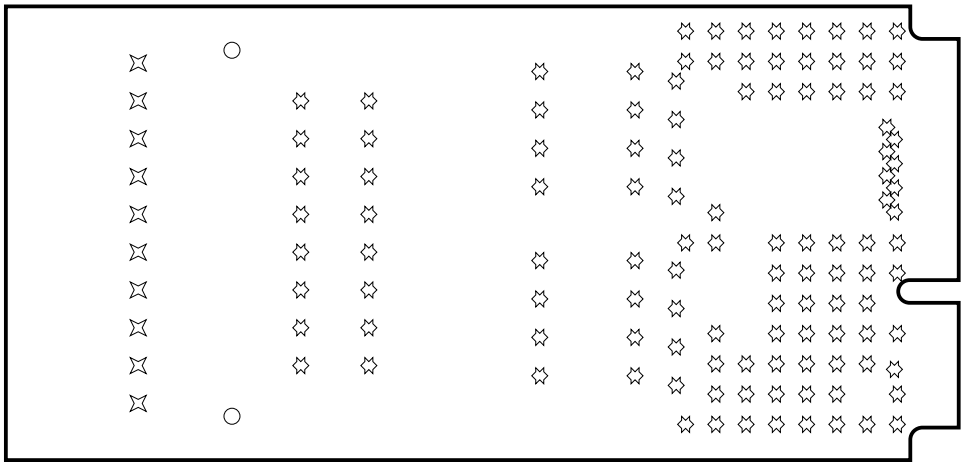

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
✩	114	0.20mm	Plated	
⌘	10	1.00mm	Plated	
○	2	2.60mm	Plated	+/-0.05mm
	126 Total			

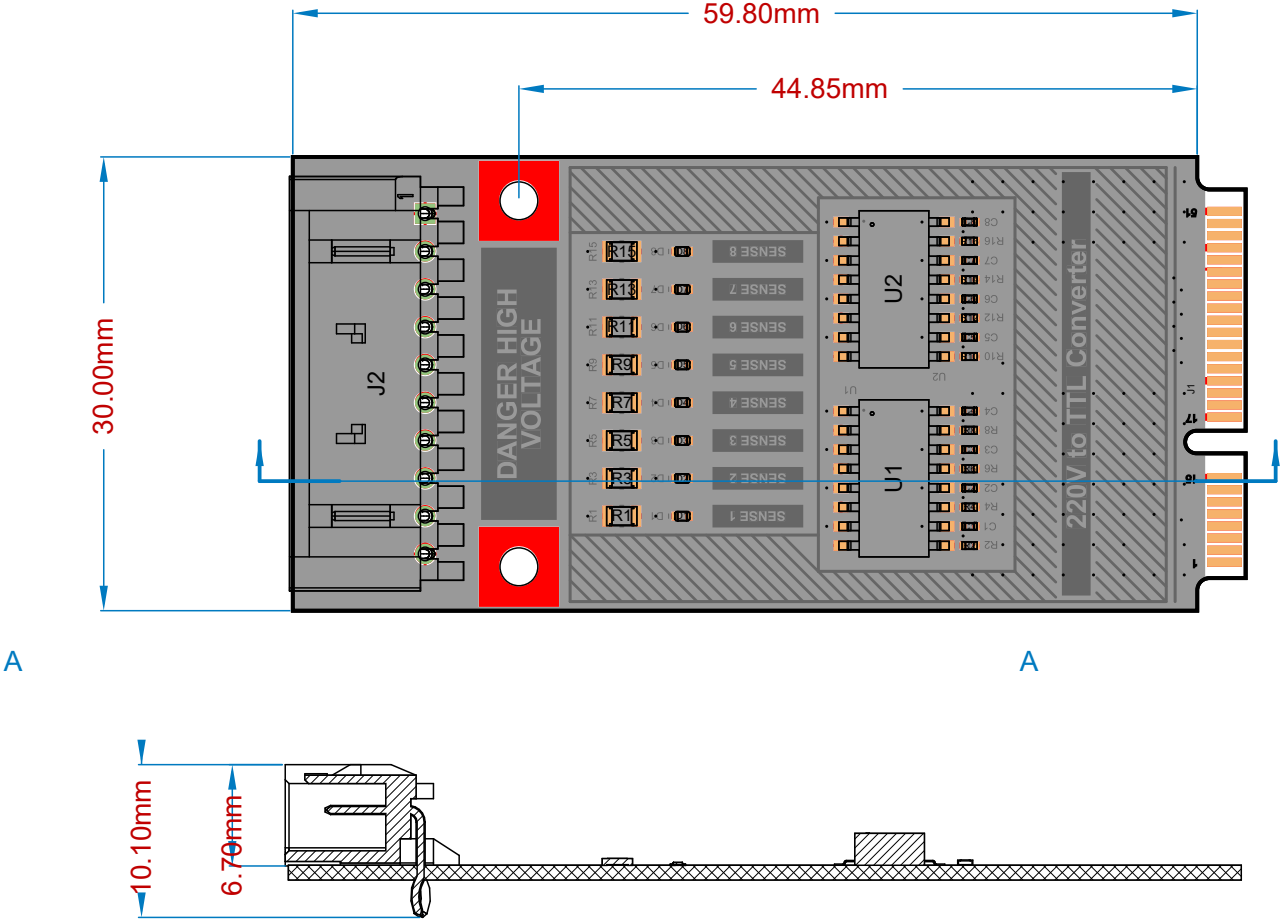
59.80mm
44.85mm
30.00mm
J2
DANGER HIGH VOLTAGE
U1
U2
220V to TTL Converter
SENSE 1
SENSE 2
SENSE 3
SENSE 4
SENSE 5
SENSE 6
SENSE 7
SENSE 8
R1
R3
R5
R7
R9
R11
R13
R15
A
A
10.10mm
6.70mm