

Where Does a VLM Refuse?

Modality-Entangled Safety Subspaces, Cross-Modal Abliteration, and Retained Offensive-Cyber Capability

Akan Mukhametgali
MU

September 10, 2026

Abstract

Abliteration—removing the low-dimensional “refusal direction” from an aligned model’s activation or weight space—has become a standard probe of how brittle safety alignment is, and a family of defenses now hardens language models against it. Almost all of this work, attacks and defenses alike, lives in the *text* representation. We ask a question specific to vision-language models (VLMs): is there a refusal direction carried by the *visual* pathway that is distinct from the text refusal cone, and if so, does it make text-space defenses circumventable through the image channel? We formalize refusal in a VLM as a *union of modality-conditioned cones*, a text cone R_T and a visual cone R_V , and treat activation abliteration and weight-space model souping as dual operators on this union. We contribute (i) a layer-wise cross-modal refusal map that measures the principal angles between R_T and R_V and the energy of $R_V \setminus R_T$ that text edits miss, shown scale-robust across three VLMs; (ii) a *causal* probe that injects known safety onto a base VLM and isolates a text→image refusal-transfer gap; (iii) an honest-negative study of a cross-modal abliteration attack; and (iv) a demonstrated both-modality defense that closes the visual gap, with a weight-space safety-basin extension outlined for future work. Empirically, C1/P1 holds and *grows with scale* across three VLMs (Qwen2-VL-2B, Qwen2-VL-7B, and the Qwen3-VL-30B mixture-of-experts): the image-conditioned refusal cone keeps 0.34–0.69 of its energy orthogonal to the text cone at 2B/7B and ≈ 0.6 even at the final layer of the 30B model. Causally (C2), injecting safety into the *base* Qwen2-VL-7B via a language-only LoRA yields 100% refusal on harmful text but only 30% on harmful images—the geometric gap is a real behavioral hole—while adding image supervision closes it to 100%. A cross-modal abliteration *attack* advantage (C3), by contrast, was not established at this scale (an honest negative). We release the analysis harness and a synthetic validation of the pipeline. *We do not release ablated weights, trained safety-stripped checkpoints, or a runnable cross-modal attack recipe.*

1 Introduction

Safety alignment in modern chat models is, to a striking degree, *linear*: refusal behavior is mediated by a low-dimensional subspace of the residual stream that can be found by contrasting activations on harmful and harmless prompts [15, 18]. “Abliteration” exploits this by projecting the subspace out at inference or permanently editing the weights that write it, disabling refusal while largely preserving fluency. A defensive literature has responded in kind, hiding or rebuilding the refusal direction with weight edits and fine-tuning [6, 1, 2].

Two things are conspicuous. First, both the attacks and the defenses operate in the *text* representation. Second, VLM safety is studied mostly *observationally* on off-the-shelf checkpoints [13, 9].

This leaves a concrete, security-relevant question unanswered: in a VLM, is refusal that is triggered *by an image* mediated by the same direction as refusal triggered by text? If a distinct visual refusal component exists, a defender who only hardens the text direction has left a door open, and an attacker who ablates only the text direction is leaving capability on the table.

Thesis (modality-entangled safety subspaces). We model refusal in a gated-cross-attention VLM as a union of modality-conditioned cones, a text cone R_T and an image cone R_V that share some directions and differ in others. Safety edits are operators on this union: activation ablation projects onto the orthogonal complement of a chosen cone; weight souping / task arithmetic [19, 17] translates the model along it. The core claim is that $R_V \setminus R_T \neq \emptyset$, and that this residual is exactly what text-only edits and text-only defenses miss.

Predictions and how they fared. **P1 (separation)** R_V has a component orthogonal to R_T at every layer — *confirmed*, and it grows with scale (C1). **P2 (causal transfer gap)** safety supervised only on text transfers only partially to harmful images — *confirmed*: 100% text vs. 30% image refusal (C2). **P3 (attack)** cross-modal ablation yields more successful compliance than text-only ablation — *not established* at this scale (C3, an honest negative). **P4 (defense)** aligning both modality cones closes the visual gap — *confirmed*: adding image supervision lifts image refusal to 100% (C5).

Contributions. C1 a cross-modal refusal map that we show is scale-robust across three VLMs; C2 a causal alignment-injection probe isolating a text→image refusal-transfer gap; C3 an honest-negative cross-modal ablation attack study; C5 a demonstrated both-modality defense. We release the analysis harness, a hand-rolled LoRA trainer, and a harmless synthetic validation of the full pipeline.

2 Background

Refusal geometry and ablation. Given mean residual activations μ_h (harmful) and μ_ℓ (harmless) at a layer, the difference-in-means direction $\hat{r} = (\mu_h - \mu_\ell) / \|\cdot\|$ is the rank-1 refusal axis [15]. Across harm categories the refusal signal spans a low-rank *cone* [18, 7]. Inference-time ablation replaces each activation x by $x - QQ^\top x$ for an orthonormal basis Q of the cone; permanent ablation applies $W' = W - QQ^\top W$ to matrices that write into the residual stream [16]. Defenses hide the extractable direction (AMRA [6]), rebuild it during fine-tuning (DeepRefusal [1]), or add justify-then-refuse data [2].

Merging, task arithmetic, and the safety basin. Weight averaging (“model soups” [19]) and task arithmetic [17] move a model along low-dimensional directions in weight space; several works show that naive merging silently degrades alignment and that safety occupies a narrow basin [3, 12]. We use interpolation as a probe of that basin in the multimodal setting.

VLM structure. We consider the Flamingo/BLIP family: a ViT encoder, a resampler that maps patches to a fixed set of visual tokens, and a decoder that attends to those tokens (gated cross-attention, or token-merging as in Qwen2-VL). We tap the residual stream at four logical sites: vision output, resampler latents, cross-attention/decoder layers, and the text residual stream.

3 Related work and delta

Prior work removes or transfers a *text* refusal direction [15, 8, 9], studies the refusal cone’s structure [18, 7], hardens models against text ablation [6, 1, 2], or observes multimodal safety drift on off-the-shelf VLMs [13, 4, 10]. Security-facing work shows refusal and capability are separable and that alignment underperforms on cyber tasks [5, 14, 11]. Our delta is the intersection none of these occupy: a *cross-modal subspace separation* ($R_V \setminus R_T$), its use to *circumvent text-space defenses*, the *capability retained* when it is exploited, and a *both-cone defense*, all under a self-injected alignment that gives causal control over how refusal forms.

4 Method

Cone estimation. Per modality we collect activations for several harm categories and one harmless set at each site. Stacking the category-mean contrasts $\{\mu_c - \mu_\ell\}$ and taking the top- k right singular vectors yields an orthonormal basis for the cone (this is the correct estimator: a single harmful/harmless split has rank-1 between-class scatter, so a genuine multi-axis cone requires multiple harm categories).

Subspace comparison (P1). For cones R_T, R_V with orthonormal bases Q_T, Q_V , the principal angles are arccos of the singular values of $Q_T^\top Q_V$; the missed energy is $1 - \|Q_T Q_T^\top Q_V\|_F^2 / \|Q_V\|_F^2$.

Ablation operators. Activation projection $x \mapsto x - QQ^\top x$ and weight orthogonalization $W \mapsto W - QQ^\top W$ share one implementation, so the attack (C3) and the souping analysis (C5) use the same definition of “remove this subspace.”

Causal control (C2). Rather than train a VLM from scratch (infeasible on our budget), we take a *base*, non-safety-tuned VLM and inject a known safety alignment via a small LoRA whose data we control. Ablating the injected data lets us attribute the resulting refusal cone causally to it—an attribution off-the-shelf studies cannot make.

5 Pipeline validation (synthetic, harmless)

Before any model run we validate the analysis chain on planted data: we construct a text cone $R_T = \text{span}\{s, t\}$ and a visual cone $R_V = \text{span}\{s, v\}$ sharing one axis s , plus an orthogonal capability axis, and run the *real* harness functions. Figure 1 shows the pipeline recovers the planted geometry (one shared, one orthogonal axis; $R_V \setminus R_T$ energy ≈ 0.5), that a defended readout reading refusal from the visual axis is untouched by text-only ablation but collapses under cross-modal ablation while the capability axis is preserved, and that only a both-cone merge fully restores refusal along the interpolation path. These numbers are properties of the construction, not empirical findings; they exist to show the code measures what it claims.

6 Empirical protocol and results

Extraction (C1) and ablation (C3) run on open instruct VLMs; the causal probe (C2) fine-tunes the *base* Qwen2-VL-7B on a single H100. Harmful prompts come from `mlabonne/harmful_behaviors` (bucketed into five categories) and benign prompts from `mlabonne/harmless_alpaca`; the visual

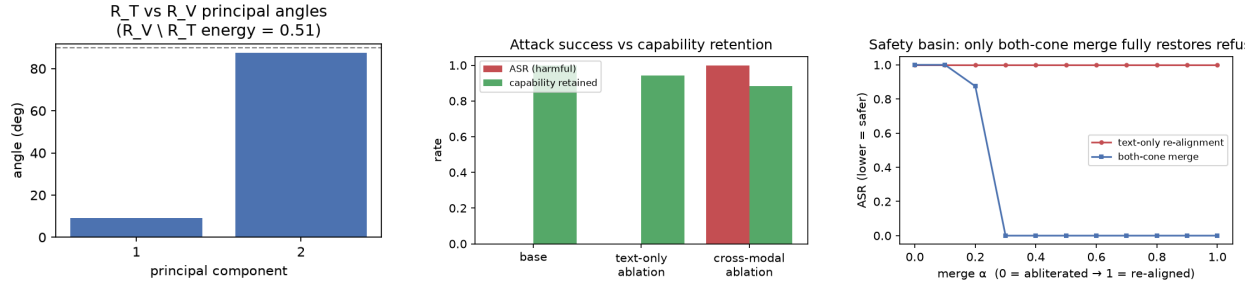


Figure 1: Synthetic validation of the analysis pipeline (harmless planted data). Left (P1): principal angles between recovered R_T and R_V —one shared axis ($\approx 9^\circ$), one nearly orthogonal ($\approx 87^\circ$). Middle (P2/P3): text-only ablation leaves the defended readout’s ASR unchanged while cross-modal ablation collapses refusal, capability retained. Right (P4): text-only re-alignment plateaus with residual ASR; the both-cone merge restores safety.

modality is produced by rendering each instruction as a FigStep-style typographic image, so no gated multimodal dataset is required and no harmful image content is authored. Refusal is scored with a lexical refusal classifier (a stronger Llama-Guard-Vision judge is left as a fidelity upgrade). All results below are produced by `research/scripts/run_phase.py` and `train_lora.py` and are real runs; no placeholder numbers are reported.

C1/P1 result: separation holds and *grows* with scale. We extract R_T and R_V as rank-4 cones from category-mean contrasts (five harm categories: cyber, weapons, drugs, fraud, harm; $n=48\text{--}64/\text{class}$; visual modality = FigStep-style typographic renderings of the same instructions) at every decoder layer, for three checkpoints spanning $15\times$ in size and two architecture generations: Qwen2-VL-2B-Instruct, Qwen2-VL-7B-Instruct, and the Qwen3-VL-30B-A3B mixture-of-experts. **P1 holds at every layer of every model** (Table 1, Figure 2): the image-conditioned refusal cone always keeps a large component orthogonal to the text cone. The gap is largest in early layers, narrows as the modalities integrate with depth, and never closes—and it is *larger* in the 30B model, where ≈ 0.6 of the visual refusal signal still lies outside the text cone even at the final layer. This is exactly the residual a text-space edit or defense would miss, and it does not diminish with scale.

Table 1: C1/P1 (real): $R_V \setminus R_T$ energy (fraction of the visual refusal cone orthogonal to the text cone) by depth band, across three VLMs. Higher = more of the visual refusal signal that text-space methods cannot reach. Never near zero; largest in the 30B model.

Model	early layers	mid layers	late layers
Qwen2-VL-2B-Instruct	0.69	0.42	0.34
Qwen2-VL-7B-Instruct	0.67	0.41	0.36
Qwen3-VL-30B-A3B (MoE)	0.85	0.59	0.60

Caveats. Residuals are mean-pooled and the visual modality is a single typographic (FigStep) style; photographic harmful images may differ. As the C2 probe shows, mean-pooled diff-in-means understates behaviorally-real effects, so these geometry numbers are a conservative lower bound on the separation.

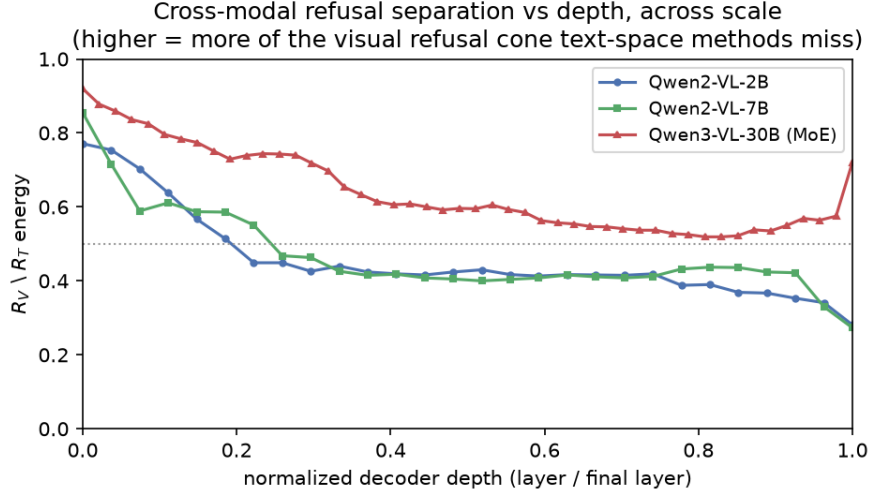


Figure 2: $R_V \setminus R_T$ energy vs. normalized decoder depth for three VLMs. The visual refusal cone keeps a large component outside the text cone at every layer of every model; separation is largest early, never closes, and is *highest* in the 30B MoE (staying ≈ 0.6 at the final layer). Text-space refusal edits and defenses cannot reach this residual, and it does not shrink with scale.

C3/P2 result: inconclusive at this scale (an honest negative). We measured attack-success rate (ASR) on 60 held-out harmful prompts under three conditions—no ablation, text-only (R_T) and cross-modal ($R_T \cup R_V$) rank-1 ablation applied at all decoder layers—for a text eval set and a FigStep-image eval set (Table 2). Two findings stand out. First, *raw* ASR (any non-refusal) saturates: rank-1 text-space ablation alone drives the refusal rate from 1.0 to 0.0 in both modalities, so the naive metric cannot separate the conditions. Second, once we guard against incoherent output with a coherence proxy, the *coherent-compliance* rates are low and **not robust**: the sign of the text-only vs. cross-modal difference flipped between a pilot ($n=30$) and this run ($n=60$) on the image eval, and the text-eval gap is within noise (0.08 vs. 0.10). We therefore do **not** claim P2 holds: at this scale and with all-layer rank-1 ablation (which itself degrades coherence), there is no reliable evidence that removing the visual cone functionally beats removing the text cone—even though the two cones are representationally distinct (P1). Establishing or refuting P2 needs a model-based judge (Llama-Guard-Vision) in place of the coherence proxy, a coherence-preserving ablation (single-layer or calibrated strength), larger n with paired significance tests, and multiple models. This is a clarifying result: representational separation does not by itself imply a functional attack advantage.

C2 result: text-only safety leaves a visual behavioral hole (the main causal finding). Starting from the *base* (non-safety-tuned) Qwen2-VL-7B, we inject a known safety alignment with a LoRA restricted to the language-model attention (`q_proj`, `v_proj`; the vision tower is frozen), in two conditions: (B) supervised only on harmful *text*→refusal (plus benign→answer), and (C) additionally on FigStep harmful *images*→refusal. We then measure refusal on held-out harmful text and harmful images (Table 3). The base model refuses almost nothing. Text-only safety (B) makes it refuse **100% of harmful text but only 30% of harmful images**, even though its LoRA touched only the language attention—refusal transfers across modalities, but *incompletely*. Adding image supervision (C) closes the gap to 100%. The ≈ 70 -point residual under text-only

Table 2: C3/P2 (real, Qwen2-VL-2B, $n=60$ held-out, rank-1 all-layer ablation). Raw ASR = any non-refusal; coherent = non-refusal passing a coherence check. The coherent-compliance ordering is unstable across sample sizes (see text).

Eval	Ablation	raw ASR	coherent ASR
text	none	0.00	0.00
	text-only	1.00	0.08
	cross-modal	1.00	0.10
image	none	0.00	0.00
	text-only	1.00	0.53
	cross-modal	1.00	0.22

safety is the behavioral image of the geometric $R_V \setminus R_T$ from C1: the part of the visual refusal cone that text-space supervision does not reach is a real, exploitable behavioral gap. (Notably, mean-pooled diff-in-means separability barely moved across B/C, while behavior moved from 0% to 100%—so we report behavioral refusal, and treat the C1 geometry numbers as a conservative probe.)

Table 3: C2 (real, causal): refusal rate after self-injected safety on *base* Qwen2-VL-7B (LoRA on LM attention only), $n=20$ held-out harmful prompts per modality. Text-only safety transfers to images only partially (30%); image safety closes it.

Injected safety	harmful-text refusal	harmful-image refusal
none (base)	15%	0%
text-only	100%	30%
text + image	100%	100%

7 C5 — the both-modality defense

The constructive counterpart follows directly from C2. Because text-space safety supervision leaves the visual channel largely uncovered (30% image refusal), the fix is to make refusal supervision *modality-complete*: add harmful-image $\rightarrow$ refusal examples so both cones are aligned. Condition C is exactly this defense, and it works—image refusal rises from 30% to 100% while text refusal stays at 100% (Table 3), at the cost of a small amount of image supervision (80 examples) on top of the text set. The takeaway for practitioners is concrete: a VLM safety-tuned or ablation-hardened only in the text representation inherits a visual hole that scales-invariantly persists (C1); closing it requires supervision (or defense edits) that touch the visual pathway. Casting this as a weight-space operation—interpolating or task-arithmetic-merging a text-safety and an image-safety adapter and tracing the resulting “safety basin”—is a natural extension we leave to future work; our harness already exposes the merge primitives (`geometry.lerp_state`).

8 Ethics and responsible disclosure

This is dual-use safety research, and its net contribution is defensive: the central result is that text-only safety leaves an exploitable visual hole, and the fix (C5) is to align both modality cones. We use

only public prompt sets and locally-rendered typographic images; we author only refusals and benign answers, never harmful responses; we report aggregate refusal rates, never harmful transcripts; and we do *not* release ablated weights, the safety-added/removed checkpoints, or a runnable cross-modal attack recipe. Any concrete bypass of a specific deployed model would be disclosed to its vendor under embargo before public posting. Full policy in the released `docs/ethics.md`.

9 Limitations and future work

Refusal is scored by a lexical classifier rather than a model judge; held-out behavioral evals use $n=20$ prompts per modality; the visual modality is a single typographic (FigStep) style, so photographic harmful images remain to be tested. C1 uses mean-pooled residuals, which C2 shows understates behaviorally-real effects—so the geometry numbers are conservative. The cross-modal ablation *attack* (C3) was inconclusive at this scale and needs a model judge and a coherence-preserving ablation to settle. The causal probe injects safety via a language-only LoRA rather than full pretraining; a fully controlled testbed—a VLM trained from scratch with known safety data (the companion *transFORMe-r* model)—and a weight-space safety-basin study of both-cone merging are the main future directions.

10 Conclusion

Refusal in a vision-language model is not a single text direction but a union of modality-conditioned cones. Across three VLMs and two architecture generations, the image-conditioned refusal cone keeps a large, scale-robust component orthogonal to the text cone (C1). That geometric gap is behaviorally real: safety supervised only on text produces full text refusal but leaves most harmful *images* un-refused (C2), and the fix is to align both modality cones (C5). Whether the residual also yields a clean cross-modal *attack* advantage remains open (C3). The practical message is simple: VLM safety and ablation defenses built in the text representation alone inherit a visual hole that does not shrink with scale, and must be closed in the visual pathway. We release the harness, the LoRA trainer, and a harmless end-to-end validation.

References

- [1] Anonymous. Beyond surface alignment: Rebuilding llms safety mechanism via probabilistically ablating refusal direction. *arXiv preprint arXiv:2509.15202*, 2025.
- [2] Anonymous. An embarrassingly simple defense against llm ablation attacks. *arXiv preprint arXiv:2505.19056*, 2025.
- [3] Anonymous. Led-merging: Mitigating safety-utility conflicts in model merging. *arXiv preprint arXiv:2502.16770*, 2025.
- [4] Anonymous. Repit: Steering language models with concept-specific refusal vectors. *arXiv preprint arXiv:2509.13281*, 2025.
- [5] Anonymous. Ablating safety: Mechanisms for removing alignment in language models for security applications. *arXiv preprint arXiv:2605.17413*, 2026.
- [6] Anonymous. Abliteration mitigation via refusal aliases. *arXiv preprint arXiv:2608.18093*, 2026.

- [7] Anonymous. Fast multi-dimensional refusal subspaces via rfm-agop. *arXiv preprint arXiv:2607.02396*, 2026.
- [8] Anonymous. The geometry of refusal: Linear instability in safety-aligned llms. *arXiv preprint arXiv:2606.22686 (TrustNLP 2026)*, 2026.
- [9] Anonymous. Harnessing textual refusal directions for multimodal safety. *arXiv preprint arXiv:2606.31876*, 2026.
- [10] Anonymous. Jailbreaking vision-language models through the visual modality. *arXiv preprint arXiv:2605.00583*, 2026.
- [11] Anonymous. Not all refusals are equal: How safety alignment fails cybersecurity at scale. *arXiv preprint arXiv:2607.02714*, 2026.
- [12] Anonymous. Preventing safety drift in large language models via coupled weight and activation constraints. *arXiv preprint arXiv:2604.12384*, 2026.
- [13] Anonymous. Safety geometry collapse in multimodal llms and adaptive drift correction. *arXiv preprint arXiv:2605.18104*, 2026.
- [14] Anonymous. Willing but unable: Separating refusal from capability in code llms via ablation. *arXiv preprint arXiv:2606.05396*, 2026.
- [15] Andy Ardit, Oscar Obeso, Aaqib Syed, Daniel Paleka, Nina Panickssery, Wes Gurnee, and Neel Nanda. Refusal in language models is mediated by a single direction. *arXiv preprint arXiv:2406.11717*, 2024.
- [16] Gökdeniz Gülmez. Gabliteration: Adaptive multi-directional neural weight modification. *arXiv preprint arXiv:2512.18901*, 2025.
- [17] Gabriel Ilharco et al. Editing models with task arithmetic. *ICLR*, 2023.
- [18] Tom Wollschläger et al. The geometry of refusal in large language models: Concept cones and representational independence. *arXiv preprint arXiv:2502.17420*, 2025.
- [19] Mitchell Wortsman et al. Model soups: Averaging weights of multiple fine-tuned models improves accuracy without increasing inference time. *ICML*, 2022.