



Institut Pasteur

Snakemake overview

Thomas Cokelaer

Institut Pasteur

Dec. 12th 2016
Journée Snakemake

$$\mathcal{S} = \mathcal{M} + \mathcal{P}$$

Think Makefile, think DAG

Snakemake is a workflow manager

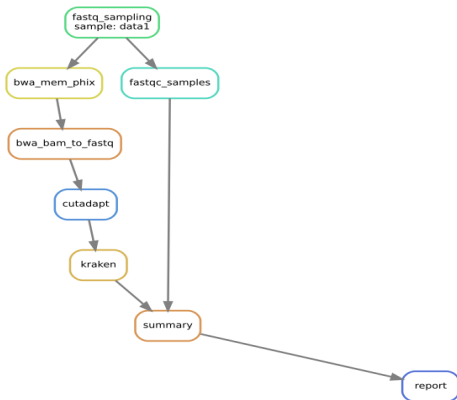


Figure:

Think Makefile, think DAG

Snakemake is a workflow manager

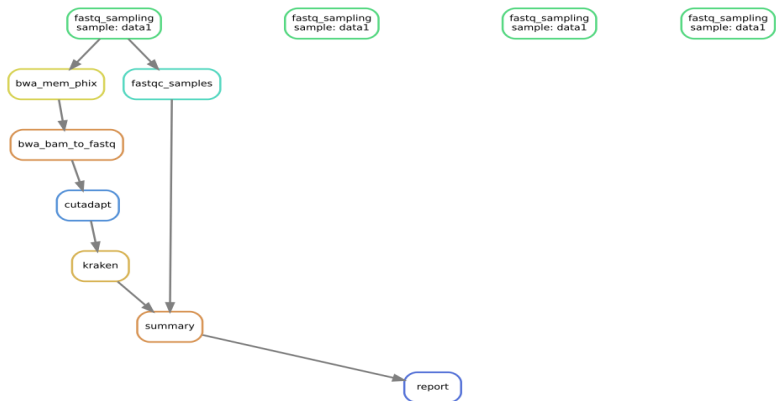


Figure: Ideal for embarrassingly parallel problem

Think Makefile, think DAG

Snakemake is a workflow manager

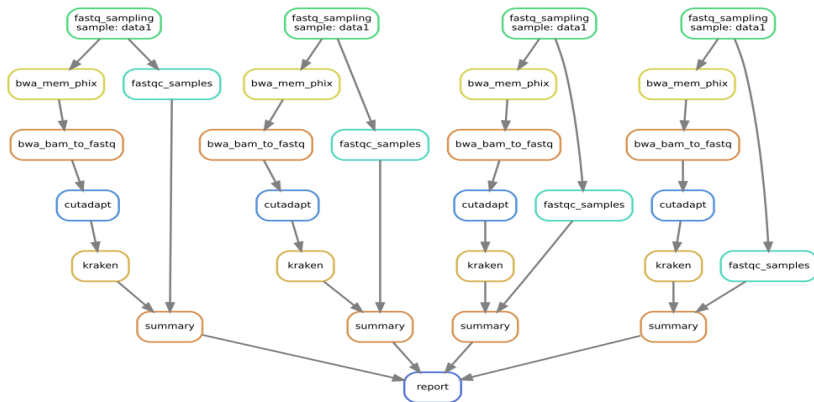


Figure: Ideal for embarassingly parallel problem

Think Makefile, think DAG

Snakemake is a workflow manager

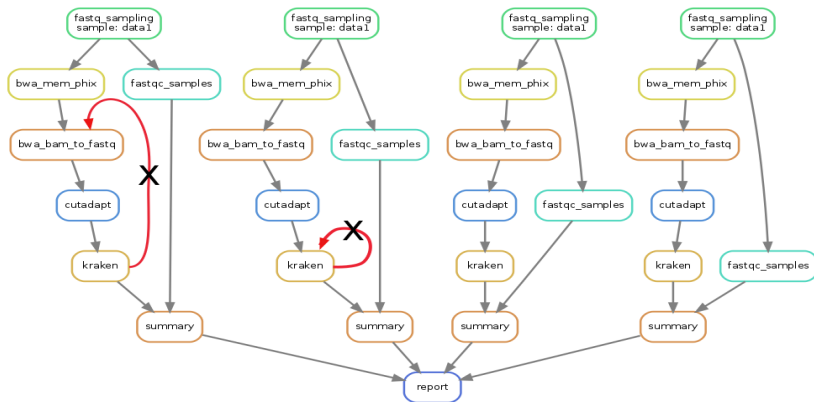


Figure: Requires a DAG (no self loop of feedback loop allowed !)

Growing community



Growing community



Genome of the Netherlands:
GoNL consortium. *Nature Genetics* 2014.

Cancer:
Townsend et al. *Cancer Cell* 2016.
Schramm et al. *Nature Genetics* 2015.
Martin et al. *Nature Genetics* 2013.

Ebola:
Park et al. *Cell* 2015

iPSC:
Burrows et al. *PLOS Genetics* 2016.

Computational methods:
Ziller et al. *Nature Methods* 2015.
Schmied et al. *Bioinformatics* 2015.
Brinda et al. *Bioinformatics* 2015
Chang et al. *Molecular Cell* 2014.
Marshall et al. *Bioinformatics* 2012.

Figure: References: slides.com/johanneskoester/snakemake-tutorial-2016

Why is it successful

Python is a batteries included language.

Why is it successful

Python is a batteries included language.

Snakemake as well !!

Why is it successful

Python is a batteries included language.


Snakemake as well !!

- Clusters can be used with minimum efforts (no intrusive code)
- Workflows can be run from or up to a given rule
- Data provenance
- Nice logging system to follow the status
- Suspend / Resume
- Various code can be integrated: R, bash, and of course Python


From sequential commands to
dependent rule graph:
a toy example

The problem

Let us consider two FastQ files (independent samples) and let us map them on a reference (phiX174). The two sample files are named `sample_A.fastq.gz` and `sample_B.fastq.gz`

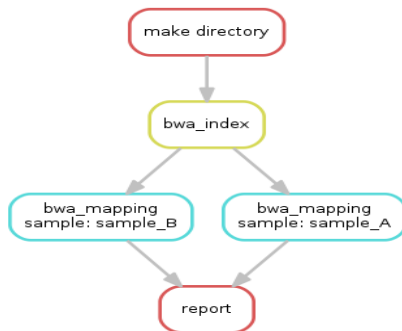

The minimalist solution

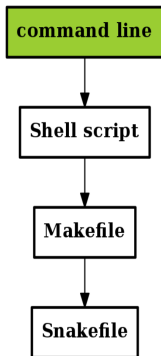


Shell commands: pretty simple

```
# Create a directory
mkdir -p mapped_sample

# Build the index of the reference
bwa index phiX174.fa

# Do the mapping twice on the two input FastQ files
bwa mem phiX174.fa A.fastq.gz | samtools view -Sb - > A.bam
bwa mem phiX174.fa B.fastq.gz | samtools view -Sb - > B.bam
```

The minimalist solution

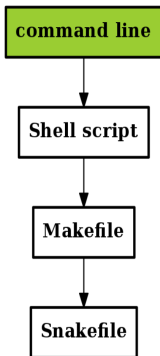

Shell commands: pretty simple

```
# Create a directory
mkdir -p mapped_sample


# Build the index of the reference
bwa index phiX174.fa

# Do the mapping twice on the two input FastQ files
bwa mem phiX174.fa A.fastq.gz | samtools view -Sb - > A.bam
bwa mem phiX174.fa B.fastq.gz | samtools view -Sb - > B.bam
```

Issues

Good start. Simple but what about some variables and scalability ?

A shell solution

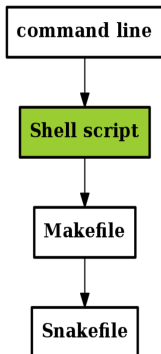

Shell loop and variables


```
#!/bin/sh
REFERENCE="phiX174.fa"
ODIR="mapped_sample"
SAMPLES='ls *.fastq.gz'

#Create a directory
mkdir -p $ODIR

# Build the index of the reference
bwa index $REFERENCE

# Do the mapping twice on the two input FastQ files
for var in $SAMPLES
do
    TARGET=${var/.fastq.gz/.bam}
    bwa mem $REFERENCE $SAMPLES | samtools view -Sb - > $ODIR/$TARGET
done
```


A shell solution

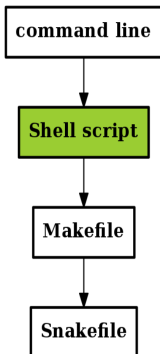

Shell loop and variables

```
#!/bin/sh
REFERENCE="phiX174.fa"
ODIR="mapped_sample"
SAMPLES='ls *.fastq.gz'

#Create a directory
mkdir -p $ODIR


# Build the index of the reference
bwa index $REFERENCE

# Do the mapping twice on the two input FastQ files
for var in $SAMPLES
do
    TARGET=${var/.fastq.gz/.bam}
    bwa mem $REFERENCE $SAMPLES | samtools view -Sb - > $ODIR/$TARGET
done
```

Issues

Still simple but sequential. What about dependencies between tasks ? What if a file exists already ? Do we start from scratch ?

The Makefile solution: a set of directives (rules)

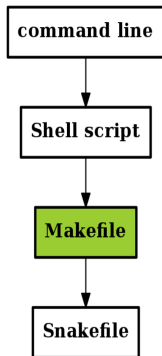

A Makefile consists of a set of rules in the following form

rule syntax


```
target: dependencies
      system command(s)
```

Makefile interests:

- handles the dependencies between rules
- avoids re-rerunning a task if the targets exist already

Widely used in C / C++ community for compilation of libraries.

The Makefile solution: a set of directives (rules)

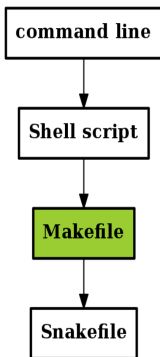

Makefile: a bwa_mapping and bwa_index rule

```

SAMPLES = sample_A sample_B
ODIR = "mapped_sample"
FASTQS = $(patsubst %,%.fastq.gz,$(SAMPLES))
BAMS = $(patsubst %, $(ODIR)/%.bam,$(SAMPLES))

INDEX = phiX174.fa.bwt
REFERENCE = phiX174.fa


# Main rule
all: $(BAMS)

# bwa_mapping
$(ODIR)/%.bam: %.fastq.gz $(INDEX) $(ODIR)
    bwa mem $(REFERENCE) $< | samtools view -Sb - > $@

$(ODIR):
    mkdir -p $(ODIR)

# bwa_index
$(INDEX): $(REFERENCE)
    bwa index $<
  
```

The Snakefile solution

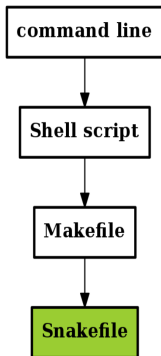

Snakefile

```

SAMPLES = ["sample_A", "sample_B"]

rule all:
    input: expand("mapped_sample/{sample}.bam", sample=SAMPLES)

rule bwa_index:
    input: "phiX174.fa"
    output: "phiX174.fa.bwt"
    shell: "bwa index {input}"

rule bwa_mapping:
    input:
        ref = "phiX174.fa",
        index = "phiX174.fa.bwt",
        fastq = "{sample}.fastq.gz"
    output: "mapped_sample/{sample}.bam"
    shell:
        "bwa mem {input.ref} {input.fastq} | samtools view -Sb - > {output}"
  
```

The Snakefile solution

Snakemake logic: Makefile

Snakemake takes the best of Makefile:

- infers dependencies and execution order
- rules define obtain output files from input files
- structured pipelines

Snakemake syntax: Python

- Own domain specific syntax (rules and keywords)
- Use Python as the glue language
- The snakemake library itself is in Python

Snakemake tutorial

The problem:

- convert a WAV signal into a frequency plot (spectrogram)
- Repeat for N input files
- Effect of the time window parameter W on the resolution
- Add an HTML / server report




Figure: Input: a time series in WAV or OGG format

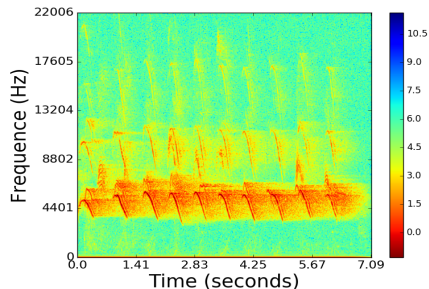


Figure: Output: a PNG image representing the time-frequency content

Rules

```
rule spectrogram:  
    input:  "DOLPHINS.wav"  
    output: "DOLPHINS.png"  
    shell: "python spectrogram.py {input}"
```

Save the file into a file called **Snakefile**

Execution

In a shell, type:

```
snakemake
```

Stdout

```
Provided cores: 1
Rules claiming more threads will be scaled down.
Job counts:
      count  jobs
      1      spectrogram
      1
rule spectrogram:
  input: DOLPHINS.wav
  output: DOLPHINS.png
1 of 1 steps (100%) done
```

Wildcards: generalized inputs/outputs

Wildcards can be used to generalize a rule.

Wildcards

```
rule sort:
    input: "{dataset}.wav"
    output: "{dataset}.png"
    shell: "python spectrogram.py {input}"
```

Wildcards: generalized inputs/outputs

Snakemake automatically resolved multiple named wildcards. You still need to set the final targets.

Wildcards

```
rule all:
    input: ["DOLPHINS.png", "WHALES.png"]

rule sort:
    input: "{dataset}.wav"
    output: "{dataset}.png"
    shell: "python spectrogram.py {input}"
```

Wildcards: generalized inputs/outputs

If the rule's output matches a requested file, the substrings matched by the wildcards are propagated to the input files and to the variable wildcards

Wildcards + expands + variables

```
samples = [ 'DOLPHINS' , 'WHALES' ]  
rule all:  
    input: expand( "{name}.png" , name=samples )  
  
rule sort:  
    input:  "{dataset}.wav"  
    output: "{dataset}.png"  
    shell: "python spectrogram.py {input}"
```

Several wildcards

```
samples = ["DOLPHINS", "WHALES"]  
windows = [512, 1024, 2048, 4096]
```

```
rule all:  
    input: expand("{name}_{ws}.png",  
                  name=samples,  
                  ws=windows)
```

```
rule spectrogram:  
    input: "{dataset}.wav"  
    output: "{dataset}_{window}.png"  
    shell:  
        "python spec.py {input} {wildcards.window}"
```

Config file

We can use a configuration file for parameters. Format are either JSON or YAML. The community seems to prefer YAML.

config.yaml

```
samples: [DOLPHINS, WHALES]
windows: [512,1024,2048,4096]
```

Snakefile

```
configfile: "config.yaml"

rule all:
    input: expand("{name}_{ws}.png",
                  name=config['samples'],
                  ws=config['windows'])

rule spectrogram:
    input: "{dataset}.wav"
    output: "{dataset}_{window}.png"

    shell:
        "python spec.py {input} {wildcards.window}"
```

Add a rule without input/output

We could add a cleanup rule:

```
rule clean:  
    shell: "rm -f DOL*.png WHALE*.png"
```

Since the rule does not produce any outputs and does not depend on other rules, it is not part of the workflow: the rule must be called explicitly:

```
snakemake clean
```

dependencies

If not target is specified, snakemake tries to apply the first rule in the workflow Do not put the clean rule at the beginning !

Handle logs

```
configfile: "config.yaml"

rule all:
    input: expand("data/{name}_{ws}.png",
                  name=config['samples'],
                  ws=config['windows'])

rule spectrogram:
    input: "data/{dataset}.wav"
    output: "data/{dataset}_{window}.png"
    log: "logs/{dataset}_{window}.log"
    shell:
        "python spec.py {input} {wildcards.window} > {log}"
```


The **param** and **run** keywords

```
rule all:
    input:
        expected_output_list ,
        "server.ready"

rule server:
    output: touch("server.ready")
    params:
        port=config['port']
    run: # Some python code
        from easydev import browse
        browse("http://127.0.0.1:%s" % params['port'])

rule spectrogram:
    ....
```

onsuccess section

If the workflow succeeds, the onsuccess section is ran if provided (same for onerror section).

```
onsuccess :  
    from myapp import SpecExample  
    app = SpecExample(samples, window, "data")  
    app.launch(port=config['port'])
```

You also have a **onerror** and **onstart** sections if needed.

demo

Get materials from

https://github.com/sequana/presentations/tree/master/2016/snakemake_IPday_dec/examples/demo

SPECTROGRAM DEMO

Sample:


WHALES

Window:

1024

Plot

Table

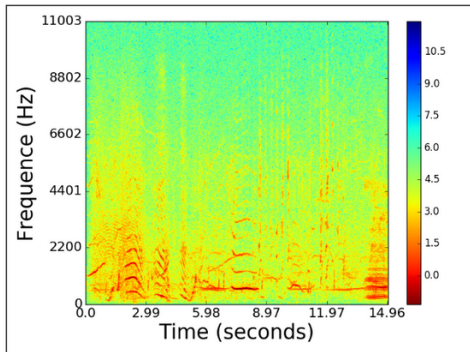

Advanced topics

alternative title: cheeries on the cake

Job execution (source: J. Koster talk)

A job is executed if

- output file target does not exist
- output file needed by another executed job and does not exist
- input file newer than output file
- input file will be updated by other job
- execution is enforced

determined via breadth-first-search on DAG of jobs

Threading

Disjoint paths in the DAG of jobs can be executed in parallel using `--cores` argument:

```
snakemake --cores 8
```

We can be more specific inside the rules:

```
rule bwa_mapping:
    input: test.fastq
    output: test.bam
    threads: 4
    shell: bwa mem -t {threads} {input} > {output}
```

And use the same command:

```
snakemake --cores 8
```

but here only two jobs are executed at the same time

Resources (memory)

We can be specific about memory used by a job with the resources keyword:

```
rule bwa_mapping:
    input: test.fastq
    output: test.bam
    threads: 4
    resources: mem_mb=1000
    shell: bwa mem -t {threads} {input} > {output}
```

and use the resources parameter when calling Snakemake:

```
# execute with only 8 cores and 1Gb memory

snakemake --cores 8 --resources mem_mb=1000
```

so here only one job at a time is executed

Cluster execution

No intrusive code. It just worked on SGE and then on a SLURM cluster without changing a single line of code !

```
# execute the workflow on cluster with qsub submission command
# (and up to 100 parallel jobs)
snakemake --cluster qsub --jobs 100

# tell the cluster system about the used threads
snakemake --cluster "qsub -pe threaded {threads}" --jobs 100

# execute the workflow with DRMAA
snakemake --drmaa --jobs 100

# execute the workflow on cluster with sbatch (SLURM)
snakemake --cluster "sbatch --qos fast" --jobs 100
```


Errors

If an error occurs after hours of computation, fix the error in your code or missing files, and run snakemake again. Finished jobs won't be re-run.

Other features

- handles temporary and protected files
- run until a given rule
- run from a given rule
- stats about run time
- benchmark: run several times the rules
- any external scripts can be used (R, python, etc)
- remote files (http, ftp, google cloud, amazon, dropbox)
- rules may have priorities
- cluster time and memory can be fully customized
- modular: can include rules, or sub workflow

Conclusions and discussions

Conclusions

Mature

Snakemake is a mature tool ready for production.

batteries included

To cite just one great feature: free parallelization on a cluster.

Nice Syntax

The syntax is in Python, the library is in Python. Nevertheless, only a minimalist knowledge is required to get started since nice functions are already provided (e.g. `expand`).

Large community

Large snakemake community. See also the conda/bioconda community.

Discussions

Snakemake is great so what's wrong ?

Not much but here are some food for thoughts

- Snakefile uses Python syntax but Snakefile are not Python module
- Errors are sometimes too cryptic and definitely not useful for end-users
- Despite lots of sanity checks, if you are not careful you may end up in an infinite loop or delete the content of a file. So do lots of testing and save your data files before production. And just avoid symbolic links same input/output filenames.
- The rule syntax is great but developers makes different choices on how they use them. So despite a great idea of sharing tools, you end up with many different pipelines and rules that does the same thing...

References

- Great documentation for developers on Snakemake web site:
 - <https://bitbucket.org/snakemake/snakemake/wiki/Documentation>
 - <https://bitbucket.org/snakemake/snakemake/wiki/Home>
- Useful information:
 - <http://slides.com/johanneskoester/deck-1>
 - <http://snakemake.bitbucket.org/snakemake-tutorial.html>
 - <http://slowkow.com/notes/snakemake-tutorial/>
 - http://watson.nci.nih.gov/~sdavis/blog/flexible_bioinformatics_pipelines_with_snakemake/
- This talk and materials
All snakefiles and data files to play around and available on
https://github.com/sequana/presentations/2016/snakemake_IPday_dec

Snakemake Citations

Köster J., Rahmann S. Snakemake – a scalable bioinformatics workflow engine.

Bioinformatics application note Vol 28 (19) 2012

Acknowledgments

Acknowledgments

```
HELPERS = [  
    "Dimitri Desvillechabrol",  
    "Rachel Legendre",  
    "Christiane Bouchier",  
    "The bioinformatics and biostatistics Hub (IP)"]  
  
rule thank:  
    input: expand("{helpers}", helpers=HELPERS)  
  
rule you:  
    output: temp(touch("{to}"))
```


Acknowledgments


```

HELPERS = [
    "Dimitri Desvillechabrol",
    "Rachel Legendre",
    "Christiane Bouchier",
    "The bioinformatics and biostatistics Hub (IP)"]

rule thank:
    input: expand("{helpers}", helpers=HELPERS)

rule you:
    output: temp(touch("{to}"))
  
```

```
snakemake -s thanks.rules --dag | dot -Tpng > thanks.png
```



Questions

What happens when the snakemake is interrupted

- If you stop your snakemake (i.e. ctrl+c):

```
Terminating processes on user request.
Will exit after finishing currently running jobs.
Removing output files of failed job samtools since they might be corrupted:
reference.fa.fai
```

- On the cluster, the current job is not kill
- If you close your shell (Crash simulation):

```
IncompleteFilesException:
The files below seem to be incomplete. If you are sure that certain files are
not incomplete, mark them as complete with
```

```
snakemake --cleanup-metadata <filenames>
```

```
To re-generate the files rerun your command with the --rerun-incomplete flag.
Incomplete files:
ERR036019_unsort.bam
```

- We can rerun the snakemake with --rerun-incomplete.