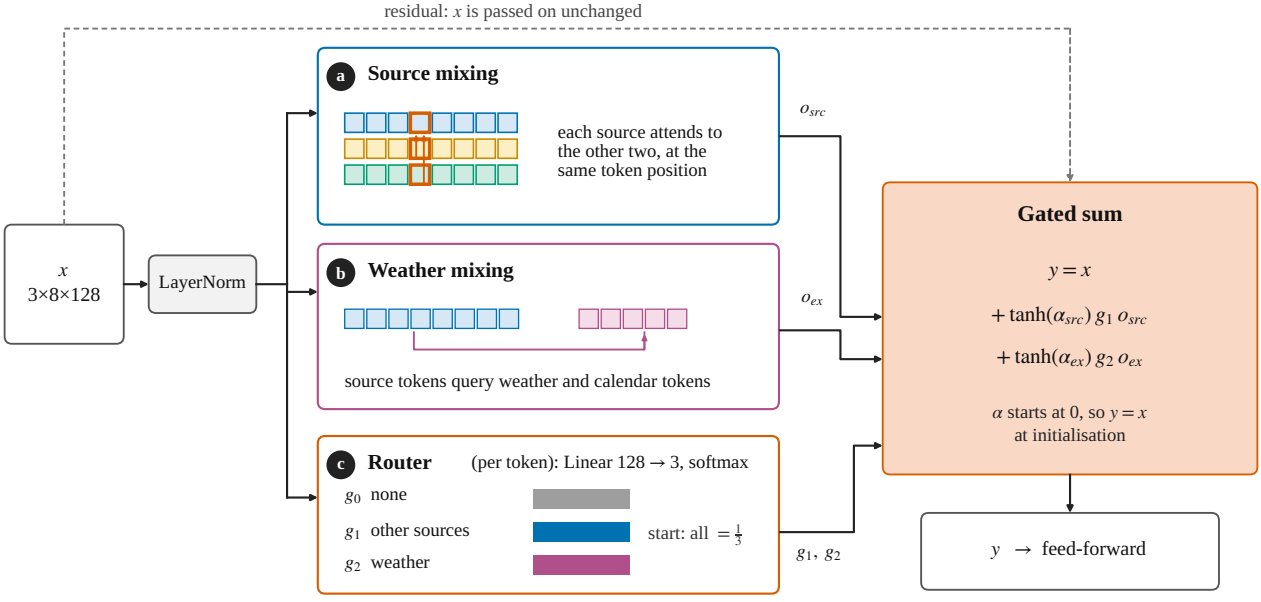
residual: x is passed on unchanged
x
3×8×128
LayerNorm
a
Source mixing
each source attends to the other two, at the same token position
b
Weather mixing
source tokens query weather and calendar tokens
c
Router
(per token): Linear 128 → 3, softmax
g0 none
g1 other sources
g2 weather
start: all = 1/3
o_src
o_ex
g1, g2
Gated sum
y = x
+ tanh(α_src) g1 o_src
+ tanh(α_ex) g2 o_ex
α starts at 0, so y = x at initialisation
y → feed-forward