

CO5 At3

Level 3


NAME: A K Selva Prabhu

REG NO: 192421224

COURSE CODE: CSA0904

COURSE NAME: PROGRAMMING FOR JAVA

1

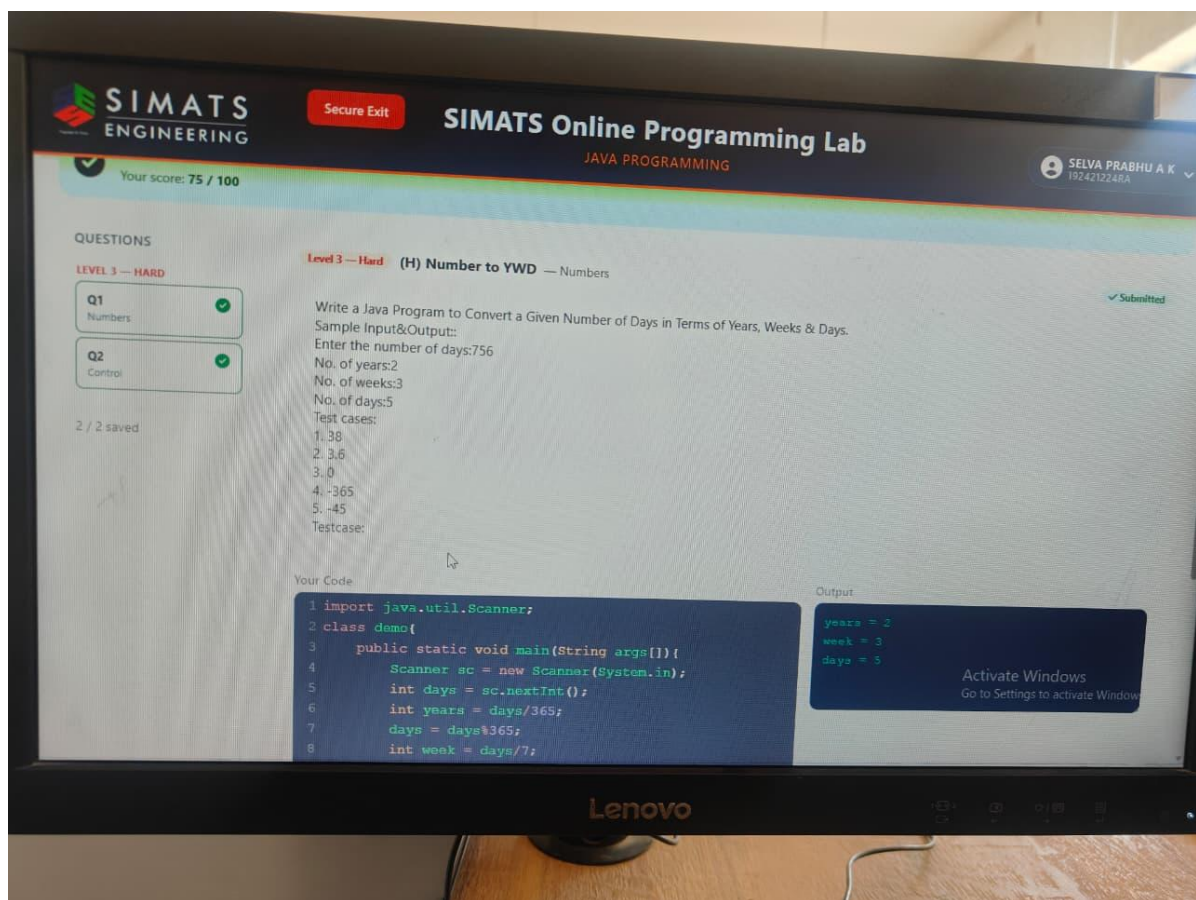

Q. -45
Testcase:

Your Code

```
1 import java.util.Scanner;
2 class demo{
3     public static void main(String args[]){
4         Scanner sc = new Scanner(System.in);
5         int days = sc.nextInt();
6         int years = days/365;
7         days = days%365;
8         int week = days/7;
9         days = days%7;
10        System.out.println("years = " + years);
11        System.out.println("week = "+week);
12        System.out.println("days = "+ days);
13
14
15    }
16 }
```

Output

```
years = 2
week = 3
days = 5
```

Submit Your Code
You can click on the button to submit your code

Next →

The image shows a computer monitor displaying the SIMATS Online Programming Lab interface. The top header includes the SIMATS Engineering logo, a 'Secure Exit' button, and the page title 'SIMATS Online Programming Lab' with 'JAVA PROGRAMMING' below it. On the right, a user profile for 'SELVA PRABHU A K' is visible. The main content area shows 'CO5-AT3- Level 3' with a 'Level Exam' tag and a timestamp of '31 Aug 2026, 11:59 AM'. A green banner indicates 'Result Available' with a score of '75 / 100'. Below this, a 'QUESTIONS' section lists 'Q1 Numbers' and 'Q2 Control', both marked as completed. The 'Q2 Control' question is expanded, showing a 'Level 3 - Hard (H) Roman' control question. The question text explains Roman numeral symbols (I, V, X, L, C, D, M) and their values, and asks for a program to convert a Roman numeral to an integer. The user's answer is shown as 'Input: s = "III"'. A 'Submitted' status is indicated on the right.

SIMATS ENGINEERING Secure Exit **SIMATS Online Programming Lab** 7
JAVA PROGRAMMING

CO5-AT3- Level 3
Level Exam </> Java 31 Aug 2026, 11:59 AM

Result Available
Your score: 75 / 100

QUESTIONS

LEVEL 3 — HARD

Q1 Numbers ✓

Q2 Control ✓

2 / 2 saved

Level 3 — Hard (H) Roman — Control ✓ Submitted

Roman numerals are represented by seven different symbols: I, V, X, L, C, D and M.

Symbol Value

I 1
V 5
X 10
L 50
C 100
D 500
M 1000

For example, 2 is written as II in Roman numeral, just two ones added together. 12 is written as XII, which is simply X + II. The number 27 is written as XXVII, which is XX + V + II.

Roman numerals are usually written largest to smallest from left to right. However, the numeral for four is not IIII. Instead, the number four is written as IV. Because the one is before the five we subtract it making four. The same principle applies to the number nine, which is written as IX. There are six instances where subtraction is used:

- I can be placed before V (5) and X (10) to make 4 and 9.
- X can be placed before L (50) and C (100) to make 40 and 90.
- C can be placed before D (500) and M (1000) to make 400 and 900.

Given a roman numeral, convert it to an integer.

Example:
Input: s = "III"

