From Weak Programs to a Router

A follow-up to `IMPROVEMENT_PLAN.md`. It tells the story in three parts: (1) how we found the weak judge programs and decided what to do, (2) how we acted on those directions, and (3) the router we learned - with all the accuracy numbers (routing measured at a **25% escalation budget**) and the escalation plot. The test-CV router is reported **separately at the end** because it is a ceiling, not a real metric.

All numbers are on the **721-row held-out test set**, scored against the LLM judge's labels. The committee's base accuracy (no routing) is **0.749**.

---

1. Finding the weak programs, and what to do next

We scored all 80 programs individually against both label sets (the 721 LLM-labeled rows and the 35 human-labeled rows). About 15 of them added little or no signal. Ranked by how well a program's score separates good from bad matches on the LLM set (AUC; 0.50 = no better than a coin flip), the **10 weakest** were:

program	rubric	test AUC
judge_77	Modifier/Qualifier	0.498
judge_34	Specificity	0.526
judge_61	Processing/Additive	0.528
judge_28	Nutrition proximity	0.541
judge_37	Specificity	0.544
judge_58	Processing/Additive	0.567
judge_74	Modifier/Qualifier	0.580
judge_62	Processing/Additive	0.585
judge_49	Food category	0.587
judge_52	Food category	0.592

They clustered in a few rubrics (specificity, modifier, processing, food-category), and failed for three plain reasons: they **assumed the two foods already matched** and only looked for conflicting words (so they scored almost everything high); they **matched loose single words** ("with", "in") out of context; and some **ranked fine but output on a squashed scale**, so the single yes/no cutoff threw their signal away.

The directions we decided to pursue (from `IMPROVEMENT_PLAN.md`): de-noise the committee, calibrate the aggregator, **learn a router** to escalate only the uncertain rows, repair the over-strict programs, and grow the human-labeled set.

---

2. Acting on those directions

- **Abstention (make weak programs stay silent).** We let each program abstain when its score is near its decision threshold. **Not a clean win** - it destabilized committee selection and gave no reliable

accuracy gain.

- **De-noise.** Pruning the weakest programs (by a validation-only criterion) left accuracy unchanged - they weren't being selected anyway. But replacing the vote-based aggregator with a **calibrated continuous aggregator** rescued the "posterior" confidence signal (see below).
- **Routing with the paper's signals.** Escalating the least-confident rows to the LLM works. **Vote disagreement** is a usable signal; the **raw Snorkel posterior was poorly calibrated** and barely beat random - which the calibrated aggregator fixes.
- **Learn a router.** The main new step - covered next.

---

3. Learning a router

What it is. A small classifier that looks at a row and predicts **"will the committee get this one wrong?"** We then spend our LLM budget on the rows it flags as most-likely-wrong.

- **Input:** only committee outputs for the row - every program's score, summary stats, the aggregator's confidence, vote disagreement, abstain counts, and simple pair features (word overlap, a "hard category" flag). **No LLM call.**
- **Output:** a number = probability the committee is wrong (used to rank rows).
- **Ground truth to train on:** `committee_wrong = 1 if committee's answer != LLM's answer`. We generate this honestly on the validation set using 5-fold out-of-fold refits.
- **Training data:** the **222 validation rows** - of which only **22 were committee errors** (a small, imbalanced training signal; this matters below).
- **How the budget enters:** the router only *ranks* rows. At serving time we escalate the top **X%** most-likely-wrong rows (here **X = 25%**); the rest keep the committee's answer.

Accuracy of every experiment (routing at 25% escalation)


Group	Method	Accuracy @25%
Base (no routing)	Programmatic committee	0.749
Base (no routing)	Continuous calibrated aggregator	0.750
Routing - baselines	**Oracle** (best possible)	0.999
Routing - baselines	Random	0.812
Routing - paper signals	Vote variance	0.870
Routing - paper signals	Snorkel posterior margin	0.853
Routing - paper signals	Continuous-aggregator posterior	0.854
Routing - learned (deployable)	Logistic Regression	0.861
Routing - learned (deployable)	Random Forest	0.854
Routing - learned (deployable)	XGBoost	0.857

Abstention is on a different axis (it drops weak rows instead of escalating), shown here with its coverage, not comparable to the 25%-budget rows above:

band	coverage	accuracy (committed rows)
0.00	1.000	0.749

band	coverage	accuracy (committed rows)
0.05	0.863	0.794
0.10	1.000	0.723
0.15	0.943	0.740

Escalation plot

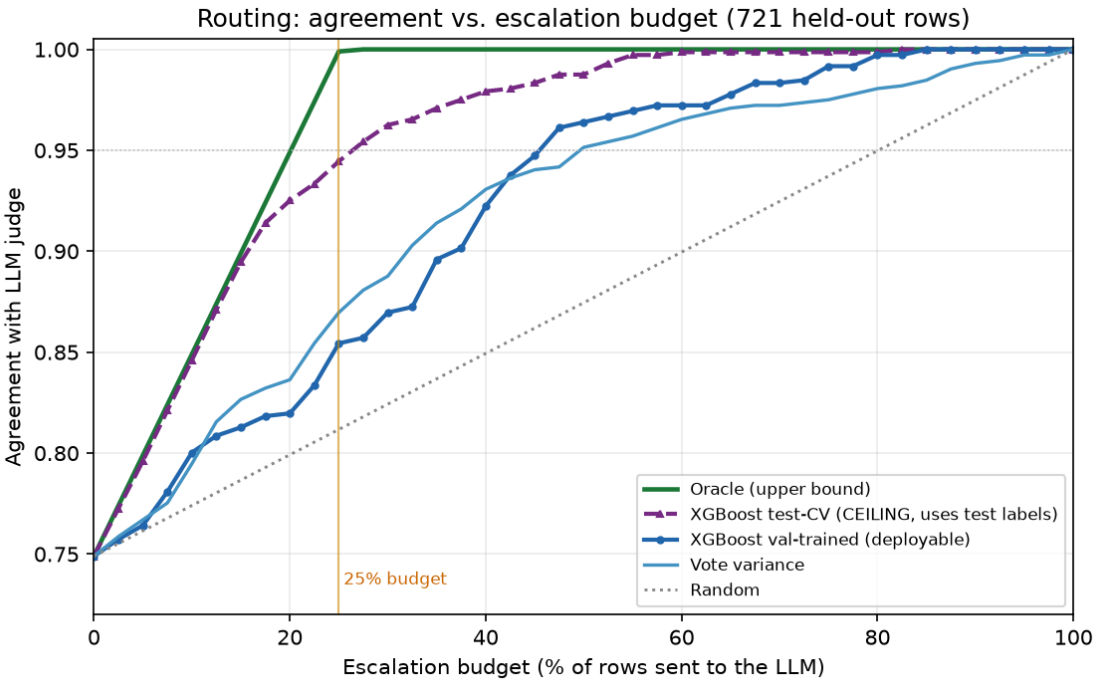

Reading it: at a 25% budget the deployable routers and paper signals all land around **0.85-0.87**, well above random (0.81) but well below the oracle (~1.0). The learned routers only marginally beat the simple vote-variance signal - because the router had just **22 error examples** to learn from, drawn from an easy validation set (the programs were built using validation examples, so validation is not representative of test). **The limit is the training data, not the model** - hyperparameter tuning of LR and XGBoost changed nothing.

---

4. The test-CV router - a ceiling, NOT a real result

To ask *"how good could the router be if it had representative training data?"*, we also trained it by cross-validation **on the test set itself** (with the richer feature set). This gives:

Method	Accuracy @25%
XGBoost (test-CV, enriched)	**0.949**
Logistic Regression (test-CV, enriched)	0.935

These are not deployable numbers and must not be quoted as results. They use the **test labels to train the router**, which you would not have in production. It is a legitimate *ceiling estimate* (the same way the PAJAMA paper evaluates its ModernBERT router), showing that **with representative labeled data the router could get close to the oracle (~0.95 at 25%)** - but the honest, deployable number today is the validation-trained **~0.86 at 25%**. The gap between 0.86 and 0.95 is exactly the value of collecting a

representative, labeled router-training set.

---

5. Bottom line

- The weak programs are real but pruning them didn't help; the two things that *did* help are **calibrated aggregation** (fixes the confidence signal) and **routing** (escalate the uncertain rows).
- **Deployable today:** escalate 25% of rows -> **~0.86 agreement** with the LLM (~4x fewer LLM calls than grading everything). The best single signal is the learned router / calibrated posterior.
- **Biggest lever next:** give the router **representative, labeled training data** (disjoint from the program-synthesis examples). That is what moves it from ~0.86 toward the ~0.95 ceiling - not more model tuning.