




Activation distribution per layer (input of each Conv2d/Linear) - ResNet-18 / CIFAR-10 (FP32 checkpoint best.pth)
layers 1-8 of 21 (page 1/3)
alidation images, FP32; exact mean/std/min/max/zeros over all values, histogram + percentiles from a random subsample; y axis log

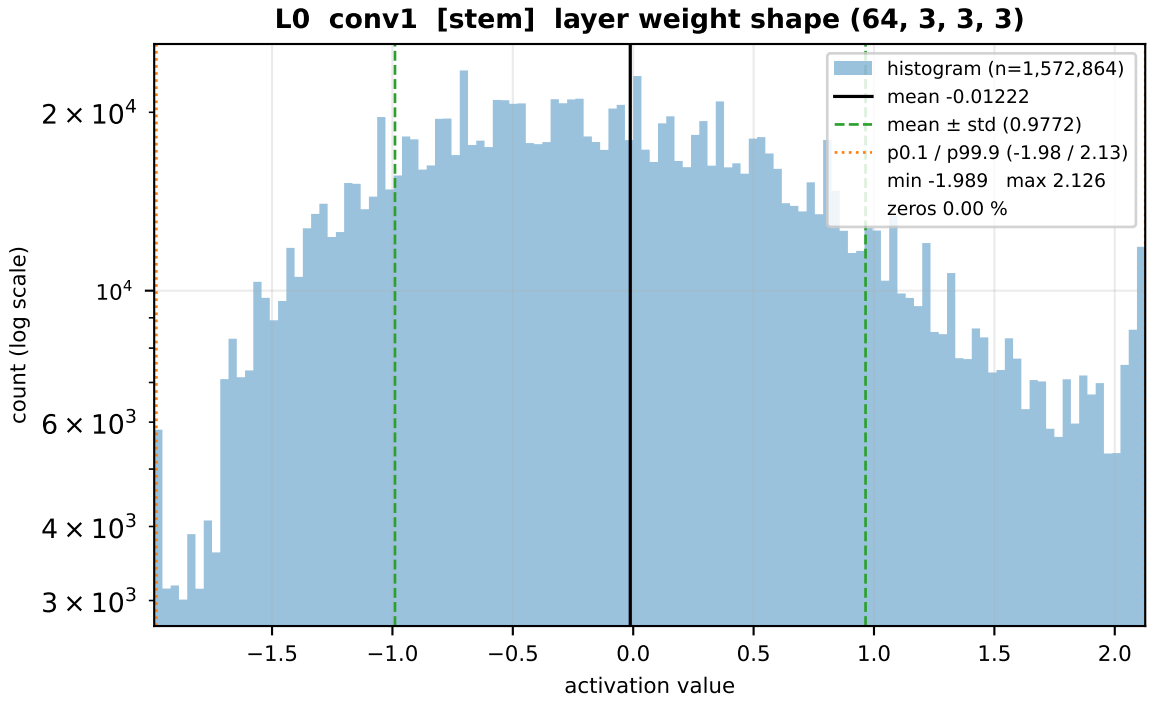


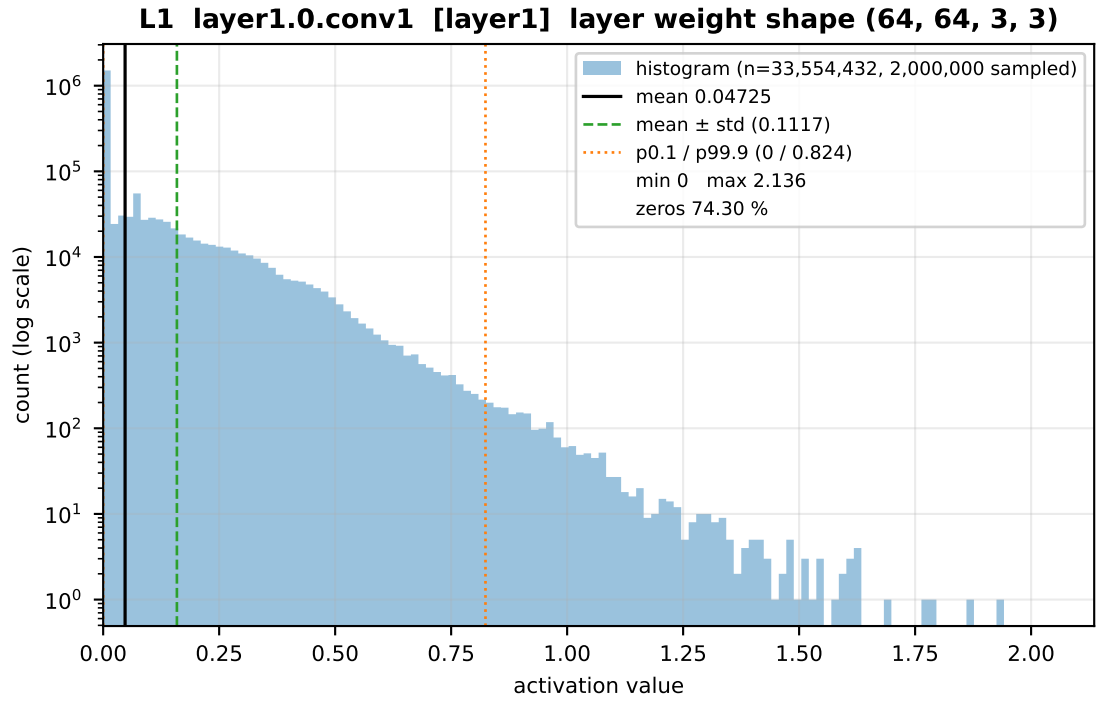


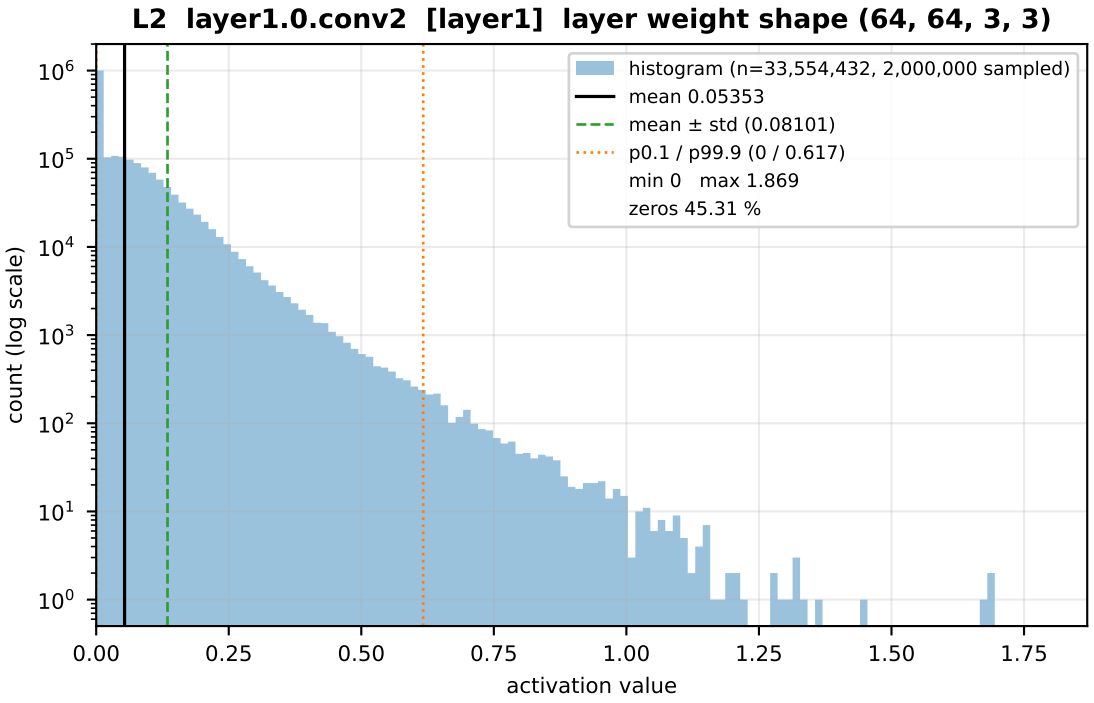


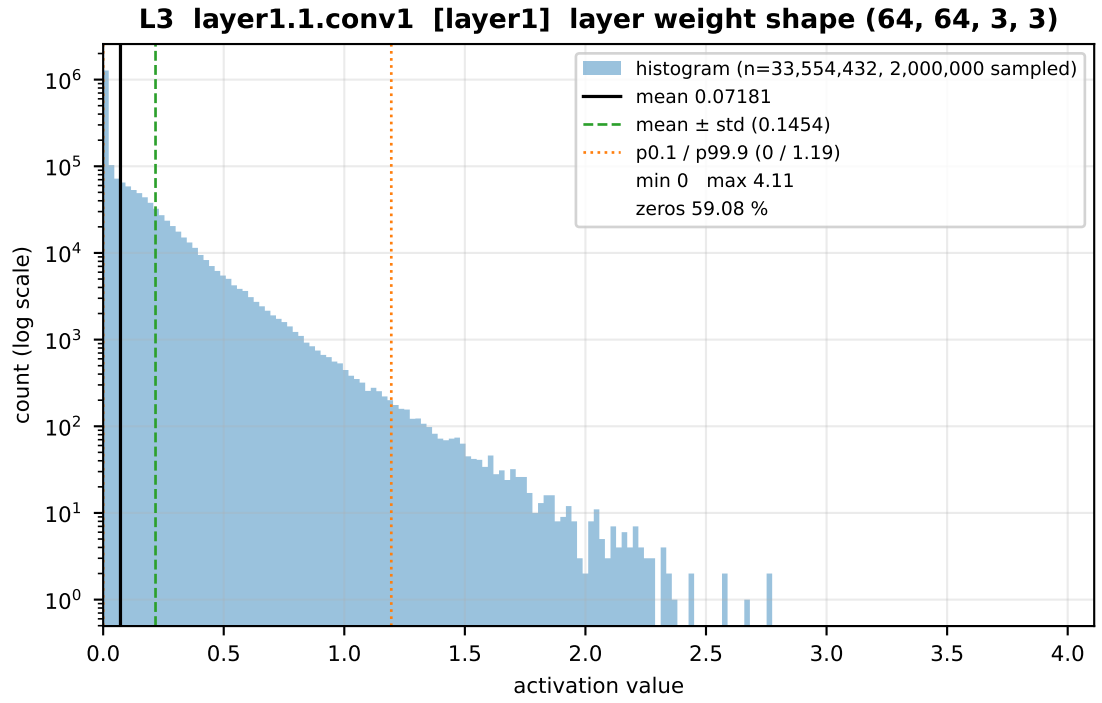

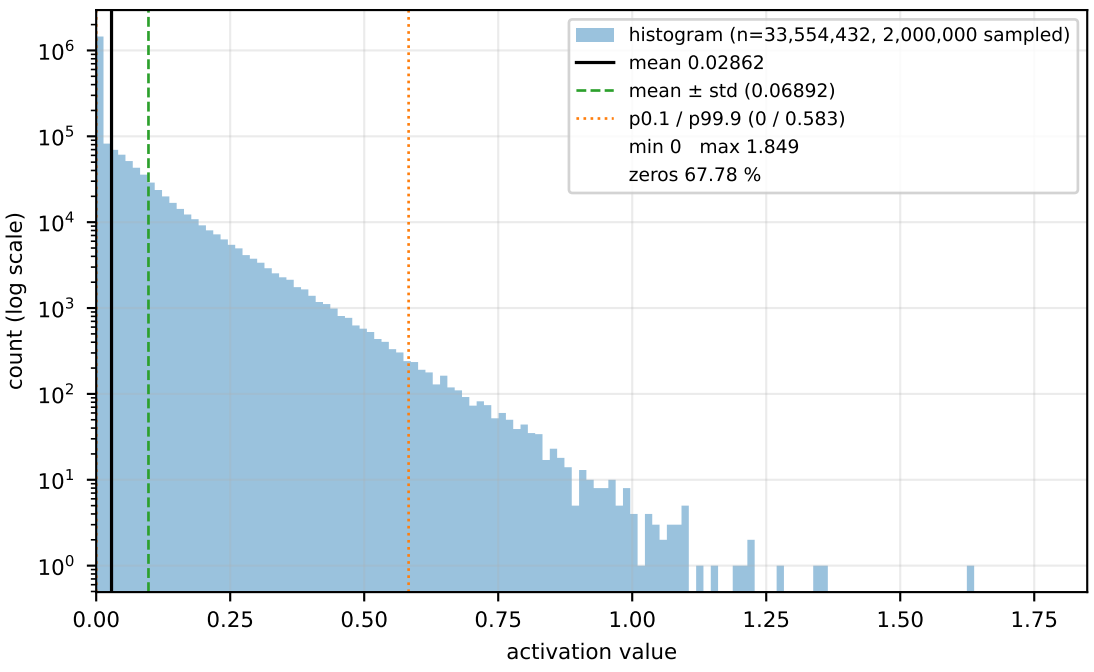


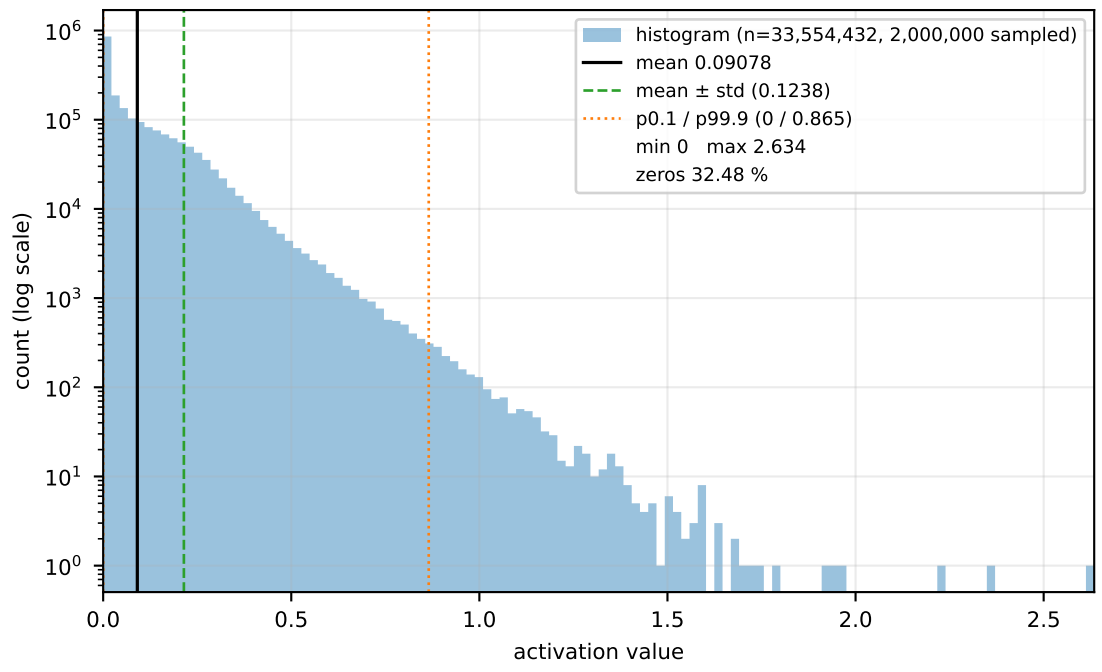


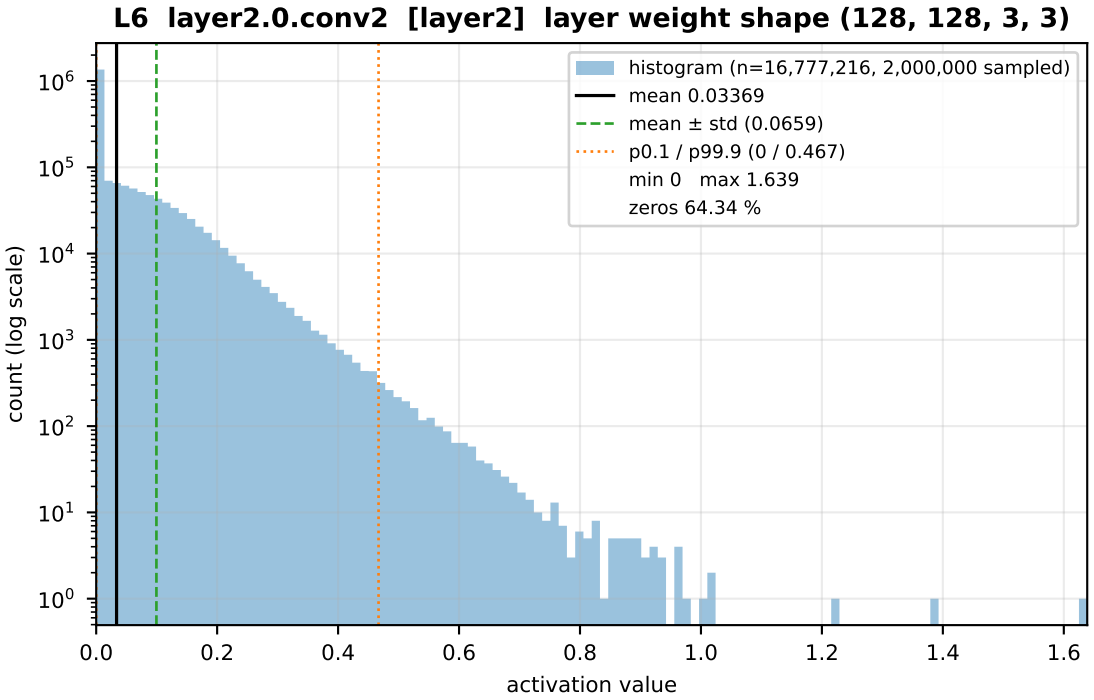


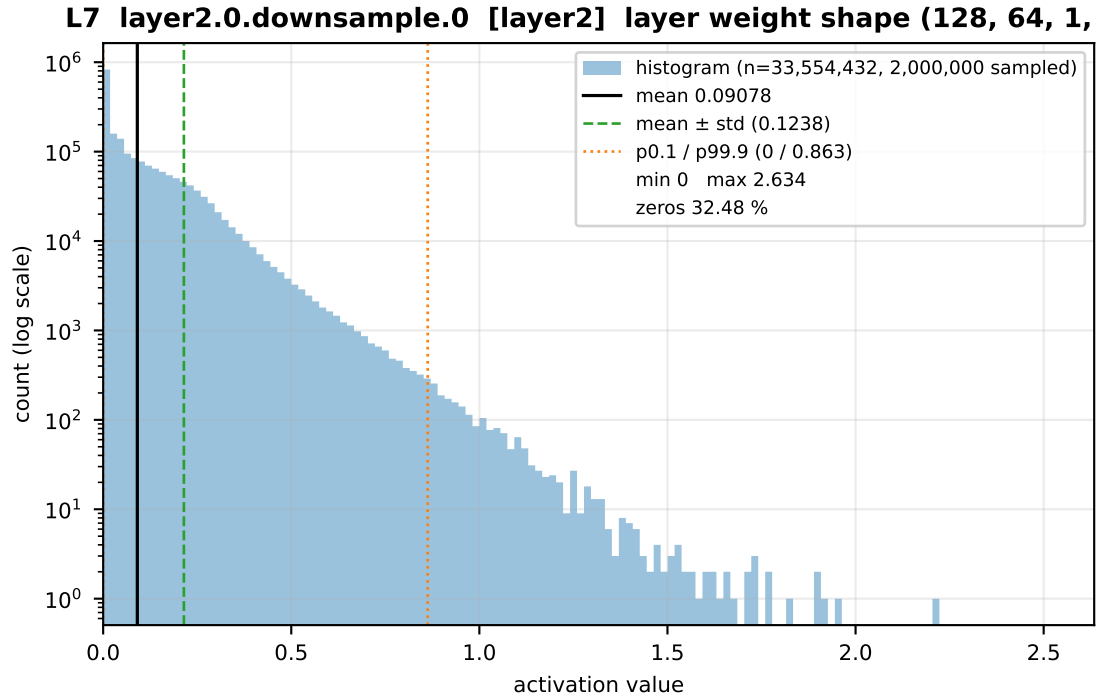



Activation distribution per layer (input of each Conv2d/Linear) - ResNet-18 / CIFAR-10 (FP32 checkpoint best.pth)
layers 9-16 of 21 (page 2/3)
alidation images, FP32; exact mean/std/min/max/zeros over all values, histogram + percentiles from a random subsample; y axis log

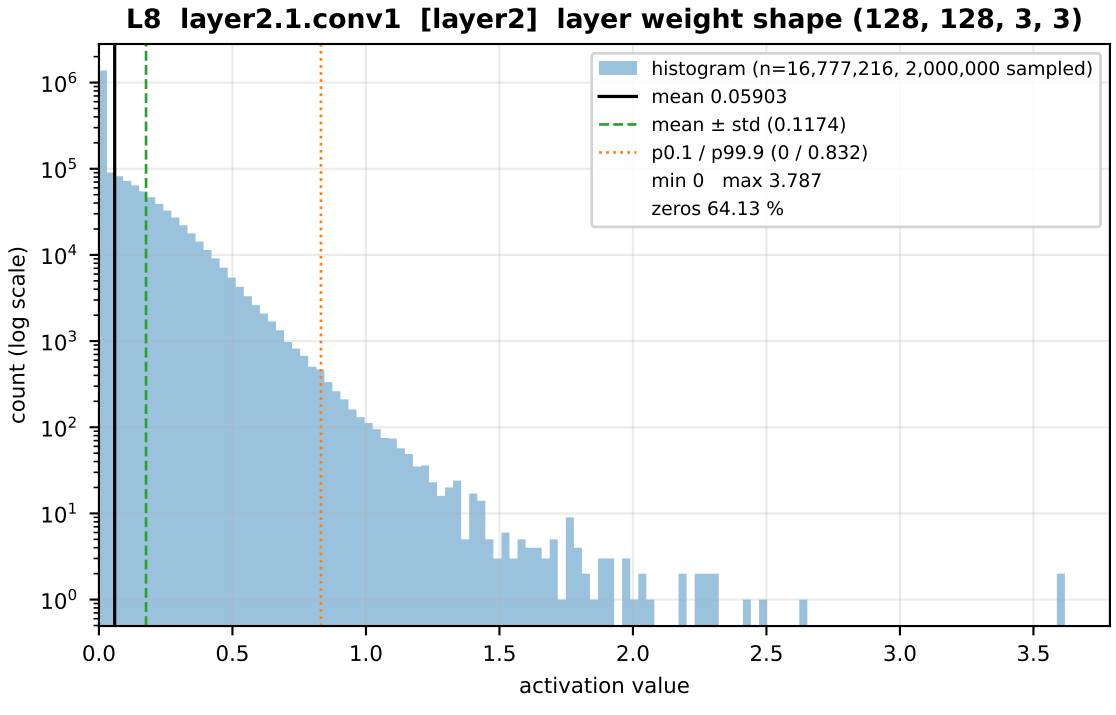


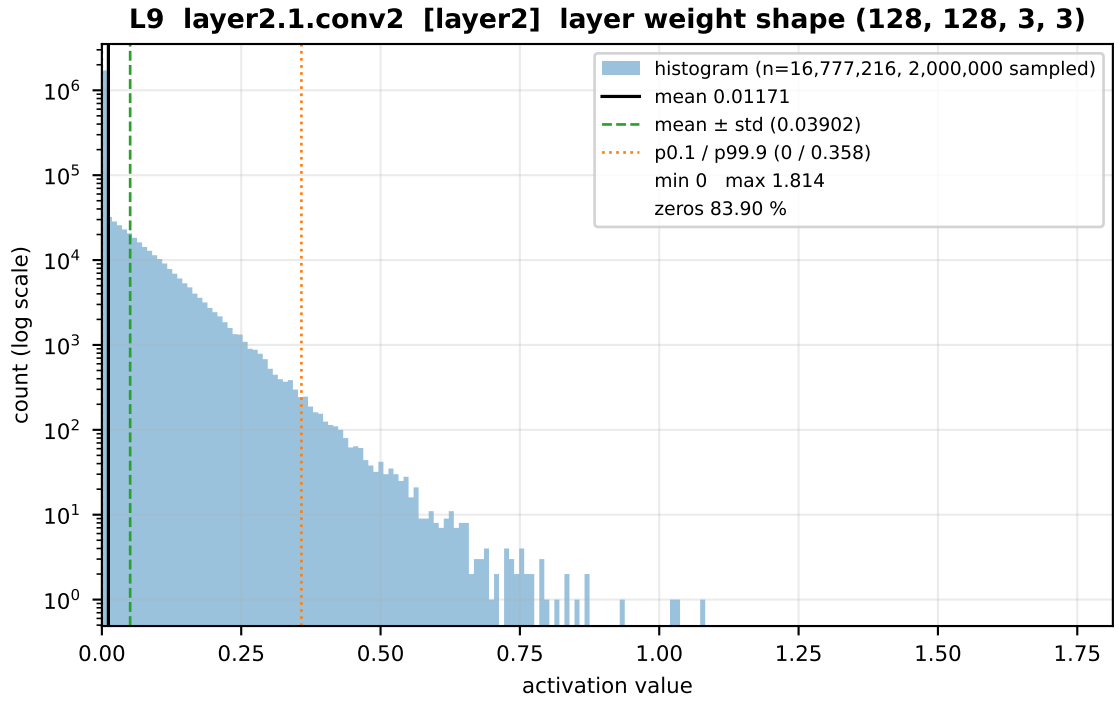


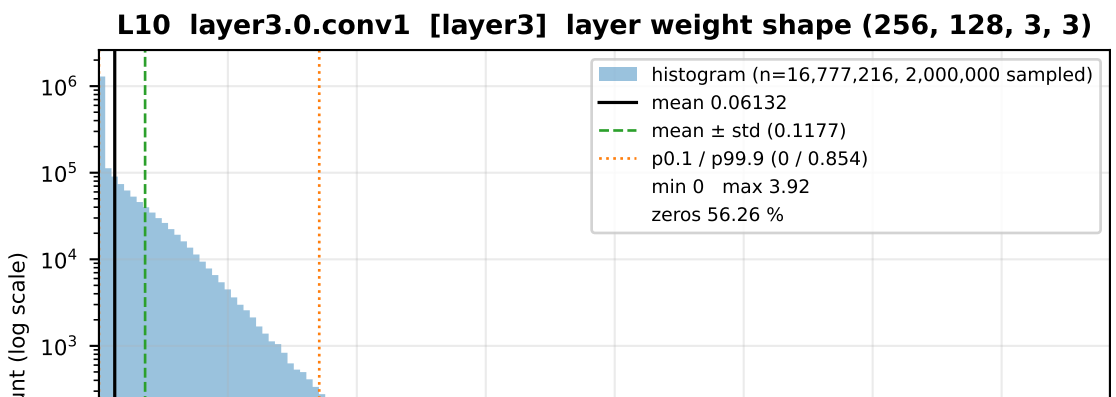


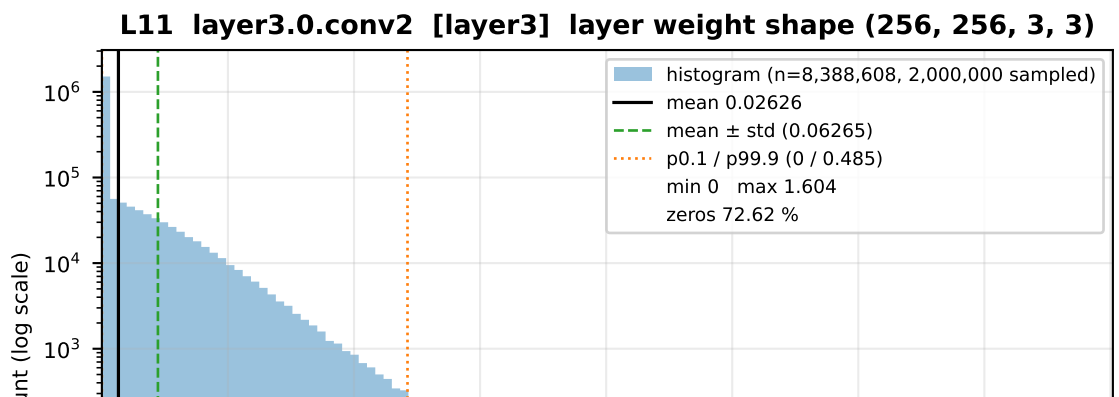

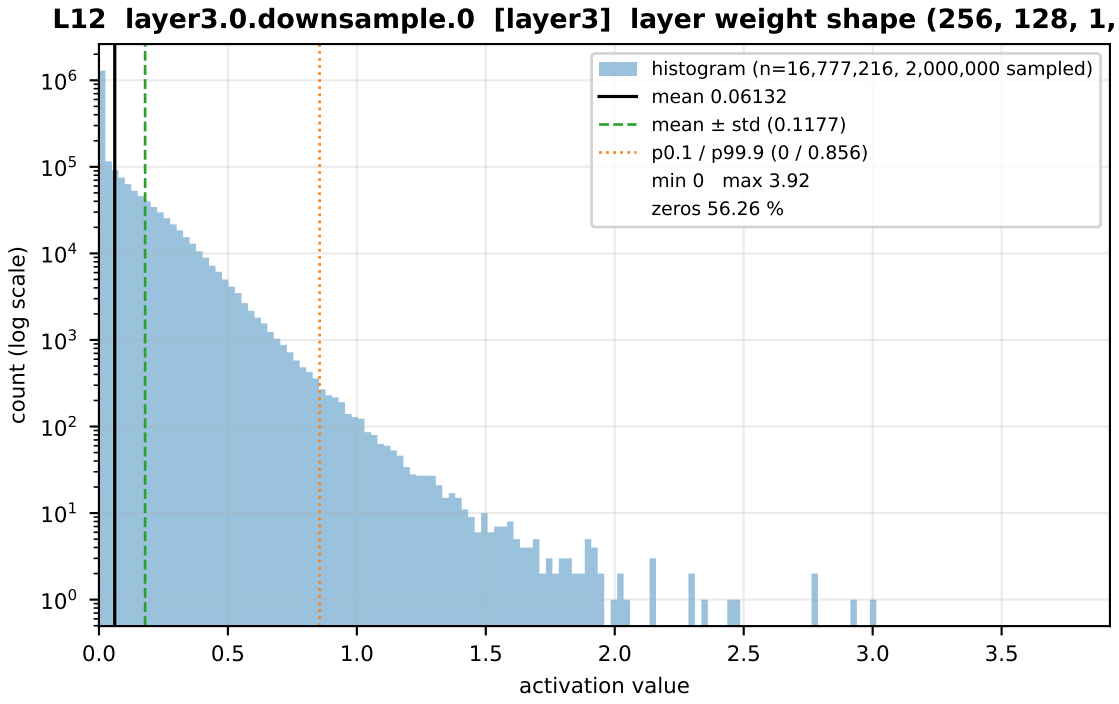

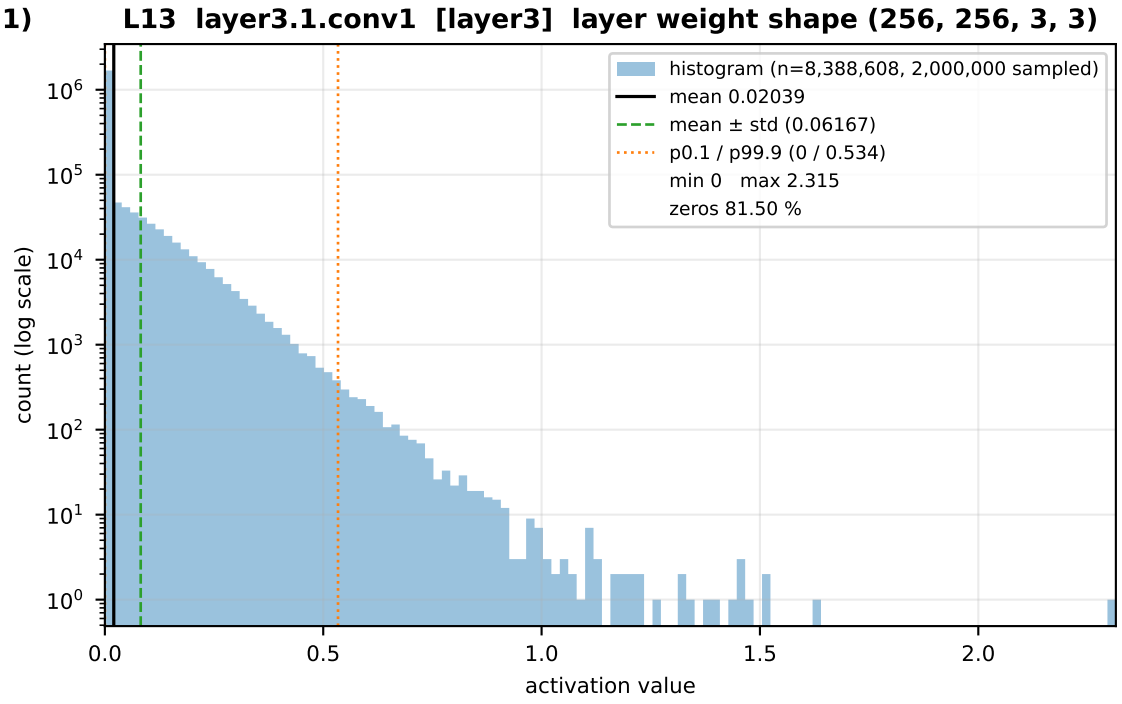

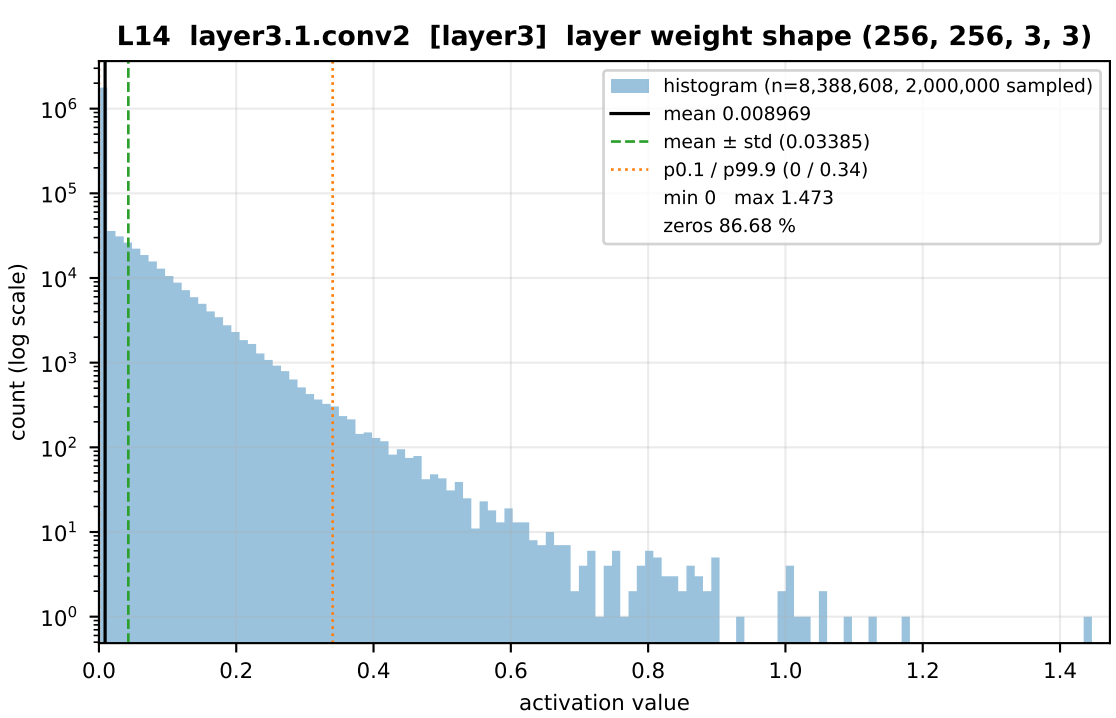

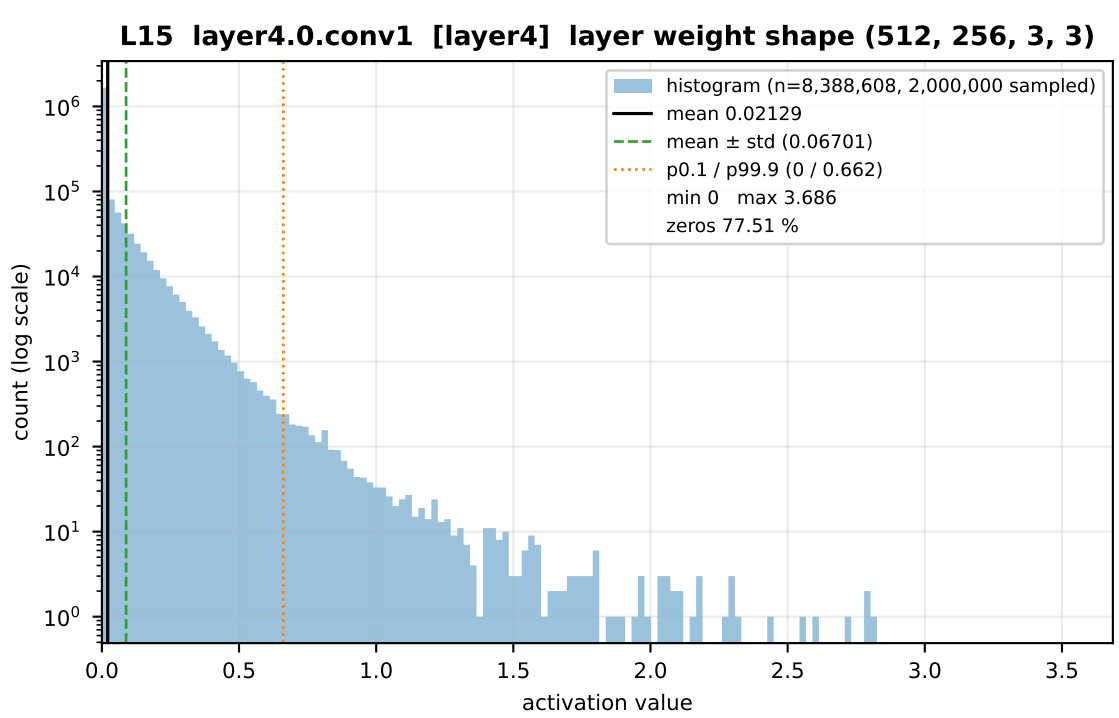

Activation distribution per layer (input of each Conv2d/Linear) - ResNet-18 / CIFAR-10 (FP32 checkpoint best.pth)
layers 17-21 of 21 (page 3/3)
alidation images, FP32; exact mean/std/min/max/zeros over all values, histogram + percentiles from a random subsample; y axis log

