

4. Our services should be able to record stats of videos, e.g., likes/dislikes, total number of views, etc.
5. Users should be able to add and view comments on videos.
-

Non-Functional Requirements:

1. The system should be highly reliable, any video uploaded should not be lost.
2. The system should be highly available. Consistency can take a hit (in the interest of availability); if a user doesn't see a video for a while, it should be fine.
3. Users should have a real time experience while watching videos and should not feel any lag.

Not in scope: Video recommendations, most popular videos, channels, subscriptions, watch later, favorites, etc.

3. Capacity Estimation and Constraints

Let's assume we have 1.5 billion total users, 800 million of whom are daily active users. If, on average, a user views five videos per day then the total video-views per second would be:

$$800M * 5 / 86400 \text{ sec} \Rightarrow 46K \text{ videos/sec}$$

Let's assume our upload:view ratio is 1:200, i.e., for every video upload we have 200 videos viewed, giving us 230 videos uploaded per second.

$$46K / 200 \Rightarrow 230 \text{ videos/sec}$$

Storage Estimates: Let's assume that every minute 500 hours worth of videos are uploaded to Youtube. If on average, one minute of video needs 50MB of storage (videos need to be stored in multiple formats), the total storage needed for videos uploaded in a minute would be:

$$500 \text{ hours} * 60 \text{ min} * 50MB \Rightarrow 1500 \text{ GB/min} (25 \text{ GB/sec})$$

These numbers are estimated with ignoring video compression and replication, which would change our estimates.

Bandwidth estimates: With 500 hours of video uploads per minute and assuming each video upload takes a bandwidth of 10MB/min, we would be getting 300GB of uploads every minute.

$$500 \text{ hours} * 60 \text{ mins} * 10MB \Rightarrow 300GB/min (5GB/sec)$$

Assuming an upload:view ratio of 1:200, we would need 1TB/s outgoing bandwidth.

4. System APIs

We can have SOAP or REST APIs to expose the functionality of our



```
uploadVideo(api_dev_key, video_title, vide_description, tags[], category_id, default_language, recording_details, video_contents)
```

Parameters:

api_dev_key (string): The API developer key of a registered account. This will be used to, among other things, throttle users based on their allocated quota.

video_title (string): Title of the video.

vide_description (string): Optional description of the video.

tags (string[]): Optional tags for the video.

category_id (string): Category of the video, e.g., Film, Song, People, etc.

default_language (string): For example English, Mandarin, Hindi, etc.

recording_details (string): Location where the video was recorded.

video_contents (stream): Video to be uploaded.

Returns: (string)

A successful upload will return HTTP 202 (request accepted) and once the video encoding is completed the user is notified through email with a link to access the video. We can also expose a queryable API to let users know the current status of their uploaded video.

```
searchVideo(api_dev_key, search_query, user_location, maximum_videos_to_return, page_token)
```

Parameters:

api_dev_key (string): The API developer key of a registered account of our service.

search_query (string): A string containing the search terms.

user_location (string): Optional location of the user performing the search.

maximum_videos_to_return (number): Maximum number of results returned in one request.

page_token (string): This token will specify a page in the result set that should be returned.

Returns: (JSON)

A JSON containing information about the list of video resources matching the search query. Each video resource will have a video title, a thumbnail, a video creation date, and a view count.

```
streamVideo(api_dev_key, video_id, offset, codec, resolution)
```

Parameters:

api_dev_key (string): The API developer key of a registered account of our service

Grokking the System Design Interview

(/collection/5668639101419520/56490502)

87% completed



Q Search Course

design-interview/3jYKmrVAPGQ)

Designing Twitter Search
(/courses/grokking-the-system-design-interview/xV9mMjj74gE)

Designing a Web Crawler
(/courses/grokking-the-system-design-interview/NE5LpPrWrKv)

Designing Facebook's Newsfeed
(/courses/grokking-the-system-design-interview/gxpWJ3ZKYwl)

Designing Yelp or Nearby Friends
(/courses/grokking-the-system-design-interview/B8rpM8E16LQ)

Designing Uber backend
(/courses/grokking-the-system-design-interview/YQVkj548NM)

Design Ticketmaster (*New*)
(/courses/grokking-the-system-design-interview/YQyq6mBKq4n)

Additional Resources
(/courses/grokking-the-system-design-interview/JYILJB6DK7g)

Glossary of System Design Basics

System Design Basics
(/courses/grokking-the-system-design-interview/B892KY261z2)

Key Characteristics of Distributed Systems
(/courses/grokking-the-system-design-interview/YQWGjlZZVz9)

Load Balancing
(/courses/grokking-the-system-design-interview/3jEwl04BL7Q)

Caching
(/courses/grokking-the-system-design-interview/3j6NnJrpp5p)

Data Partitioning
(/courses/grokking-the-system-design-interview/mEN8IJXV1LA)

Indexes
(/courses/grokking-the-system-design-interview/gxkVE8NEvXj)

Proxies
(/courses/grokking-the-system-design-interview/NR69MvM4OR2)

Explore
(/explore)

Tracks
(/tracks)

My Courses
(/mycourses)

Edpresso
(/edpresso)

Refer a Friend
(/refer-a-friend)

Create Courses/grokking-system-design-view/xV26VjZ7



offset (number): We should be able to stream video from any offset; this offset would be a time in seconds from the beginning of the video. If we support playing/pausing a video from multiple devices, we will need to store the offset on the server. This will enable the users to start watching a video on any device from the same point where they left off.

codec (string) & resolution(string): We should send the codec and resolution info in the API from the client to support play/pause from multiple devices. Imagine you are watching a video on your TV's Netflix app, paused it, and started watching it on your phone's Netflix app. In this case, you would need codec and resolution, as both these devices have a different resolution and use a different codec.

Returns: (STREAM)


A media stream (a video chunk) from the given offset.

5. High Level Design

#

At a high-level we would need the following components:

1. **Processing Queue:** Each uploaded video will be pushed to a processing queue to be de-queued later for encoding, thumbnail generation, and storage.
2. **Encoder:** To encode each uploaded video into multiple formats.
3. **Thumbnails generator:** To generate a few thumbnails for each video.
4. **Video and Thumbnail storage:** To store video and thumbnail files in some distributed file storage.
5. **User Database:** To store user's information, e.g., name, email, address, etc.
6. **Video metadata storage:** A metadata database to store all the information about videos like title, file path in the system, uploading user, total views, likes, dislikes, etc. It will also be used to store all the video comments.

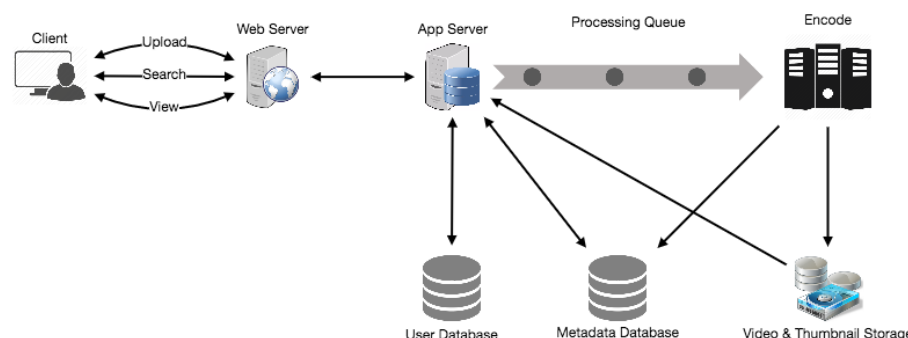

High level design of Youtube

6. Database Schema

#

Grokking the System Design Interview

(/collection/5668639101419520/56490502)

87% completed



Search Course

design-interview/3jYKmrVAPGQ)

Designing Twitter Search
(/courses/grokking-the-system-design-interview/xV9mMjj74gE)

Designing a Web Crawler
(/courses/grokking-the-system-design-interview/NE5LpPrWrKv)

Designing Facebook's Newsfeed
(/courses/grokking-the-system-design-interview/gxpWJ3ZKYwl)

Designing Yelp or Nearby Friends
(/courses/grokking-the-system-design-interview/B8rpM8E16LQ)

Designing Uber backend
(/courses/grokking-the-system-design-interview/YQVkj548NM)

Design Ticketmaster (*New*)
(/courses/grokking-the-system-design-interview/YQyq6mBKq4n)

Additional Resources
(/courses/grokking-the-system-design-interview/JYILJB6DK7g)

Glossary of System Design Basics



System Design Basics
(/courses/grokking-the-system-design-interview/B892KY261z2)

Key Characteristics of Distributed Systems
(/courses/grokking-the-system-design-interview/YQWGjZZVz9)

Load Balancing
(/courses/grokking-the-system-design-interview/3jEwl04BL7Q)

Caching
(/courses/grokking-the-system-design-interview/3j6NnJrpp5p)

Data Partitioning
(/courses/grokking-the-system-design-interview/mEN8IJXV1LA)

Indexes
(/courses/grokking-the-system-design-interview/gxkVE8NEvXj)

Proxies
(/courses/grokking-the-system-design-interview/NR69MvM1OR2)



Explore (/explore)



Tracks (/tracks)



My Courses (/mycourses)



Edpresso (/edpresso)



Refer a Friend (/refer-a-friend)



Create Courses/grokking-the-system-design-interview/xV26VjZ7



Explore
(/explore)



Tracks
(/tracks)



My Courses
(/mycourses)



Edpresso
(/edpresso)



Refer a
Friend
(/refer-a-
friend)

Grokking the System Design Interview

(/collection/5668639101419520/56490502)

87% completed



- design-interview/3jYKmrVAPGQ)
 - Designing Twitter Search
(/courses/grokking-the-system-design-interview/xV9mMjj74gE)
 - Designing a Web Crawler
(/courses/grokking-the-system-design-interview/NE5LpPrWrKv)
 - Designing Facebook's Newsfeed
(/courses/grokking-the-system-design-interview/gxpWJ3ZKYwl)
 - Designing Yelp or Nearby Friends
(/courses/grokking-the-system-design-interview/B8rpM8E16LQ)
 - Designing Uber backend
(/courses/grokking-the-system-design-interview/YQVkj548NM)
 - Design Ticketmaster (*New*)
(/courses/grokking-the-system-design-interview/YQyq6mBKq4n)
 - Additional Resources
(/courses/grokking-the-system-design-interview/JYILJB6DK7g)

Glossary of System Design Basics



- System Design Basics
(/courses/grokking-the-system-design-interview/B892KY261z2)
- Key Characteristics of Distributed Systems
(/courses/grokking-the-system-design-interview/YQWGjZZVz9)
- Load Balancing
(/courses/grokking-the-system-design-interview/3jEwl04BL7Q)
- Caching
(/courses/grokking-the-system-design-interview/3j6NnJrpp5p)
- Data Partitioning
(/courses/grokking-the-system-design-interview/mEN8IJXV1LA)
- Indexes
(/courses/grokking-the-system-design-interview/gxkVE8NEvXj)
- Proxies
(/courses/grokking-the-system-design-interview/NRG9MvM1OR2)



Create
Courses/grokking-
system-design-
view/xV26VjZ7

Video metadata storage - MySQL

Videos metadata can be stored in a SQL database. The following information should be stored with each video:

- VideoID
- Title
- Description
- Size
- Thumbnail
- Uploader/User
- Total number of likes
- Total number of dislikes
- Total number of views

For each video comment, we need to store following information:

- CommentID
- VideoID
- UserID
- Comment
- TimeOfCreation

User data storage - MySQL

- UserID, Name, email, address, age, registration details etc.

7. Detailed Component Design

#

The service would be read-heavy, so we will focus on building a system that can retrieve videos quickly. We can expect our read:write ratio to be 200:1, which means for every video upload there are 200 video views.

Where would videos be stored? Videos can be stored in a distributed file storage system like HDFS (https://en.wikipedia.org/wiki/Apache_Hadoop#HDFS) or GlusterFS (<https://en.wikipedia.org/wiki/GlusterFS>).

How should we efficiently manage read traffic? We should segregate our read traffic from write traffic. Since we will have multiple copies of each video, we can distribute our read traffic on different servers. For metadata, we can have master-slave configurations where writes will go to master first and then gets applied at all the slaves. Such configurations can cause some staleness in data, e.g., when a new video is added, its metadata would be inserted in the master first and before it gets applied at the slave our slaves would not be able to see it; and therefore it will be returning stale results to the user. This staleness might be acceptable in our system as it would be very short-lived and the

Grokking the System

Design Interview

(/collection/5668639101419520/56490502)

87% completed

Search Course

- design-interview/3jYKmrVAPGQ)
- Designing Twitter Search
(/courses/grokking-the-system-design-interview/xV9mMjj74gE)
- Designing a Web Crawler
(/courses/grokking-the-system-design-interview/NE5LpPrWrKv)
- Designing Facebook's Newsfeed
(/courses/grokking-the-system-design-interview/gxpWJ3ZKYwl)
- Designing Yelp or Nearby Friends
(/courses/grokking-the-system-design-interview/B8rpM8E16LQ)
- Designing Uber backend
(/courses/grokking-the-system-design-interview/YQVkj548NM)
- Design Ticketmaster (*New*)
(/courses/grokking-the-system-design-interview/YQyq6mBKq4n)
- Additional Resources
(/courses/grokking-the-system-design-interview/JYILJB6DK7g)

Glossary of System

Design Basics

- System Design Basics
(/courses/grokking-the-system-design-interview/B892KY261z2)
- Key Characteristics of Distributed Systems
(/courses/grokking-the-system-design-interview/YQWGjlZZVz9)
- Load Balancing
(/courses/grokking-the-system-design-interview/3jEwl04BL7Q)
- Caching
(/courses/grokking-the-system-design-interview/3j6NnJrpp5p)
- Data Partitioning
(/courses/grokking-the-system-design-interview/mEN8IJXV1LA)
- Indexes
(/courses/grokking-the-system-design-interview/gxkVE8NEvXj)
- Proxies
(/courses/grokking-the-system-design-interview/NR69MvM1OR7)

Where would thumbnails be stored? There will be a lot more thumbnails than videos. If we assume that every video will have five thumbnails, we need to have a very efficient storage system that can serve a huge read traffic. There will be two consideration before deciding which storage system should be used for thumbnails:


1. Thumbnails are small files with, say, a maximum 5KB each.
2. Read traffic for thumbnails will be huge compared to videos. Users will be watching one video at a time, but they might be looking at a page that has 20 thumbnails of other videos.

Let's evaluate storing all the thumbnails on a disk. Given that we have a huge number of files, we have to perform a lot of seeks to different locations on the disk to read these files. This is quite inefficient and will result in higher latencies.

Bigtable (<https://en.wikipedia.org/wiki/Bigtable>) can be a reasonable choice here as it combines multiple files into one block to store on the disk and is very efficient in reading a small amount of data. Both of these are the two most significant requirements of our service. Keeping hot thumbnails in the cache will also help in improving the latencies and, given that thumbnails files are small in size, we can easily cache a large number of such files in memory.

Video Uploads: Since videos could be huge, if while uploading the connection drops we should support resuming from the same point.

Video Encoding: Newly uploaded videos are stored on the server and a new task is added to the processing queue to encode the video into multiple formats. Once all the encoding will be completed the uploader will be notified and the video is made available for view/sharing.

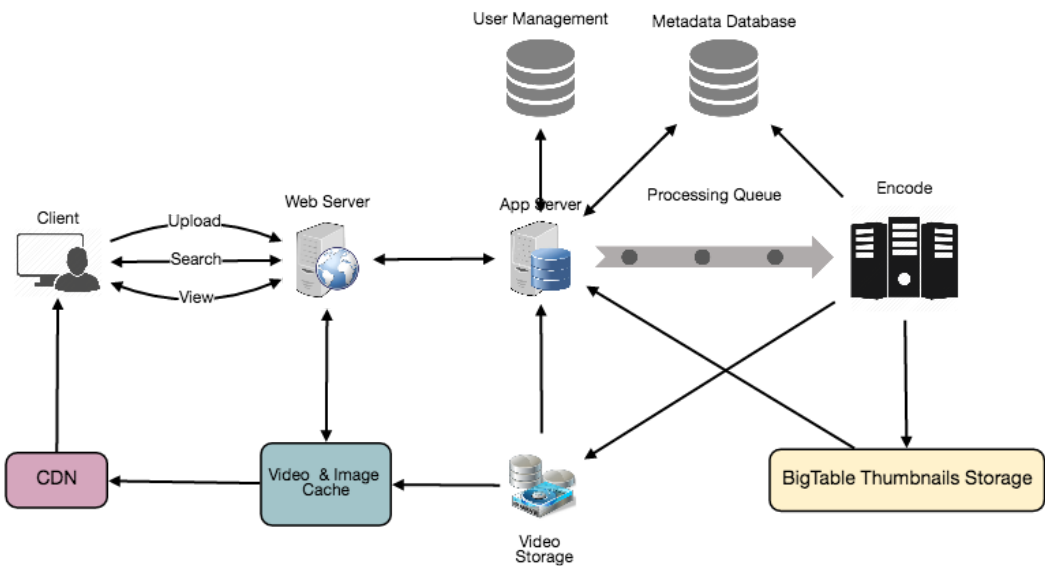

Detailed component design of Youtube

8. Metadata Sharding

#




Explore
(/explore)




Tracks
(/tracks)



My Courses
(/mycourses)



Edpresso
(/edpresso)



Refer a
Friend
(/refer-a-
friend)



Create
Courses/grokking-the-system-design-view/xV26VjZ7

Grokking the System Design Interview

(/collection/5668639101419520/56490502)

87% completed



 Search Course

design-interview/3jYKmrVAPGQ)

Designing Twitter Search
(/courses/grokking-the-system-design-interview/xV9mMjj74gE)

Designing a Web Crawler
(/courses/grokking-the-system-design-interview/NE5LpPrWrKv)

Designing Facebook's Newsfeed
(/courses/grokking-the-system-design-interview/gxpWJ3ZKYwl)

Designing Yelp or Nearby Friends
(/courses/grokking-the-system-design-interview/B8rpM8E16LQ)

Designing Uber backend
(/courses/grokking-the-system-design-interview/YQVkj548NM)

Design Ticketmaster (*New*)
(/courses/grokking-the-system-design-interview/YQyq6mBKq4n)

Additional Resources
(/courses/grokking-the-system-design-interview/JYILJB6DK7g)

Glossary of System Design Basics

System Design Basics
(/courses/grokking-the-system-design-interview/B892KY261z2)

Key Characteristics of Distributed Systems
(/courses/grokking-the-system-design-interview/YQWGjZZVz9)

Load Balancing
(/courses/grokking-the-system-design-interview/3jEwl04BL7Q)

Caching
(/courses/grokking-the-system-design-interview/3j6NnJrpp5p)

Data Partitioning
(/courses/grokking-the-system-design-interview/mEN8IJXV1LA)

Indexes
(/courses/grokking-the-system-design-interview/gxkVE8NEvXj)

Proxies
(/courses/grokking-the-system-design-interview/NR69MvM1OR2)

Since we have a huge number of new videos every day and our read load is extremely high, therefore, we need to distribute our data onto multiple machines so that we can perform read/write operations efficiently. We have many options to shard our data. Let's go through different strategies of sharding this data one by one:

Sharding based on UserID: We can try storing all the data for a particular user on one server. While storing, we can pass the UserID to our hash function which will map the user to a database server where we will store all the metadata for that user's videos. While querying for videos of a user, we can ask our hash function to find the server holding the user's data and then read it from there. To search videos by titles we will have to query all servers and each server will return a set of videos. A centralized server will then aggregate and rank these results before returning them to the user.

This approach has a couple of issues:

1. What if a user becomes popular? There could be a lot of queries on the server holding that user; this could create a performance bottleneck. This will also affect the overall performance of our service.
2. Over time, some users can end up storing a lot of videos compared to others. Maintaining a uniform distribution of growing user data is quite tricky.

To recover from these situations either we have to repartition/redistribute our data or used consistent hashing to balance the load between servers.

Sharding based on VideoID: Our hash function will map each VideoID to a random server where we will store that Video's metadata. To find videos of a user we will query all servers and each server will return a set of videos. A centralized server will aggregate and rank these results before returning them to the user. This approach solves our problem of popular users but shifts it to popular videos.

We can further improve our performance by introducing a cache to store hot videos in front of the database servers.

9. Video Deduplication

#

With a huge number of users uploading a massive amount of video data our service will have to deal with widespread video duplication. Duplicate videos often differ in aspect ratios or encodings, can contain overlays or additional borders, or can be excerpts from a longer original video. The proliferation of




Explore
(/explore)




Tracks
(/tracks)



My Courses
(/mycourses)



Edpresso
(/edpresso)



Refer a
Friend
(/refer-a-
friend)



Create
ourses/grokking-
system-design-
view/xV26VjZ7

Grokking the System Design Interview

(/collection/5668639101419520/56490502)

87% completed



 Search Course

design-interview/3jYKmrVAPGQ)

Designing Twitter Search
(/courses/grokking-the-system-
design-interview/xV9mMjj74gE)

Designing a Web Crawler
(/courses/grokking-the-system-
design-interview/NE5LpPrWrKv)

Designing Facebook's Newsfeed
(/courses/grokking-the-system-
design-interview/gxpWJ3ZKYwl)

Designing Yelp or Nearby Friends
(/courses/grokking-the-system-
design-interview/B8rpM8E16LQ)

Designing Uber backend
(/courses/grokking-the-system-
design-interview/YQVkj548NM)

Design Ticketmaster (*New*)
(/courses/grokking-the-system-
design-interview/YQyq6mBKq4n)

Additional Resources
(/courses/grokking-the-system-
design-interview/JYILJB6DK7g)

Glossary of System Design Basics



System Design Basics
(/courses/grokking-the-system-
design-interview/B892KY261z2)

Key Characteristics of Distributed
Systems
(/courses/grokking-the-system-
design-interview/YQWGjI ZZVz9)

Load Balancing
(/courses/grokking-the-system-
design-interview/3jEwl04BL7Q)

Caching
(/courses/grokking-the-system-
design-interview/3j6NnJrpp5p)

Data Partitioning
(/courses/grokking-the-system-
design-interview/mEN8IJXV1LA)

Indexes
(/courses/grokking-the-system-
design-interview/gxkVE8NEvXj)

Proxies
(/courses/grokking-the-system-
design-
interview/NR69MvM1OR2)

1. Data Storage: We could be wasting storage space by keeping multiple copies of the same video.
2. Caching: Duplicate videos would result in degraded cache efficiency by taking up space that could be used for unique content.
3. Network usage: Duplicate videos will also increase the amount of data that must be sent over the network to in-network caching systems.
4. Energy consumption: Higher storage, inefficient cache, and network usage could result in energy wastage.



For the end user, these inefficiencies will be realized in the form of duplicate search results, longer video startup times, and interrupted streaming.

For our service, deduplication makes most sense early; when a user is uploading a video as compared to post-processing it to find duplicate videos later. Inline deduplication will save us a lot of resources that can be used to encode, transfer, and store the duplicate copy of the video. As soon as any user starts uploading a video, our service can run video matching algorithms (e.g., Block Matching (https://en.wikipedia.org/wiki/Block-matching_algorithm), Phase Correlation (https://en.wikipedia.org/wiki/Phase_correlation), etc.) to find duplications. If we already have a copy of the video being uploaded, we can either stop the upload and use the existing copy or continue the upload and use the newly uploaded video if it is of higher quality. If the newly uploaded video is a subpart of an existing video or, vice versa, we can intelligently divide the video into smaller chunks so that we only upload the parts that are missing.

10. Load Balancing

#

We should use Consistent Hashing (<https://www.educative.io/collection/page/5668639101419520/5649050225344512/5709068098338816/>) among our cache servers, which will also help in balancing the load between cache servers. Since we will be using a static hash-based scheme to map videos to hostnames it can lead to an uneven load on the logical replicas due to the different popularity of each video. For instance, if a video becomes popular, the logical replica corresponding to that video will experience more traffic than other servers. These uneven loads for logical replicas can then translate into uneven load distribution on corresponding physical servers. To resolve this issue any busy server in one location can redirect a client to a less busy server in the same cache location. We can use dynamic HTTP redirections for this scenario.



Grokking the System Design Interview

(/collection/5668639101419520/56490502)

87% completed





Search Course

design-interview/3jYKmrVAPGQ)

Designing Twitter Search
(/courses/grokking-the-system-design-interview/xV9mMjj74gE)

Designing a Web Crawler
(/courses/grokking-the-system-design-interview/NE5LpPrWrKv)

Designing Facebook's Newsfeed
(/courses/grokking-the-system-design-interview/gxpWJ3ZKYwl)

Designing Yelp or Nearby Friends
(/courses/grokking-the-system-design-interview/B8rpM8E16LQ)

Designing Uber backend
(/courses/grokking-the-system-design-interview/YQVkj548NM)

Design Ticketmaster (*New*)
(/courses/grokking-the-system-design-interview/YQyq6mBKq4n)

Additional Resources
(/courses/grokking-the-system-design-interview/JYILJB6DK7g)

Glossary of System Design Basics

System Design Basics
(/courses/grokking-the-system-design-interview/B892KY261z2)

Key Characteristics of Distributed Systems
(/courses/grokking-the-system-design-interview/YQWGjZZVz9)

Load Balancing
(/courses/grokking-the-system-design-interview/3jEwl04BL7Q)

Caching
(/courses/grokking-the-system-design-interview/3j6NnJrpp5p)

Data Partitioning
(/courses/grokking-the-system-design-interview/mEN8IJXV1LA)

Indexes
(/courses/grokking-the-system-design-interview/gxkVE8NEvXj)

Proxies
(/courses/grokking-the-system-design-interview/N8G9MvM4OR2)

However, the use of redirections also has its drawbacks. First, since our service tries to load balance locally, it leads to multiple redirections if the host that receives the redirection can't serve the video. Also, each redirection requires a client to make an additional HTTP request; it also leads to higher delays before the video starts playing back. Moreover, inter-tier (or cross data-center) redirections lead a client to a distant cache location because the higher tier caches are only present at a small number of locations.

11. Cache

To serve globally distributed users, our service needs a massive-scale video delivery system. Our service should push its content closer to the user using a large number of geographically distributed video cache servers. We need to have a strategy that will maximize user performance and also evenly distributes the load on its cache servers.

We can introduce a cache for metadata servers to cache hot database rows. Using Memcache to cache the data and Application servers before hitting database can quickly check if the cache has the desired rows. Least Recently Used (LRU) can be a reasonable cache eviction policy for our system. Under this policy, we discard the least recently viewed row first.

How can we build more intelligent cache? If we go with 80-20 rule, i.e., 20% of daily read volume for videos is generating 80% of traffic, meaning that certain videos are so popular that the majority of people view them; it follows that we can try caching 20% of daily read volume of videos and metadata.

12. Content Delivery Network (CDN)

A CDN is a system of distributed servers that deliver web content to a user based in the geographic locations of the user, the origin of the web page and a content delivery server. Take a look at 'CDN' section in our Caching (https://www.educative.io/collection/page/5668639101419520/5649050225344512/5643440998055936) chapter.

Our service can move popular videos to CDNs:

- CDNs replicate content in multiple places. There's a better chance of videos being closer to the user and, with fewer hops, videos will stream from a friendlier network.
- CDN machines make heavy use of caching and can mostly serve videos out of memory.

Less popular videos (1-20 views per day) that are not cached by

Grokking the System Design Interview

(/collection/5668639101419520/56490502)

87% completed

Search Course

- design-interview/3jYKmrVAPGQ)
- Designing Twitter Search

(/courses/grokking-the-system-design-interview/xV9mMjj74gE)
- Designing a Web Crawler

(/courses/grokking-the-system-design-interview/NE5LpPrWrKv)
- Designing Facebook's Newsfeed

(/courses/grokking-the-system-design-interview/gxpWJ3ZKYwl)
- Designing Yelp or Nearby Friends

(/courses/grokking-the-system-design-interview/B8rpM8E16LQ)
- Designing Uber backend

(/courses/grokking-the-system-design-interview/YQVkj548NM)
- Design Ticketmaster (*New*)

(/courses/grokking-the-system-design-interview/YQyq6mBKq4n)
- Additional Resources

(/courses/grokking-the-system-design-interview/JYILJB6DK7g)

Glossary of System Design Basics

- System Design Basics

(/courses/grokking-the-system-design-interview/B892KY261z2)
- Key Characteristics of Distributed Systems

(/courses/grokking-the-system-design-interview/YQWGjI ZZVz9)
- Load Balancing

(/courses/grokking-the-system-design-interview/3jEwI04BL7Q)
- Caching

(/courses/grokking-the-system-design-interview/3j6NnJrpp5p)
- Data Partitioning

(/courses/grokking-the-system-design-interview/mEN8IJXV1LA)
- Indexes

(/courses/grokking-the-system-design-interview/gxkVE8NEvXj)
- Proxies

(/courses/grokking-the-system-design-interview/NR69MvM1OR21)

13. Fault Tolerance

We should use Consistent Hashing (https://www.educative.io/collection/page/5668639101419520/5649050225344512/5709068098338816/) for distribution among database servers. Consistent hashing will not only help in replacing a dead server, but also help in distributing load among servers.



Report an Issue

Ask a Question

(https://discuss.educative.io/c/grokking-the-system-design-interview-design-gurus/system-design-problems-designing-youtube-or-netflix)