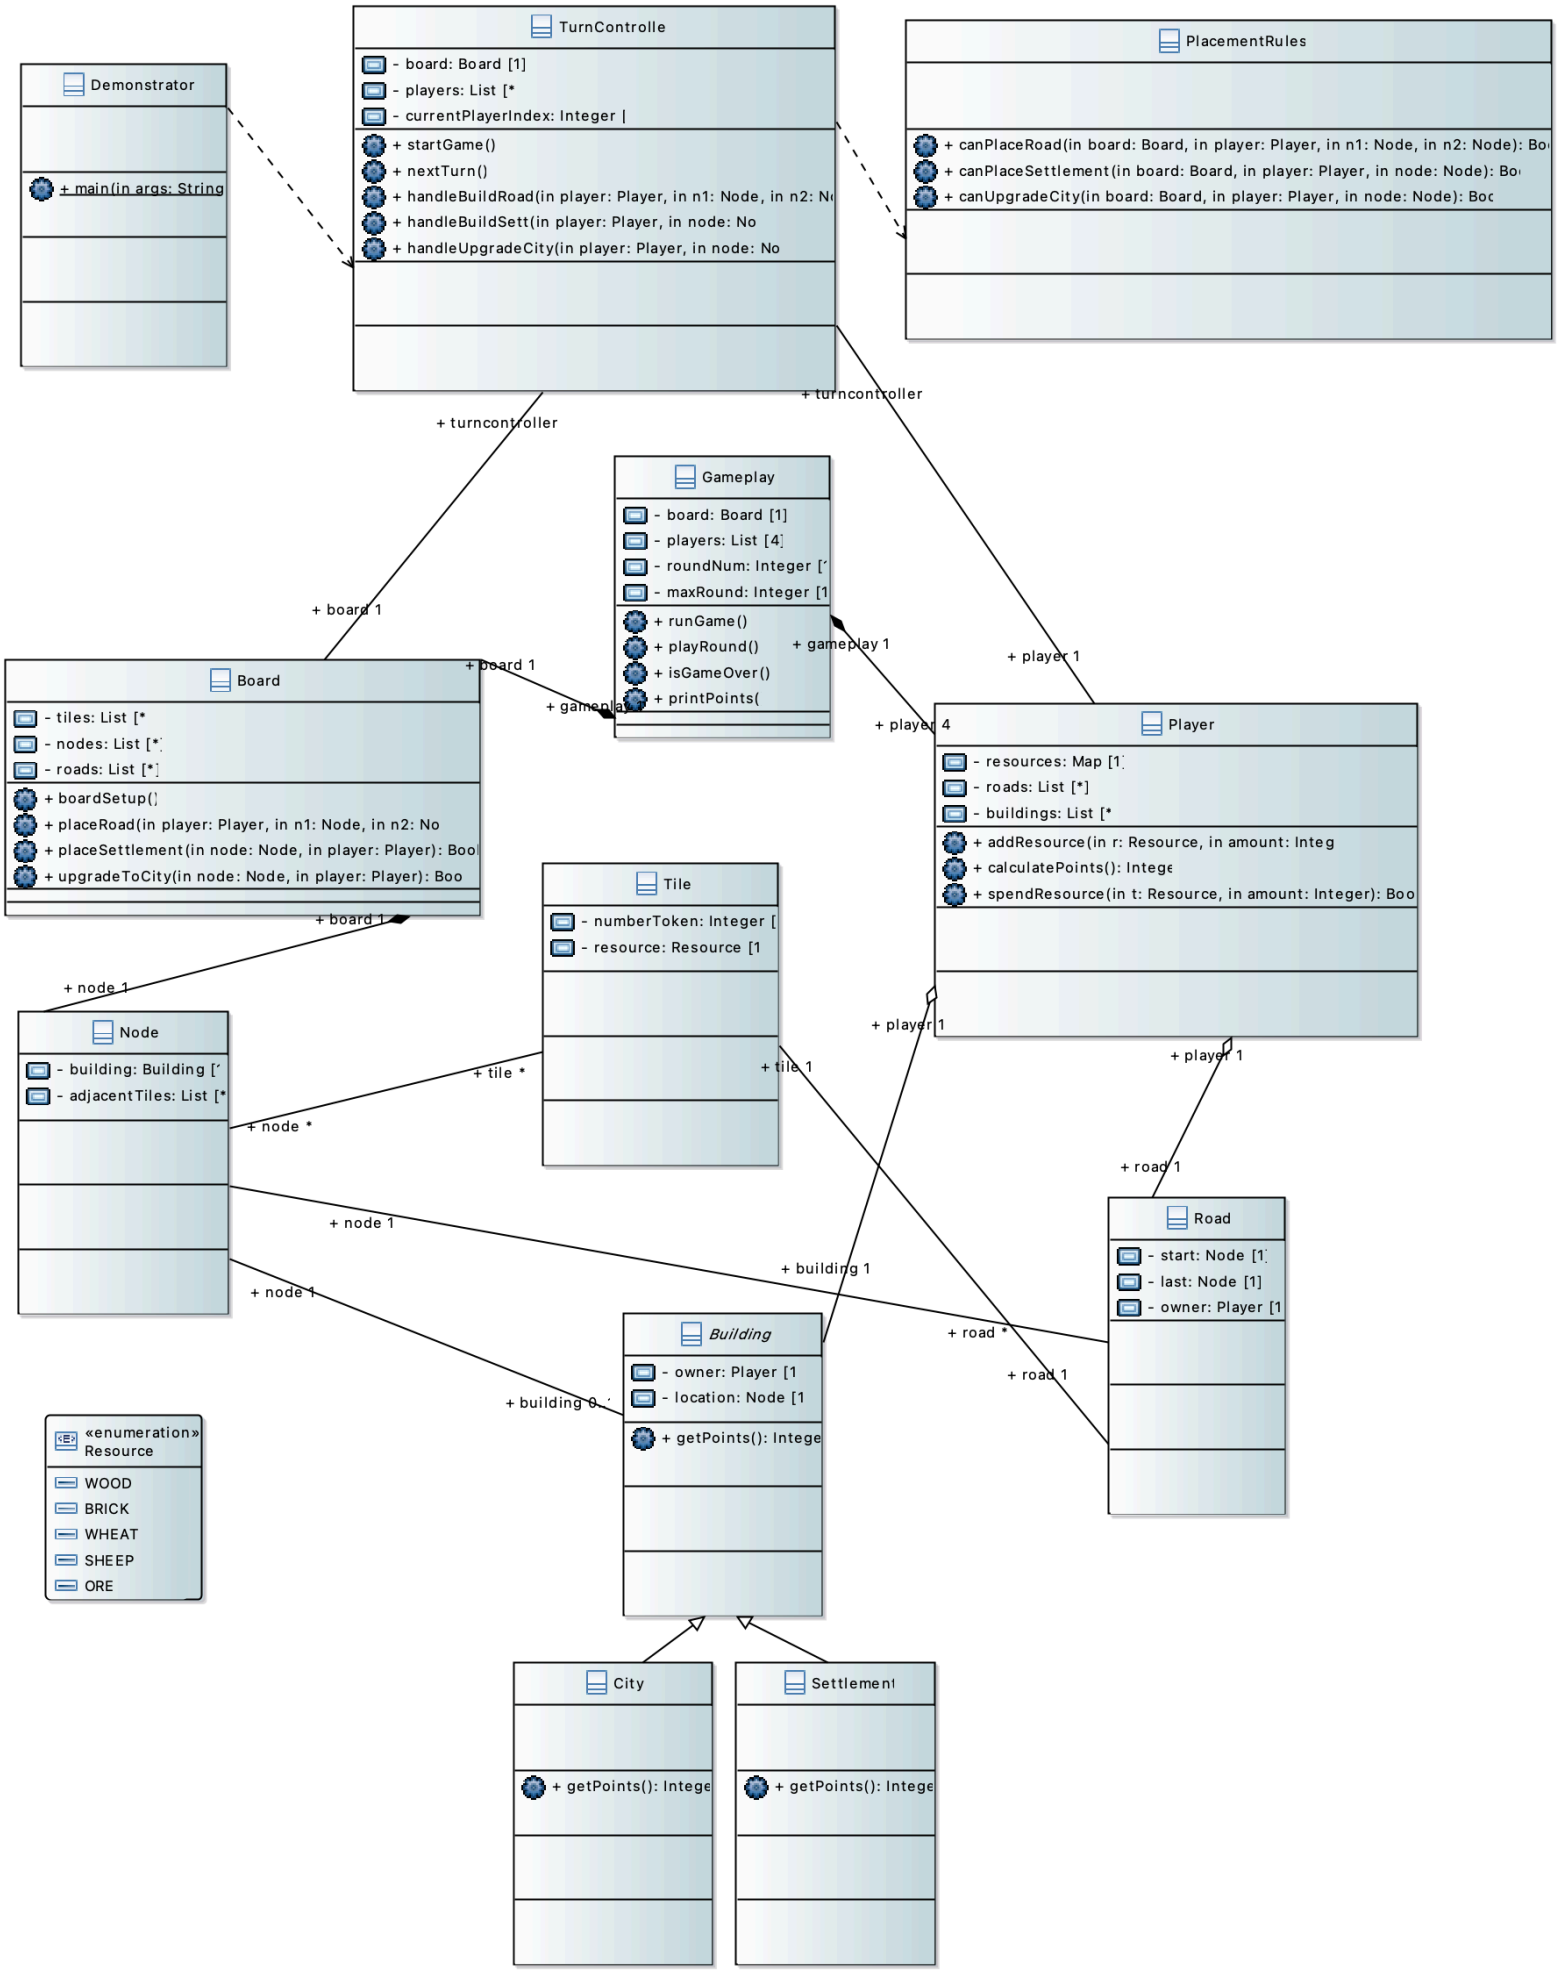
Demonstrator
+ main(in args: String
TurnControlle
- board: Board [1]
- players: List [*
- currentPlayerIndex: Integer [
+ startGame()
+ nextTurn()
+ handleBuildRoad(in player: Player, in n1: Node, in n2: N
+ handleBuildSett(in player: Player, in node: No
+ handleUpgradeCity(in player: Player, in node: No
PlacementRules
+ canPlaceRoad(in board: Board, in player: Player, in n1: Node, in n2: Node): Bo
+ canPlaceSettlement(in board: Board, in player: Player, in node: Node): Bo
+ canUpgradeCity(in board: Board, in player: Player, in node: Node): Boo
+ turncontroller
+ turncontroller
Gameplay
- board: Board [1]
- players: List [4
- roundNum: Integer [
- maxRound: Integer [1
+ runGame()
+ playRound()
+ isGameOver()
+ printPoints(
+ board 1
+ board 1
+ gameplay 1
+ gameplay
+ player 1
+ player 4
Board
- tiles: List [*
- nodes: List [*
- roads: List [*
+ boardSetup()
+ placeRoad(in player: Player, in n1: Node, in n2: No
+ placeSettlement(in node: Node, in player: Player): Boo
+ upgradeToCity(in node: Node, in player: Player): Boo
Player
- resources: Map [1
- roads: List [*]
- buildings: List [*
+ addResource(in r: Resource, in amount: Integ
+ calculatePoints(): Intege
+ spendResource(in t: Resource, in amount: Integer): Boo
+ board 1
+ node 1
Tile
- numberToken: Integer [
- resource: Resource [1
+ player 1
+ player 1
Node
- building: Building [
- adjacentTiles: List [*
+ tile *
+ tile 1
+ node *
+ road 1
+ node 1
Road
- start: Node [1
- last: Node [1]
- owner: Player [1
+ building 1
+ node 1
+ road *
+ road 1
Building
- owner: Player [1
- location: Node [1
+ getPoints(): Intege
+ building 0
«enumeration»
Resource
WOOD
BRICK
WHEAT
SHEEP
ORE
City
+ getPoints(): Intege
Settlement
+ getPoints(): Intege