

Tv = v READING GROUP

Categorical types and AGI

Session A. Categories and Functors

Akshay Shanker

7 August 2026

"Applied category theory is information plumbing. It's boring... but plumbers save more lives than doctors."

DisCoPy project, "Why?" · discopy.org.

PART 1

Introduction

Objective

Sessions run over six to eight talks.

Objective: gain *sufficient* fluency in *basic* **category theory** and **type theory** to assess their utility for:

- transparency and verification in computing *applied* high-dimensional dynamic programming and reinforcement learning problems.
- efficient symbolic and rigorous model representation.
- "speaking deterministically" to AI (LLM) systems, i.e., giving AI the power to reason deterministically using relational graphs (artificial general intelligence?).

May or may not help us prove new results.

Category theory

- Organizes **objects** and **morphisms** with specified **domains** and **codomains**.
- Shifts focus from **properties of objects** to **relations between objects** and transformations of those relations.
- Simple structures that can represent structures in disparate mathematical areas — a common language.

Universality. The most useful idea for us is **universality**: is there one simple representation of a model that fixes the ground truth for all its transformations?

Type theory

- A formal system that classifies objects by their types.
- Types classify terms (expressions) and rule out invalid compositions among them.

Categorical type theory. A type system generates a classifying category from syntax, which records the types of objects being composed as context. An **elaboration** is a structure-preserving map from that category into a **semantic category**. (A **semantic category** assigns each type and each expression its higher-order **meaning**.)

Why should economists care?

- The real world is complex: to analyse an applied, non-stationary DP problem rigorously, we mix and match areas of math — analysis, geometry, convex analysis, order theory, algebraic topology, etc. — and representations of the model (sequence space, recursive, stages, etc.).
- Model representations are hard to computationally encode — so economists don't bother to write what they are *actually* computing.
- Lack of transparency *is already a problem*, but compounds into a significant problem when AI assisted economic modelling comes into the picture.

Category theory can give us a *simple and common* language to formally represent *the plumbing* of a model.

Overarching question. Can categorical type theory formalize structures that are otherwise too **complicated**, or that remain **implicit**, in the notation of fields like analysis, calculus, and optimisation?

Research program: Symbolic dynamic programming

Create a formal **declarative** symbolic system to write dynamic programs so that:

1. Written syntax faithfully represents the mathematical model we claim to compute.
2. Properties of the mappings from computational implementations and approximations to the mathematical model are explicit.
3. Semantics is **denotational** (what expressions mean) rather than **operational** (how a machine executes them).



Road-map

1. Introduction.
2. Categories and functors.
 - i. Categories
 - ii. Functors and diagrams
 - iii. Duality
 - iv. Introduction to universality via simple DP
3. Dynamic-programming research.

Next talks:

- Equivalence of categories (natural transformations), formalize universality, Yoneda Lemma
- DP applications (further)
- Colimits.
- Types and terms.

PART 2

2. Categories and functors

2.1 Categories · 2.2 Functors and diagrams · 2.3 Duality · 2.4 Introduction to universality

2.1 Categories

A category

Definition 1.1.1. A category consists of a collection of **objects** $X, Y, Z, \dots$ and a collection of **morphisms** $f, g, h, \dots$ such that each morphism has a specified domain and codomain ($f : X \rightarrow Y$), each object has an identity $\text{id}_X : X \rightarrow X$, and each composable pair has a specified composite – $f : X \rightarrow Y$ and $g : Y \rightarrow Z$ yield $gf : X \rightarrow Z$ – subject to two axioms:

- **unitality:** $\text{id}_Y f = f = f \text{id}_X$ for every $f : X \rightarrow Y$;
 - **associativity:** $h(gf) = (hg)f$ for every composable triple.
- Definition 1.1.1 supplies no elements, no membership relation, and no underlying sets.
 - Note how the objects are recoverable from the identity morphisms (Remark 1.1.2 in Riehl), so **morphisms** take primacy.

Examples of categories

Concrete categories: the objects have underlying sets, and the morphisms are structure-preserving functions.

- The objects of **Set** are sets, and its morphisms are functions.
- The objects of **Top** are topological spaces, and its morphisms are continuous maps.
- The objects of **Vect_k** are vector spaces over a field k , and its morphisms are linear maps.
- The objects of **Meas** are measurable spaces, and its morphisms are measurable functions.
- The objects of **Poset** are partially ordered sets, and its morphisms are order-preserving maps.

Categories versus sets

In each of the examples listed in Example 1.1.3, the collection of objects is not a set (Remark 1.1.5).

Notation. For objects x, y , write $\mathbf{C}(x, y)$ for the collection of morphisms $x \rightarrow y$.

Definitions 1.1.6–1.1.7. A category is **small** if it has only a set's worth of arrows in total, and **locally small** if between any pair of objects there is only a set's worth of morphisms — that is, each $\mathbf{C}(x, y)$ is a set. Small implies locally small, because a subcollection of a set is a set. The converse fails.

- A set is known through its elements and the membership relation. A category is known through its morphisms and their composition.
- The notion of sameness in a category is isomorphism (Definition 1.1.10), not equality.

Morphisms need not be functions

Examples

- $\mathbf{Mat}_{\mathbb{R}}$ denotes the category of real matrices
 - Objects are the positive integers
 - Morphism $n \rightarrow m$ is an $m \times n$ real matrix
 - Identity morphism is the identity matrix
 - Regarding composition, consider $A : m \rightarrow n$ and $B : n \rightarrow p$; the composite $BA : m \rightarrow p$ is the matrix product
- A preorder $(P, \leq)$, a set with a reflexive and transitive relation, is a category with exactly one morphism $x \rightarrow y$ when $x \leq y$ and none otherwise
 - Reflexivity gives the identities: $a \leq a$, so $a \rightarrow a$ for each $a \in P$
 - Transitivity gives composition: $x \leq y$ and $y \leq z$ imply $x \rightarrow z$

Isomorphism

Definition 1.1.10. A morphism $f : X \rightarrow Y$ is an **isomorphism** when there exists $g : Y \rightarrow X$ with $gf = \text{id}_X$ and $fg = \text{id}_Y$; the objects are then isomorphic, $X \cong Y$.

Counter-example (a map that is not an isomorphism)

- In **Set**, let $X = \{0\}$, $Y = \{0, 1\}$, $f : X \rightarrow Y$ with $f(0) = 0$, and $g : Y \rightarrow X$ the only map back
 - $gf = \text{id}_X$, but fg sends both points of Y to 0, so $fg \neq \text{id}_Y$
 - No other g exists, so f has no inverse and is not an isomorphism

Examples of isomorphisms

Examples 1.1.11.

- In **Set**, the isomorphisms are the bijections.
- In **Top**, the category whose objects are topological spaces and whose morphisms are continuous maps (Example 1.1.3(ii)), the isomorphisms are the **homeomorphisms**. Definition 1.1.10 requires the inverse to be a morphism of the same category, so the inverse must itself be continuous, and a continuous bijection can fail to have a continuous inverse. Wrapping a half-open interval once around a circle is a continuous bijection whose inverse is discontinuous at the point where the ends meet, so interval and circle are isomorphic in **Set** but not in **Top**.
- In a poset, the only isomorphisms are the identities, which is the categorical statement of antisymmetry.

*"A category provides a context in which to answer the question
'When is one thing the same as another thing?'"*

Riehl (2016), *Category Theory in Context*, §1.1, p. 7.

2.2 Functors and diagrams

Functors

Definition 1.3.1. A functor $F : \mathbf{C} \rightarrow \mathbf{D}$ assigns an object Fc to each object c and a morphism $Ff : Fc \rightarrow Fc'$ to each $f : c \rightarrow c'$, preserving the structure: $Fg \cdot Ff = F(gf)$ and $F(\text{id}_c) = \text{id}_{Fc}$.

Examples 1.3.2. The forgetful functor $U : \mathbf{Vect}_k \rightarrow \mathbf{Set}$ sends a vector space to its underlying set.

Definition 1.5.7 (faithful). A functor $F : \mathbf{C} \rightarrow \mathbf{D}$ is **faithful** if for each pair of objects x, y of $\mathbf{C}$, the map $f \mapsto Ff : \mathbf{C}(x, y) \rightarrow \mathbf{D}(Fx, Fy)$ is injective.

Note the forgetful functor U above is faithful, since two linear maps with the same underlying function are equal.

Faithful and non-faithful functors

$$\begin{array}{ccc}
 x & \begin{array}{c} \xrightarrow{f} \\ \xrightarrow{g} \end{array} & y \\
 & \xrightarrow{F} & \\
 Fx & \begin{array}{c} \xrightarrow{Ff} \\ \xrightarrow{Fg} \end{array} & Fy
 \end{array}$$

Faithful. Distinct morphisms remain distinct.

$$\begin{array}{ccc}
 x & \begin{array}{c} \xrightarrow{f} \\ \xrightarrow{g} \end{array} & y \\
 & \xrightarrow{F} & \\
 Fx & \xrightarrow{Ff = Fg} & Fy
 \end{array}$$

Not faithful. Distinct morphisms may collapse.

The chain rule

- Let $\mathbf{Euclid}_*$ be the category
 - Objects are pairs $(\mathbb{R}^n, a)$, a Euclidean space with a chosen point
 - Morphisms $(\mathbb{R}^n, a) \rightarrow (\mathbb{R}^m, b)$ are the differentiable f with $f(a) = b$
- Recall $\mathbf{Mat}_{\mathbb{R}}$ is the matrix category defined earlier
- Sending $(\mathbb{R}^n, a)$ to n and f to its Jacobian matrix at a defines a functor $D : \mathbf{Euclid}_* \rightarrow \mathbf{Mat}_{\mathbb{R}}$
- Check functoriality axioms
 - Identities go to identity matrices
 - Composition in $\mathbf{Mat}_{\mathbb{R}}$ is matrix multiplication, so the composition axiom of Definition 1.3.1 becomes the chain rule $D(g \circ f)_a = Dg_{f(a)} \cdot Df_a$

Law of iterated expectations

Example

Very cool!

- Fix a probability space $(\Omega, \mathcal{F}, \mathbb{P})$ and let **Info** be the preorder category whose objects are the sub- σ -algebras $\mathcal{G} \subseteq \mathcal{F}$ (the information sets, ordered by reverse inclusion)
- There is exactly one morphism $\mathcal{H} \rightarrow \mathcal{G}$ when $\mathcal{G} \subseteq \mathcal{H}$.
- Sending $\mathcal{G}$ to $L^2(\Omega, \mathcal{G}, \mathbb{P})$ and the morphism $\mathcal{H} \rightarrow \mathcal{G}$ to the conditional expectation $\mathbb{E}[\cdot \mid \mathcal{G}] : L^2(\Omega, \mathcal{H}, \mathbb{P}) \rightarrow L^2(\Omega, \mathcal{G}, \mathbb{P})$ defines a functor **Info** $\rightarrow$ **Vect** $_{\mathbb{R}}$
 - The identity axiom holds because a $\mathcal{G}$ -measurable variable is its own conditional expectation
 - For $\mathcal{G} \subseteq \mathcal{H} \subseteq \mathcal{K}$ the composition axiom is the tower property

$$\mathbb{E}[\mathbb{E}[x \mid \mathcal{H}] \mid \mathcal{G}] = \mathbb{E}[x \mid \mathcal{G}], \quad x \in L^2(\Omega, \mathcal{K}, \mathbb{P}).$$

- With $\mathcal{G} = \mathcal{F}_t$ and $\mathcal{H} = \mathcal{F}_{t+1}$ the information of an agent at successive dates, the composition axiom reads $\mathbb{E}_t[\mathbb{E}_{t+1}[x]] = \mathbb{E}_t[x]$, the law of iterated expectations.

Time-consistent discounting is a functor

Example

- Dates form the preorder category $(\mathbb{N}, \leq)$: one morphism $k \rightarrow m$ when $k \leq m$
- Discount weights form a category $\mathbf{B}\mathbb{R}_{>0}$ with a single object $\bullet$
 - A morphism $\bullet \rightarrow \bullet$ is a positive number r ; as with matrices, a morphism need not be a function
 - Composing r after s is the number rs , and the identity morphism is 1
- A functor $D : (\mathbb{N}, \leq) \rightarrow \mathbf{B}\mathbb{R}_{>0}$ sends every date to $\bullet$ and the morphism $k \rightarrow m$ to a positive number $D(k, m)$
 - Read $D(k, m)$ as the weight the date- k self places on date- m utility
 - Identity axiom: $D(k, k) = 1$
 - Composition axiom: $D(k, m) = D(n, m) D(k, n)$ for $k \leq n \leq m$

Time-consistent discounting is a functor (continued)

Example (continued)

- Exponential discounting $D(k, m) = \beta^{m-k}$ satisfies both axioms
 - $D(k, k) = \beta^0 = 1$ and $\beta^{m-n} \beta^{n-k} = \beta^{m-k}$
- Quasi-hyperbolic discounting $D(k, m) = \beta \delta^{m-k}$ for $m > k$, with $\beta < 1$, fails composition
 - $D(0, 2) = \beta \delta^2$ but $D(1, 2) D(0, 1) = \beta^2 \delta^2$
- Composition says $D(k, m)/D(k, n) = D(n, m)$
 - The date- k self and the date- n self trade off dates n and m at the same rate
 - Agreement of all selves on these rates is time consistency, so the β - δ weights are time inconsistent

Diagrams

Definition 1.6.4. A **diagram** in a category $\mathcal{C}$ is a functor $F : \mathbf{J} \rightarrow \mathcal{C}$; the domain $\mathbf{J}$ is called the indexing category of the diagram.


A **quiver** is a directed graph that may contain loops and parallel arrows.

- The objects and morphisms of a category form a quiver, and every finite directed path in it has a specified composite, well defined by the associativity axiom of Definition 1.1.1 (pp. 3–4).

Simple diagrams

$$x \xrightarrow{f} y$$

Arrow. The indexing category has two objects and one arrow, $1 \rightarrow 2$.

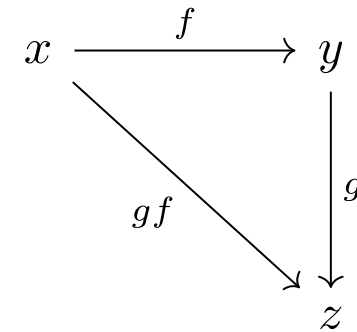

Commutative triangle. The indexing category is the poset $1 \leq 2 \leq 3$.

Two more diagrams: span and cospan

$$x \xleftarrow{f} a \xrightarrow{g} y$$

A **span**. The indexing category is $1 \leftarrow 0 \rightarrow 2$.

$$x \xrightarrow{f} a \xleftarrow{g} y$$

A **cospan**. The indexing category is $1 \rightarrow 0 \leftarrow 2$.

*Teaser: completing a cospan to a commutative square in the universal way produces the **pullback**, a limit; completing a span, the **pushout**, a colimit.*

Buffer stock model with income growth

Consider a **standard** consumption–saving problem under perfect foresight, with parameters R (return factor), β (discount), $\gamma > 1$ (CRRA), and income growth factor G .

- Define the **absolute patience factor** $\mathbb{P} := (R\beta)^{1/\gamma}$.
- Assume $G < R$.

The agent's problem. With $u(c) = c^{1-\gamma}/(1-\gamma)$, the value functions satisfy

$$v_t(m_t, p_t) = \max_{0 < c_t \leq m_t} u(c_t) + \beta v_{t+1}(m_{t+1}, p_{t+1}), \quad m_{t+1} = R(m_t - c_t) + p_{t+1}, \quad p_{t+1} = G p_t.$$

where p_t is income at time t , m_t is wealth, and c_t is consumption.


2.2 FUNCTORS AND DIAGRAMS · PROOF BY DIAGRAM

Proof by diagram

Claim. Assume $G < R$. Then $\mathbb{P} < G \Rightarrow \mathbb{P} < R^{1/\gamma}G^{1-1/\gamma} \Rightarrow \mathbb{P} < R$.


Proof (by composition, on the diagram).

- $G < R$ gives the two right-hand arrows, $G \rightarrow R^{1/\gamma}G^{1-1/\gamma}$ and $R^{1/\gamma}G^{1-1/\gamma} \rightarrow R$: each is equivalent to $G < R$.
- Given the top arrow $\mathbb{P} \rightarrow G$, composing gives $\mathbb{P} \rightarrow R^{1/\gamma}G^{1-1/\gamma}$.
- Composing once more gives $\mathbb{P} \rightarrow R$. ■

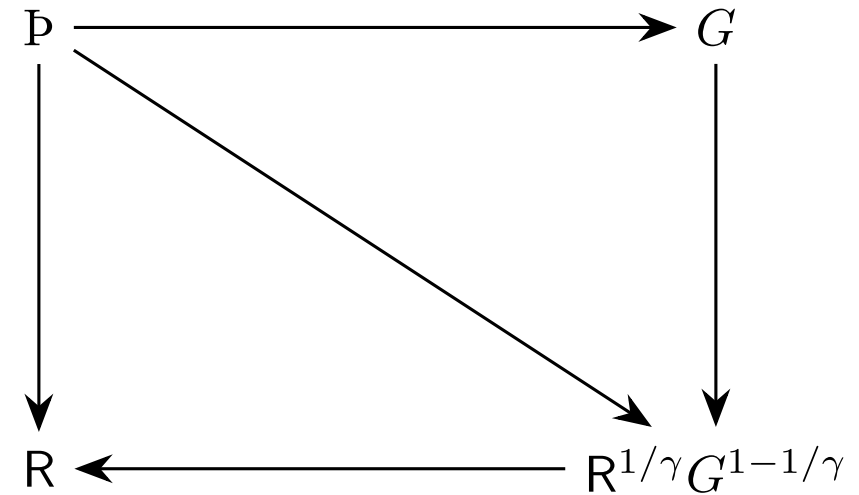

Commutative diagrams

A square indexed by 2×2 (Example 1.6.6, Remark 1.6.7) commutes when $hf = kg$:

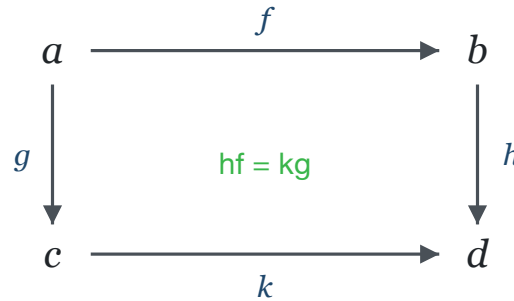

Lemma 1.6.5. Functors preserve commutative diagrams.

Proof. A diagram in $\mathbf{C}$ is a functor $F : \mathbf{J} \rightarrow \mathbf{C}$ (Definition 1.6.4), so its image under a functor $G : \mathbf{C} \rightarrow \mathbf{D}$ is the composite $GF : \mathbf{J} \rightarrow \mathbf{D}$, a diagram of shape $\mathbf{J}$. Suppose F commutes, and take any two parallel paths in it with equal composites, $Ff_n \cdots Ff_1 = Fg_m \cdots Fg_1$. Because G preserves composites, applying it to each side gives $GFf_n \cdots GFf_1 = GFg_m \cdots GFg_1$. ■

Diagram chase

A **diagram chase** is a style of proof: it establishes that a diagram commutes by substituting, one step at a time, a segment of a path for an equal composite until the parallel path is reached. Each step is licensed by the following lemma.


Lemma 1.6.11. If, inside a composable path $f_n, \dots, f_1$, a segment satisfies $f_k \cdots f_i = g_m \cdots g_1$, then

$$f_n \cdots f_1 = f_n \cdots f_{k+1} g_m \cdots g_1 f_{i-1} \cdots f_1.$$

Proof. By associativity (Definition 1.1.1) the path may be composed in blocks, $f_n \cdots f_1 = q s p$ with $p = f_{i-1} \cdots f_1$, $s = f_k \cdots f_i$, $q = f_n \cdots f_{k+1}$. Since $s = g_m \cdots g_1$ as arrows, $q s p = q (g_m \cdots g_1) p = f_n \cdots f_{k+1} g_m \cdots g_1 f_{i-1} \cdots f_1$. ■

Pasting squares

Example (pasting, diagram 1.6.10). Suppose the two inner squares commute, $hf = kg$ and $\ell j = mh$. The outer rectangle presents the parallel paths $\ell j f$ and $m k g$, with $\ell j f = m k g$:

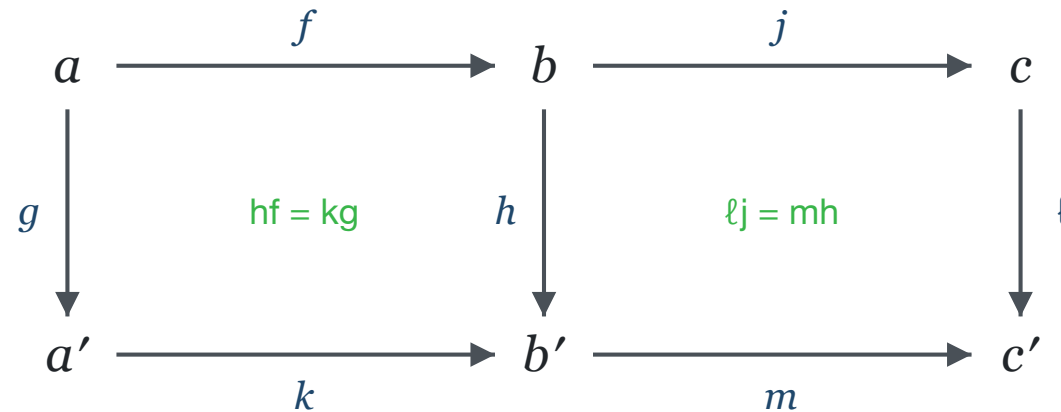

$$\ell j f \stackrel{\ell j = mh}{=} m h f \stackrel{h f = kg}{=} m k g$$

Each equality substitutes an equal segment inside the path, by Lemma 1.6.11.

2.3 Duality

Duality through the opposite category

Definition 1.2.1. The opposite category $\mathbf{C}^{\text{op}}$ has the same objects as $\mathbf{C}$ and, for each morphism $f : x \rightarrow y$ between objects x and y of $\mathbf{C}$, a morphism $f^{\text{op}} : y \rightarrow x$, with composites $f^{\text{op}} g^{\text{op}} = (gf)^{\text{op}}$.

The duality principle.

- A theorem of the form "for all categories $\mathbf{C}$, a given statement holds" applies, in particular, to every opposite category $\mathbf{C}^{\text{op}}$.
- Re-expressing a conclusion in terms of the data of $\mathbf{C}$ reverses the direction of every morphism and the order of every composite.
- The re-expressed statement is the dual statement, and the re-expressed proof is the dual proof — "a two-for-one deal: any proof in category theory simultaneously proves two theorems" (p. 10).

Exercise 1.2.vii

Exercise 1.2.vii (Riehl). Consider the poset $(P, \leq)$ as a category. Define the supremum of a subcollection of objects $A \subset P$ in such a way that the dual statement defines the infimum. Prove that the supremum of a subset of objects is unique, whenever it exists, in such a way that the dual proof demonstrates the uniqueness of the infimum.

Notation. $(P, \leq)$ is the category with a unique morphism $x \rightarrow y$ exactly when $x \leq y$ (Example 1.1.4(iii)), and the subcollection is A with $A \subseteq P$.

Supremum in a poset

Definition. An object s is a **supremum** of A when:

- (i) for every $a \in A$ there is a morphism $a \rightarrow s$, and
- (ii) for every object u of P such that there is a morphism $a \rightarrow u$ for each $a \in A$, there is a morphism $s \rightarrow u$.

The opposite poset. By Definition 1.2.1, P^{op} has the same elements as P , and it has a morphism $x \rightarrow y$ exactly when P has a morphism $y \rightarrow x$. It follows that P^{op} is $(P, \geq)$.

The dual statement: infimum

Dual statement. An object i is a supremum of A in P^{op} when: (i) for every $a \in A$ there is a morphism $a \rightarrow i$ in P^{op} ; (ii) for every u with a morphism $a \rightarrow u$ in P^{op} for each $a \in A$, there is a morphism $i \rightarrow u$ in P^{op} .

Each arrow translates: $x \rightarrow y$ in P^{op} means $y \leq x$ in P . Thus the dual statement for i says:

- (i) i is a lower bound of A in P , and
- (ii) for every lower bound u of A in P , we have $u \leq i$.

It follows that i is the infimum of A .

Since P^{op} is again a poset, we can apply the uniqueness proof for suprema to P^{op} . Reading the result in P then says that the infimum is unique.

Uniqueness of the supremum

Proposition. If s and s' are both suprema of $A \subseteq P$, then $s = s'$.

Proof. Assume s and s' each satisfy conditions (i) and (ii) of the definition of the supremum.

Step 1. By condition (i), applied to s and to s' in turn, each of s and s' is an upper bound of A .

Step 2. Condition (ii) for s' , applied to the upper bound s produced by Step 1, yields a morphism $f : s' \rightarrow s$.


Step 3. Condition (ii) for s , applied to the upper bound s' produced by Step 1, yields a morphism $g : s \rightarrow s'$.

Step 4. By Definition 1.1.1 the composites $fg : s \rightarrow s$ and $gf : s' \rightarrow s'$ exist. A preorder, and in particular a poset, has at most one morphism between any two objects, and $\text{id}_s \in P(s, s)$ by Definition 1.1.1; hence $fg = \text{id}_s$ and $gf = \text{id}_{s'}$. These are the equations of Definition 1.1.10, so $f : s' \rightarrow s$ is an **isomorphism** with inverse g , and $s \cong s'$.


Step 5. In a poset the only isomorphisms are the identities, which is the categorical statement of antisymmetry (Example 1.1.11(v)); the isomorphism of Step 4 is thus an identity, and $s = s'$. ■

Lemma 1.2.3

Lemma 1.2.3. For $f : x \rightarrow y$ in $\mathbf{C}$ the following are equivalent: (i) f is an isomorphism; (ii) for every object c , postcomposition $f_* : \mathbf{C}(c, x) \rightarrow \mathbf{C}(c, y), h \mapsto fh$, is a bijection; (iii) for every object c , precomposition $f^* : \mathbf{C}(y, c) \rightarrow \mathbf{C}(x, c), k \mapsto kf$, is a bijection.

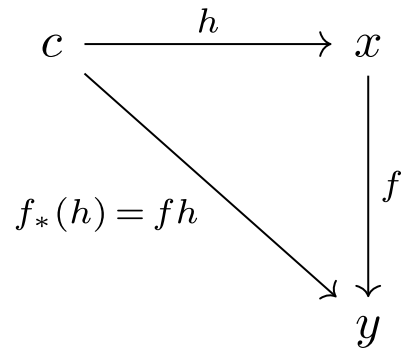

postcomposition f_* composes f after an arrow h into the domain

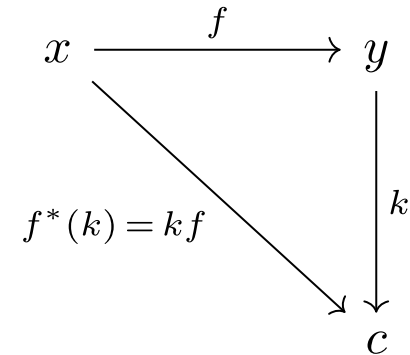

precomposition f^* composes f before an arrow k out of the codomain

Applying duality to Lemma 1.2.3

Riehl proves (i) $\Leftrightarrow$ (ii) directly (pp. 11–12; not reproduced here) and obtains (i) $\Leftrightarrow$ (iii) by duality.

- (i) $\Leftrightarrow$ (ii) holds in every category, hence in $\mathbf{C}^{\text{op}}$. Applied to $f^{\text{op}} : y \rightarrow x$, it says f^{op} is an isomorphism if and only if postcomposition by f^{op} , $\mathbf{C}^{\text{op}}(c, y) \rightarrow \mathbf{C}^{\text{op}}(c, x)$, is a bijection for every c .
- Translate back to $\mathbf{C}$. A morphism $c \rightarrow y$ of $\mathbf{C}^{\text{op}}$ is a morphism $y \rightarrow c$ of $\mathbf{C}$, so the two hom-sets are $\mathbf{C}(y, c)$ and $\mathbf{C}(x, c)$; and since $f^{\text{op}}k^{\text{op}} = (kf)^{\text{op}}$, postcomposition by f^{op} acts as $k \mapsto kf$, the precomposition f^* .
- f^{op} is an isomorphism exactly when f is, because the two inverse equations reverse into each other. The translated statement is then (i) $\Leftrightarrow$ (iii).

Monomorphisms

Definitions dualize as theorems do.

Definition 1.2.7 (monomorphism). A morphism $f : x \rightarrow y$ in a category $\mathbf{C}$ is a **monomorphism** if for every object w and every parallel pair $h, k : w \rightarrow x$, $fh = fk$ implies $h = k$.

$$\begin{array}{ccccc} w & \xrightarrow{\quad h \quad} & x & \xrightarrow{\quad f \quad} & y \\ & \xrightarrow{\quad k \quad} & & & \end{array}$$

$$fh = fk \implies h = k$$

Epimorphisms

Definition 1.2.7 (epimorphism). A morphism $f : x \rightarrow y$ in a category $\mathbf{C}$ is an **epimorphism** if for every object z and every parallel pair $h, k : y \rightarrow z$, $hf = kf$ implies $h = k$.

$$x \xrightarrow{f} y \begin{array}{c} \xrightarrow{h} \\ \xrightarrow{k} \end{array} z$$

$$hf = kf \implies h = k$$

Monomorphisms and epimorphisms in Set

Example 1.2.8. In **Set**, the monomorphisms are the injections and the epimorphisms are the surjections.

The axiom of choice.

- A **section** of $f : X \rightarrow Y$ is a right inverse, a function $s : Y \rightarrow X$ with $f \circ s = \text{id}_Y$. Only a surjection can have a section, since $f \circ s = \text{id}_Y$ makes f onto.
- The axiom of choice is equivalent to the assertion that **every surjection admits a section**, since a section chooses one element of $f^{-1}(y)$ for each y .
- In **Set** the epimorphisms are the surjections (Example 1.2.8), and an epimorphism admitting a section is called **split**.
- The axiom of choice therefore says that **every epimorphism in Set is split**.

Duality for monomorphisms and epimorphisms

Proposition. Let $f : x \rightarrow y$ be a morphism of $\mathbf{C}$. Then f is a monomorphism in $\mathbf{C}$ if and only if $f^{\text{op}} : y \rightarrow x$ is an epimorphism in $\mathbf{C}^{\text{op}}$, and f is an epimorphism in $\mathbf{C}$ if and only if f^{op} is a monomorphism in $\mathbf{C}^{\text{op}}$.

Proof. Step 1. By Definition 1.2.1, $h \mapsto h^{\text{op}}$ matches each parallel pair $h, k : w \rightarrow x$ in $\mathbf{C}$ with a parallel pair $h^{\text{op}}, k^{\text{op}} : x \rightarrow w$ in $\mathbf{C}^{\text{op}}$, every such pair arises this way, and $h = k$ exactly when $h^{\text{op}} = k^{\text{op}}$.

Step 2. The composition rule of Definition 1.2.1 gives $(fh)^{\text{op}} = h^{\text{op}}f^{\text{op}}$, and likewise for k , so $fh = fk$ in $\mathbf{C}$ exactly when $h^{\text{op}}f^{\text{op}} = k^{\text{op}}f^{\text{op}}$ in $\mathbf{C}^{\text{op}}$.

Step 3. Substituting Steps 1 and 2 into Definition 1.2.7, the condition " $fh = fk$ implies $h = k$, for every parallel pair" in $\mathbf{C}$ becomes " $h^{\text{op}}f^{\text{op}} = k^{\text{op}}f^{\text{op}}$ implies $h^{\text{op}} = k^{\text{op}}$, for every parallel pair" in $\mathbf{C}^{\text{op}}$, and these are the definitions of " f is a monomorphism" and " f^{op} is an epimorphism"; this proves the first equivalence.

Step 4. Apply the first equivalence in $\mathbf{C}^{\text{op}}$, whose opposite category is $\mathbf{C}$ (Definition 1.2.1 applied twice), with f^{op} in place of f ; the second equivalence follows. ■

2.4 Introduction to universality

Discrete dynamical systems


Definition (Riehl, Example 2.1.1). A **discrete dynamical system** is a set X with a function $g : X \rightarrow X$ and a chosen element $x_0 \in X$. Applying g repeatedly to x_0 produces the recursive sequence $x_{n+1} = g(x_n)$, the **trajectory** of x_0 .

- **Example A.** The triple $(\mathbb{N}, s, 0)$, the natural numbers with the successor $s(n) = n + 1$ and starting point 0; its trajectory is $0, 1, 2, \dots$
- **Example B.** The perfect-foresight buffer-stock model of the earlier example, with a fixed consumption policy c satisfying $c(m) \leq m$: $X = \mathbb{R}_+$ holds market resources m , the law of motion is $g(m) = (R/G)(m - c(m)) + 1$, and $x_0 = m_0$.

What makes $(\mathbb{N}, s, 0)$ universal?

Morphism of dynamical systems (Riehl, Example 2.4.11). A morphism $\varphi : (X, g, x_0) \rightarrow (Y, g', y_0)$ is a function $\varphi : X \rightarrow Y$ that commutes with the laws of motion, $\varphi \circ g = g' \circ \varphi$, and preserves the starting points, $\varphi(x_0) = y_0$. It carries the trajectory of x_0 onto the trajectory of y_0 .

- For $\varphi : (\mathbb{N}, s, 0) \rightarrow (X, g, x_0)$ the two conditions read $\varphi(n + 1) = g(\varphi(n))$ and $\varphi(0) = x_0$, so φ is the trajectory of x_0 , defined by recursion and unique by induction, $\varphi(n) = x_n$.
- Every system thus receives exactly one morphism from $(\mathbb{N}, s, 0)$, and to choose it is to choose an initial condition; the next two slides make this precise.

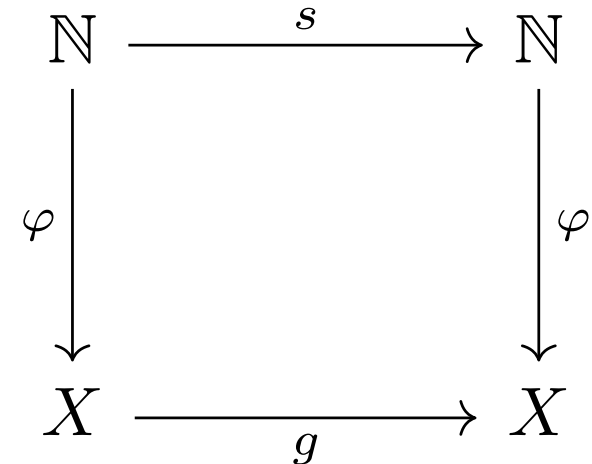

Generalising: universal morphisms

Definition (universal morphism). Let $F : \mathbf{C} \rightarrow \mathbf{D}$ be a functor and X an object of $\mathbf{D}$. A **universal morphism from X to F** is a pair (A, u) , with A an object of $\mathbf{C}$ and $u : X \rightarrow F(A)$ a morphism of $\mathbf{D}$, such that for every object A' of $\mathbf{C}$ and every morphism $f : X \rightarrow F(A')$ in $\mathbf{D}$ there is exactly one morphism $h : A \rightarrow A'$ in $\mathbf{C}$ with $F(h) \circ u = f$.

$$\begin{array}{ccc}
 X & \xrightarrow{u} & F(A) \\
 & \searrow f & \downarrow F(h) \\
 & & F(A')
 \end{array}
 \qquad
 \begin{array}{c}
 A \\
 \vdots h \\
 A'
 \end{array}$$

Every f factors through u in exactly one way; the dashed arrows are the ones the definition asserts.

Claim: $(\mathbb{N}, s, 0)$ is universal


Take $\mathbf{C} = \mathbf{End}$ (sets with a function to themselves; morphisms commute with those functions), $\mathbf{D} = \mathbf{Set}$, $F = U$ the forgetful functor, and $X = \mathbf{1}$, so that $f : \mathbf{1} \rightarrow U(X, g)$ picks an initial condition x_0 . The pair is $A = (\mathbb{N}, s)$ with $u : \mathbf{1} \rightarrow \mathbb{N}$ picking 0.

Claim. $((\mathbb{N}, s), u)$ is a universal morphism from $\mathbf{1}$ to U .

Proof. Step 1. In $\mathbf{End}$, $h : (\mathbb{N}, s) \rightarrow (X, g)$ means $h(n+1) = g(h(n))$, and $U(h) \circ u = f$ means $h(0) = x_0$.

Step 2. Definition by recursion gives such an h . Two such agree at 0, and agreement at n gives agreement at $n+1$, so by induction they agree everywhere.

Step 3. Hence h is the trajectory $h(n) = x_n$, the morphism φ of the previous slide.

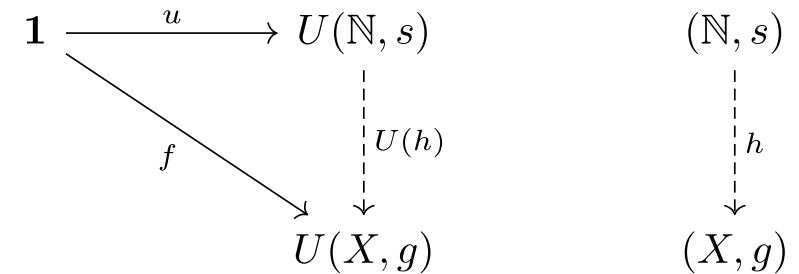

Implications

- A morphism out of $(\mathbb{N}, s)$ is determined by where it sends 0, and every choice occurs, so $\text{End}((\mathbb{N}, s), (X, g)) \cong X$ by $h \mapsto h(0)$. The universal pair is unique up to a unique isomorphism.
- Every set X has its own universal morphism to U , the system $X \times \mathbb{N}$ with shift $(x, n) \mapsto (x, n + 1)$, the free dynamical system on X . The assignment $X \mapsto X \times \mathbb{N}$ is the **left adjoint** of U , a notion of a later session.
- Products, free groups, and tensor products are universal morphisms for suitable F , and so are limits and colimits. The supremum of Exercise 1.2.vii is a colimit, which is where Session B begins.

Universality. For dynamical systems, the one representation that fixes the ground truth for all transformations is $(\mathbb{N}, s, 0)$, whose outgoing morphisms are trajectories. Our research objective is to define **natural** diagrams for broader classes of stochastic and branching systems.

PART 3

3. Dynamic-programming research

Grammar · Syntax trees · Binding · Elaboration

Context-free grammar



Pāṇini, c. 4th century BCE
the *Aṣṭādhyāyī*



John Backus, 1924–2007
creator of Fortran; proponent of functional programming


A context-free grammar is a finite set of rewrite rules applied *recursively* to generate every well-formed expression of a language, each rule applying independently of surrounding context. Programming languages are parsed using a grammar (with some context) into syntax trees, and then interpreted and compiled.

Syntax trees

Parsing the Python line

```
v = u(c) + beta * w
```

applies one grammar rule at each node of a tree; the leaves, read left to right, return the tokens of the source line.

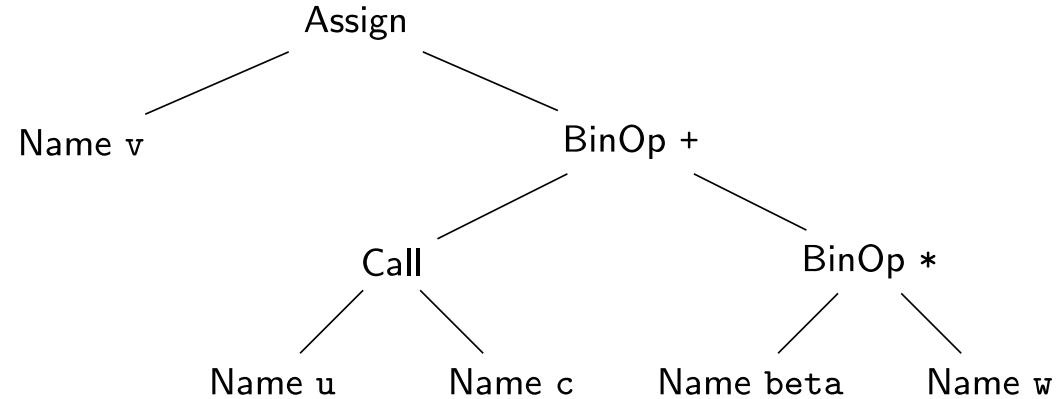

The Bellman operator

Now consider the following Bellman operator:

$$v(m) = \max_{c \in \mathcal{D}(m)} \left\{ u(c) + \beta \mathbb{E}_{\xi'} v(R(m - c) + \xi') \right\} \quad \text{i.e.} \quad v = \mathbb{T} v$$

- X is the state space; $m \in X$ is current resources.
- A is the choice space; $\mathcal{D}(m) \subseteq A$ is the feasible set at m ; $c \in \mathcal{D}(m)$ is consumption.
- Z is the shock space; $\xi' \in Z$ is the next-period income shock with a fixed law on Z ; $\mathbb{E}_{\xi'}$ is expectation under that law.
- $g : X \times A \times Z \rightarrow X$ with $g(m, c, \xi') = R(m - c) + \xi'$ is the transition; $R > 0$ is the gross return factor.
- $u : A \rightarrow \mathbb{R}$ is one-period utility; $\beta \in (0, 1)$ is the discount factor.
- v is a candidate value function in $\mathbb{R}^X$, the bounded measurable functions on X .

Syntax for the Bellman operator

Formally, let $v \in \mathcal{B}_\varphi(X)$, the space of measurable functions on X bounded by a weight φ , and define $\mathbb{T}$ by evaluation:

$$(\mathbb{T}v)(m) = \max_{c \in \mathcal{D}(m)} \left\{ u(c) + \beta \mathbb{E}_{\xi'} v(R(m - c) + \xi') \right\} \quad \forall m \in X$$

This is the correct Bellman operator, and its properties are critical to understanding the economic problem. Can we write it out in abstract syntax so that no information is lost when we parse? **No.**

"But I wrote the Bellman operator in Python." A `def T(v)` on arrays is a different object, a procedure $\hat{T} : \mathbb{R}^N \rightarrow \mathbb{R}^N$ on a grid of N points, and its syntax tree contains only the node kinds of the syntax-tree slide, assignments, calls, and loops over floats. That the grid stands for X , the loop for $\mathbb{E}_{\xi'}$, and the procedure for $\mathbb{T}$ appears nowhere in the program text, so the claim "this code computes $\mathbb{T}v$ " cannot be checked mechanically. **We trust that the author has coded the operator faithfully to the one written in the paper.**

First-order syntax for the Bellman operator

Call a map **higher-order** when it takes a function as an input or returns one as an output, and call syntax **first-order** when functions are not themselves inputs or outputs of the parsed expressions.

A parser produces an **abstract syntax tree** (AST): one syntax tree built from the grammar's constructors.

- An AST *cannot* represent bound variables.
- Higher order requires some context.

How can first-order typed syntax, in which functions are never inputs or outputs, represent the higher-order map $\mathbb{T} : v \mapsto \mathbb{T}v$?

An AST cannot represent bound variables


NORMALIZED SYMBOLIC SOURCE

$\text{Val}[>]$ is continuation; $\text{Val}[\sim]$ is decision.

```

op bellman(v : Val[>]) : Val[~] {
  v(m) =
    max_{c ∈ D(m)} {
      u(c) + β E_{ξ'}[
        v(g(m, c, ξ'))
      ]
    }
}


```

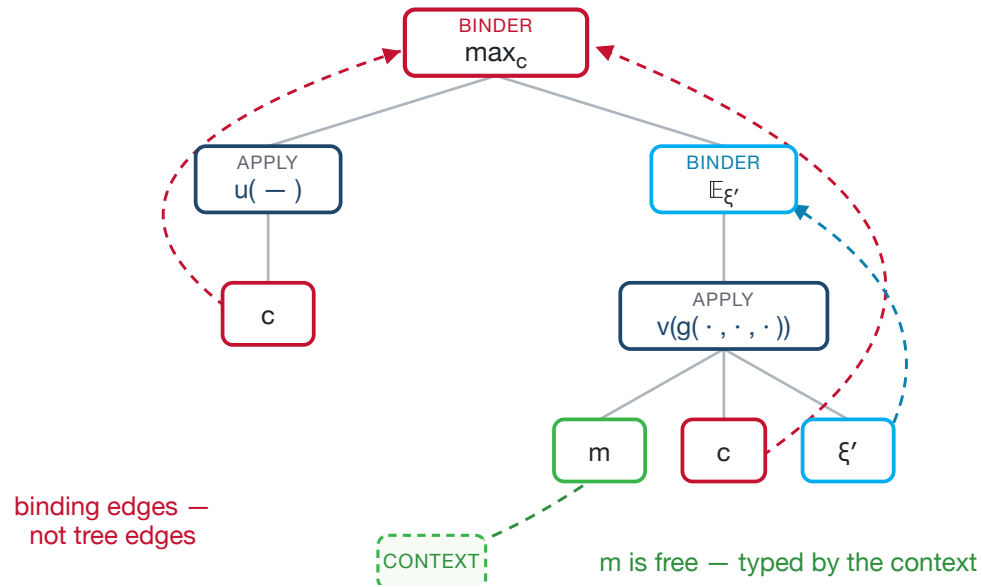

With binding edges, above is a **category**, typed by its *context* — an AST carries no binding relation.

For the **higher-order** functional equations of dynamic programming there is no formal system of binding at all, so the step from equations to solver code has no formal **semantics** (concretely, there is no object called $\mathbb{T}$ in `DYNARE` that one can point to and inspect); we want such relations formalized.


Elaboration of the Bellman operator

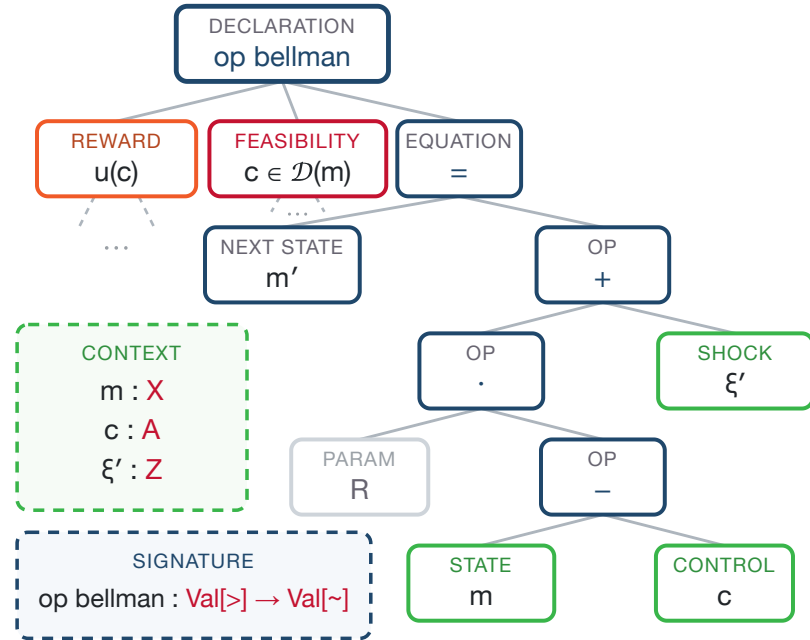

the nodes record bare syntax;
the red line types the expression in its context
 $(m : X, c : A, \xi' : Z) \vdash R(m - c) + \xi' : X$

- **Objects of $\text{Cl}(\Sigma)$ are contexts**, finite lists of typed variables such as $\Gamma = (m : X, c : A, \xi' : Z)$. The value types $\text{Val}[>]$ and $\text{Val}[\sim]$ in the signature are declared types, as X is.
- **Arrows of $\text{Cl}(\Sigma)$ are typed expressions read in a context.** The red line beneath the tree says that, with the variables typed as listed, $R(m - c) + \xi'$ has type X ; as an arrow it is $\Gamma \rightarrow X$. The signature line makes `op bellman` itself an arrow between value types $\text{Val}[>] \rightarrow \text{Val}[\sim]$. Arrows compose by substituting expressions into expressions, so we can compose `op_bellman` with other `ops` whose signatures agree.
- **Elaboration is meaning.** An elaboration is a structure-preserving functor from $\text{Cl}(\Sigma)$ to the semantic category (Jacobs, Theorem 2.2.1): it assigns each type a space and each arrow a map. It sends X to the model's state space, Γ to the product $X \times A \times Z$, the expression arrow above to the transition g , and both value types to the function space $\mathcal{B}_\varphi(X)$.
- **Elaboration sends the operator symbol to an operator.** The image of `op bellman` is $\mathbb{T} : \mathcal{B}_\varphi(X) \rightarrow \mathcal{B}_\varphi(X)$, built from the leaf meanings $g, u, \mathcal{D}$ as the body prescribes. The unique such interpretation is the meaning functor Υ .

The meaning functor Υ

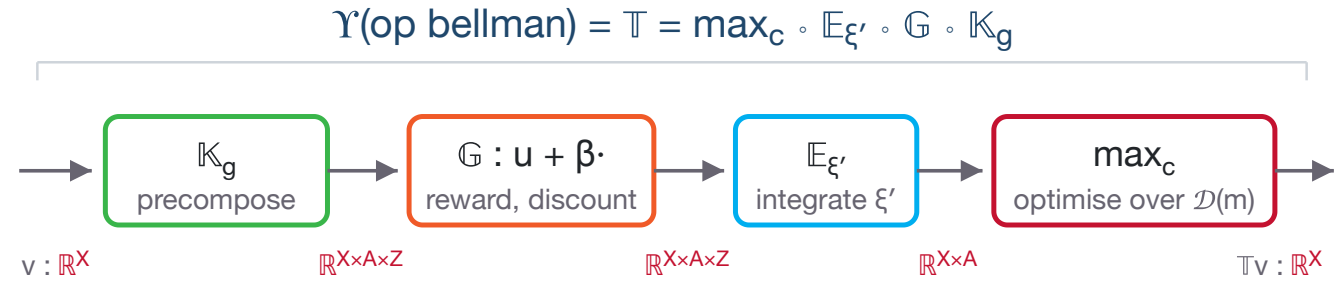

the boxes are operators; the wire labels are the types of their inputs and outputs


g maps to $\mathbb{K}_g$ by precomposition

$$(\mathbb{K}_g v)(m, c, \xi') = v(g(m, c, \xi'))$$

- Any typed syntax should map to a universal category (what is the universal category here?).
 - This is not abstract — it needs to happen just like parsing code.
- We can then study the properties of opposite categories (push-forward measures).
- Composing and factoring operators.
- More complex model structures (branching).

The meaning functor Υ (continued)

And we want to do all this using only relations between variables, market resources $\rightarrow$ assets $\rightarrow$ next-period assets, and no other math. Hence category theory.

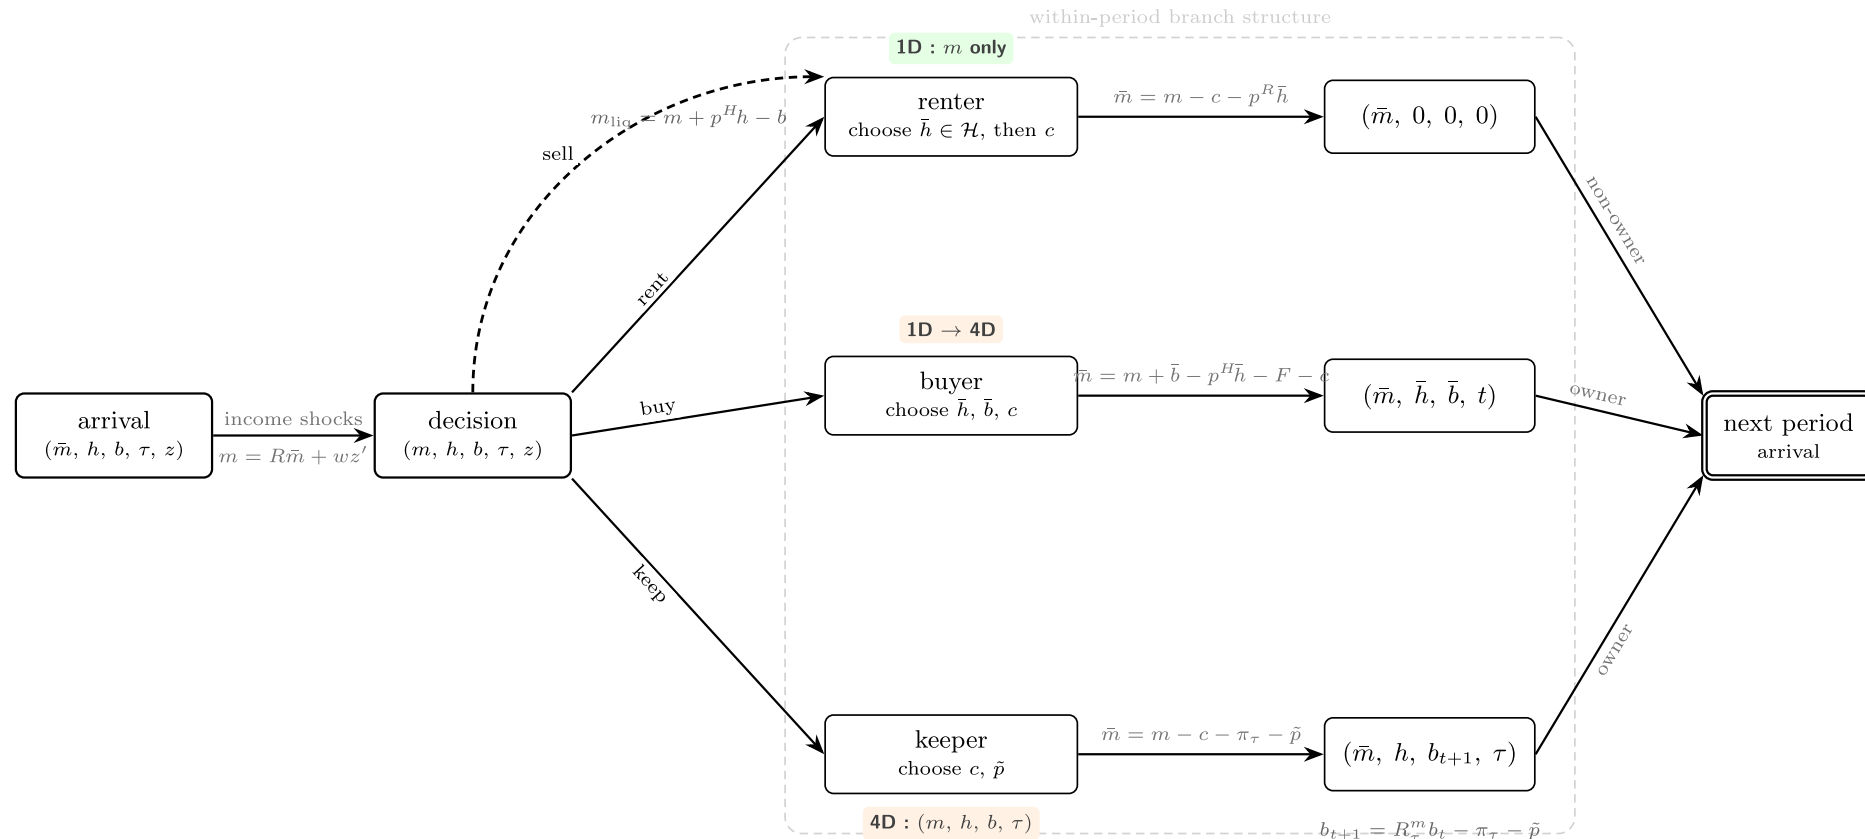

Further examples

- The [Category Theory for AGI, Spring 2026 course page](#) is Sridhar Mahadevan's seminar at the University of Massachusetts Amherst.
- [Lecture 2: Functors](#) contains the example in which the objects are Markov decision processes, the arrows are MDP homomorphisms, and reinforcement-learning algorithms are presented as functors to value functions.
- [Categories for AGI](#) is a longer treatment of the MDP and reinforcement-learning example.
- [Universal Decisions with Kan Extensions](#) is a more advanced decision-theory example.

References

- Backus, John (1978). "Can Programming Be Liberated from the von Neumann Style? A Functional Style and Its Algebra of Programs." ACM Turing Award lecture. *Communications of the ACM* 21(8), 613–641.
- Baez, John (2006). "Quantum Quandaries: A Category-Theoretic Perspective." Cited as the source of the epigraph to Riehl §1.3.
- DisCoPy project. "Why?" discopy.org, accessed 7 August 2026.
- Eilenberg, Samuel, and Saunders Mac Lane (1942). "Natural isomorphisms in group theory." *Proceedings of the National Academy of Sciences USA* 28, 537–543.
- Eilenberg, Samuel, and Norman Steenrod (1952). *Foundations of Algebraic Topology*. Cited as the source of the epigraph to Riehl §1.6.

References

- Fiore, Marcelo P., Gordon D. Plotkin, and Daniele Turi (1999). "Abstract Syntax and Variable Binding." *Proceedings of the Fourteenth Annual IEEE Symposium on Logic in Computer Science*, 193–202. DOI 10.1109/LICS.1999.782615.
- Goguen, J. A., J. W. Thatcher, E. G. Wagner, and J. B. Wright (1977). "Initial Algebra Semantics and Continuous Algebras." *Journal of the ACM* 24(1), 68–95.
- Ingerman, Peter Zilahy (1967). "'Pāṇini-Backus Form' Suggested." *Communications of the ACM* 10(3), 137. DOI 10.1145/363162.363165.
- Jacobs, Bart (1999). *Categorical Logic and Type Theory*. Studies in Logic and the Foundations of Mathematics 141. Amsterdam: Elsevier (North-Holland). ISBN 0-444-50170-3.
- Lamiaux, Thomas, and Benedikt Ahrens (2024). "An Introduction to Different Approaches to Initial Semantics." arXiv:2401.09366 [cs.LO].

References

- Mahadevan, Sridhar. *Category Theory for AGI*, Spring 2026 course page, University of Massachusetts Amherst. people.cs.umass.edu/~mahadeva/categorical-agi.html, accessed 7 August 2026.
- Mahadevan, Sridhar. "Lecture 2: Functors." people.cs.umass.edu/~mahadeva/papers/lecture2.pdf, accessed 7 August 2026.
- Mahadevan, Sridhar. *Categories for AGI*. people.cs.umass.edu/~mahadeva/papers/catagi.pdf, accessed 7 August 2026.
- Mahadevan, Sridhar. *Universal Decisions with Kan Extensions*. people.cs.umass.edu/~mahadeva/papers/udm.pdf, accessed 7 August 2026.
- Oliveira, Bruno C. d. S., and Andres Löb (2013). "Abstract Syntax Graphs for Domain Specific Languages." *Proceedings of PEPM '13*, 87–96. DOI 10.1145/2426890.2426909.

References

- Penn, Gerald, and Paul Kiparsky (2012). "On Pāṇini and the Generative Capacity of Contextualized Replacement Systems." *Proceedings of COLING 2012: Posters*, 943–950, Mumbai. aclanthology.org/C12-2092.
- Pfenning, Frank, and Conal Elliott (1988). "Higher-Order Abstract Syntax." *Proceedings of PLDI '88*, 199–208. DOI 10.1145/53990.54010.
- Riehl, Emily (2016). *Category Theory in Context*. Dover Publications. Author's free PDF: emilyriehl.github.io/files/context.pdf.
- Stan Development Team (2025). *Stan Reference Manual*, version 2.39.