




AI Agent Architectures in Practice




Single Agent + Tools

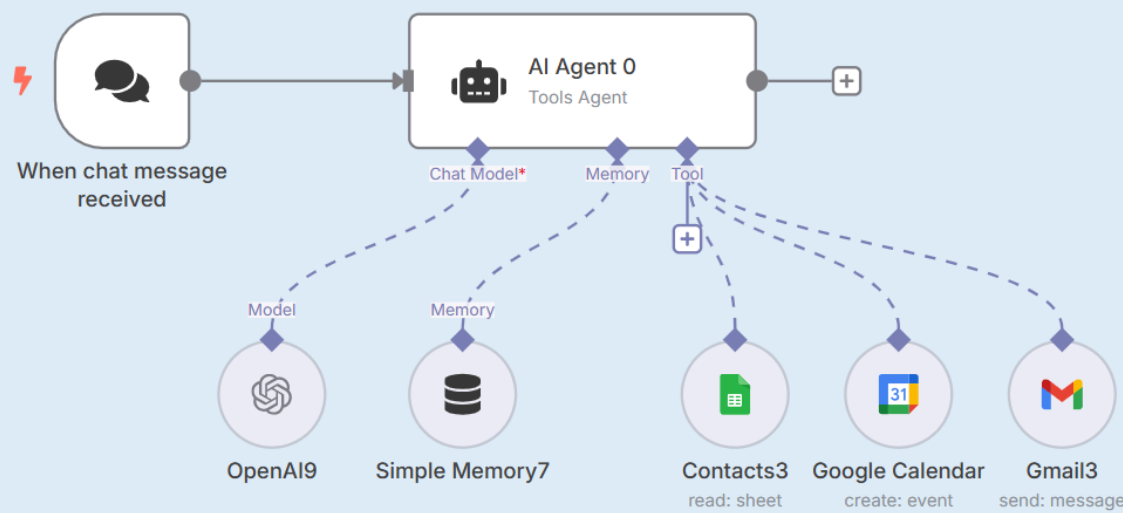


Sequential Agents

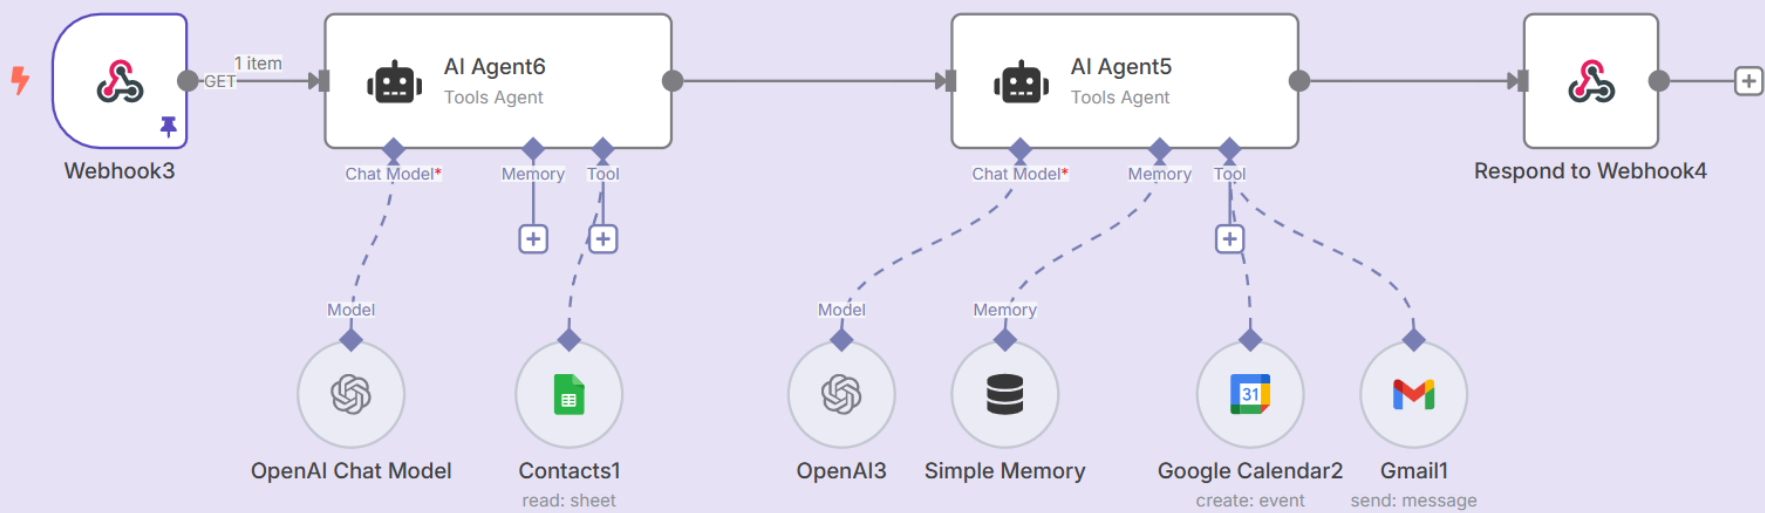


Single Agent + MCP Servers + Tools

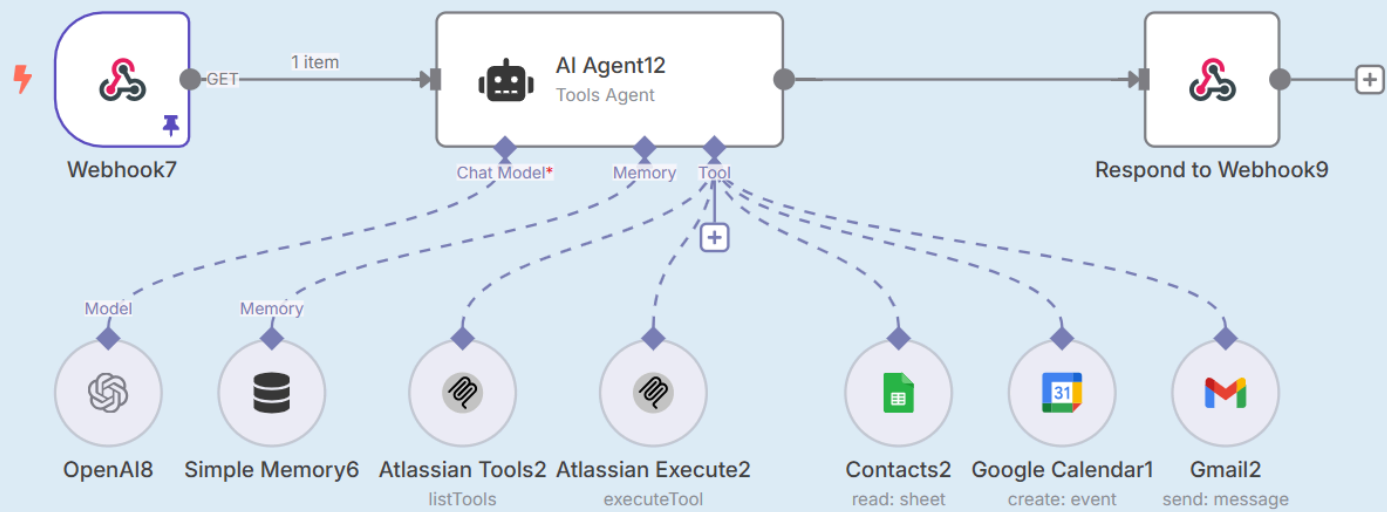


Agents Hierarchy + Parallel Agents + Shared Tools

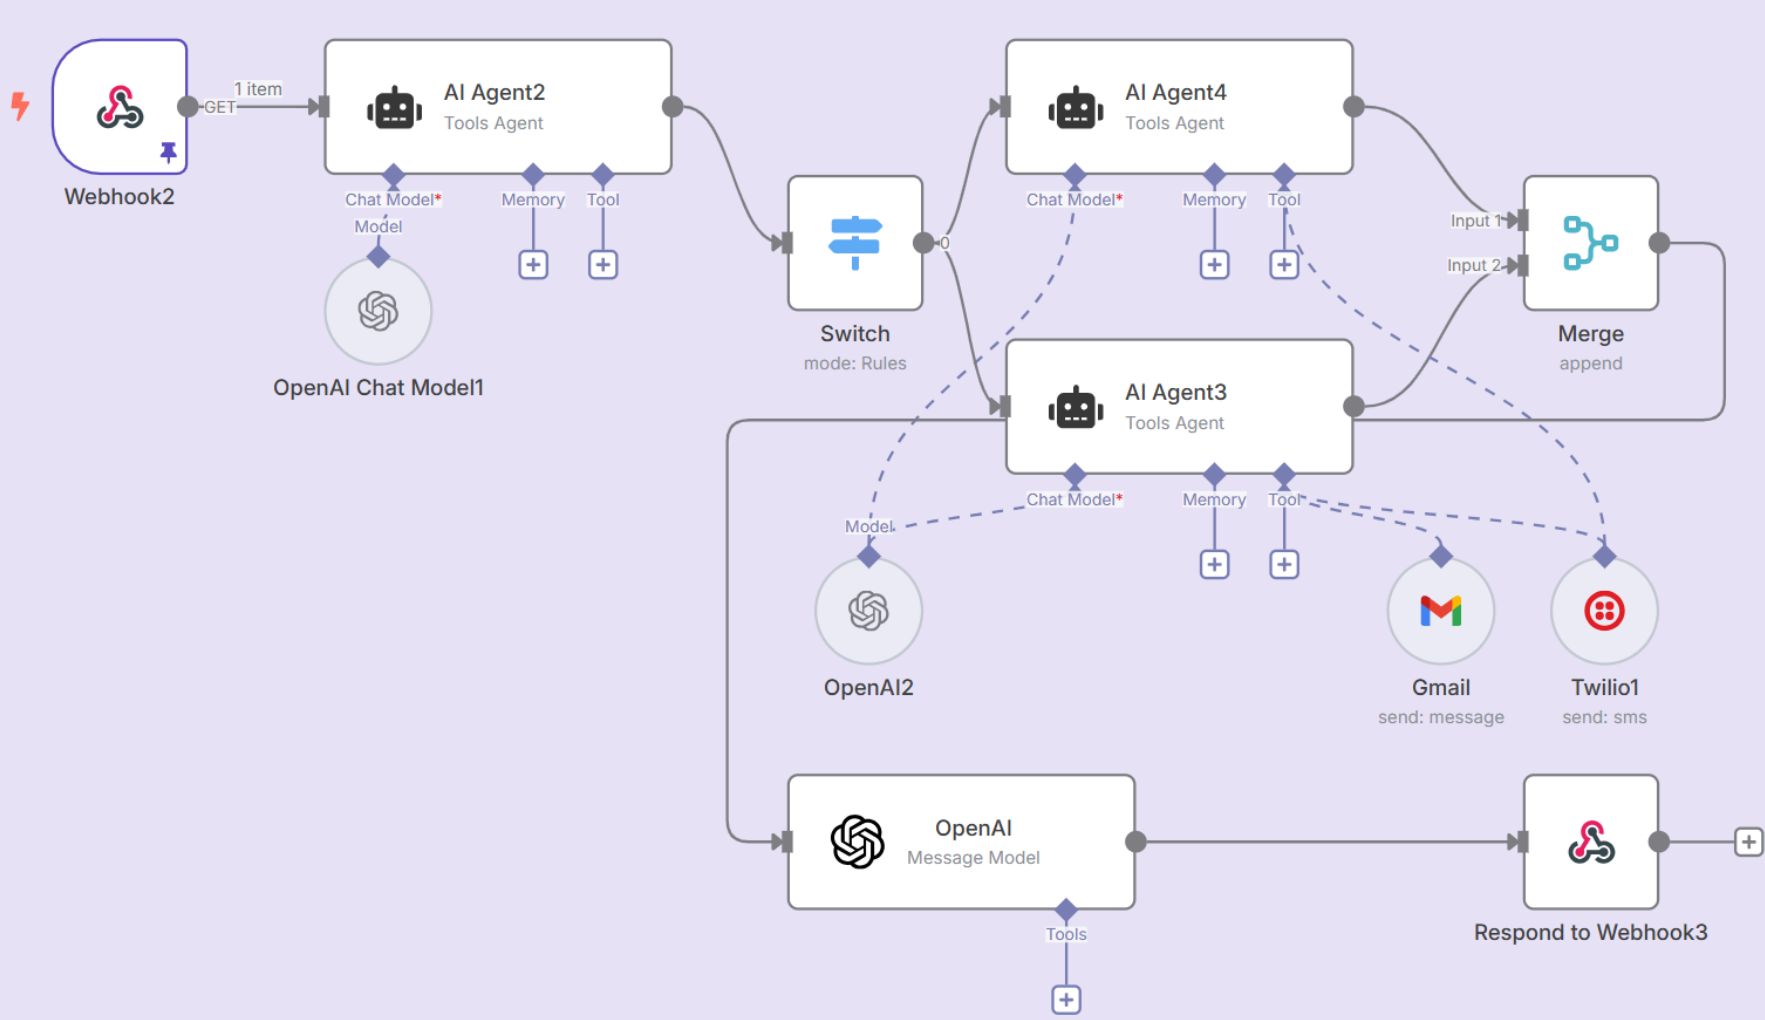


Single Agent + Tools + Router

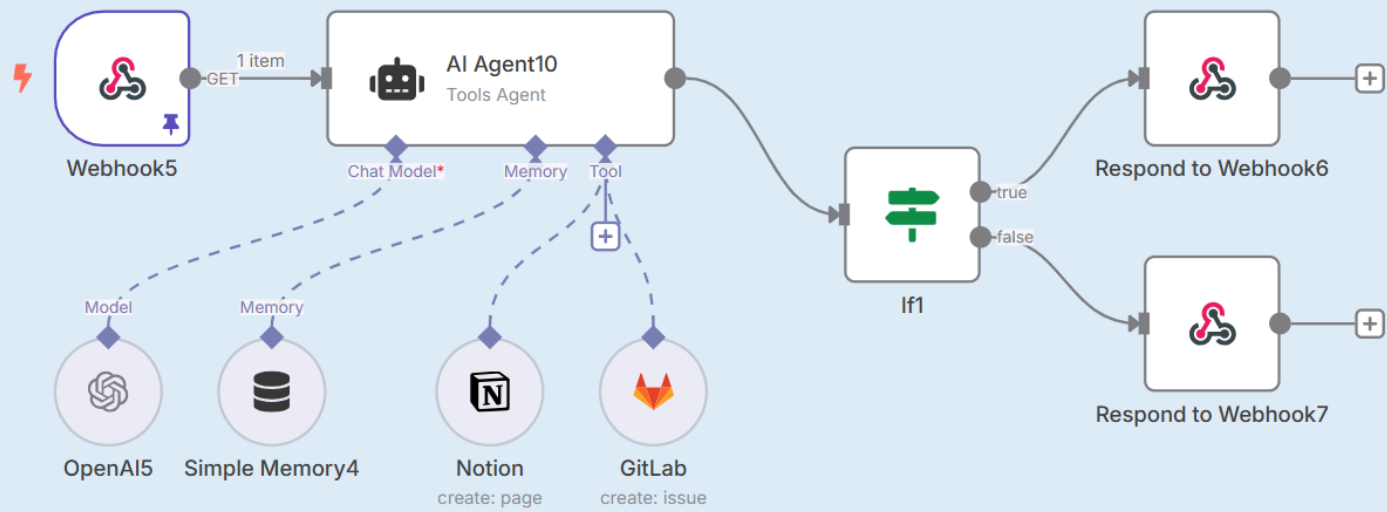


Agents Hierarchy + Loop + Parallel Agents + Shared RAG

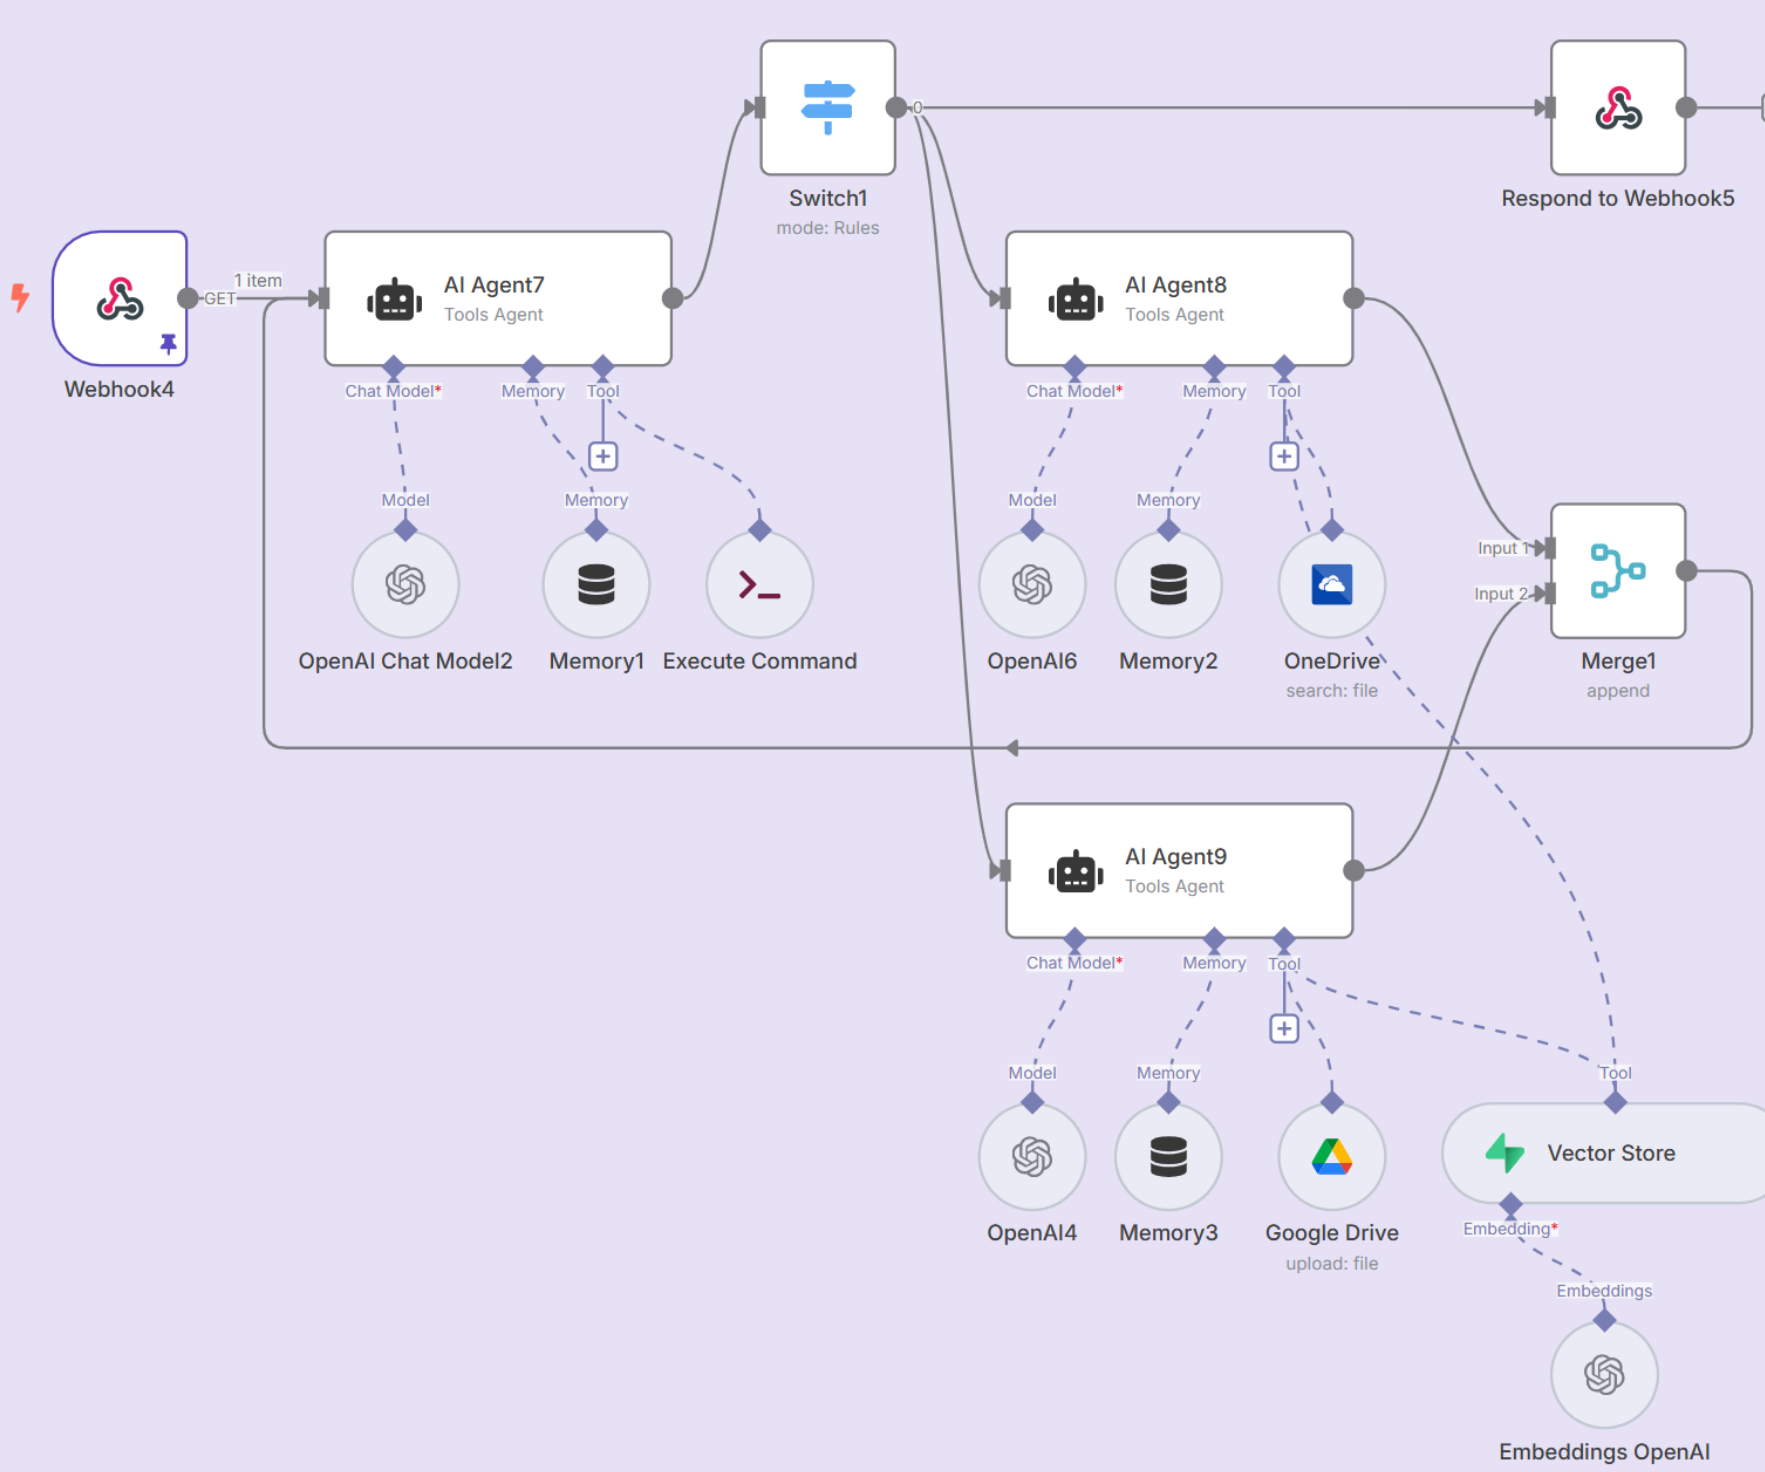


Single Agent + Human in the Loop + Tools

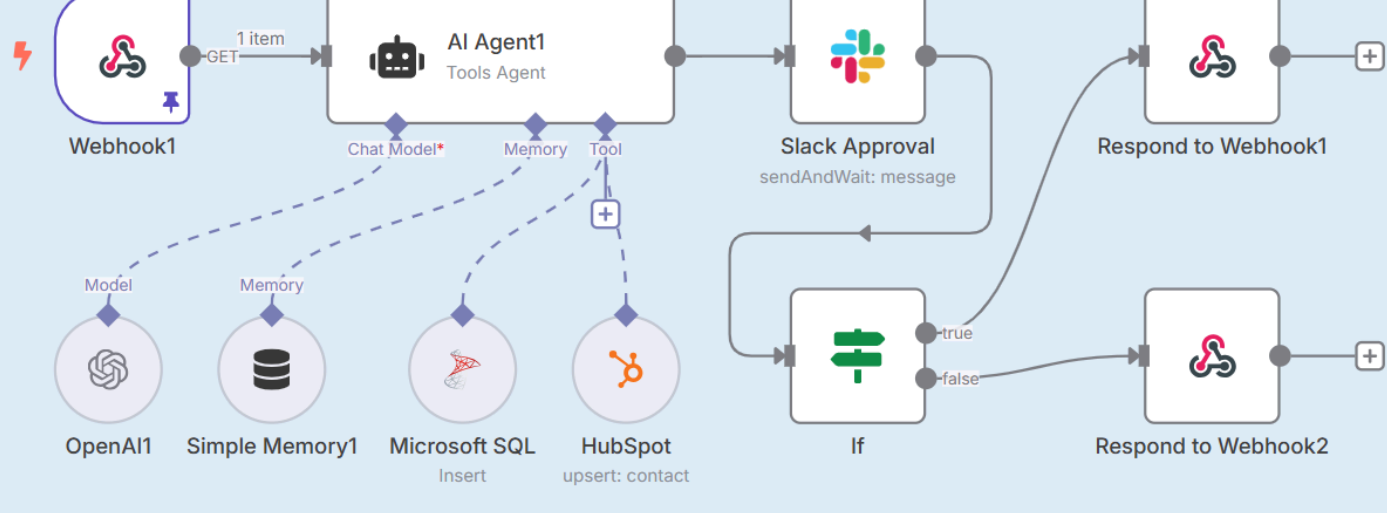

Single Agent + Dynamically Call Other Agents

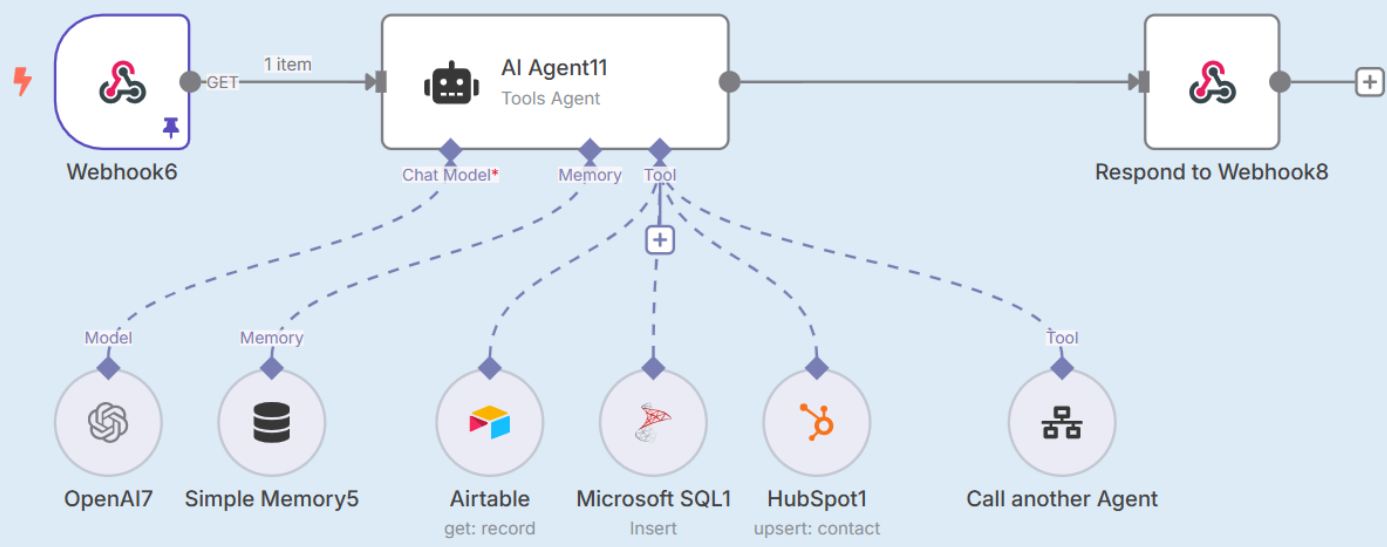


Agentic RAG Architectures in Practice

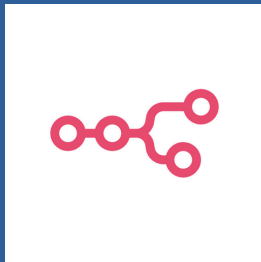


Prep: Add Google Drive files to Pinecone

Reacts when files are added or modified

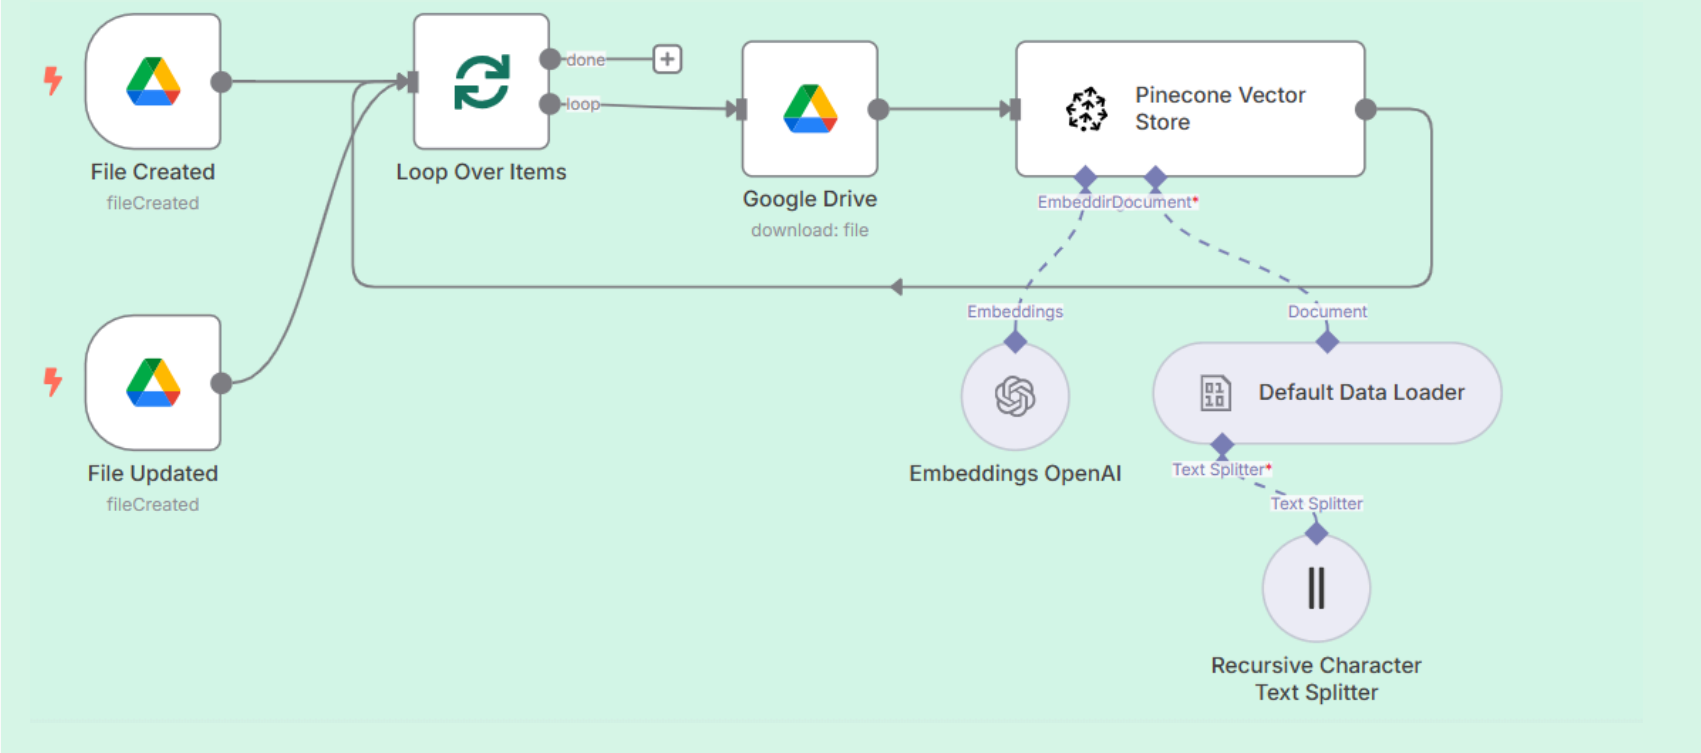


Vanilla RAG

Reuses user request as a RAG prompt

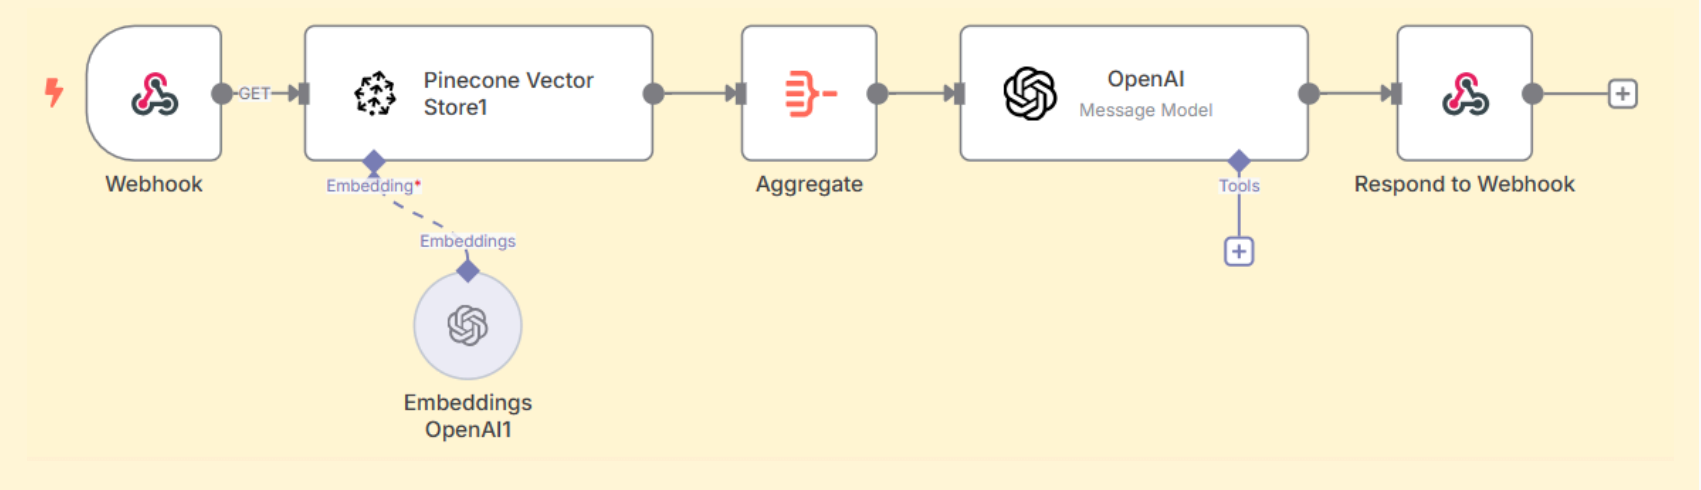

Adaptive RAG

Can answer without RAG, formulates a dedicated RAG prompt

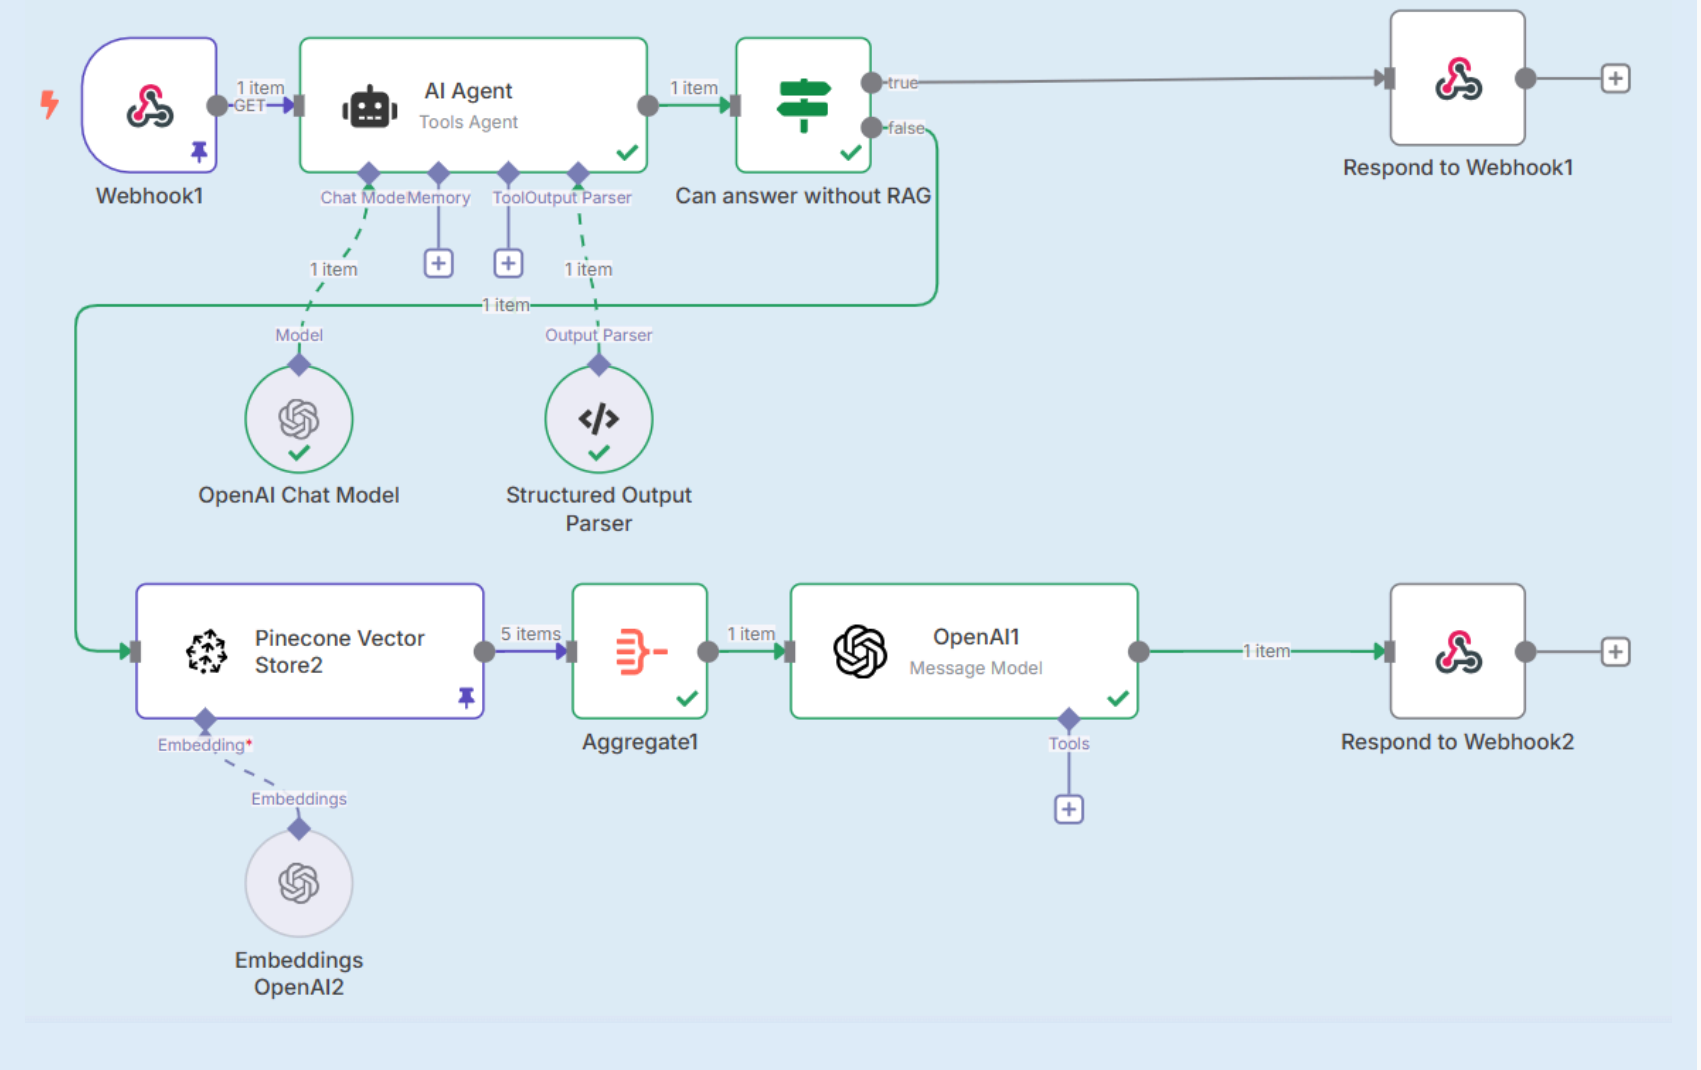

Hybrid RAG

Can query multiple data sources. Here, demonstrated for Pinecone vector database, GraphQL, and SQL

