

OncoEvidence: Mechanism-Guided Evidence Triage for Cancer Drug Repurposing

When a knowledge graph earns its place, and how to show its mechanism reasoning is predictive and faithful

Akshatha Arunkumar

Final Project Deliverable | June 28, 2026

Abstract. OncoEvidence ranks oncology drug-repurposing candidates on the PrimeKG knowledge graph, extracts the multi-hop mechanism path that would explain each one, and uses a literature-grounded language model to grade whether that mechanism is supported. The project is built around an honest question: once a strong tabular ranker is in place, what does the graph actually add? We show the answer is *mechanism*, and we then stress that mechanism signal along the two axes that matter for a real triage tool. On a corrected, leakage-safe benchmark (5 seeds) a tuned XGBoost matches or beats the graph network at link ranking. But only the graph yields a traceable drug $\rightarrow$ target $\rightarrow$ cancer-gene $\rightarrow$ cancer path; that path structure separates true indications from random pairs at AUROC 0.879 and agrees with curated Drug-MechDB at 0.802. Two new results make the case stronger. On a prospective time-split the graph model ranks *future* oncology indications at AUROC 0.930 and beats a structure-blind control by +0.047. And a counterfactual test shows the mechanism head is *faithful*: deleting the curated mechanism edge, and only that edge, collapses the prediction ($p \approx 3.6 \times 10^{-34}$). One orthogonal check against ClinicalTrials.gov is reported as an honest negative.

Six findings at a glance.

1. Plain link ranking does not need the graph: tuned XGBoost matches or beats the GNN in every regime.
2. Only the graph produces a traceable multi-hop mechanism path.
3. Mechanism structure separates true indications from random pairs (AUROC 0.879), survives hard negatives, and matches DrugMechDB (0.802).
4. Blinded mechanism recovery: with the direct edge hidden, only the joint GNN names the bridge gene (R@10 0.25 vs ~ 0 baselines).
5. **New, prospective:** on a time-split the GNN ranks future indications at AUROC 0.930, beating a structure-blind control by +0.047.
6. **New, faithfulness:** deleting the curated mechanism edge hurts $\gg$ a random edge (contrast 0.124, $p \approx 3.6 \times 10^{-34}$, faithful 83%).

1 Background and significance

Developing a new drug takes many years and large cost, while thousands of approved drugs already carry known safety profiles. If an approved drug acts on a protein or pathway that also drives a cancer, repurposing it is a fast route to a candidate therapy. Biomedical knowledge graphs such as PrimeKG encode millions of relationships among drugs, proteins, genes, pathways, and diseases, so the information needed to reason about such mechanisms already exists as paths through the graph. The open problem is *trust*: a bare drug-disease score hides its reasoning and cannot separate a real mechanism from a coincidence.

Novelty, stated carefully. Knowledge-graph repurposing with explanations is not new: TxGNN [1] is a graph foundation model with multi-hop rationales, and KGML-xDTD [3] predicts treatment links with KG-based mechanism paths. This project does not claim “a knowledge graph plus a language model for repurposing” as novel. The defensible contribution is methodological: quantify *when* graph structure adds value beyond a strong tabular ranker, show that its value is mechanism extraction rather than better ranking, and audit those mechanisms three ways most demos skip — against a curated mechanism database, against a prospective time-split, and against a counterfactual faithfulness test.

2 Data and system

Knowledge graph. We use PrimeKG [2], processed into a heterogeneous graph of 129,312 nodes and 8,100,498 directed edges over 50 relation types (Table 1). The prediction target is the drug $\xrightarrow{\text{indication}}$ disease relation (9,388 edges), with 3,170 oncology diseases flagged by an ontology-keyword filter.

Node type	Count	dim	Node type	Count	dim
biological_process	28,642	384	disease	17,080	384
gene / protein	27,610	384	effect_phenotype	15,311	384
anatomy	14,033	384	molecular_function	11,169	384
drug	7,957	384	pathway	2,516	384
cellular_component	4,176	384	exposure	818	384

Table 1: PrimeKG node inventory. Every node carries a 384-d SentenceTransformer embedding of its name, shared identically by the GNN and the tabular baselines so that any performance gap measures graph structure, not features.

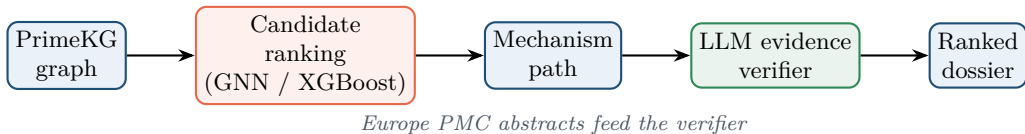


Figure 1: The OncoEvidence pipeline: rank candidates, extract a mechanism path, verify it against the literature, output an evidence-backed shortlist.

3 Methods

3.1 Candidate ranking and the controls

Repurposing is framed as link prediction on the drug $\rightarrow$ indication $\rightarrow$ disease relation. A heterogeneous GraphSAGE [6] encoder builds an embedding for every node by message passing over its typed neighbours, and an MLP decoder scores a pair:

$$\mathbf{h}_v^{(l)} = \sigma\left(W^{(l)}\left[\mathbf{h}_v^{(l-1)} \parallel \text{AGG}_{u \in \mathcal{N}_r(v)} \mathbf{h}_u^{(l-1)}\right]\right), \quad s(d, c) = \text{MLP}\left([\mathbf{z}_d \parallel \mathbf{z}_c]\right). \quad (1)$$

Three controls receive the *same* features: a tuned XGBoost on the concatenated endpoint features (the primary tabular ranker), a FEATUREMLP (the same projection and decoder but no message passing), and a DistMult knowledge-graph embedding $s(d, c) = \mathbf{z}_d^\top \text{diag}(\mathbf{r}) \mathbf{z}_c$ (a pure memorizer

with no representation for unseen nodes). All models are trained with binary cross-entropy on positives and sampled negatives.

3.2 Mechanism-path extraction

For a candidate we search PrimeKG for short paths through mechanism relations (drug-target, protein-protein, protein-pathway, protein-disease), scoring each by specificity and penalizing promiscuous hubs:

$$\text{score}(p) = \beta_{\text{type}} + \underbrace{\frac{1}{\log_2(\deg(\text{bridge}) + 2)}}_{\text{bridge specificity}} \cdot \underbrace{\frac{1}{\log_2(\delta_{\text{drug}} + 2)}}_{\text{IDF carrier penalty}}, \quad (2)$$

where δ_{drug} is the number of drugs that bind the bridge protein (an inverse-frequency penalty that suppresses generic carriers such as albumin) and β_{type} orders direct-target (3) over interaction (2) over shared-pathway (1) templates. A typical recovered chain:




Figure 2: A direct-target mechanism path. The extractor recovers textbook MOAs such as Quizartinib–FLT3, Tamibarotene–RARA, Topotecan–TOP1, and Trifluridine–TYMS for true indications; random pairs usually yield no path.

3.3 The mechanism head and the joint objective

A mechanism head scores a (drug, gene, disease) triple on the *same* encoder embeddings, $s_{\text{mech}}(d, g, c) = \text{MLP}([\mathbf{z}_d \| \mathbf{z}_g \| \mathbf{z}_c])$. We train it jointly with the link objective using an InfoNCE term that ranks the curated DrugMechDB bridge gene g^+ above K degree-matched decoys g_k^- :

$$\mathcal{L} = \mathcal{L}_{\text{link}} + \lambda \mathcal{L}_{\text{mech}}, \quad \mathcal{L}_{\text{mech}} = -\log \frac{\exp s_{\text{mech}}(d, g^+, c)}{\exp s_{\text{mech}}(d, g^+, c) + \sum_{k=1}^K \exp s_{\text{mech}}(d, g_k^-, c)}. \quad (3)$$

3.4 The two audits: prospective and faithfulness

Prospective (temporal) split. PrimeKG has no timestamps, so we assign each true oncology pair (d, c) an approximate first-evidence year $\tau(d, c) = \text{earliest Europe PMC co-mention}$. For a cutoff T , the PAST set $\{(d, c) : \tau \leq T\}$ seeds the message-passing graph and supervision, while the FUTURE set $\{(d, c) : \tau > T\}$ is held out; its target edges are removed, so the model must rank future indications above negatives using only pre- T structure.

Counterfactual faithfulness. For a held-out pair whose bridge gene g is a real drug-target edge e_{dg} , we recompute g ’s mechanism score after deleting e_{dg} and compare against deleting a random other target edge e_{dr} of the same drug:

$$\Delta_{\text{MOA}} = s_{\text{full}} - s_{\setminus e_{dg}}, \quad \Delta_{\text{rand}} = s_{\text{full}} - s_{\setminus e_{dr}}, \quad \text{contrast} = \overline{\Delta_{\text{MOA}}} - \overline{\Delta_{\text{rand}}}. \quad (4)$$

A faithful model satisfies $\Delta_{\text{MOA}} \gg \Delta_{\text{rand}}$.

3.5 Metrics

We report AUROC and AUPRC for separation/ranking, recall@ k for retrieval, and the precision of “supported” verdicts,

$$\text{precision} = \frac{\#\{\text{“supported” pairs whose path gene is in the DrugMechDB MOA set}\}}{\#\{\text{“supported” pairs DrugMechDB covers}\}}. \quad (5)$$

4 Results

4.1 Finding 1: the link task does not need the graph

With a tuned XGBoost on shared features, the GNN does not win in any regime (Table 2, Fig. 3). Paired tests confirm it: in the cold-disease regime XGBoost beats the GNN by 0.081 AUROC (the GNN-favoring one-sided test gives $p = 0.98$), while the GNN crushes the DistMult memorizer (+0.43 AUROC, $p = 2.4 \times 10^{-4}$). For link ranking with rich text features, a strong tabular model suffices.

Test AUROC (5 seeds)	GNN	XGBoost	MLP	KGE
Transductive	0.977	0.988	0.973	0.907
Inductive (cold-disease, oncology)	0.882	0.963	0.930	0.452
Inductive (cold-drug)	0.956	0.958	0.931	0.482

Table 2: Corrected, leakage-safe benchmark (mean over 5 seeds). The DistMult memorizer (KGE) collapses on unseen nodes in both inductive regimes, confirming the task needs content features, not memorized identity.

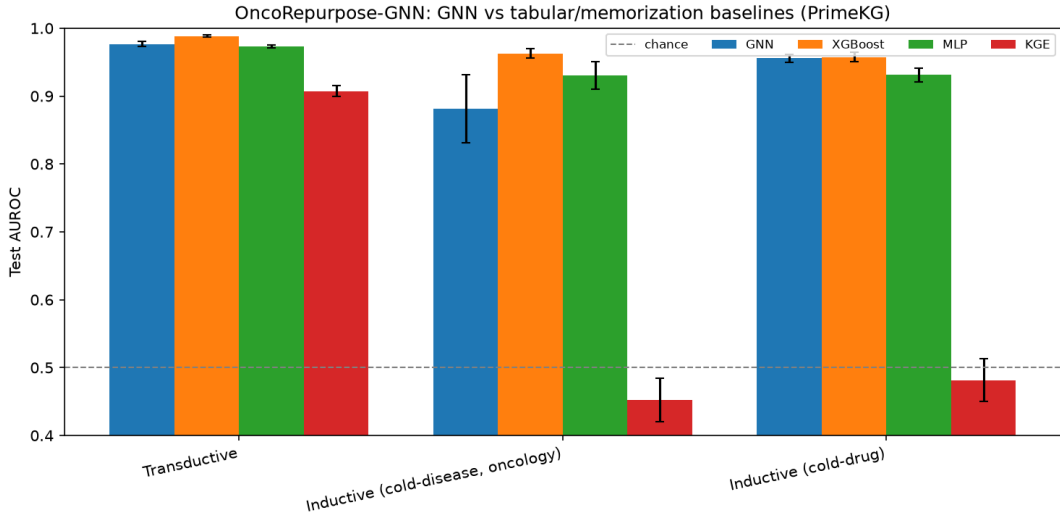


Figure 3: Benchmark AUROC by regime and model (5 seeds, error bars = std). XGBoost (or a tie) leads everywhere; KGE collapses on the inductive splits.

4.2 Ablations: where the GNN’s ranking signal comes from

Three ablations locate the GNN’s signal (Table 3, Fig. 4). Removing all auxiliary topology (*empty*) drops cold-disease AUROC from 0.899 to 0.777, but *shuffling* edges barely hurts (0.879), so the GNN leans on node features and coarse connectivity more than on specific graph structure. Dropping individual relation families (drug-protein, disease-protein, pathway) each costs little. And under non-semantic *structural* features the GNN still does not beat XGBoost (0.838 vs 0.861), so there is no hidden cold-start ranking win to claim.

Topology (cold-disease)	GNN AUROC
Intact graph	0.899
Shuffled edges	0.879
Empty (features only)	0.777

Relation drops: drug-protein 0.934, disease-protein 0.920, pathway 0.933.

Features	GNN	XGB	MLP
Text (384-d)	0.889	0.960	0.939
Structural (23-d)	0.838	0.861	0.830
Random (64-d)	0.837	0.490	0.843

Table 3: Left: topology and relation ablations (3 seeds, cold-disease). Right: feature ablation (2 seeds). XGBoost’s collapse to chance under random features confirms it uses real signal; the GNN never overtakes it.

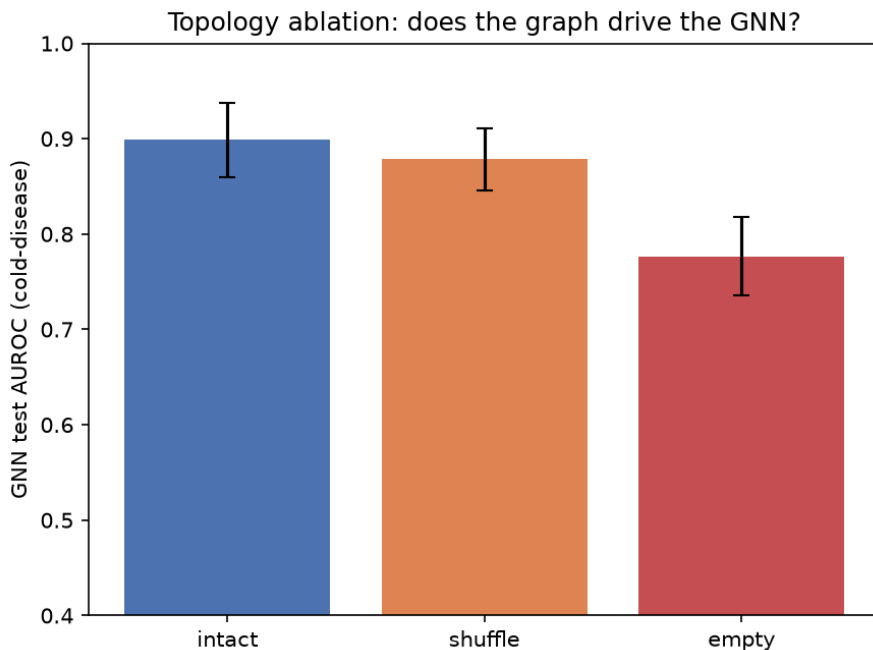


Figure 4: Topology ablation. Erasing structure (*empty*) costs the most; shuffling edges costs little, indicating the GNN’s ranking relies mostly on node features.

4.3 Finding 2–3: the graph carries real, discriminative mechanism

A tabular model cannot produce a traceable mechanism; the graph can (Fig. 2). Over 400 true indications versus 400 random pairs, the mechanism signal separates the two groups at **AUROC 0.879** (Table 4, Fig. 5), and the extracted bridge genes agree with curated DrugMechDB for 211 of 263 covered pairs (**0.802**; e.g. Methotrexate→{ATIC, DHFR, TYMS}, Topotecan→{TOP1}, Decitabine→{DNMT1, DNMT3A}).

Metric	True	Random
Mean mechanism score	1.95	0.16
Direct-target rate	34.0%	0.25%
Any mechanistic path	81.3%	8.8%

Separation AUROC
0.879

Table 4: Mechanism paths separate true indications from random pairs. A true indication is roughly 136× more likely to have a direct drug-target to cancer-gene link.

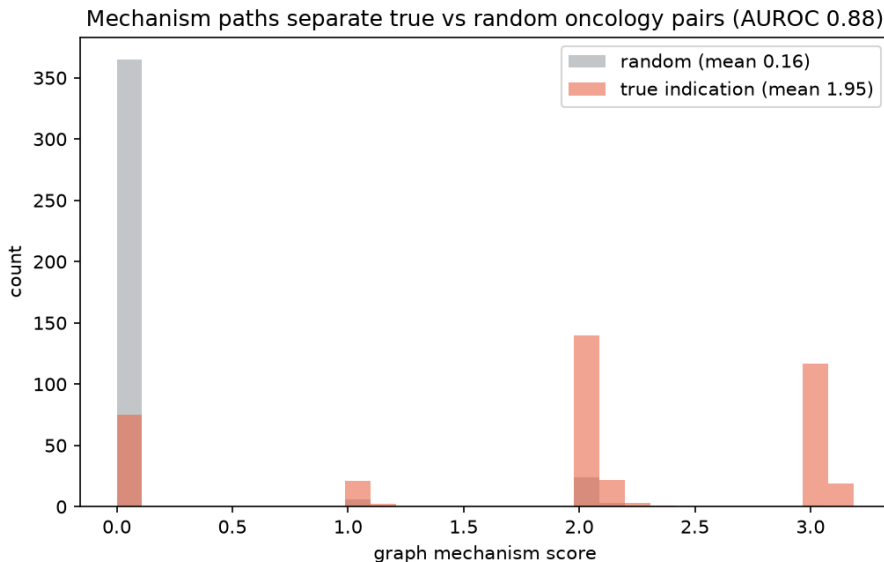


Figure 5: Distribution of the graph mechanism score for true indications versus random drug-cancer pairs. Random pairs pile up at zero; true indications spread to high, specific scores (AUROC 0.879).

Robustness to hard negatives. Separation degrades gracefully as negatives get harder and only the deliberately adversarial *shared-target* case nears chance (Table 5). An ablation that removes *direct*-target paths still separates (0.887), so the signal is not merely the most obvious drug-target link.

Negatives vs true	random	oncology-drug	degree-matched	shared-target
Separation AUROC	0.887	0.870	0.742	0.609

Table 5: Hard-negative stress test (400 vs 400, seed 0). Ablations: full 0.887, template-only 0.884, no-direct-target 0.887, so indirect mechanisms also separate.

The verifier is a conservative, precise reviewer. Over 50 true versus 50 random pairs the language model marks far fewer “supported” than a keyword baseline, but those calls are more trustworthy (Table 6): of its supported calls DrugMechDB covers, 6/7 are confirmed versus 13/22 for keyword matching.

	Language model	Keyword baseline
True pairs graded “supported”	11 / 50	34 / 50
Random pairs graded “supported”	1 / 50	2 / 50
“Supported” confirmed by DrugMechDB	0.857 (6/7)	0.591 (13/22)

Table 6: Verifier precision (OpenRouter `gpt-4o-mini`). Small denominators (Wilson 95% CI roughly 0.49–0.97 for 6/7), so this is a pilot signal. Each verdict carries a verbatim quote, e.g. Topotecan / TOP1: “a topoisomerase I (TOP1) inhibitor”.

4.4 Finding 4: the graph’s one genuine ranking-free edge

We trained the GNN jointly (Eq. 3) and asked it to name the curated bridge gene for held-out cold-disease pairs (3 seeds, $n \approx 186$ –260). Unblinded, a trivial “the drug’s own targets” baseline dominates because the bridge gene is usually the drug’s direct target. But with that direct edge hidden, the trivial and degree baselines collapse to about zero while the joint GNN still recovers the gene from indirect structure (Table 7). A link-only GNN scored through the identical head recovers nothing, so the signal is attributable to the auxiliary objective, not the architecture.

Bridge-gene recovery	Unblinded R@10	Blinded R@10	Blinded MRR
Joint GNN (link + mechanism)	0.31	0.25	0.21
Trivial target-lookup	0.80	0.00	0.00
Link-only GNN (same head, no aux loss)	0.00	0.00	0.00
Degree prior	0.02	0.02	0.02

Table 7: Mechanism recovery on held-out pairs. When the direct edge is hidden, only the joint GNN recovers the gene, a small (~ 0.25 R@10) but genuine graph-only signal. Caveat: recovery of *known* mechanism via indirect paths, not de novo discovery, on a modest sample.

4.5 Finding 5 (new): the model is predictive over time

To test whether the model could have flagged an indication *before* it was established, we hold out indications by time (cutoff $T = 2005$; 350 sampled pairs, 341 years resolved, 240 past / 101 future; 3 seeds). Trained only on pre-2005 structure, the GNN ranks the held-out future indications at **AUROC 0.930** and **AUPRC 0.707** and beats the structure-blind control on every metric and seed (Table 8, Fig. 6). Unlike the plain link task in Finding 1, the graph adds a small but consistent edge here, widest on the harder metrics.

$T=2005$	AUROC	AUPRC	R@50	R@100
GNN (graph)	0.930	0.707	0.393	0.703
MLP (blind)	0.882	0.592	0.337	0.587
Graph gain	+0.047	+0.115	+0.056	+0.116

PAST
(in graph)

FUTURE
(held out)

time →

Table 8: Prospective time-split (mean over 3 seeds). PAST pairs seed the graph; FUTURE pairs are predicted from pre- T structure only. Caveat: the year proxy is the earliest literature co-mention, not a regulatory date.

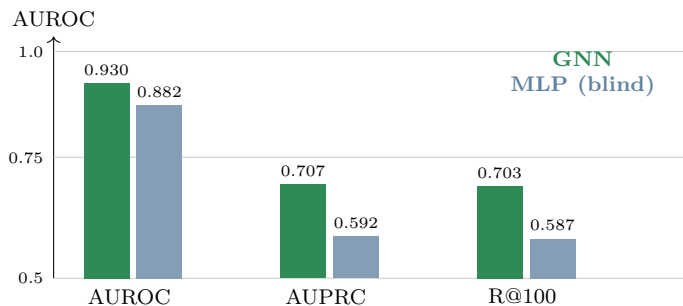


Figure 6: Prospective performance: the graph model (green) beats the structure-blind control (blue) on every metric, with the gap widening on the harder AUPRC and recall@100.

4.6 Finding 6 (new): the mechanism reasoning is faithful

Can we trust the mechanism the graph names? For each held-out pair whose bridge gene is a real drug-target edge we apply Eq. 4: recompute the gene’s score with the full graph, with that pair’s curated mechanism edge deleted, and with a random other target edge of the same drug deleted (316 instances, 2 seeds, no retraining). Removing the curated edge degrades the bridge gene far more than removing a random one (Table 9, Fig. 7): a paired Wilcoxon test gives $p \approx 3.6 \times 10^{-34}$, the model is faithful in 83% of instances, and the two populations separate at AUROC 0.835.

Counterfactual edge removal	Score drop	Rank drop
Remove curated mechanism edge	0.124	~211
Remove random target edge (same drug)	−0.001	~2
Contrast (faithfulness)	0.124	—

Table 9: Faithfulness by counterfactual edge removal (pooled, 316 instances; logit space). Faithful in 83.3% of cases; paired Wilcoxon $p \approx 3.6 \times 10^{-34}$; separation AUROC 0.835. Measured on the well-posed population (pairs whose bridge gene is an actual drug-target edge).

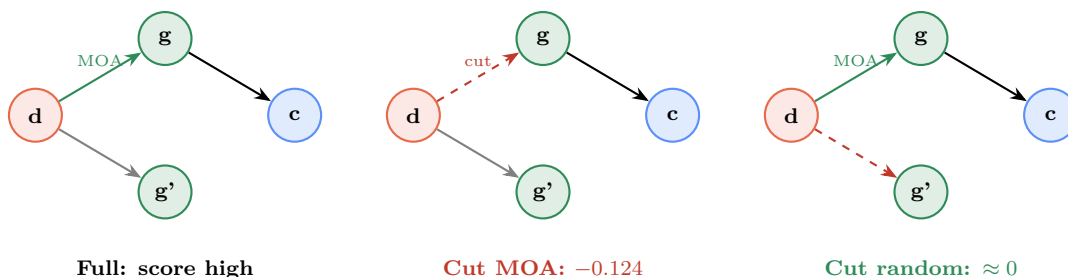


Figure 7: Counterfactual faithfulness. Cutting the curated MOA edge $d \rightarrow g$ collapses the bridge gene’s score; cutting a random other target edge $d \rightarrow g'$ barely changes it.

4.7 An honest negative: orthogonal trial validation

We also asked whether top *novel* predictions (not already PrimeKG indications) appear as registered oncology trials more than matched controls. Top raw-score predictions were not enriched over random (6.7% versus 7.4%, Fisher $p = 0.69$). Raw score does track trial existence above chance (AUROC 0.676 over 810 pairs, $p \approx 1.5 \times 10^{-5}$), but this is a popularity confound: one broadly-indicated drug (folic acid) accounts for 78% of the top set’s hits. The specificity-lift ranking that de-confounds popularity shows no enrichment at all ($0.55\times$ versus random, $p = 0.97$). We report this as inconclusive: the raw scores track human trial activity mostly through popular drugs, not through the specific novel shortlist. A usable version needs MeSH/ChEBI name normalization and trial phase/recency, which is future work.

5 Discussion

The contribution is a disciplined account of where a knowledge graph helps. On plain link ranking it does not beat a tuned tabular model, and we say so. Its value is the traceable mechanism a tabular model cannot produce, and this report strengthens that case along the two axes that matter for a real triage tool. Finding 5 shows the mechanism-aware graph model is *predictive*: trained only on pre-2005 structure, it ranks post-2005 indications at 0.930 AUROC and beats the structure-blind control, so the signal is not merely retrospective bookkeeping. Finding 6 shows the mechanism reasoning is *faithful*: deleting the curated edge, and only that edge, collapses the prediction, so the explanation reflects the biology the model actually used.

Limitations. The blinded recovery and faithfulness tests are recovery of known mechanism, not de novo discovery; some samples are modest; the time axis is a literature proxy; and the orthogonal trial check was a negative. None of the predictions are medical advice.

6 Reproducibility

Open tools (PyTorch Geometric, scikit-learn, XGBoost) and public data (PrimeKG, Europe PMC, DrugMechDB, ClinicalTrials.gov). Every reported number has a script and a JSON record in `results/`: `oncorepurpose.json` (Findings 1 + ablations), `feature_ablation.json`, `mechanism_eval.json` (Finding 3), `hard_negatives_eval.json`, `verify_llm_eval.json`, `mechanism_recovery_eval.json` (Finding 4), `temporal_split_eval.json` (Finding 5), `edge_faithfulness_eval.json` (Finding 6), and `clinicaltrials_validation.json` (negative). A six-part Colab notebook track reproduces the pipeline end to end, with Part 4 fully self-contained. All predictions are hypothesis-generating research, not medical advice.

References

- [1] Huang K, Chandak P, et al. *A foundation model for clinician-centered drug repurposing (TxGNN)*. Nature Medicine, 2024.
- [2] Chandak P, Huang K, Zitnik M. *Building a knowledge graph to enable precision medicine (PrimeKG)*. Scientific Data, 2023.
- [3] *KGML-xDTD: a knowledge graph-based framework for drug treatment prediction and mechanism description*. 2023.
- [4] Zitnik M, Agrawal M, Leskovec J. *Modeling polypharmacy side effects with graph convolutional networks (Decagon)*. Bioinformatics, 2018.
- [5] Mayers M, et al. *DrugMechDB: a curated database of drug mechanism paths*. 2022.
- [6] Hamilton W, Ying R, Leskovec J. *Inductive representation learning on large graphs (GraphSAGE)*. NeurIPS, 2017.