


PIZZA HUT SALES ANALYSIS USING SQL



**ORDER
NOW**

ABHISHEK YADAV

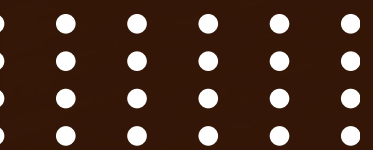

INTRODUCTION



This project analyzes Pizza Hut sales data using SQL to generate meaningful business insights related to revenue, customer ordering behavior, and pizza performance. Various SQL concepts such as JOINS, aggregate functions, subqueries, and window functions were used to analyze sales trends, top-selling pizzas, and category-wise revenue contribution.



IDENTIFY THE HIGHEST-PRICED PIZZA.

```
SELECT
    a.name, p.price
FROM
    pizza_types a
    JOIN
    pizzas p ON p.pizza_type_id = a.pizza_type_id
ORDER BY p.price DESC
LIMIT 1;
```



name	price	
The Greek Pizza	35.95	

Identify the most common pizza size ordered.

```
SELECT
    a.size, SUM(b.quantity) AS Total_Quantity
FROM
    pizzas a
    JOIN
    order_details b ON b.pizza_id = a.pizza_id
GROUP BY a.size
ORDER BY Total_Quantity desc;
```



size	Total_Quantity	
L	18956	
M	15635	
S	14403	
XL	552	
XXL	28	

LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.



```
SELECT
    a.name, SUM(c.quantity) AS Quantity
FROM
    pizza_types a
    JOIN
    pizzas b ON b.pizza_type_id = a.pizza_type_id
    JOIN
    order_details c ON c.pizza_id = b.pizza_id
GROUP BY a.name
ORDER BY quantity DESC
LIMIT 5;
```



name	Quantity
The Barbecue Chicken Pizza	2432
The Classic Deluxe Pizza	2453
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```
SELECT
    a.category, SUM(c.quantity) AS Qunatity
FROM
    pizza_types a
    JOIN
    pizzas b ON b.pizza_type_id = a.pizza_type_id
    JOIN
    order_details c ON c.pizza_id = b.pizza_id
GROUP BY a.category
ORDER BY Qunatity DESC;
```



category	Qunatity	
Classic	14888	
Supreme	11987	
Veggie	11649	
Chicken	11050	

DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.



```
SELECT
    HOUR(order_time) AS Hours, COUNT(order_id) AS Total_order
FROM
    orders
GROUP BY hours
```

Hours	Total_order
23	28
22	663
21	1198
20	1642
19	2009
18	2399
17	2336
16	1920
15	1468
14	1472
13	2455
12	2520
11	1231
10	8
9	1



Join relevant tables to find the category-wise distribution of pizzas.



```
SELECT
    a.category, COUNT(b.pizza_id) AS Total_pizza
FROM
    pizza_types a
    JOIN
    pizzas b ON b.pizza_type_id = a.pizza_type_id
GROUP BY a.category;
```



	category	Total_pizza	
	Chicken	18	
	Classic	26	
	Supreme	25	
	Veggie	27	



GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.



```
SELECT
    ROUND(AVG(Quantity), 2) AS Avg_per_day
FROM
    (SELECT
        a.order_date, SUM(b.quantity) AS Quantity
    FROM
        orders a
    JOIN order_details b ON b.order_id = a.order_id
    GROUP BY a.order_date) AS Order_quantity;
```



Avg_per_day
138.47

Determine the top 3 most ordered pizza types based on revenue.



```
SELECT
    a.name, SUM(b.price * c.quantity) AS Revenue
FROM
    pizza_types a
    JOIN
    pizzas b ON b.pizza_type_id = a.pizza_type_id
    JOIN
    order_details c ON c.pizza_id = b.pizza_id
GROUP BY a.name
ORDER BY revenue DESC
LIMIT 3
```



name	Revenue	
The Thai Chicken Pizza	43434.25	
The Barbecue Chicken Pizza	42768	
The California Chicken Pizza	41409.5	

Calculate the percentage contribution of each pizza type to total revenue.



```
SELECT
  a.category,
  round((SUM(b.price * c.quantity)*100) / (SELECT
    SUM(b1.price * c1.quantity) AS revenue
  FROM
    pizzas b1
    JOIN
    order_details c1 ON c1.pizza_id = b1.pizza_id)) AS total_part
FROM
  pizza_types a
  JOIN
  pizzas b ON b.pizza_type_id = a.pizza_type_id
  JOIN
  order_details c ON c.pizza_id = b.pizza_id
GROUP BY a.category;
```



	category	total_part
	Classic	27
	Veggie	24
	Supreme	25
	Chicken	24

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.



```
select order_date,
round(sum(Revenue) over (order by order_date),2) as cumulative_sum
from
⊖ (select a.order_date,sum(b.price*c.quantity) as Revenue
from
orders a join order_details c on c.order_id=a.order_id
join pizzas b on b.pizza_id = c.pizza_id group by a.order_date) as sales
```

	order_date	cumulative_sum	
	2015-01-01	2713.85	
	2015-01-02	5445.75	
	2015-01-03	8108.15	
	2015-01-04	9863.6	
	2015-01-05	11929.55	
	2015-01-06	14358.5	
	2015-01-07	16560.7	
	2015-01-08	19399.05	
	2015-01-09	21526.4	
	2015-01-10	23990.35	
	2015-01-11	25862.65	
	2015-01-12	27781.7	
	2015-01-13	29831.3	
	2015-01-14	32358.7	
	2015-01-15	34343.5	
	2015-01-16	36937.65	
	2015-01-17	39001.75	



Determine the top 3 most ordered pizza types based on revenue for each pizza category.



```
select category, name, revenue,rank_no from
(select category, name, revenue, rank() over (partition by category order by revenue desc) as rank_no from
(SELECT
    a.category,
    a.name,
    ROUND(SUM(b.price * c.quantity), 2) AS Revenue
FROM
    pizza_types a
    JOIN
    pizzas b ON b.pizza_type_id = a.pizza_type_id
    JOIN
    order_details c ON c.pizza_id = b.pizza_id
GROUP BY a.category , a.name)as a) as b
where rank_no<=3;
```



category	name	revenue	rank_no
Chicken	The Thai Chicken Pizza	43434.25	1
Chicken	The Barbecue Chicken Pizza	42768	2
Chicken	The California Chicken Pizza	41409.5	3
Classic	The Classic Deluxe Pizza	38180.5	1
Classic	The Hawaiian Pizza	32273.25	2
Classic	The Pepperoni Pizza	30161.75	3
Supreme	The Spicy Italian Pizza	34831.25	1
Supreme	The Italian Supreme Pizza	33476.75	2
Supreme	The Sicilian Pizza	30940.5	3
Veggie	The Four Cheese Pizza	32265.7	1
Veggie	The Mexicana Pizza	26780.75	2
Veggie	The Five Cheese Pizza	26066.5	3