

Exercise Credentials can be obtained from URL: <https://ibm.biz/zCEEWorkshop>

This document can be downloaded from URL <https://ibm.biz/BdMBLk>

- This image is intended to provide the opportunity to have hands-on experience with IBM z/OS Connect. The instructions for these exercises on this image can be found in the **Exercises** folder on the desktop or downloaded from the sites shown below to your local workstation. Note that these sites will not be accessible from the zVA image itself, they must be accessed from your local workstation.

Areas covered by the exercises on this include:

- Developing and deploying z/OS Connect artifacts for accessing z/OS resources. These exercises are available at Github URL <https://ibm.biz/BdMBLy>. Exercises for consuming OpenAPI 3 specification documents are available at Github URL <https://ibm.biz/BdMBLG>. *All the z/OS Connect Designer instances are configured with the exact same support for CICS, Db2 or IMS. If you want to repeat a specific OpenAPI3 exercise, just use another Designer instance. Note that this will require the use of different ports and context roots when testing the APIs. See the information on page 7 for more details.*
- Developing z/OS applications that can access remote APIs running on other platforms using z/OS Connect API Requester applications. These exercises are available at Github URL <https://ibm.biz/BdMBLq>.
- Performing some basic system and security administrator security. The exercises related to the administration and security of z/OS Connect servers are available at Github URL <https://ibm.biz/BdMBLe>.

The copy/paste files referenced in these exercises can be found in the **CopyPaste Files** directory on the desktop or downloaded from the same Github sites. Note that when using copy/paste, avoid using the **Ctrl-C** and **Ctrl-V** key sequences. Use the toolbar copy/paste options or the right-mouse button click options.

Note that the exercises for the non-administration/security exercises can be performed in any sequence. For the administration/security exercises you have a choice to make. You can either start with exercises *zCEE Customization Basic Configuration(1of2)* and *zCEE Customization Basic Security(2of2)* (performed in this order) *or* start with exercise *zOSSEC1 Quick Start*. At the completion of either of these sets of exercises, a basic z/OS Connect server with SAF security enabled. This is required to complete the remaining exercises.

- Credential passwords. At various times you will be required to enter a password. The passwords for the identities are:
 - **USER1** is the password for identity **USER1** (USER1 is a RACF identity)
 - **fredpwd** is the password for **Fred** (Fred is not a RACF identity and case matters) in the developing API exercises. For the security exercises, the password for **Fred** is **Fred**.
 - Below is section entitled **Personal Communication Tips**. Review this section before performing any steps involving 3270 access to TSO or CICS. This document includes important information such as key mappings for the 3270 **Enter** and **Clear** keys.

Please do not shut Windows down, just close the session or disconnect from the remote desktop.

Personal Communications Tips


Note: The 3270-terminal sessions for TSO and OMVS screen shots in these exercises are shown in reverse video simply for printing purposes.

There are 3270-emulator keyboard mapping issues encountered when the Windows desktop is accessed using a browser. So, some of the keyboard mappings described in this document may not work as intended.


Below is a guide to help you resolve issues if you have inconsistent or non-working 3270 keys.

Any references to the *Enter* key in non-3270 windows, OMVS terminal session, etc. refers to the key labeled *Enter* on the keyboard.

- The 3270-emulator used for this workshop (IBM Personal Communication) maps the 3270 *enter* key to the right **Ctrl** key (see below). If the right **Ctrl** key does not work, try using the key labeled **Enter** or **Return** on your keyboard.
- The 3270 *newline* key has been mapped to the **Shift-Enter** key sequence.
- The 3270 *clear* key has been mapped to the **Cntl-Enter** key sequence.
- If all else fails, select *Actions* on the 3270-emulator tool bar and then select the *Display Popup Keypad* option. This displays the popup below where you select various keys.

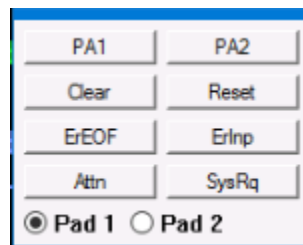


- z/OS Updates Different 3270-terminal emulators will display an icon like the *Personal Communications'* icon below at the bottom of the screen when the keyboard is locked. If this occurs use the left **Ctrl** key to reset or free the keyboard.

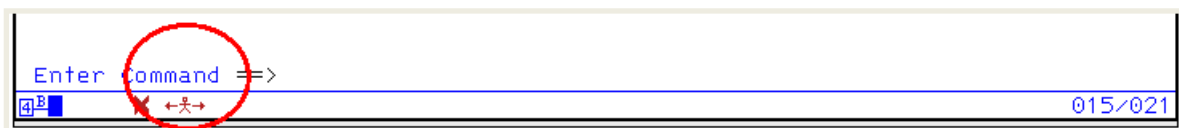


Configuring the Keyboard with Mac keyboards

- To reconfigure the IBM Personal Communications keyboard when using a Mac keyboard, click on *View* on the tool bar and select the **Tool Bar** option. Next click on the *Remap Keyboard functions* icon (see below)

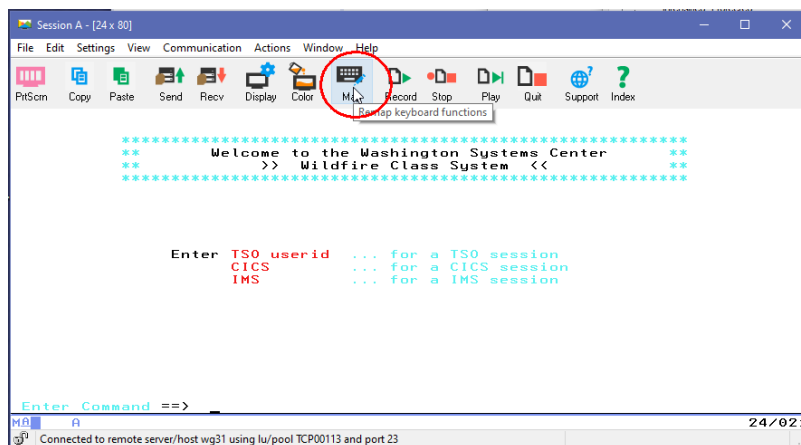

- To set the **Return** key to perform the *enter* function, click on the **Return** (1) key, use the pull down arrow to select *Enter* from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Base* (3) to set the default function of pressing the **Return** key to *[enter]* (refer to the picture below).

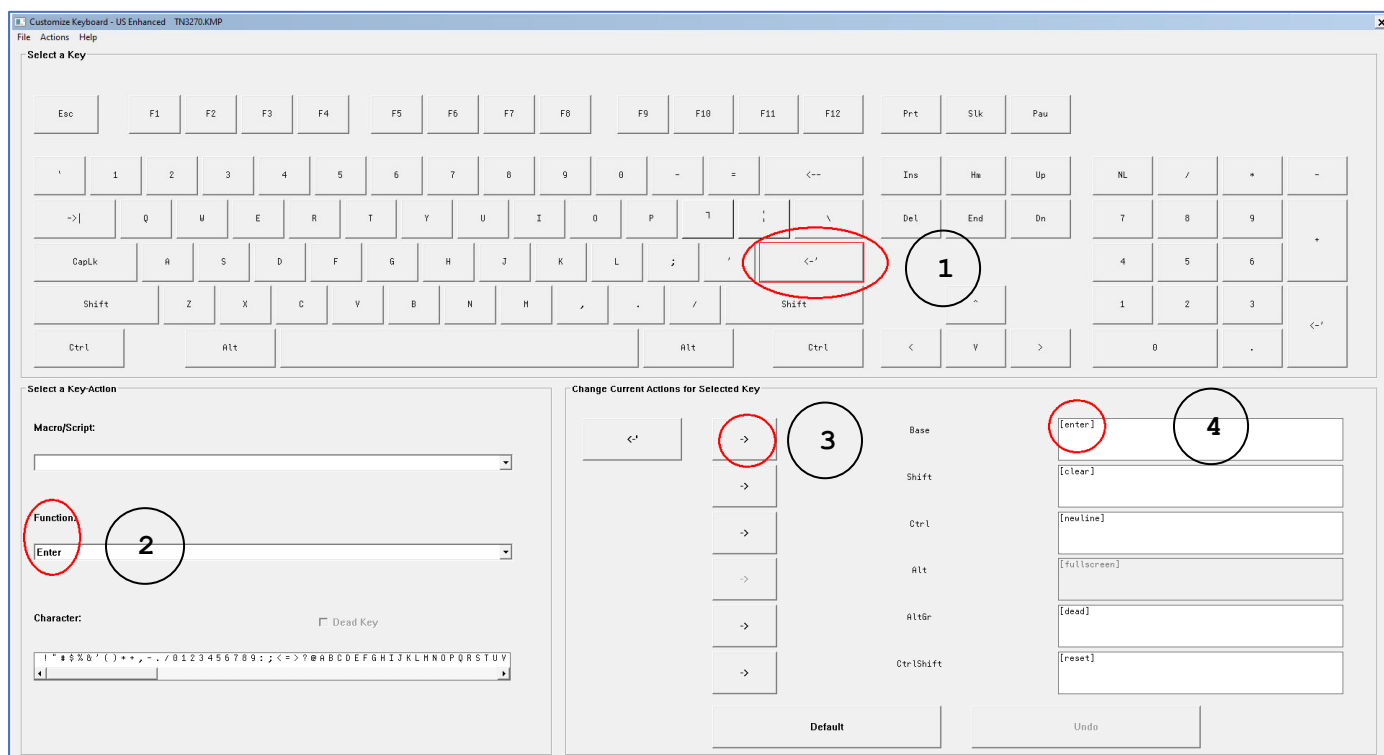


- To set the **Return** key to perform the *clear the screen* function, click on the **Return** (1) key, use the pull down arrow to select *Clear Screen* from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Shift* (3) to set the default function of pressing the **Shift-Return** key sequence *[clear]*.


- To set the **Return** key to perform the *new line* function, click on the **Return** (1) key, use the pull down arrow to select *New Line* from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Ctrl* (3) to set the default function of pressing the **Ctrl-Return** key sequence to move the cursor down a line [*newline*].
- To set the **Return** key to reset a locked keyboard, click on the **Return** (1) key, use the pull down arrow to select *Reset* from the function list menu (2), and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *CtrlShift* (3) to set the default function of pressing the **Ctrl-Shift-Return** key sequence to reset or unlock a key board [*reset*].

When finished, your keyboard actions for the **Return** key should match the picture above.

- To set the **Ctrl-C** key sequence to perform the *copy* function, click on the **C** key (1) and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of **Ctrl** (2) to set the default function of pressing the **Ctrl-C** key sequence to *[edit-copy]* (3) (refer to the picture below).

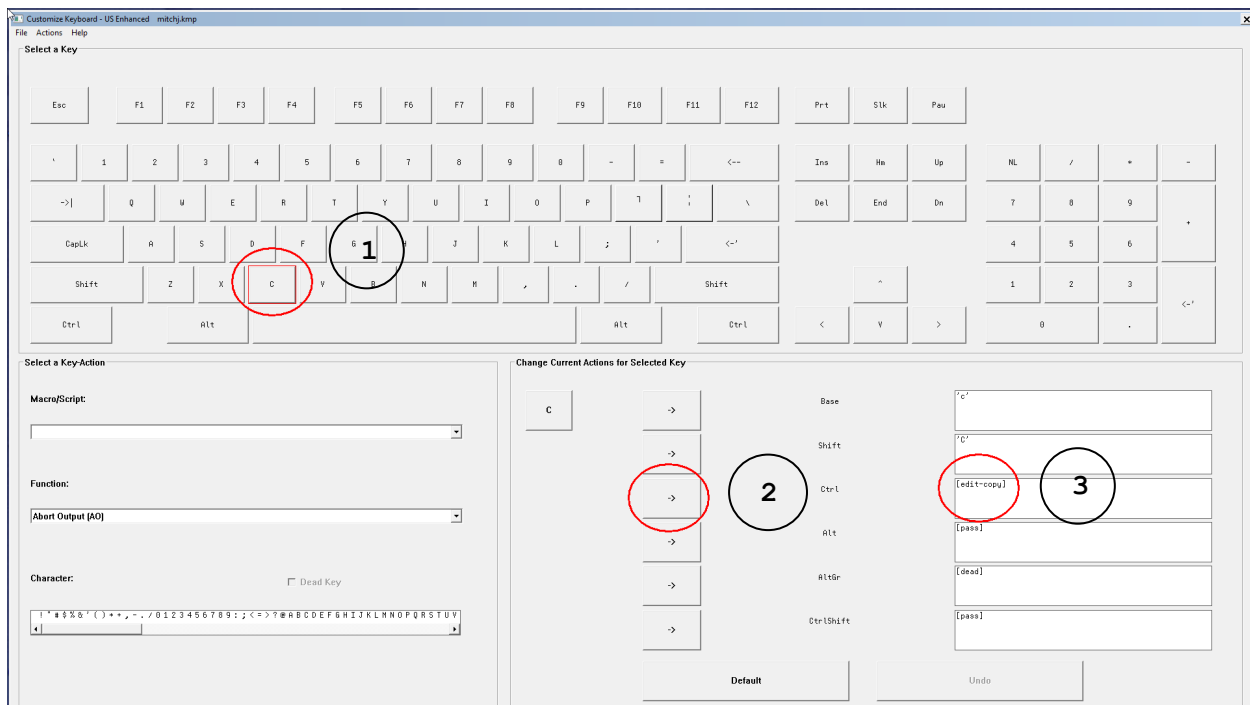

- To set the **Ctrl-V** key sequence to perform the *paste* function, click on the **V** key (1) and then in the *Change Current Actions for Selected Key* section, click on the arrow to the left of *Ctrl* (2) to set the default function of pressing the **Ctrl-V** key sequence to *[edit-paste]* (3) (refer to the picture below).

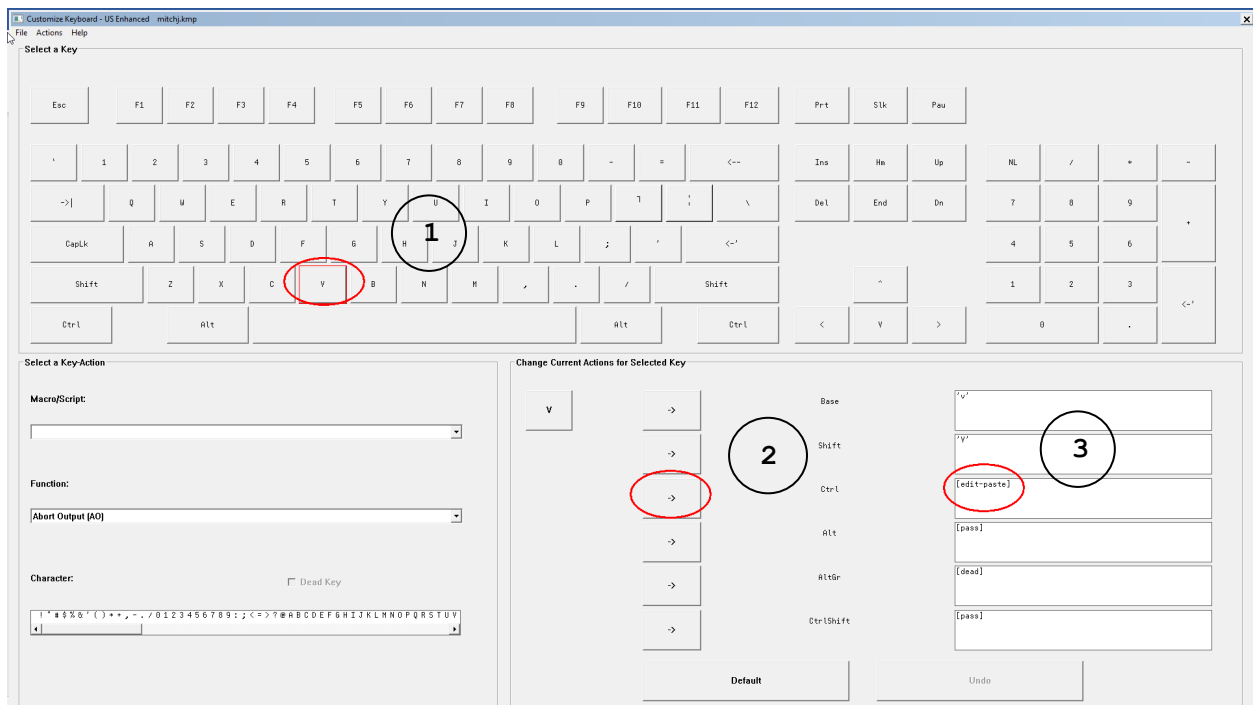

Updating the YAML files for OpenAPI3 APIs

The OpenAPI3 specification YAML files that will be imported in the *Designer* for the OpenAPI3 exercises have been configured with a URL value for the context root in the *servers* field of the specification document, see URL <https://swagger.io/specification> for more details. This was done because we recommend as a best practice. For z/OS Connect, context root values should always be provided in API's specification document. This is recommended because when multiple APIs are to be deployed into the same z/OS Connect native server, unique context roots are an absolute requirement. And from an administrative point of view, it is easier to provide a context root value before a specification document is imported into the *Designer* rather than later in the deployment process.


For these exercises, the OpenAPI3 specification YAML files have their *context root* URL values for the *Server Object* to as shown below:

Container short name	Context root	HTTP port	HTTPS port
catalog	/catalog	9082	9445
cscvinc	/cscvinc	9084	9447
employees	/roster	9086	9449
sandbox	/sandbox	9088	9451
phonebook	/phonebook	9092	9555

The containers used for the OpenAPI3 exercises have been configured with an *webApplication* configuration element that set the *contextRoot* attribute to the value of the environment variable *BASE_PATH*, see below.


```
<webApplication id="myApi" name="${BASE_PATH}" contextRoot="/${BASE_PATH}"
  location="${server.config.dir}dropins/api.war" />
```

The value for environment variable *BASE_PATH* is set in the *docker-compose.yaml* files of each server.

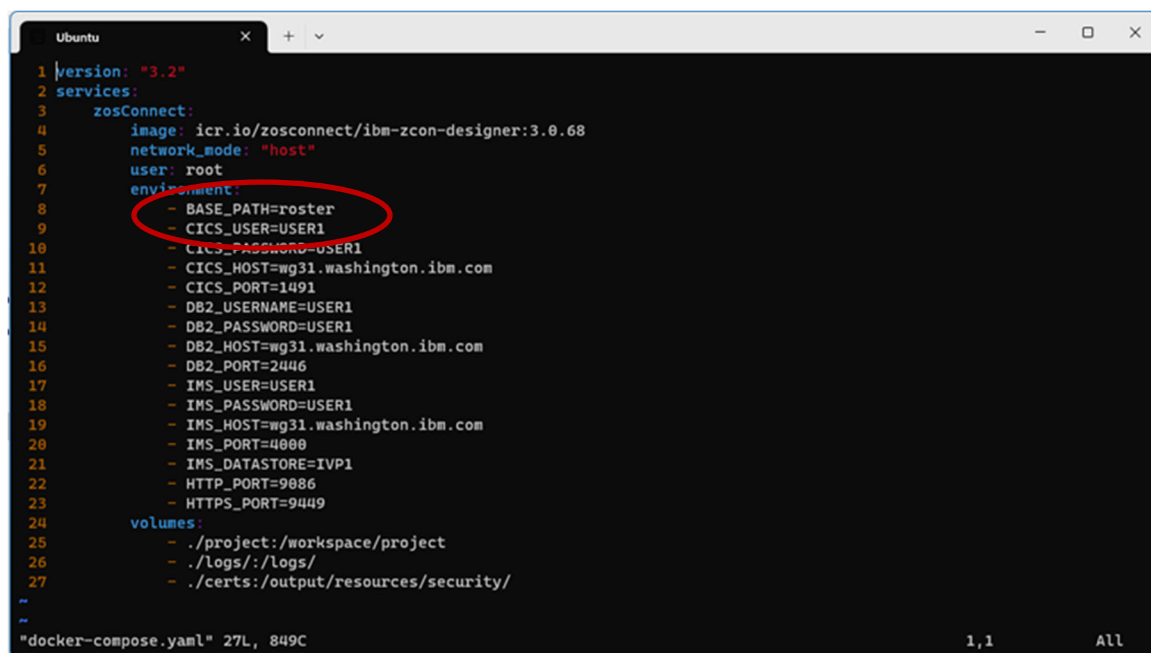

```
1 version: "3.2"
2 services:
3   zosConnect:
4     image: icr.io/zosconnect/ibm-zcon-designer:3.0.68
5     network_mode: "host"
6     user: root
7     environment:
8       - BASE_PATH=roster
9       - CICS_USER=USER1
10      - CICS_PASSWORD=USER1
11      - CICS_HOST=wg31.washington.ibm.com
12      - CICS_PORT=1491
13      - DB2_USERNAME=USER1
14      - DB2_PASSWORD=USER1
15      - DB2_HOST=wg31.washington.ibm.com
16      - DB2_PORT=2446
17      - IMS_USER=USER1
18      - IMS_PASSWORD=USER1
19      - IMS_HOST=wg31.washington.ibm.com
20      - IMS_PORT=4000
21      - IMS_DATASTORE=IVP1
22      - HTTP_PORT=9086
23      - HTTPS_PORT=9449
24   volumes:
25     - ./project:/workspace/project
26     - ./logs:/logs/
27     - ./certs:/output/resources/security/
"
```

If you want to repeat an OpenAPI3 exercise using a different container, the YAML specification file URL must be updated before it is imported in the *Designer* with the context root value that has been preconfigured for that container. Edit the OpenAPI3 YAML file and change the URL value of the *Server Object* so it matches the context root value above of the new container. For example, if I wanted to import and test the IMS Phone book YAML file in the **cscvinc** container. I would need to edit file *PhonebookAPI.yaml* in directory *C:/z/openApi3/yaml* and change the *Server Object* as shown below to **usr: /cscvinc**

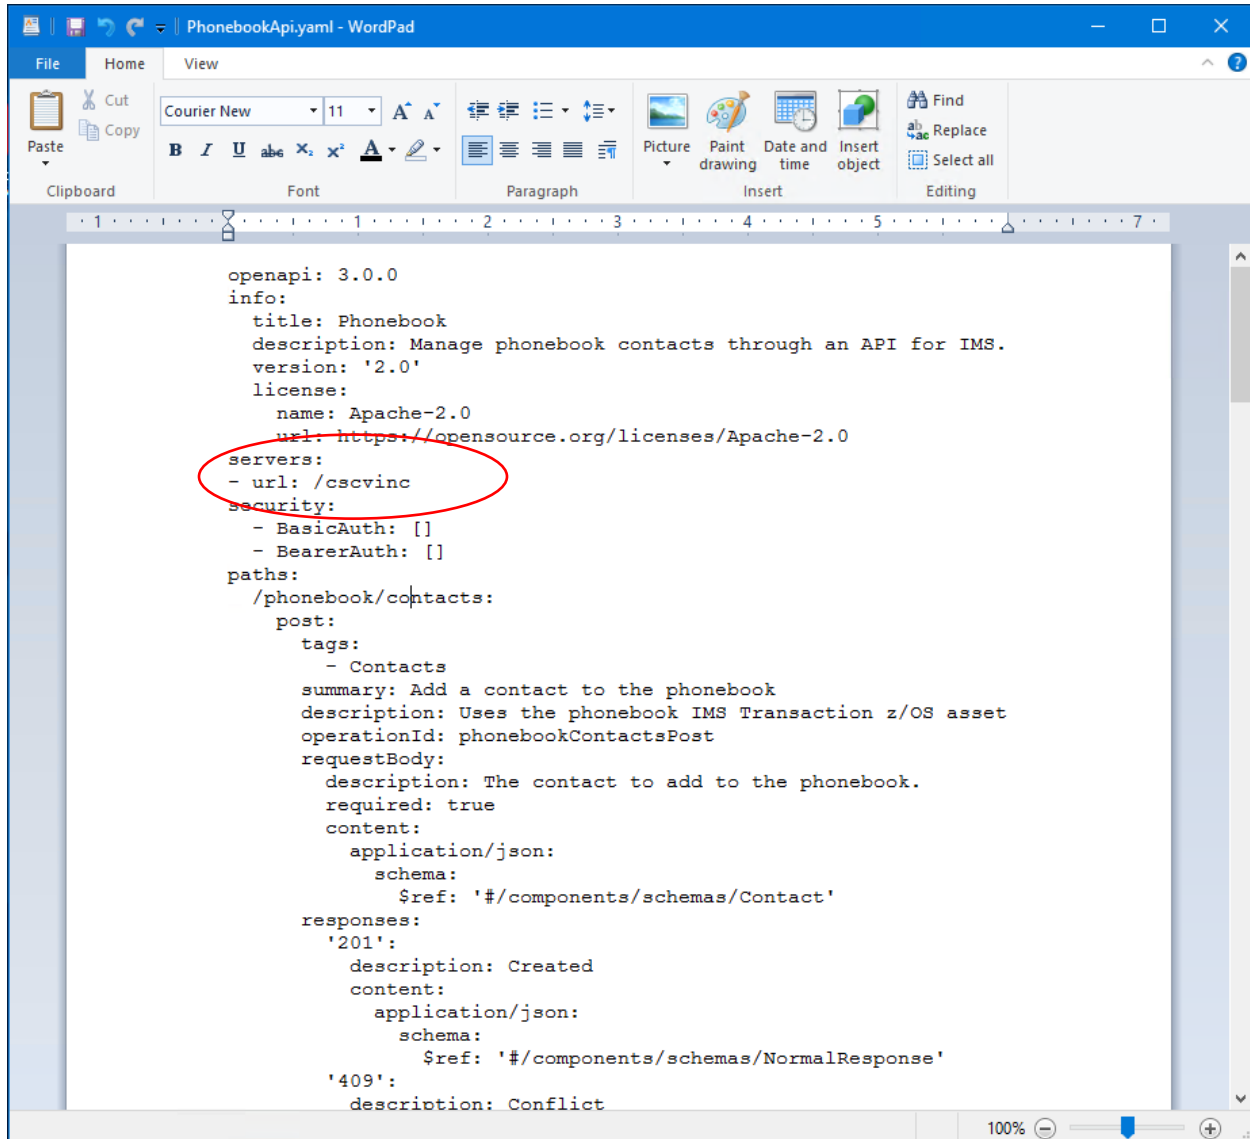

```
openapi: 3.0.0
info:
  title: Phonebook
  description: Manage phonebook contacts through an API for IMS.
  version: '2.0'
  license:
    name: Apache-2.0
    url: https://opensource.org/licenses/Apache-2.0
servers:
- url: /cscvinc
security:
- BasicAuth: []
- BearerAuth: []
paths:
  /phonebook/contacts:
    post:
      tags:
      - Contacts
      summary: Add a contact to the phonebook
      description: Uses the phonebook IMS Transaction z/OS asset
      operationId: phonebookContactsPost
      requestBody:
        description: The contact to add to the phonebook.
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Contact'
      responses:
        '201':
          description: Created
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NormalResponse'
        '409':
          description: Conflict
```