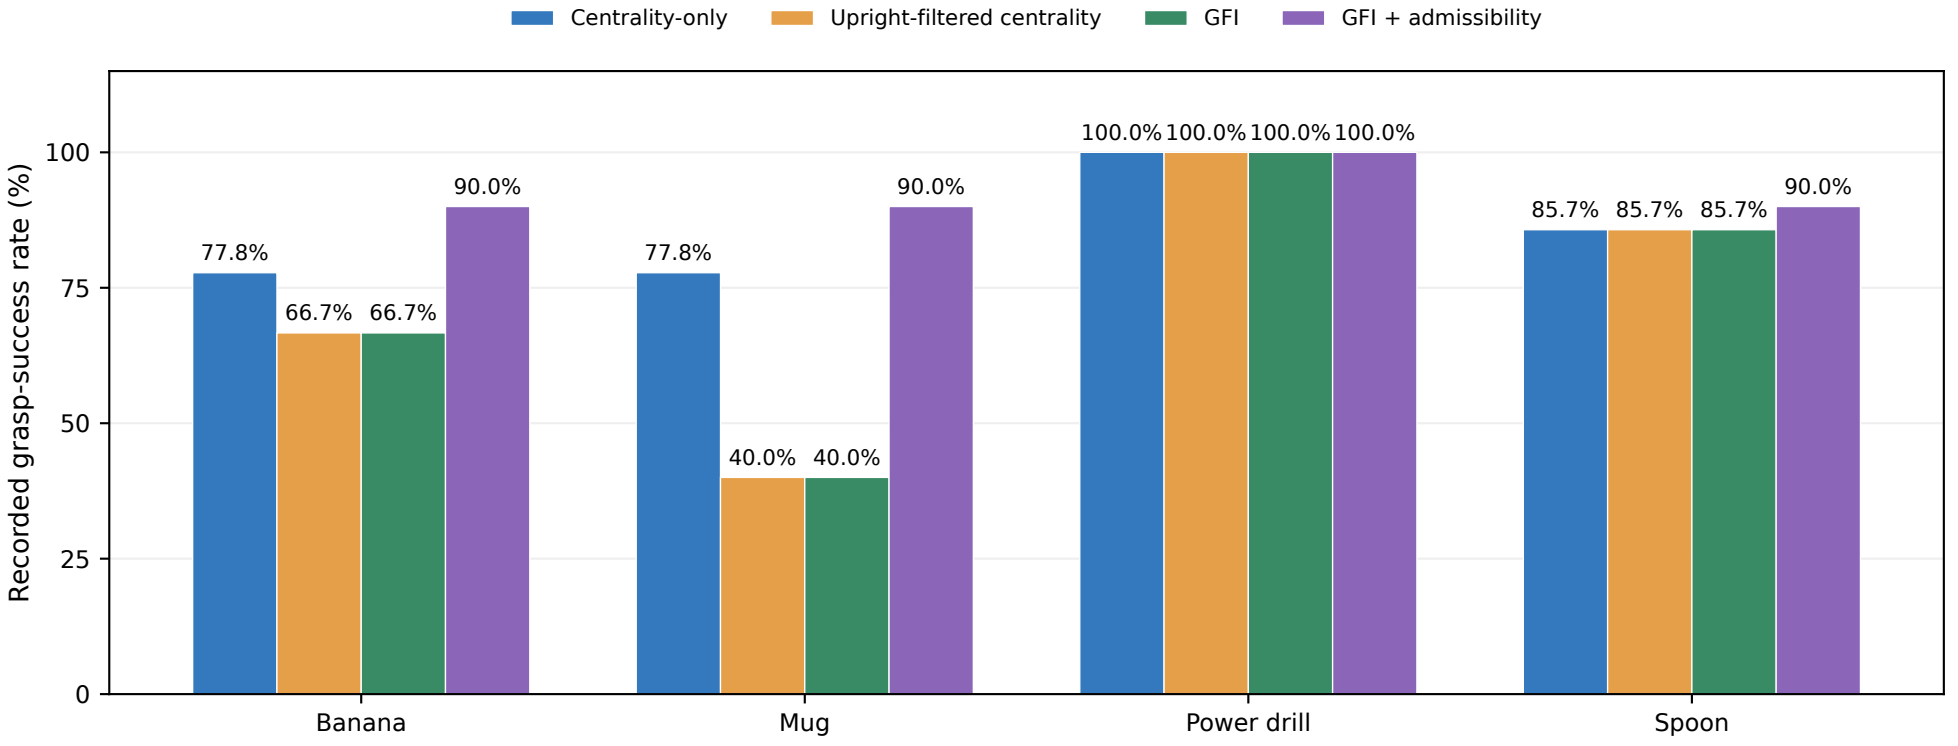

GFI + admissibility uses a separate robot-specific candidate-selection protocol.
Upright-filtered centrality reuses GFI outcomes; retrospective denominators may be below 10.