Screenshot 1 - VPC Created (enterprise-vpc)

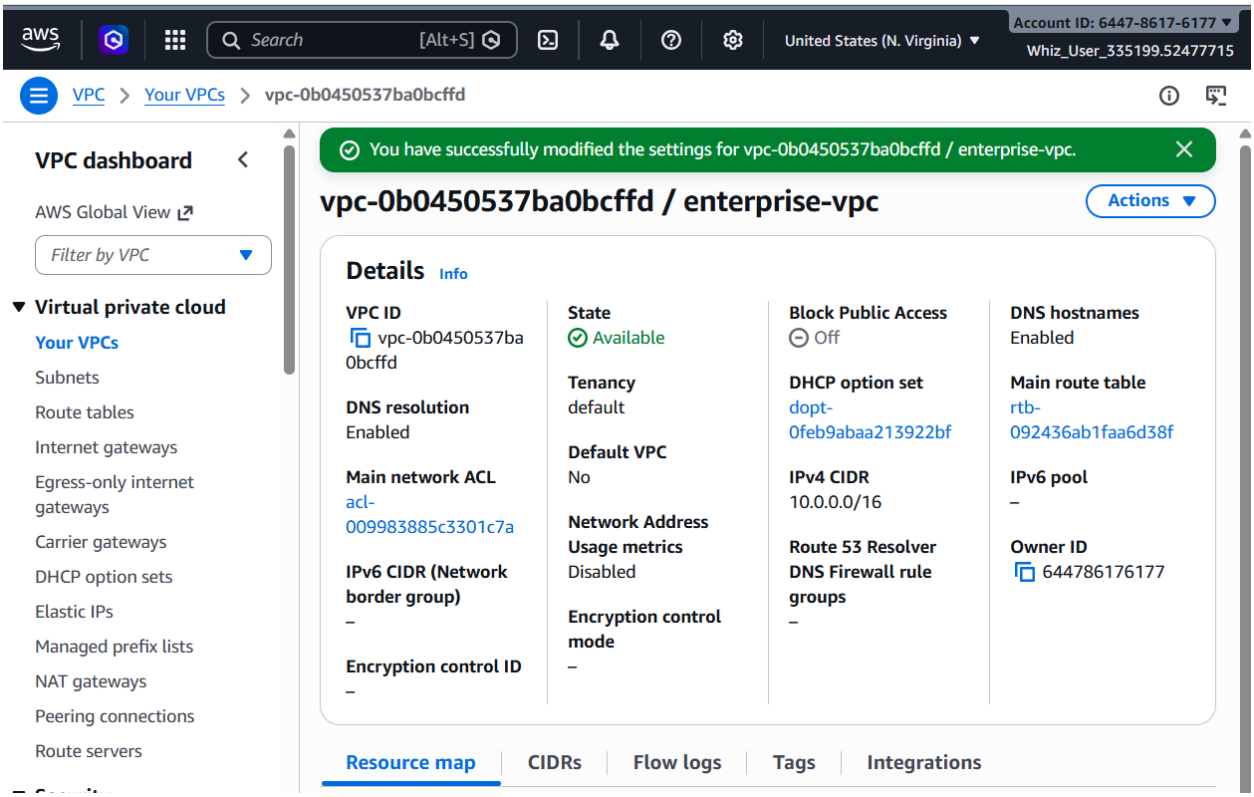

Screenshot 2 - Four Subnets Created

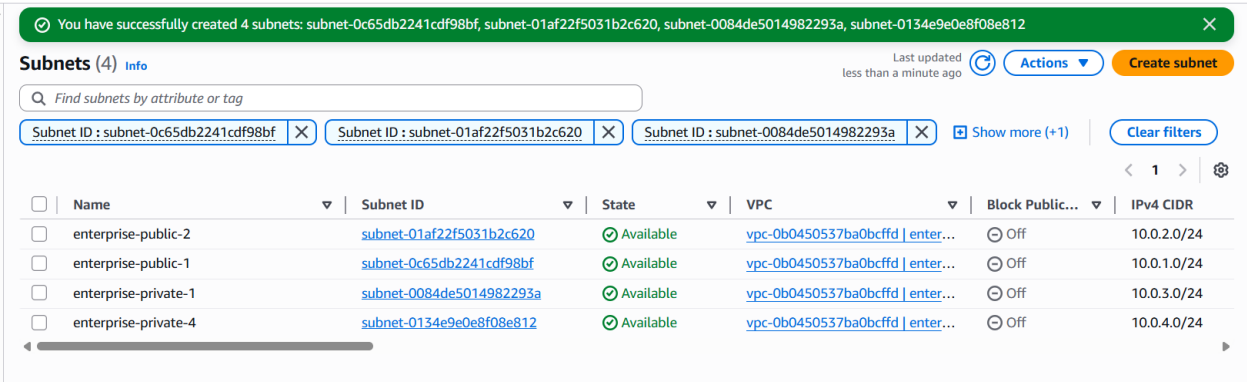

Screenshot 3 - Internet Gateway Created (enterprise-igw)

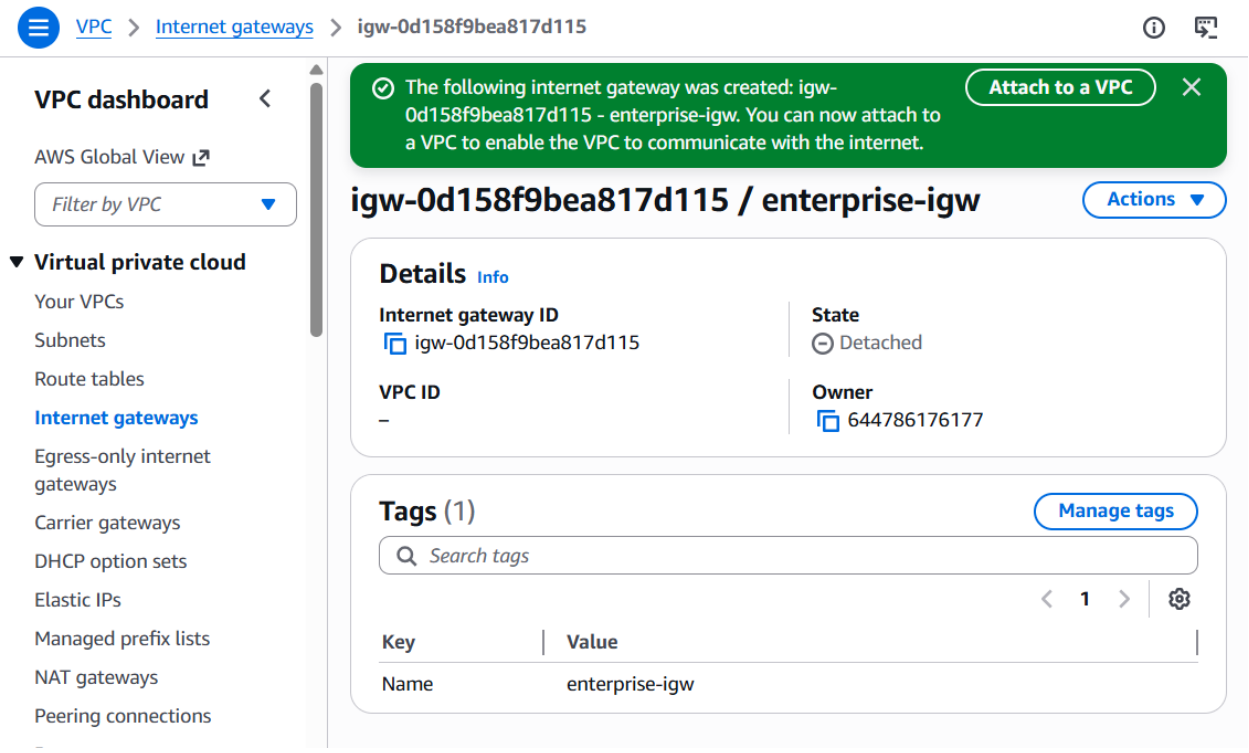

Screenshot 4 - Internet Gateway Attached to VPC

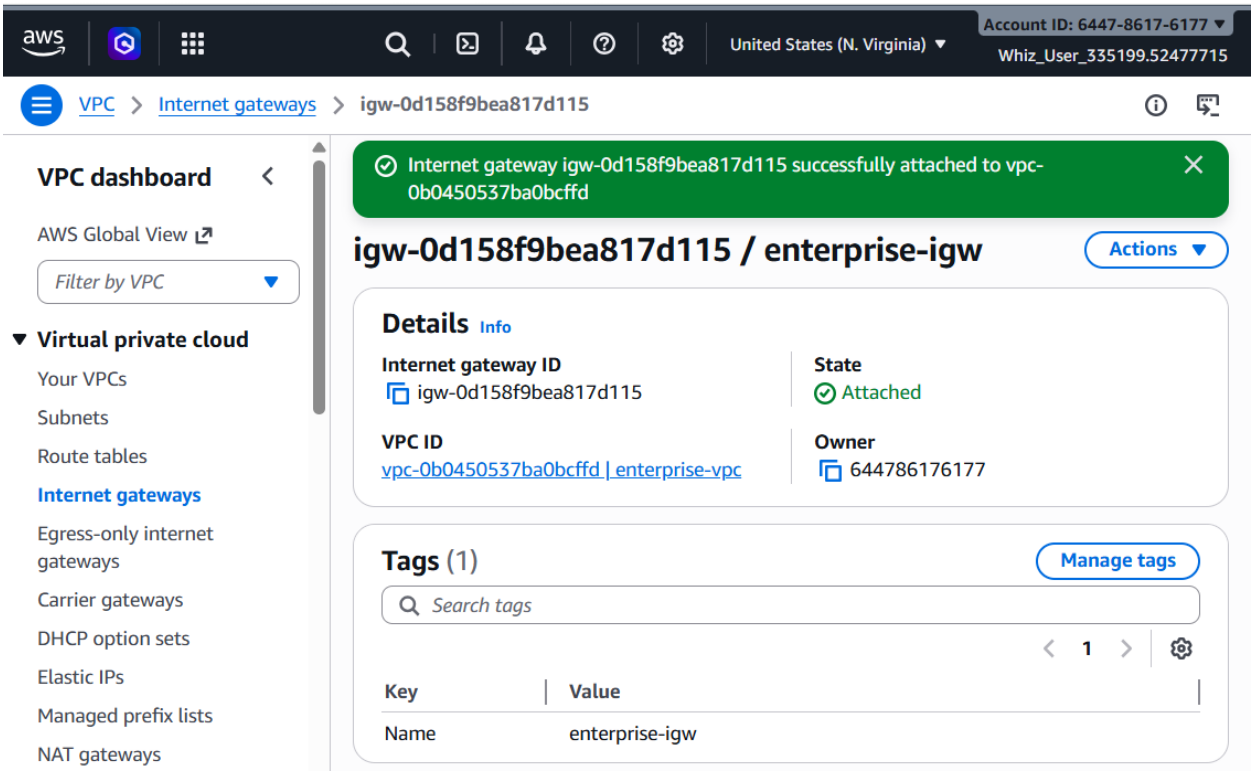

Screenshot 5 - NAT Gateway Creation

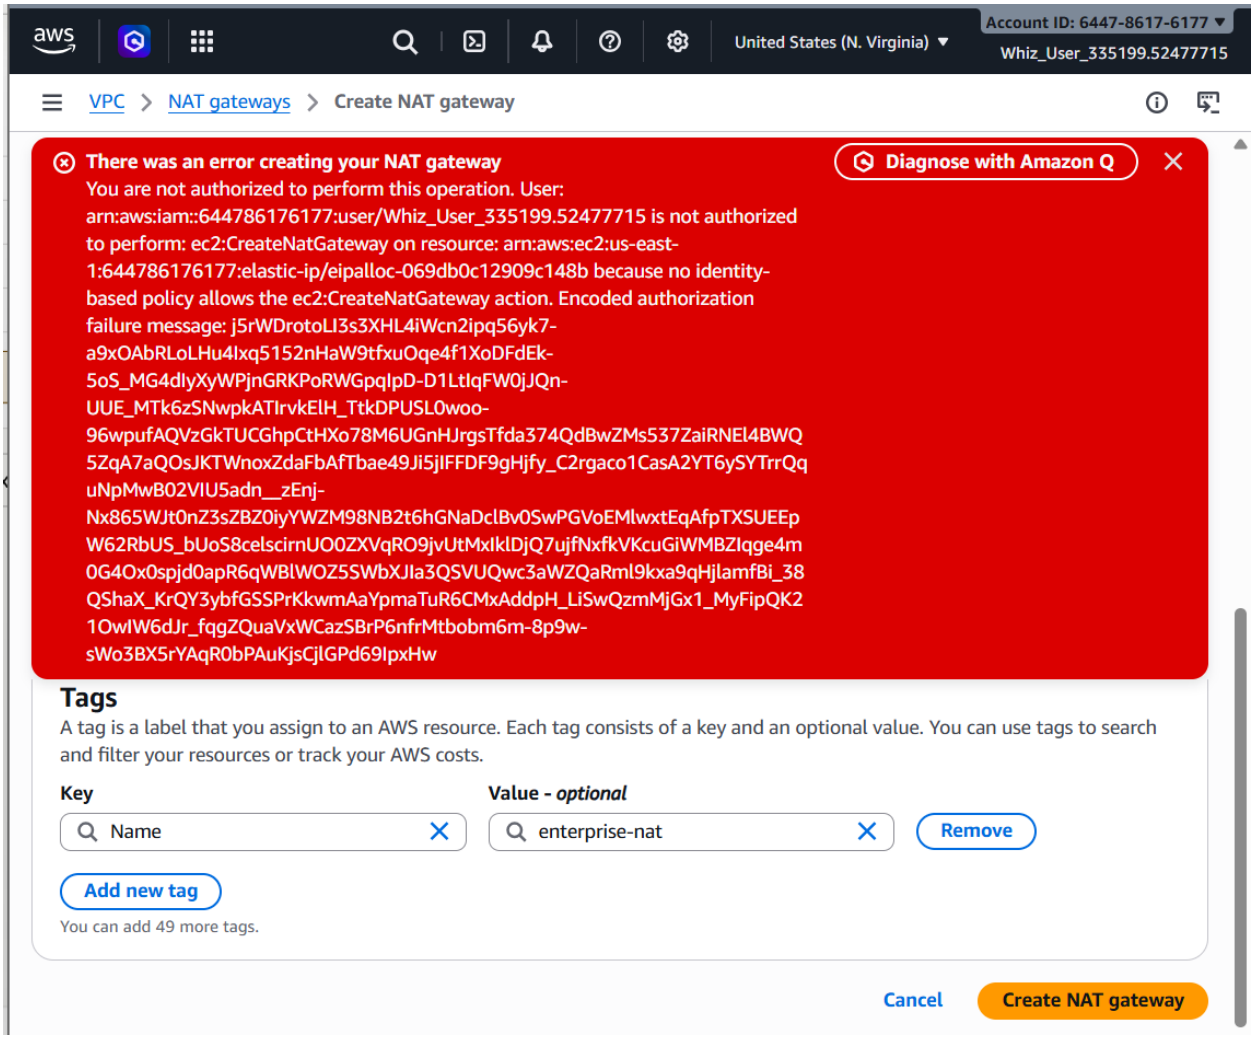

Screenshot 6 - Public Route Table Created (enterprise-public-rt)

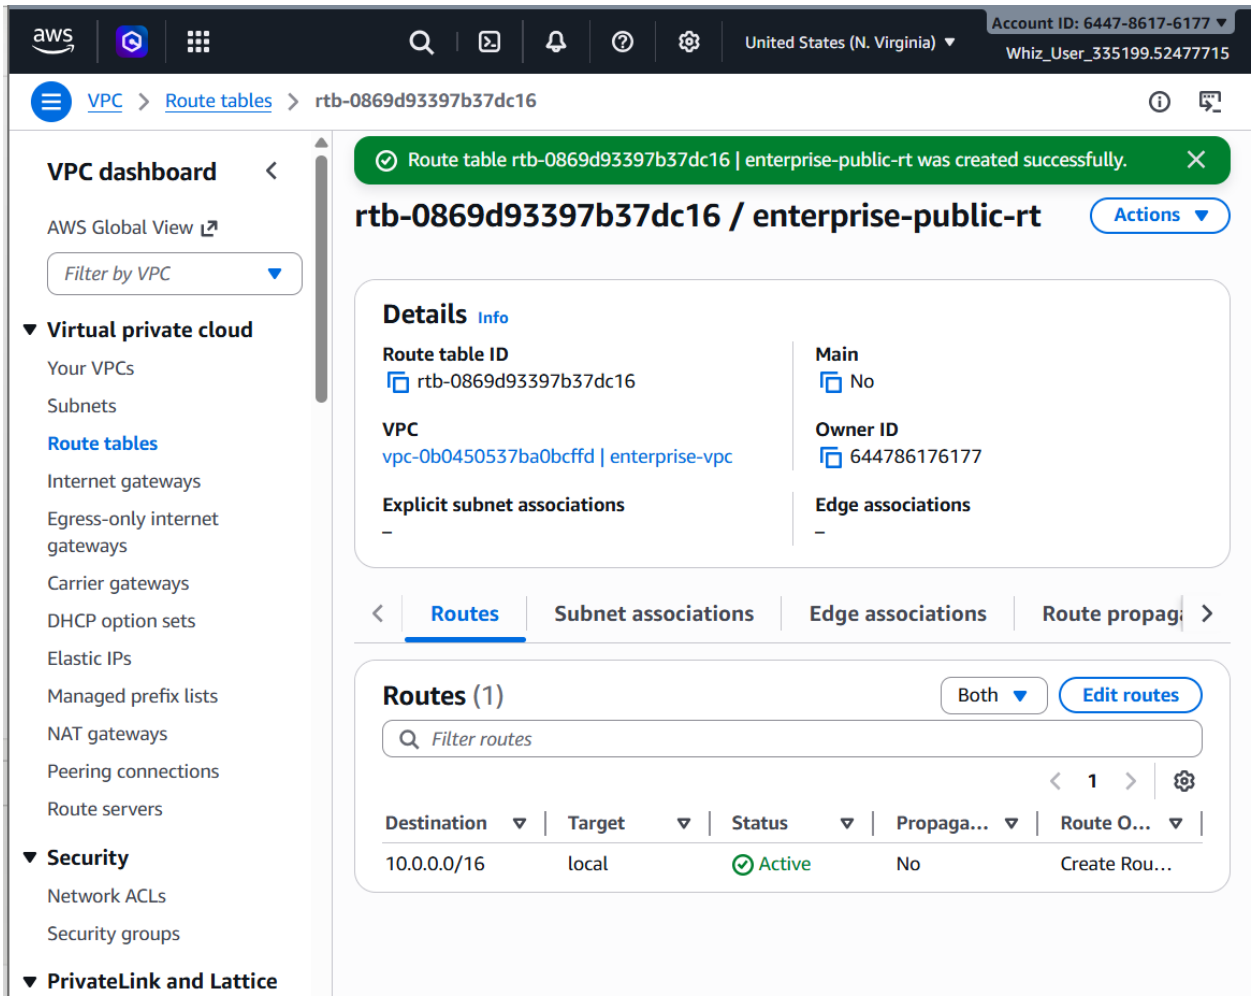

Screenshot 7 - Internet Route Added (0.0.0.0/0 to IGW)

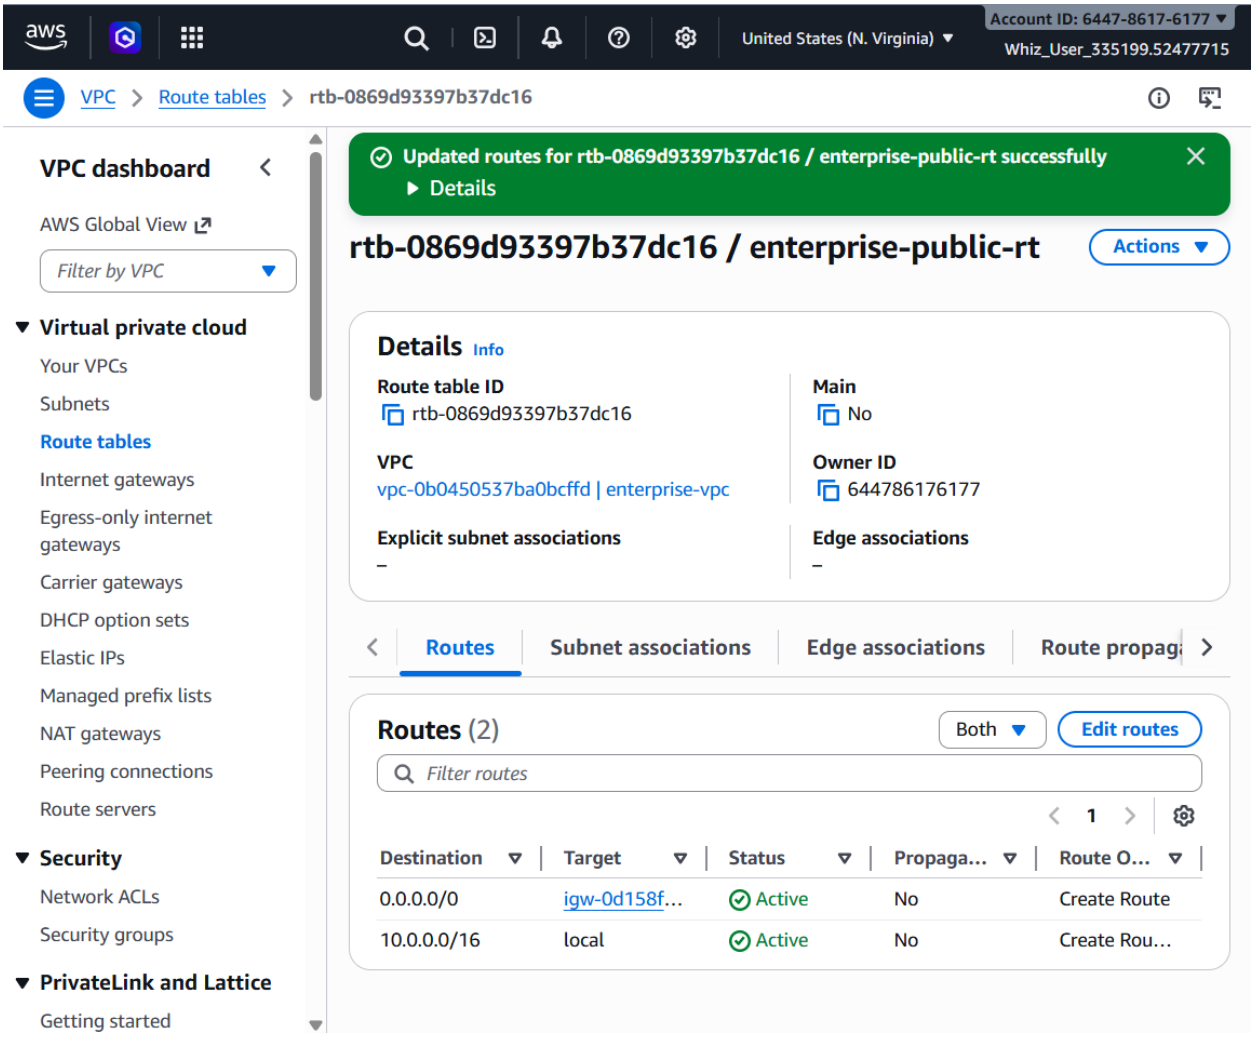

Screenshot 8 - Public Subnets Associated with Route Table

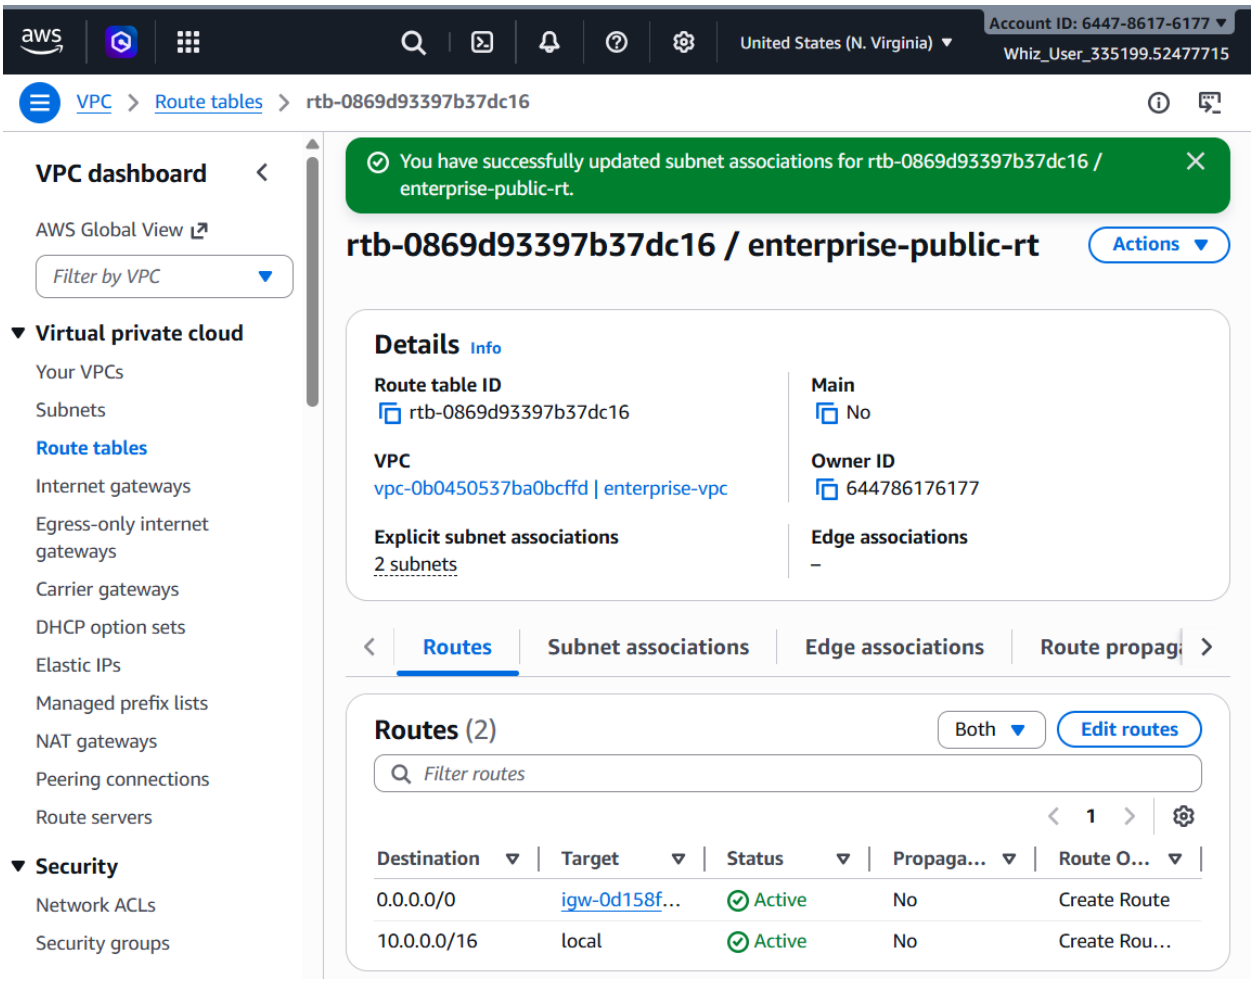

Screenshot 9 - EC2 Security Group Created (enterprise-ec2-sg)

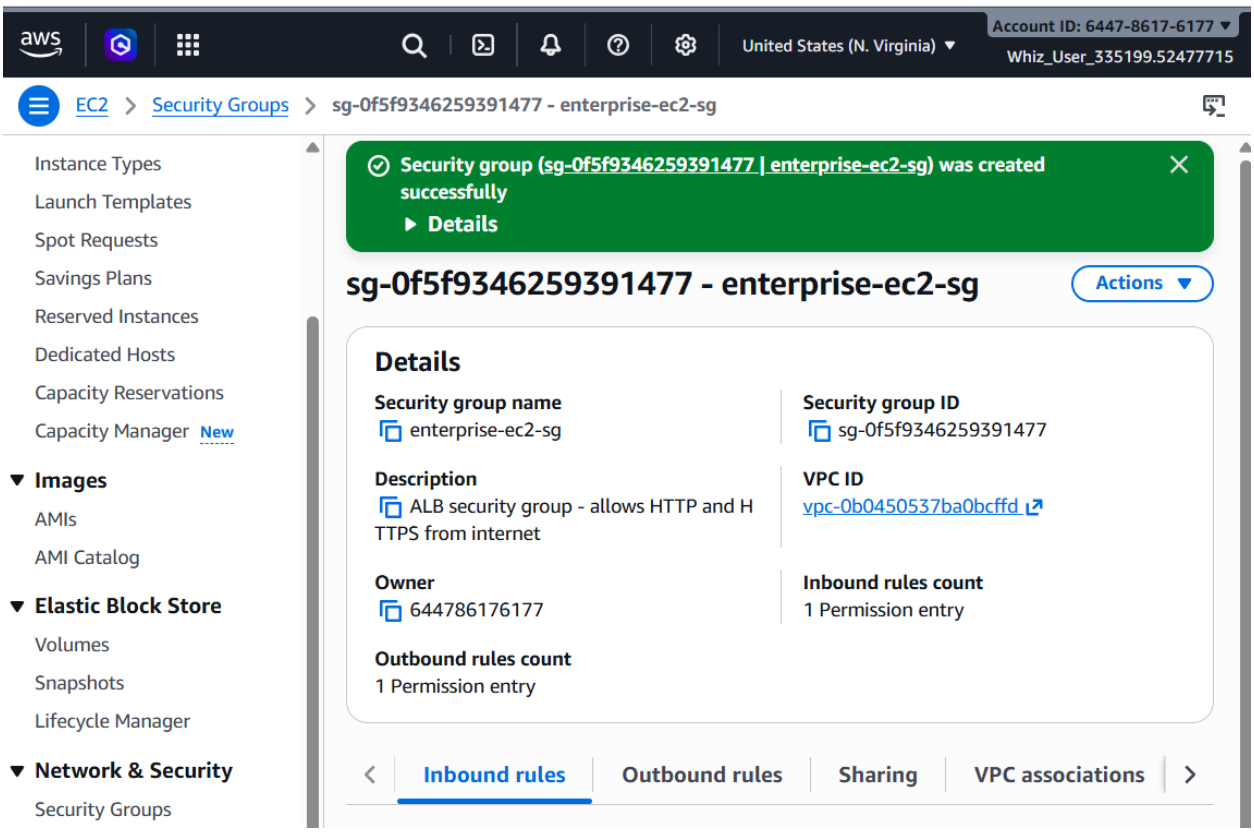

Screenshot 10 - All Security Groups Created (ALB, EC2, RDS)

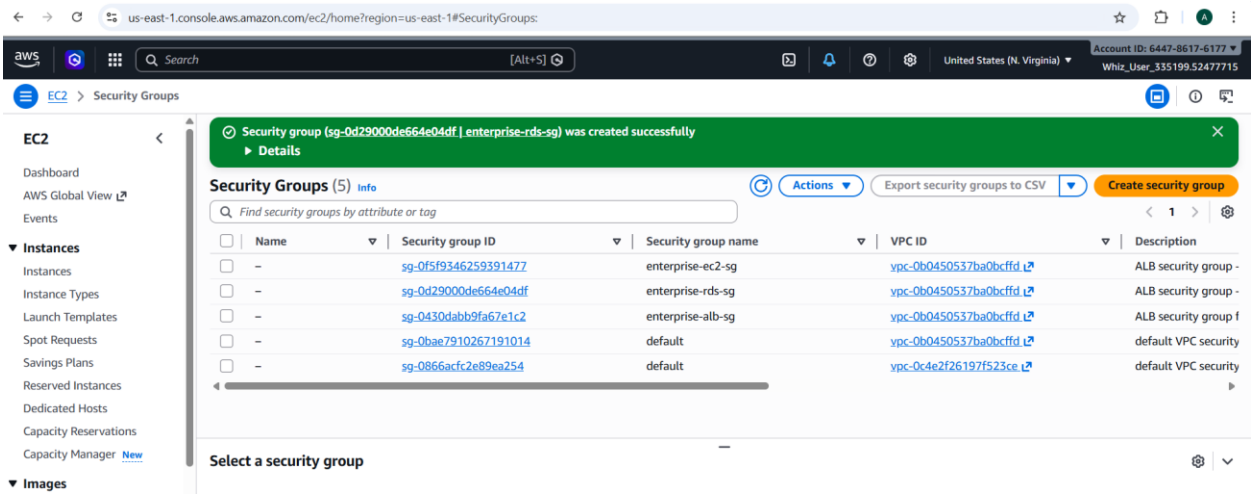

Screenshot 11 - IAM Role Created (enterprise-ec2-role)

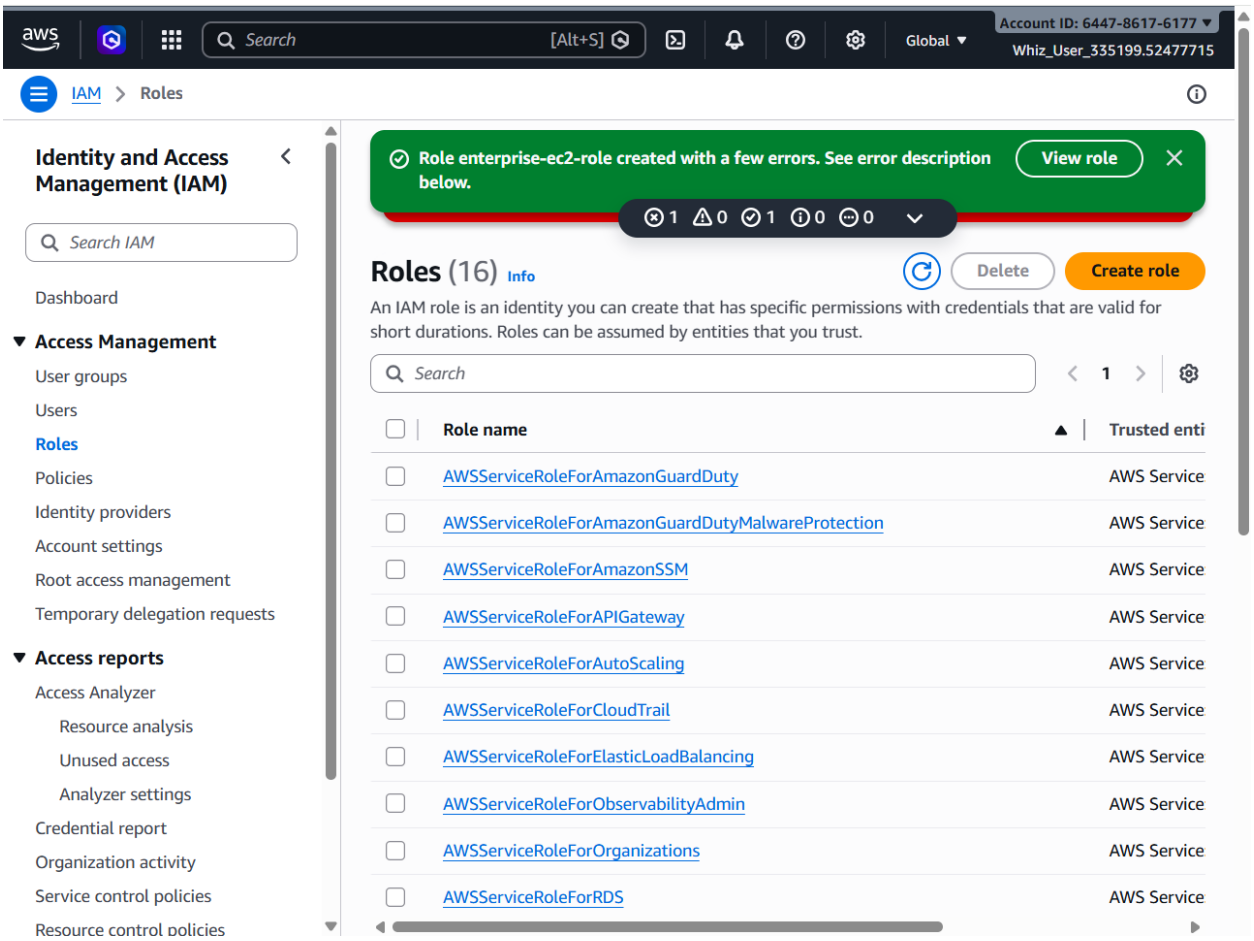

Screenshot 12 - Secrets Manager Configured

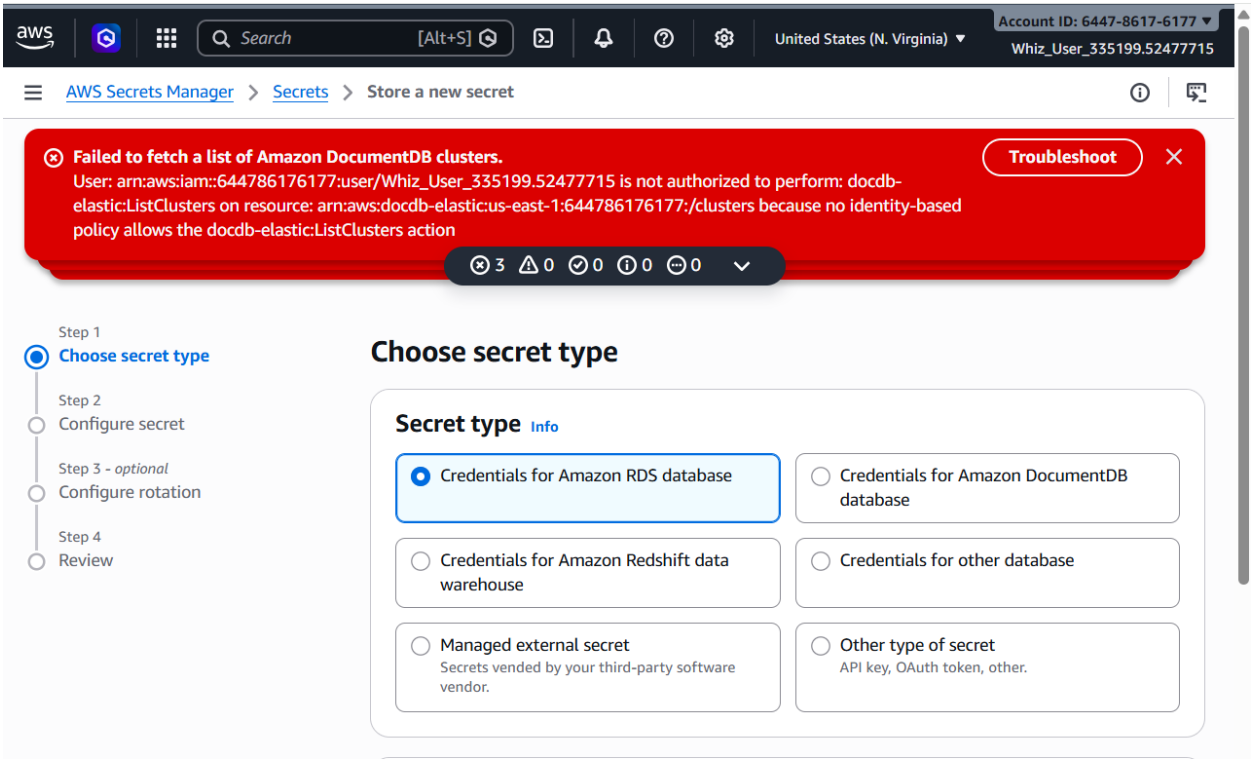

Screenshot 13 - EC2 Instance Running (enterprise-web-server-1)

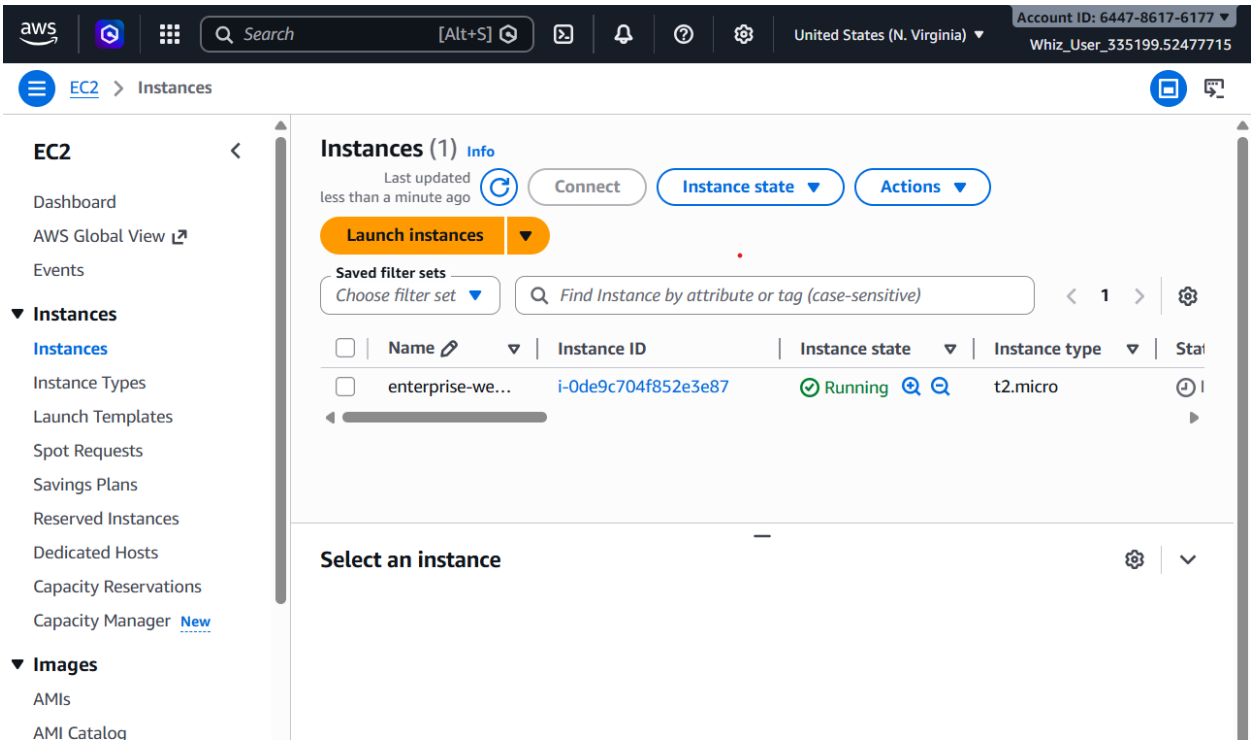

Screenshot 14 - Target Group Created (enterprise-web-tg1)

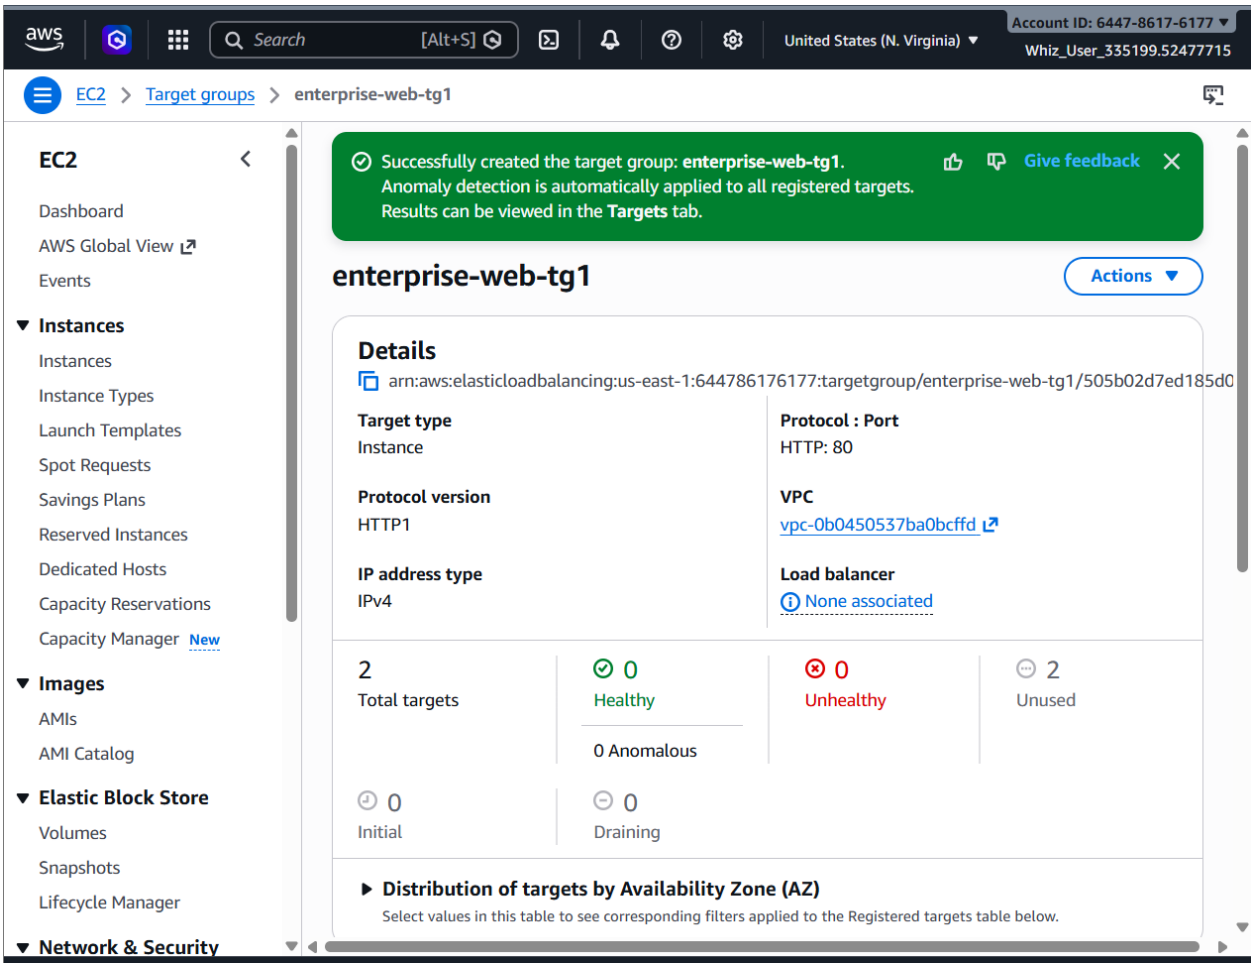

Screenshot 15 - Application Load Balancer Created (enterprise-alb)

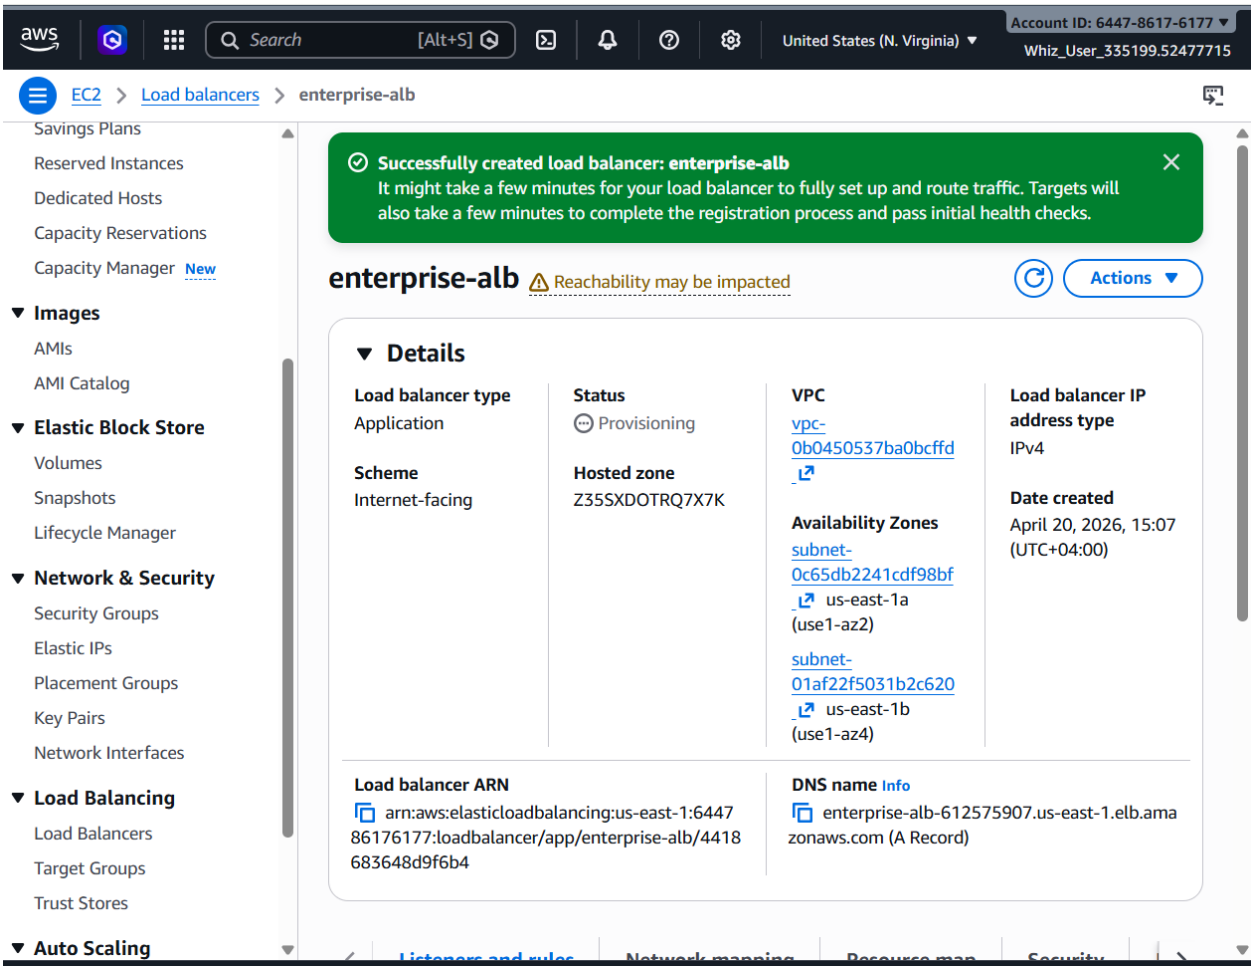

Screenshot 16 - RDS Database Creation

Create with express configuration in seconds

Create and query an Aurora PostgreSQL serverless database with pre-configured settings to get started quickly. You can modify some settings in the configuration details section now and most other settings later using the modify flow.

Database configuration

Aurora PostgreSQL with Serverless instance (Version 17)

Configuration details

*Aurora Capacity Unit (ACU) pricing is $0.12 per ACU-Hour and storage is $0.10 per GB-month.

An error has occurred.
User: arn:aws:iam::644786176177:user/Whiz_User_335199.52477715 is not authorized to perform: rds:CreateDBCluster on resource: arn:aws:rds:us-east-1:644786176177:cluster:database-1 because no identity-based policy allows the rds:CreateDBCluster action

Diagnose with Amazon Q

Cancel | Create database

Screenshot 17 - CloudWatch Log Group

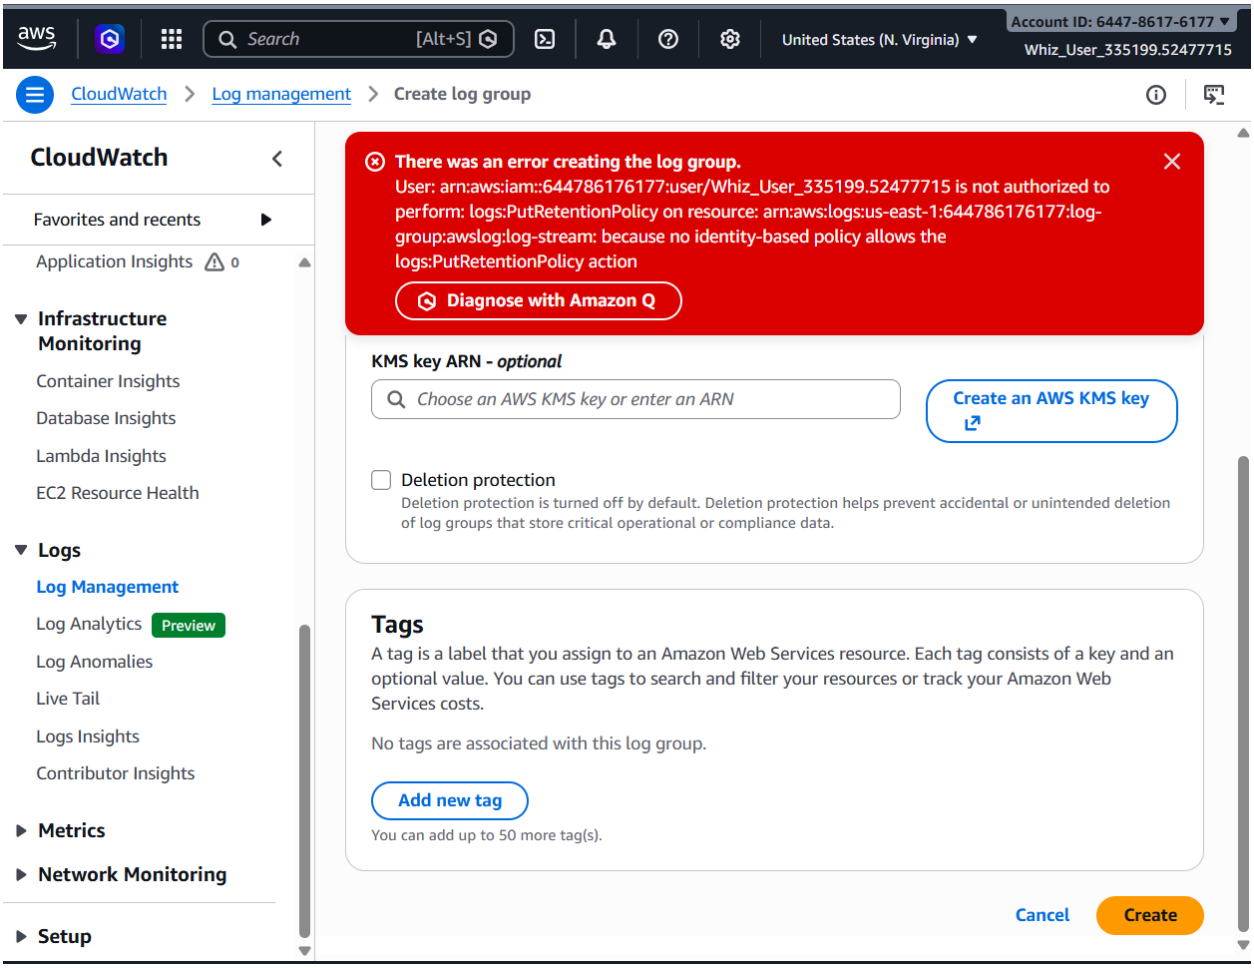

Screenshot 18 - SNS Topic Created (aerts1)

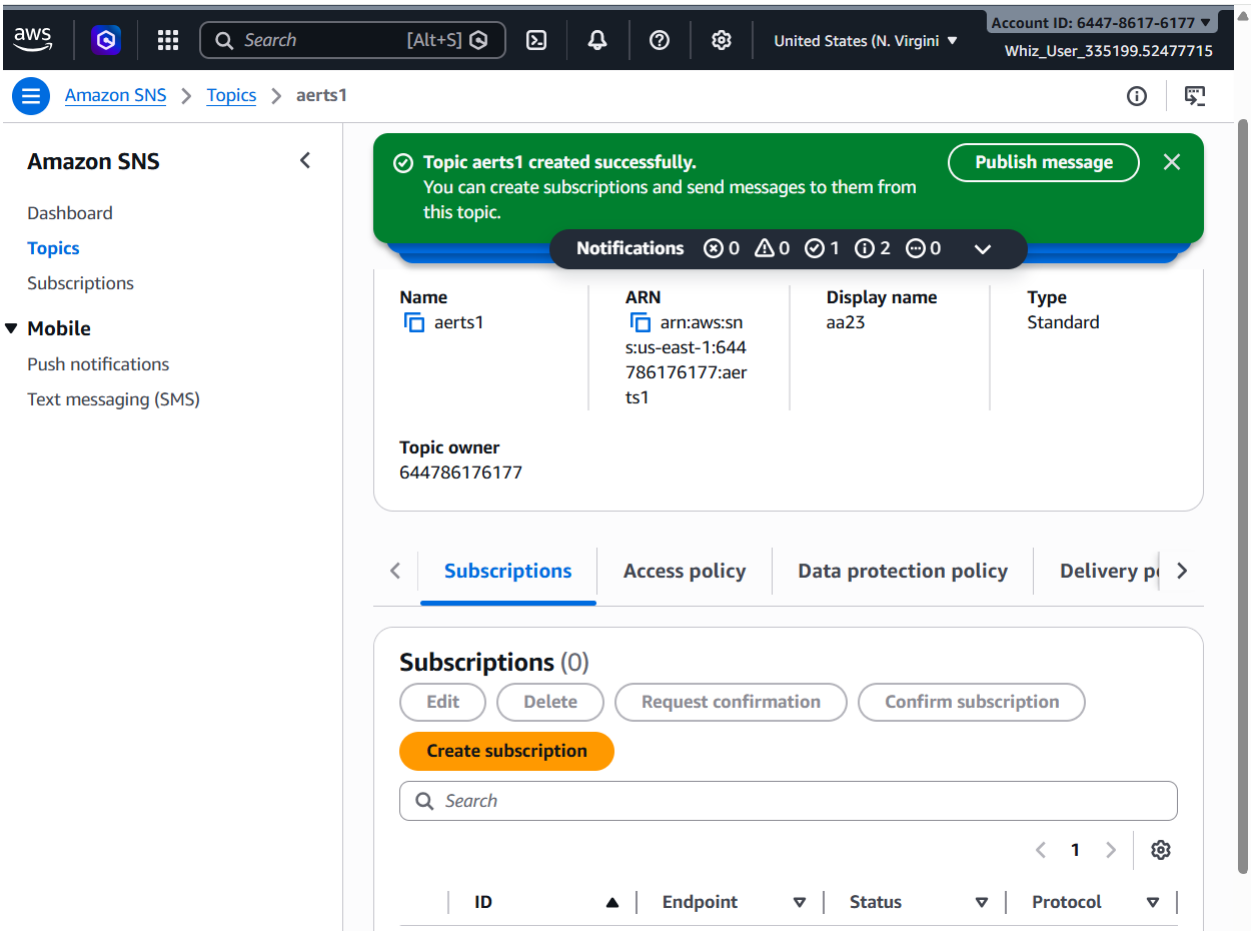

Screenshot 19 - SNS Subscription Confirmed

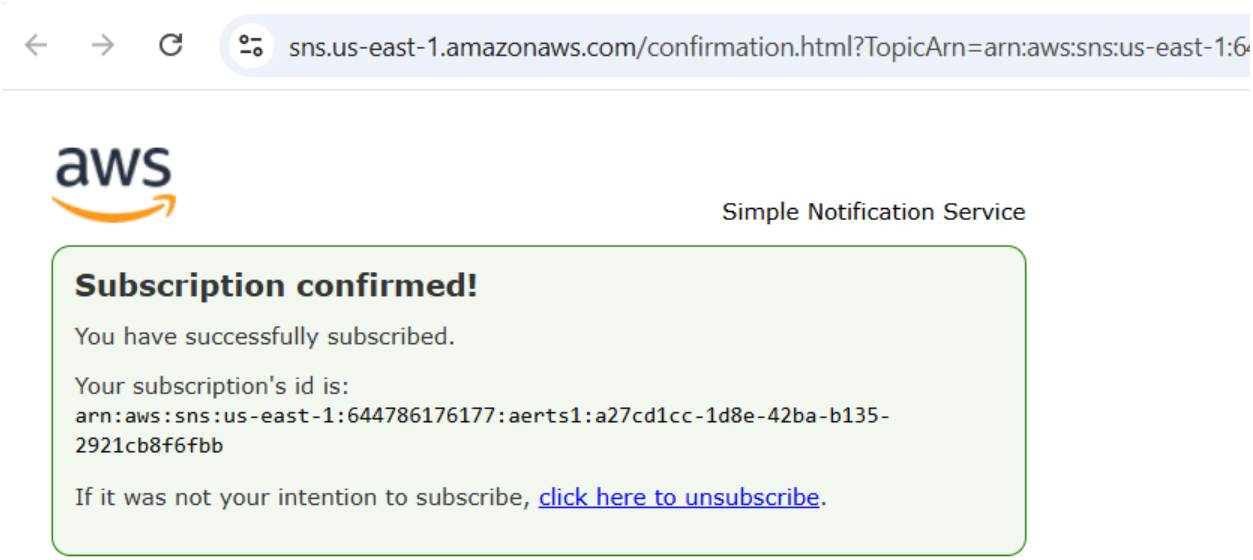

Screenshot 20 - CloudWatch Metrics Selected

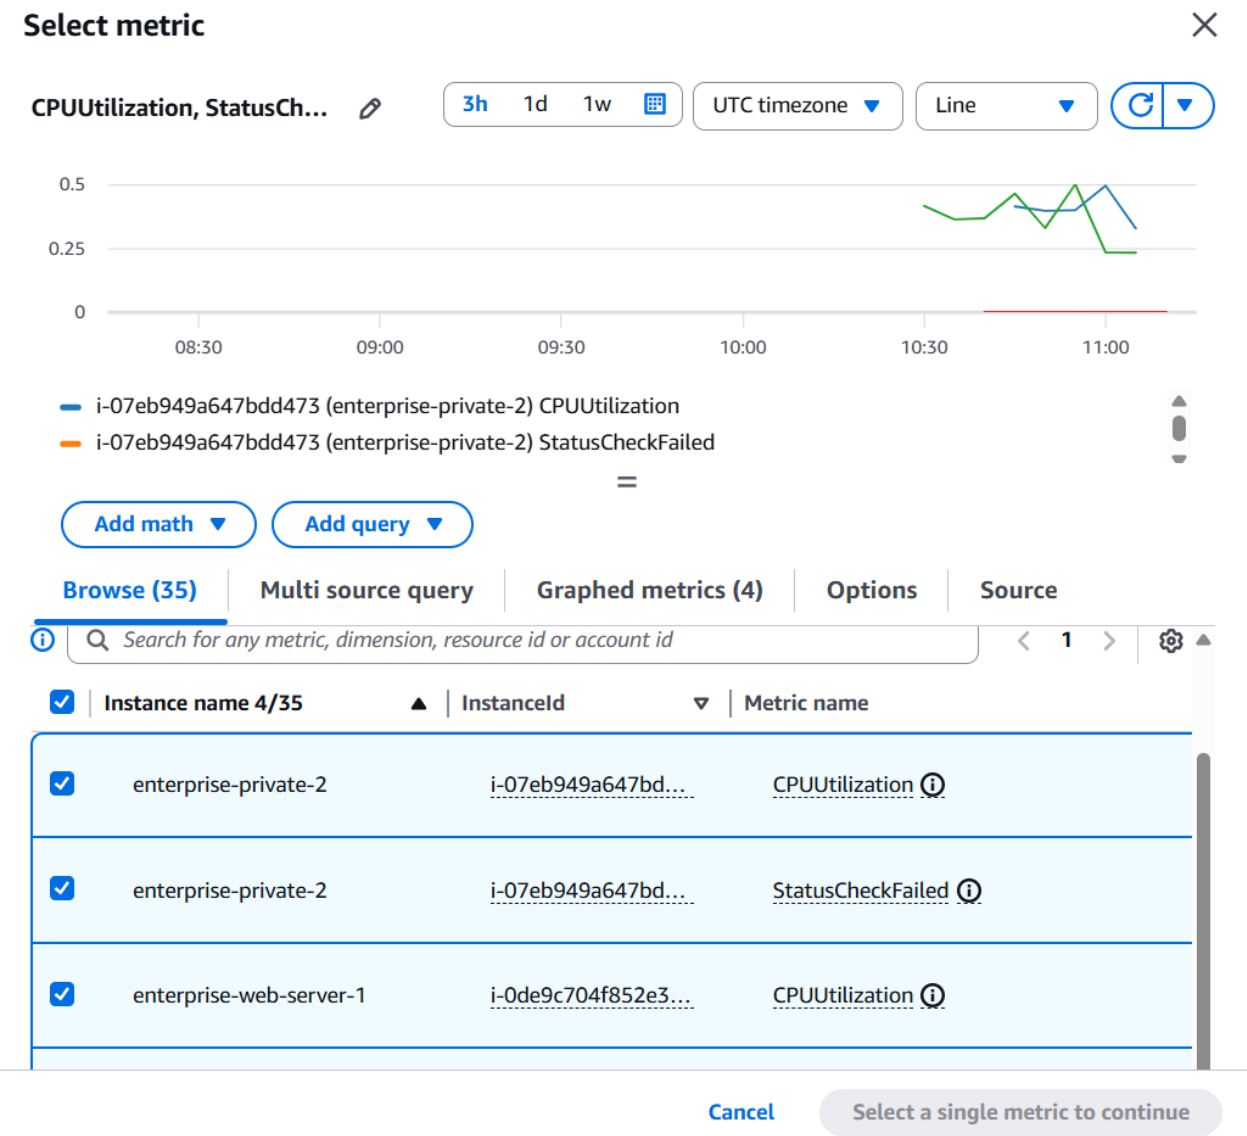
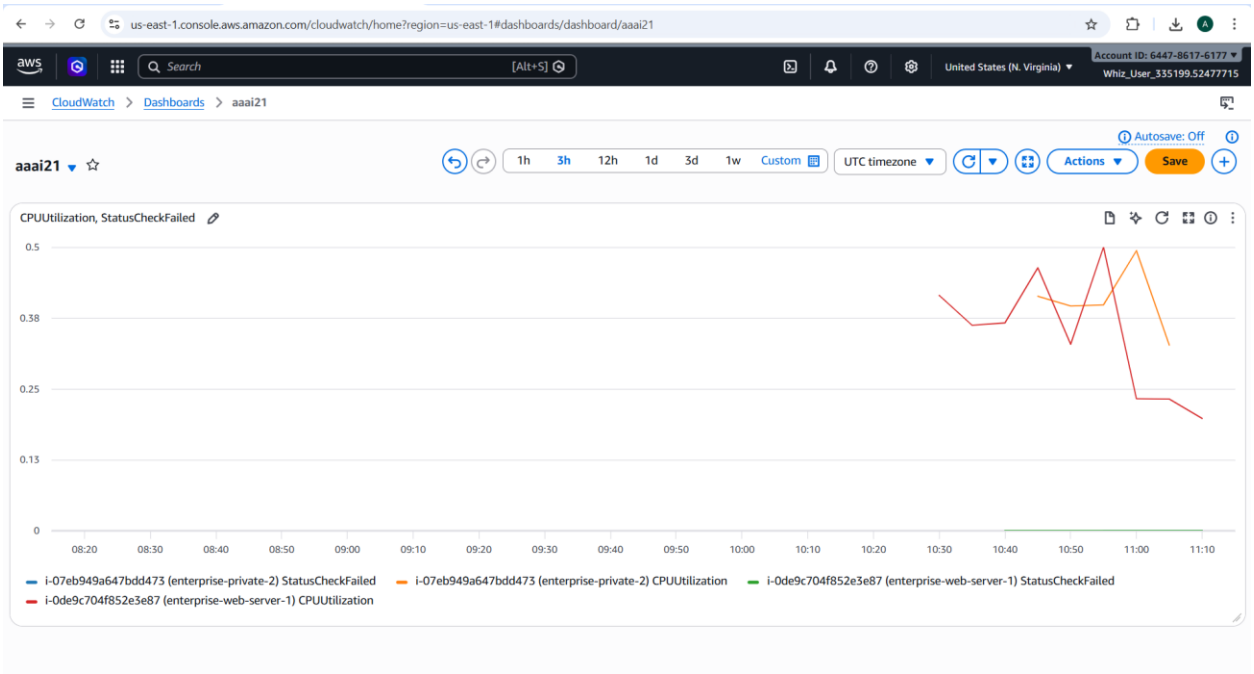
Screenshot 21 - CloudWatch Dashboard (aaai21)