


Dialer's flow with Dubber

Google Notifications

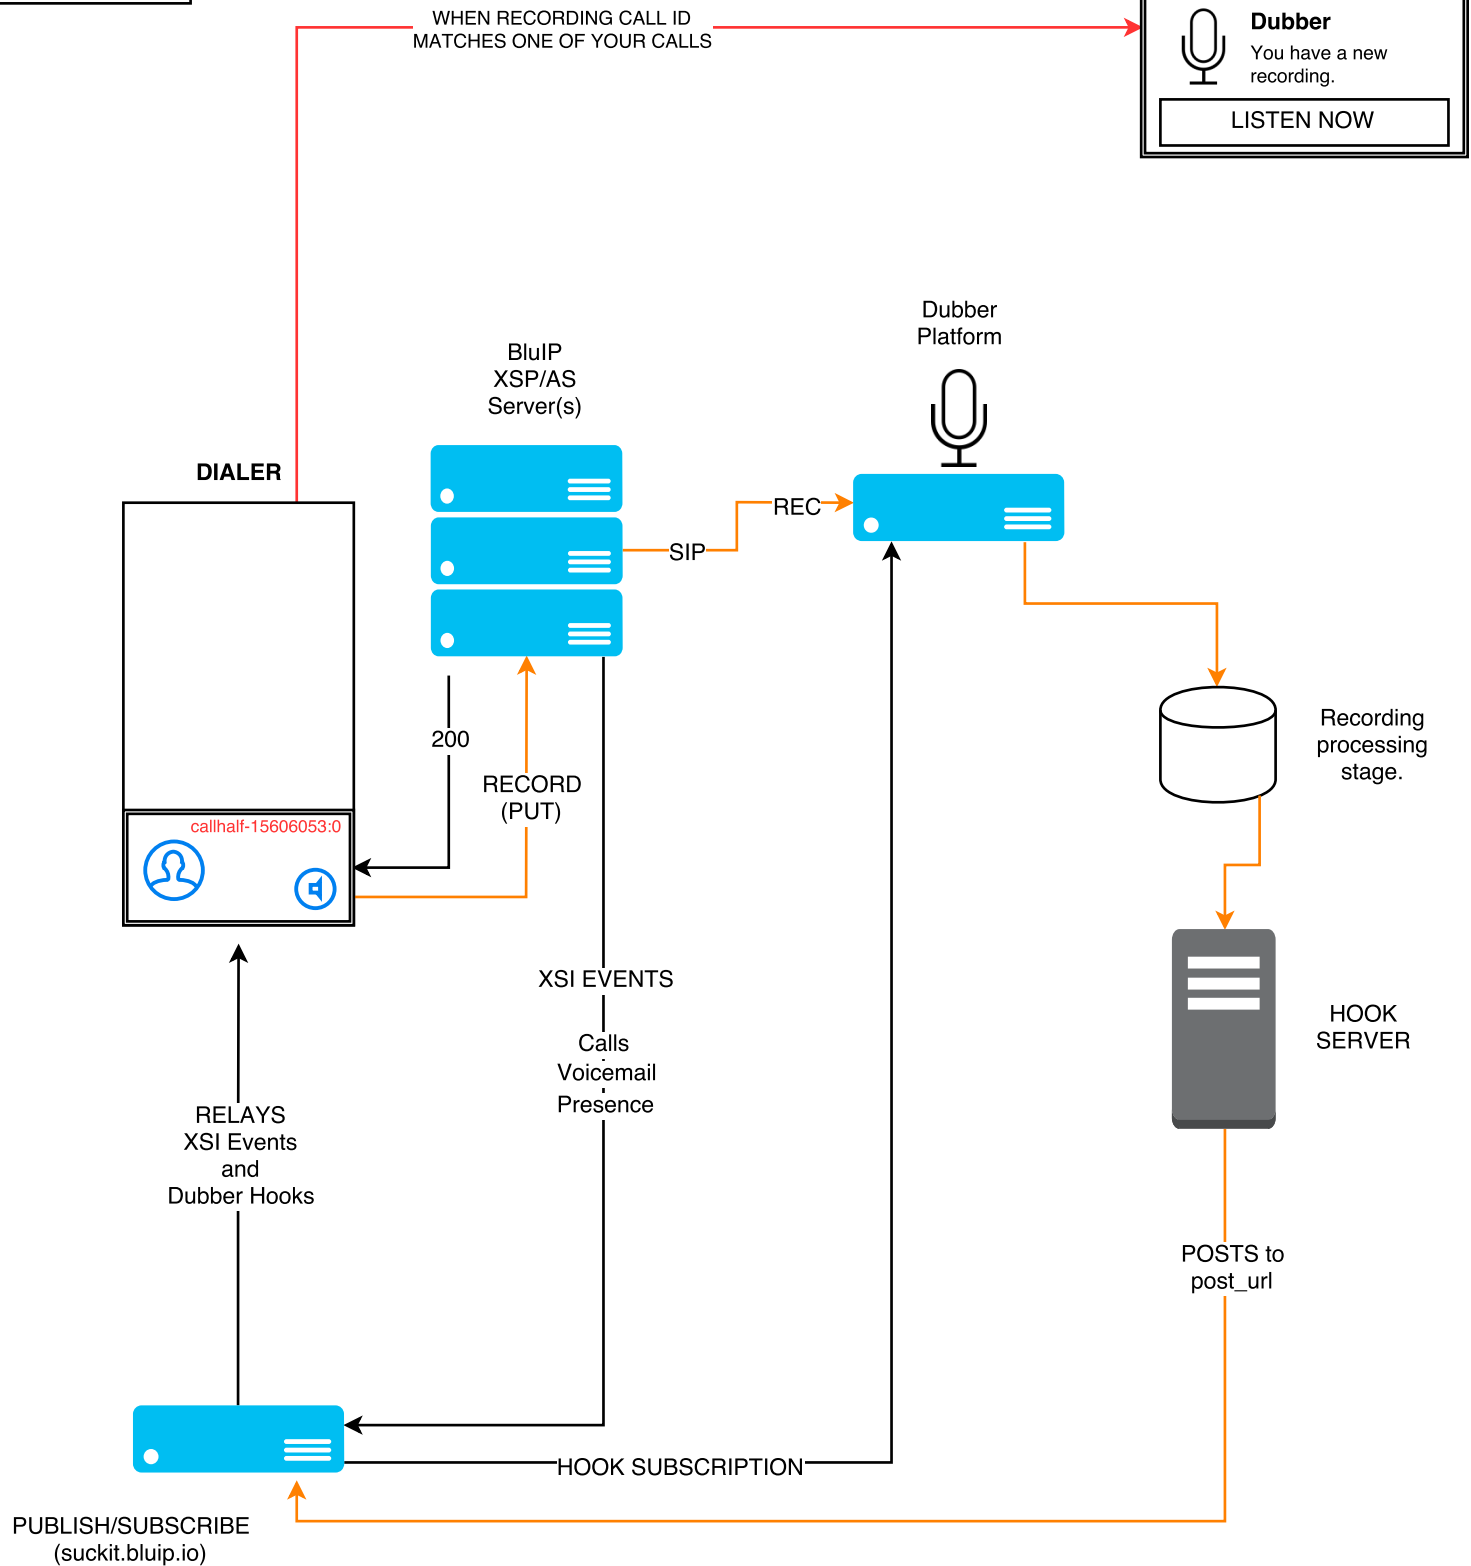

EXAMPLE OF WHAT A HOOK PUBLISHES TO THE POST_URL (LESS RED)

```
{
  notification_url: 'https://api.dubber.net/sandbox/v1/notifications/38b4cc08a76e986ab4e5',
  event_type: 'recording.create',
  resource_url: 'https://api.dubber.net/sandbox/v1/recordings/0640752955',
  parent_url: 'https://api.dubber.net/sandbox/v1/accounts/toolsbluipio',
  sequence_id: '14454494880',
  callId: 'callhalf-15606053: 0'
}
```

We need the call ID to be part of the hook data.

A HOOK SUBSCRIPTION

1. event_type:"recording.create"
2. id:"dac81572cc564b82ee9b"
3. post_url:"https://suckit.bluip.io/api/listener?rooms=7026904397@bluip.com&trigger=talk"
4. self:"https://api.dubber.net/sandbox/v1/notifications/dac81572cc564b82ee9b"
5. status:"Active"