

Introduction to CSS - 01



CSS

Cascade Style Sheet

provides
styling

overwrite

<H1> Piyush </H1> →


CSS

Default
Styles


use CSS?

Inline CSS — inject inside tag

Internal CSS → HTML CSS ← file

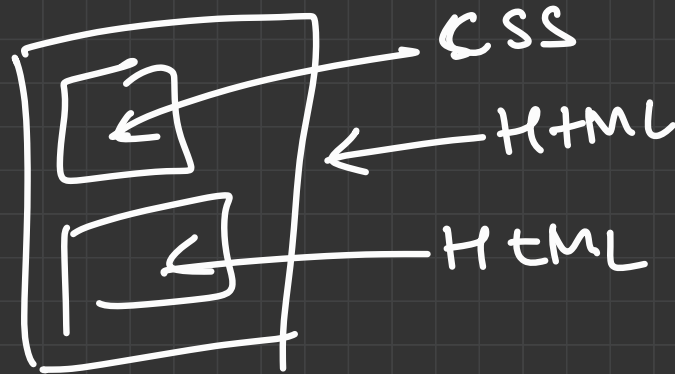

External CSS

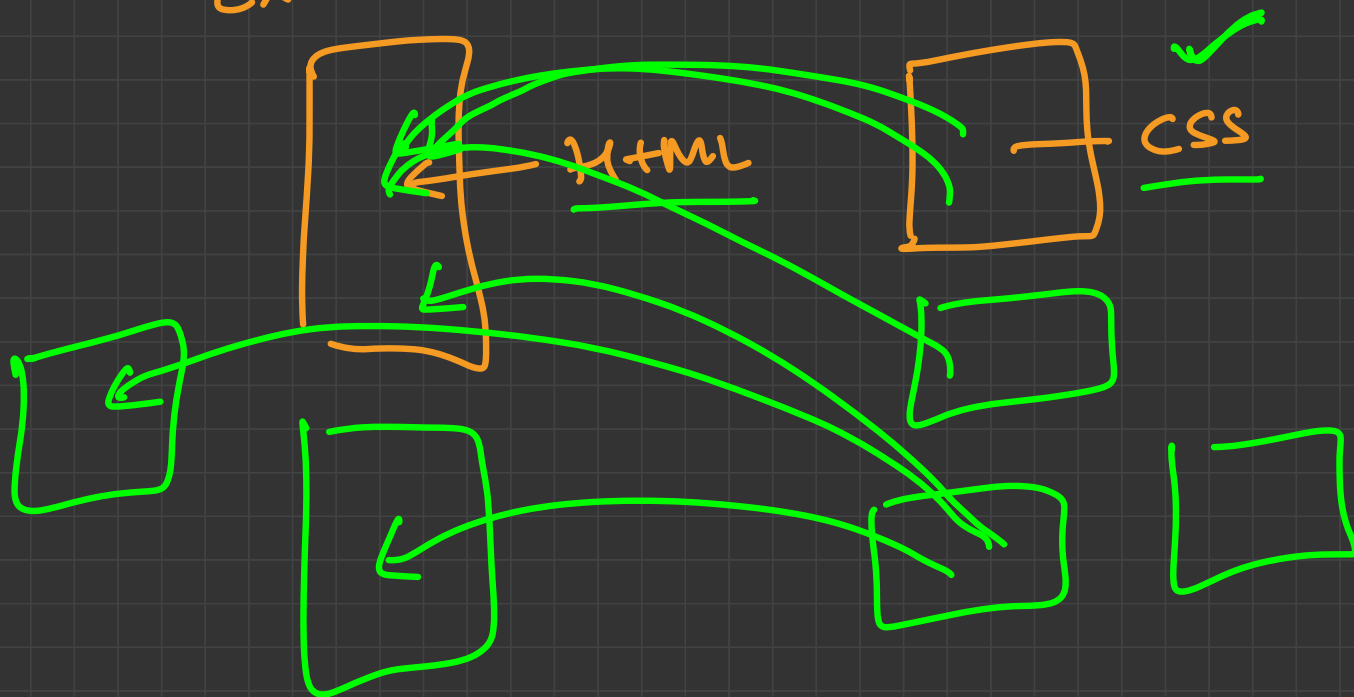

Internal CSS


selector

`<style>`
h1 {
 Prop
}
;

3
`</style>`

↑
value

↓

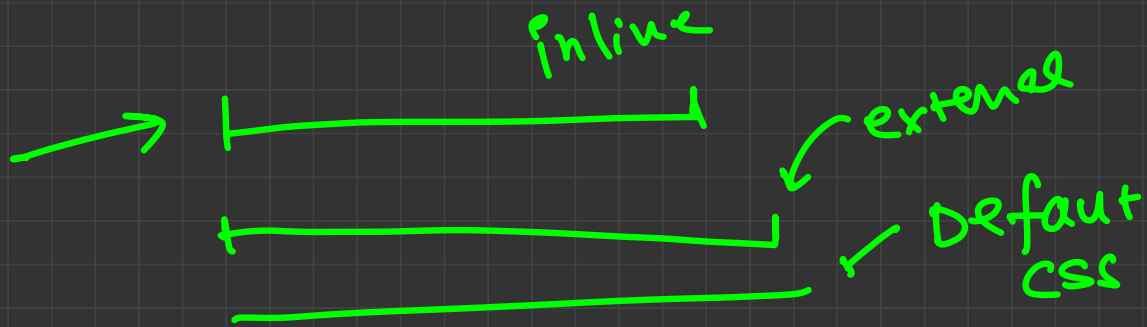

| |
|--|
| |
|--|

 {

↑ tag name

← Selecting all tags

| <u>id</u> | class |
|-----------|-------|
|-----------|-------|

}

unique

h1 ← Tag

← Select by hash tag

Scaler

```
< Mukul id="1"  
      class="fluid master"  
>
```




Currently

Scale Stud

↑ tag


##

full IID

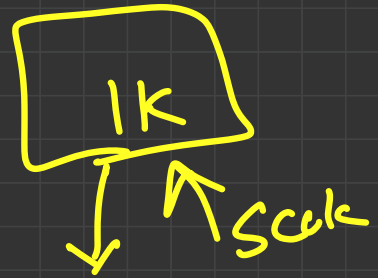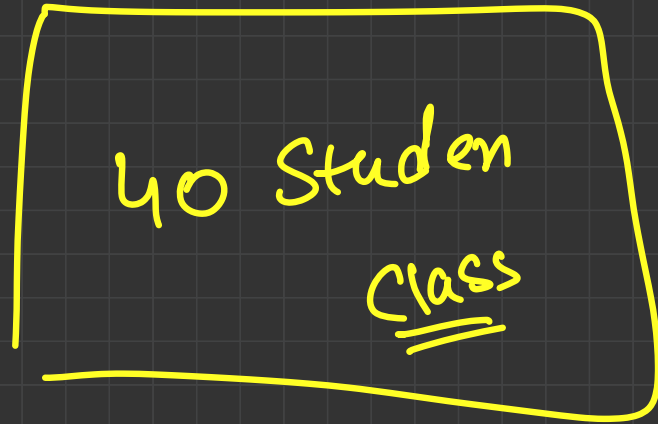

3. link CSS

Top
Bottom
Approach

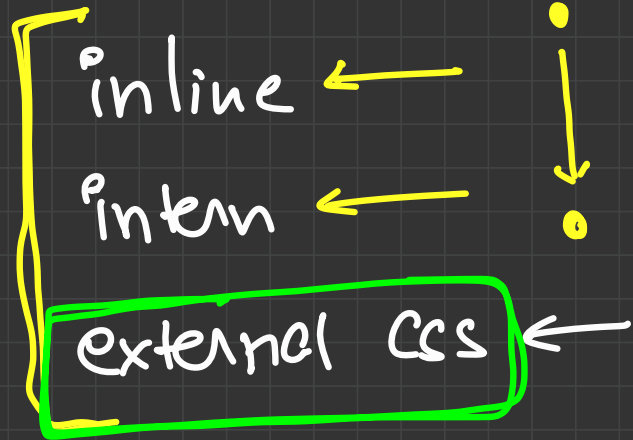

a
b
c ✓

CSS linking ✓✓

Important ← Bad Boy
HTML



inline

ID

#

class


Selector

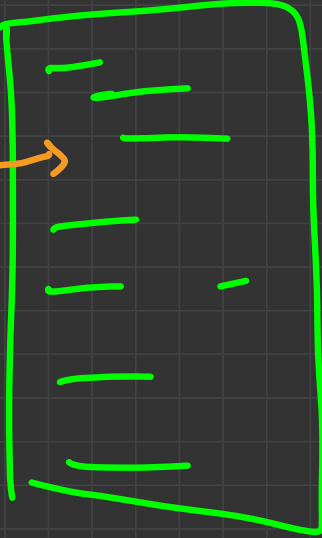


ext. ==

Specificity

selector

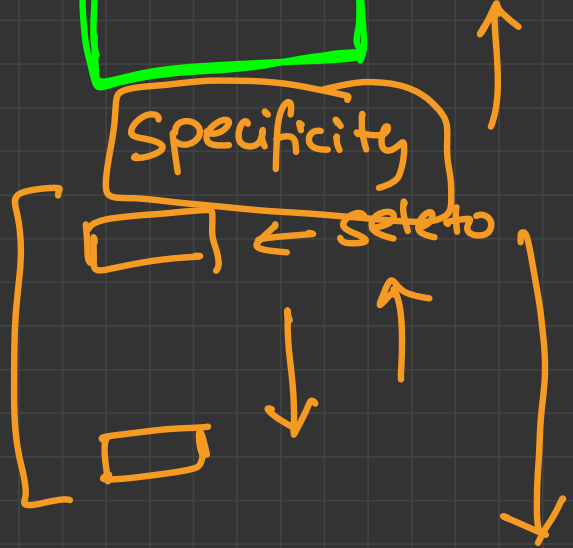

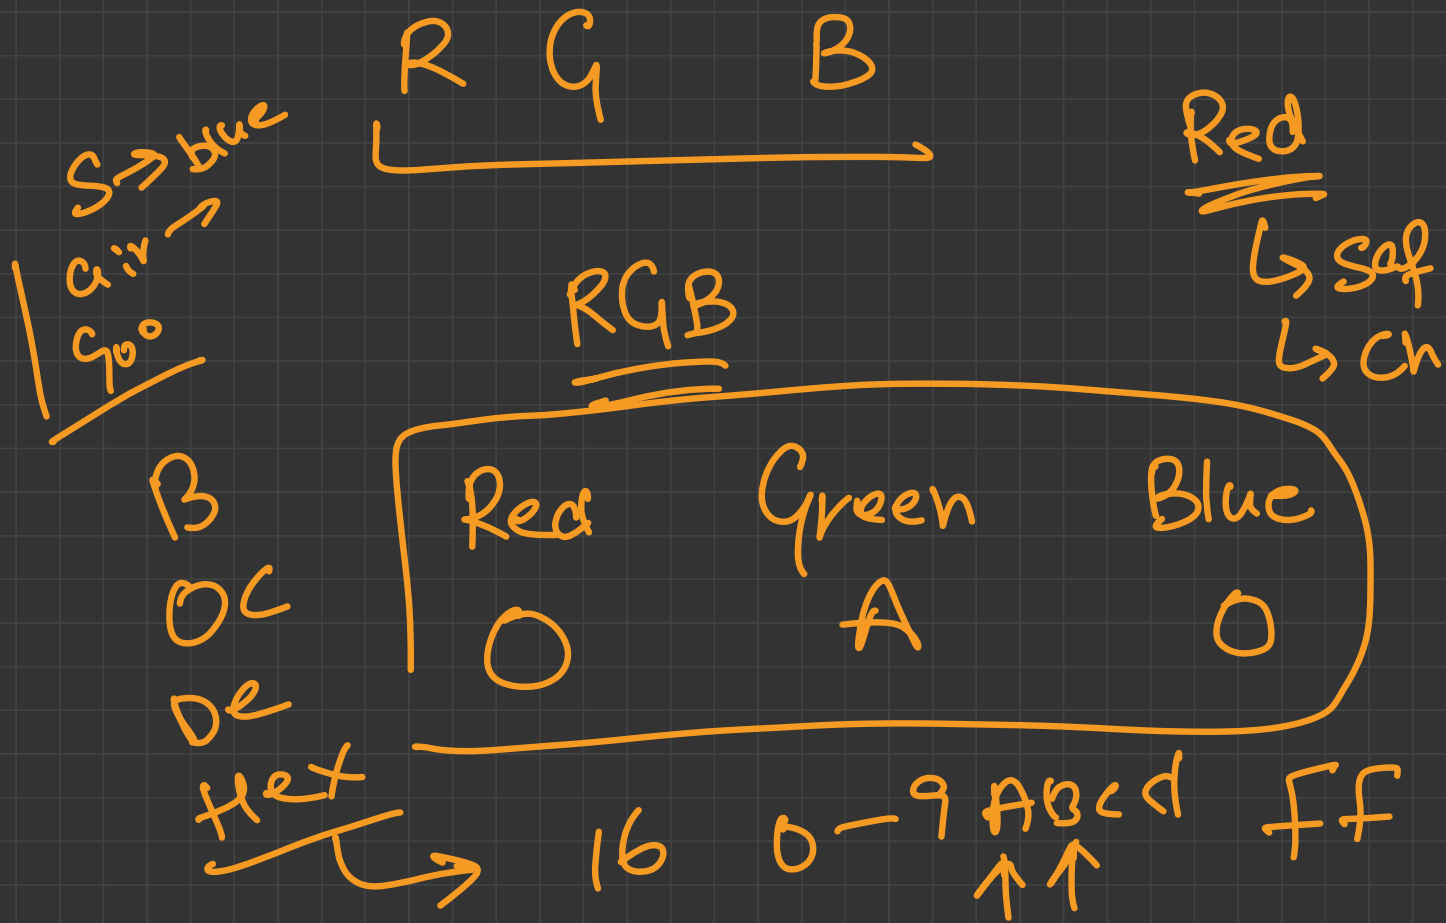


f o o ← Red

↓
f f o o [o o]
[]
9

o o

o o

o o

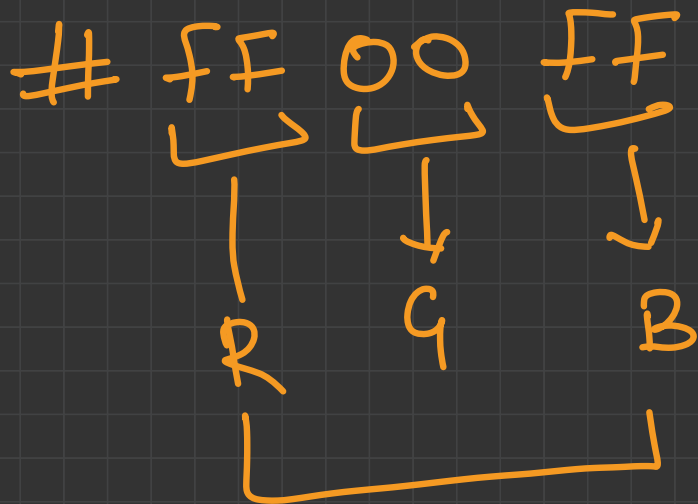

FF 00 09

units.

px ← pixels → 100px

<p> mob
↑ font size = 100px the
 lap
3em ← parent

