

# week10\_code

March 31, 2025

## 1 Week 2 Ingesting and Exploring the Dataset

```
[1]: # install wordcloud
!pip install wordcloud
```

```
Defaulting to user installation because normal site-packages is not writeable
Requirement already satisfied: wordcloud in /home/jupyter-
geean/.local/lib/python3.12/site-packages (1.9.4)
Requirement already satisfied: numpy>=1.6.1 in
/opt/tljh/user/lib/python3.12/site-packages (from wordcloud) (1.26.4)
Requirement already satisfied: pillow in /opt/tljh/user/lib/python3.12/site-
packages (from wordcloud) (11.1.0)
Requirement already satisfied: matplotlib in /opt/tljh/user/lib/python3.12/site-
packages (from wordcloud) (3.10.0)
Requirement already satisfied: contourpy>=1.0.1 in
/opt/tljh/user/lib/python3.12/site-packages (from matplotlib->wordcloud) (1.3.1)
Requirement already satisfied: cycler>=0.10 in
/opt/tljh/user/lib/python3.12/site-packages (from matplotlib->wordcloud)
(0.12.1)
Requirement already satisfied: fonttools>=4.22.0 in
/opt/tljh/user/lib/python3.12/site-packages (from matplotlib->wordcloud)
(4.55.3)
Requirement already satisfied: kiwisolver>=1.3.1 in
/opt/tljh/user/lib/python3.12/site-packages (from matplotlib->wordcloud) (1.4.8)
Requirement already satisfied: packaging>=20.0 in
/opt/tljh/user/lib/python3.12/site-packages (from matplotlib->wordcloud) (24.1)
Requirement already satisfied: pyparsing>=2.3.1 in
/opt/tljh/user/lib/python3.12/site-packages (from matplotlib->wordcloud) (3.2.1)
Requirement already satisfied: python-dateutil>=2.7 in
/opt/tljh/user/lib/python3.12/site-packages (from matplotlib->wordcloud)
(2.9.0.post0)
Requirement already satisfied: six>=1.5 in /opt/tljh/user/lib/python3.12/site-
packages (from python-dateutil>=2.7->matplotlib->wordcloud) (1.17.0)
```

```
[2]: # import packages
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
```

```

from wordcloud import WordCloud
%matplotlib inline

import warnings
warnings.filterwarnings("ignore")

```

```

[3]: # change working directory
import os
os.getcwd() # Get current working directory
os.chdir('..') # Move up one directory level from notebooks
print(os.getcwd())
#os.chdir('../data') # change to the data folder

```

/home/jupyter-geeant/cookiecutter-data-science/{{ cookiecutter.repo\_name }}

```

[4]: # load the data
df = pd.read_csv('data/Combined Data.csv', index_col=0)

```

```

[5]: # make a copy and get rid of the missing values
df1 = df.copy()
df1.dropna(inplace = True)
# see the top head of the data
df1.head()

```

```

[5]:

```

	statement	status
0	oh my gosh	Anxiety
1	trouble sleeping, confused mind, restless hear...	Anxiety
2	All wrong, back off dear, forward doubt. Stay ...	Anxiety
3	I've shifted my focus to something else but I'...	Anxiety
4	I'm restless and restless, it's been a month n...	Anxiety

```

[6]: # number of missing values
missing_values = df.isnull().sum()

print(missing_values)

```

```

statement    362
status        0
dtype: int64

```

```

[7]: # get the rows and columns of all of the data
rows,columns = df.shape
print(f"Number of rows: {rows}")
print(f"Number of columns: {columns}")

```

```

Number of rows: 53043
Number of columns: 2

```

```
[8]: # calculate the number of missing values
rows_with_missing = df[df.isnull().any(axis=1)]
print(rows_with_missing)
```

	statement	status
293	NaN	Anxiety
572	NaN	Anxiety
595	NaN	Anxiety
1539	NaN	Normal
2448	NaN	Normal
...	...	...
52838	NaN	Anxiety
52870	NaN	Anxiety
52936	NaN	Anxiety
53010	NaN	Anxiety
53031	NaN	Anxiety

[362 rows x 2 columns]

The dataset contains 362 missing values in the ‘Statement’ column and no missing values for ‘Status’.

## 2 Missing Values -Week 3

Many of the rows have NaNs and represent anxiety and normal. Since there are 53,043 values and there are only 362 rows where there is missing values. We feel that it is best to drop these rows since they represent only 0.7% of the data and as you will see later we have an abundance of “normal” and “anxiety” labeled data.

The dataset includes 52,681 rows and 2 columns after removing missing values.

```
[9]: # get the rows and columns of the data that drops the missing values
rows,columns = df1.shape
print(f"Number of rows: {rows}")
print(f"Number of columns: {columns}")
```

Number of rows: 52681

Number of columns: 2

We want to add a column to explore the length of each statement. This can help us quantify the user’s input and support further analysis. This will give us an idea on how to preprocess the text and determine tokenization especially for transformer models. Many NLP models, especially those based on deep learning, have limitations on input length so determining the length is important.

```
[10]: # create a new column that gives the length of each statement
df1['statement_len'] = df1['statement'].apply(lambda x: len(x.split(' ')))
df1.head()
```

```
[10]:
```

	statement	status	statement_len
0	oh my gosh	Anxiety	3
1	trouble sleeping, confused mind, restless hear...	Anxiety	10
2	All wrong, back off dear, forward doubt. Stay ...	Anxiety	14
3	I've shifted my focus to something else but I'...	Anxiety	11
4	I'm restless and restless, it's been a month n...	Anxiety	14

From the output, we can see that this dataset includes 2 variables: statement and status.

The statement variable is a text variable that contains different user inputs.

The status variable represents different emotional statuses, which contain different categories.

The next step is to explore dataset

```
[11]: # information about the dataset
'''The class type of the DataFrame.
The range of the index.
The number of columns and their names.
The count of non-null values in each column.
The data type of each column.
The memory usage of the DataFrame.'''

print(df1.info())
```

```
<class 'pandas.core.frame.DataFrame'>
Index: 52681 entries, 0 to 53042
Data columns (total 3 columns):
#   Column          Non-Null Count  Dtype
---  -
0   statement       52681 non-null  object
1   status          52681 non-null  object
2   statement_len   52681 non-null  int64
dtypes: int64(1), object(2)
memory usage: 1.6+ MB
None
```

Statement and status column are object data types. The statement\_len column is an integer/numeric datatype.

```
[12]: # descriptive statistics
'''count is the number of non-null entries.
unique is the number of unique values.
top is the most frequent value.
freq is the frequency of the most frequent value.'''
df1.describe(include='object').T
```

```
[12]:
```

	count	unique	top	freq
statement	52681	51073	what do you mean?	22
status	52681	7	Normal	16343

The 'Statement' column contains 51,073 unique values, indicating that most user inputs are unique. The most frequently appeared statement is "What do you mean?" and occurred 22 times in the dataset. The frequent occurrence of "What do you mean?" suggests significant communication gaps or misunderstandings, indicating areas where individuals feel confused or need more clarity, which is crucial in mental health discussions. This phrase often reflects a state of uncertainty or anxiety, signaling important emotional states. It could also indicate active engagement and a desire for better understanding and it could indicate that individuals need more support or reassurance, aiding in tailoring mental health resources effectively.

The 'Status' column contains 7 unique values and represents different emotion statuses. The most common status is "Normal", suggesting that over 30% of the statements in the dataset fall under this category.

```
[13]: # Get summary statistics for the 'statement_len' column
summary_statistics = df1['statement_len'].describe()
print(summary_statistics)
```

```
count      52681.000000
mean         113.035914
std          163.501877
min           1.000000
25%           15.000000
50%           62.000000
75%          148.000000
max          6300.000000
Name: statement_len, dtype: float64
```

```
[14]: # Calculate the mode of the 'statement_len' column
mode_value = df1['statement_len'].mode()[0]

print(f"The mode of the 'statement_len' column is: {mode_value}")
```


The mode of the 'statement\_len' column is: 5

The summary statistics for the 'Statement\_len' column show the distribution of statement lengths. The average statement contains 113 words with a standard deviation of 163.5 words. The shortest statement only has 1 word, while the longest contains 6300 words. The most frequent statement length is 5 words, indicating that short phrases are commonly used.

The following bar plot of the frequency of statement length visualizes the previous statement.

```
[15]: # Create a bar plot of the frequency of the 'statement_len' column
statement_len_counts = df1['statement_len'].value_counts()

plt.bar(statement_len_counts.index, statement_len_counts.values,
        edgecolor='black')
plt.xlabel('Statement Length (Number of Words)')
plt.ylabel('Frequency')
plt.title('Bar Plot of Frequency of Statement Length')
plt.show()
```

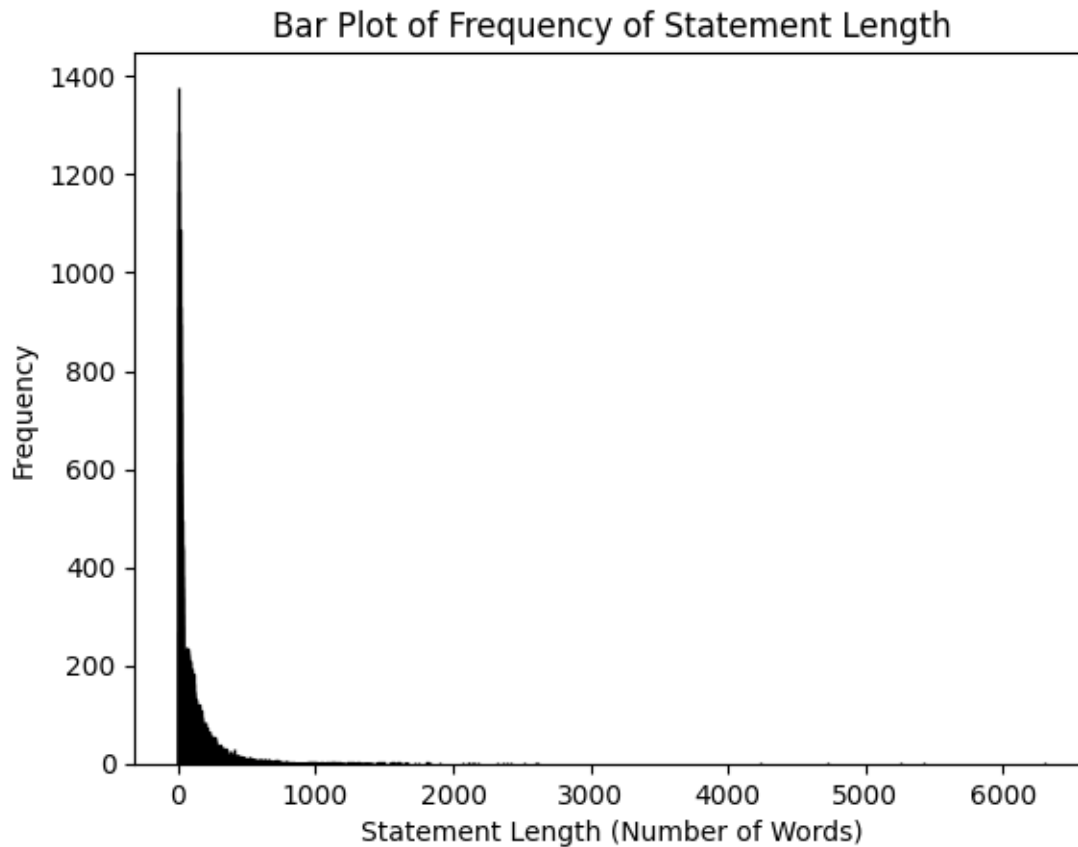

The histogram shows that it is a right skewed distribution, which most of the statement length under 1000 words. This means that when we focus on the output length, we should set it to be under 1000.

```
[16]: # Histogram of Frequency of Statements by Status
plt.figure(figsize=(12,8))


# get the unique status values and their counts
status_counts = df1['status'].value_counts()

# create the bar plot
ax = status_counts.plot(kind='bar')

# add the count labels on top of each bar
for i, v in enumerate(status_counts):
    ax.text(i, v, str(v), ha='center', va='bottom')

plt.title('Statement distribution by status')
plt.xlabel('Status')
plt.ylabel('Count')
```

```
plt.tight_layout()
plt.show()
```

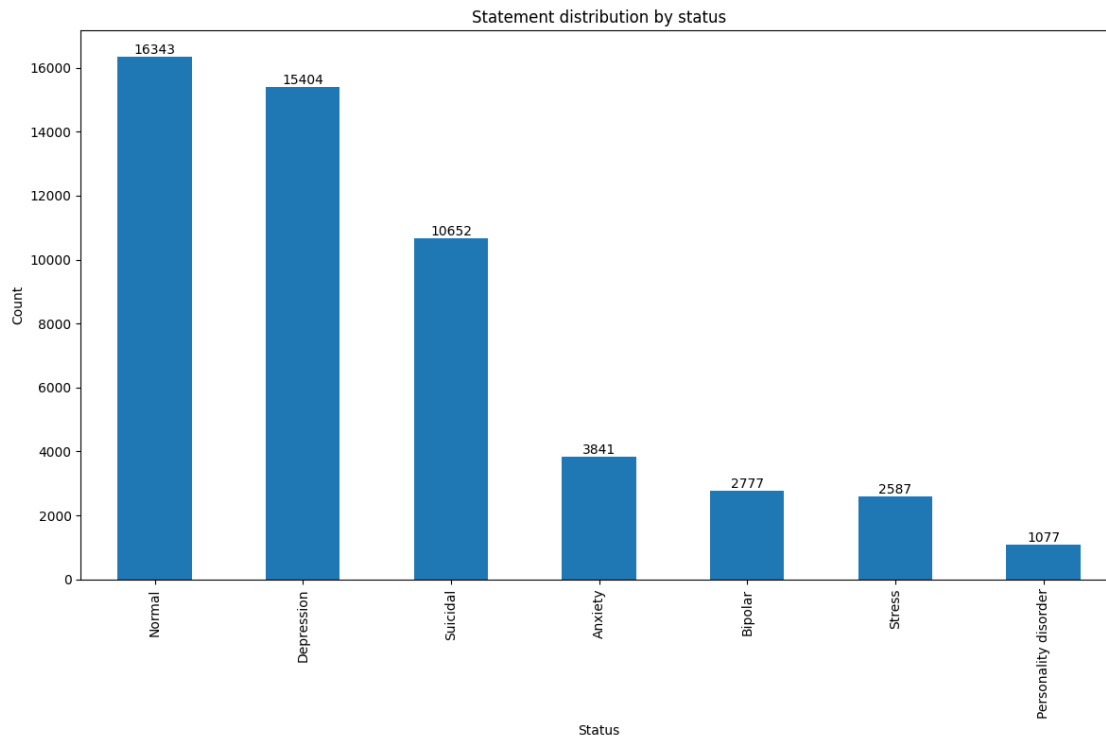

Here is a plot showing distribution by status. Normal is the most common status and contains 16343 data, followed by depression and suicidal, which are the 2nd and 3rd largest portions of the dataset. Personality disorder is the most rare one, which contains 1077 data.

The ratio between different statuses suggests about 70% of the user's input falls under the negative status category.

The target variable in our dataset is unbalanced in favor of depression, suicidal and normal. This imbalance could affect our model's performance, so we'll need to address it later to ensure accurate and fair predictions especially when predicting sentiment analysis for anxiety, bipolar, stress and personality disorder.

```
[17]: # Word Cloud Before Preprocessing
# Combine all statements into a single string
text = ' '.join(df1['statement'].dropna())

# Create a word cloud
wordcloud = WordCloud(width=800, height=400, background_color='white').
    generate(text)

# Display the word cloud
```





10743 ThrowawayIm female, 20 years old. Ever since I...  
 10834 I have only 1 person I can somewhat open to bu...  
 11537 The title is not meant to discourage others, b...  
 11581 I no longer know what else to do but write thi...  
 11636 And has life gotten better?&#x200B;No. Eve...  
 11831 Sorry this is long but I doubt anyone will eve...  
 13188 I am frustrated. that is the constant theme wi...  
 13293 I cannot TAKE IT ANYMORE. I cannot TAKE IT ANY...  
 13577 I am very sick and tired, both mentally and ph...  
 14602 I am 27 years old and have grown deeper into a...  
 16061 Bear with me please, this may be extremely len...  
 16498 Hey, this is goodbye note. it is most likely g...  
 18215 I am someone living in Turkey. My age is proba...  
 18323 I am going to be turning 30 in a couple weeks...  
 19321 This happened a little while ago but it still ...  
 19701 If there is a more beneficial sub please lmk s...  
 20867 Apologies for length. there is a \*lot\* to expl...  
 21285 First I am going to present you with a few que...  
 21396 will i ever be noticed? is my life worth anyth...  
 21858 I constantly repeat to myself that I have neve...  
 22243 I do not expect anyone to read this rambly mes...  
 22351 This is a lengthy post but its a summary of my...  
 22563 I have been thinking about posting online for ...  
 23195 My entire life has spontaneously combusted ove...  
 23366 I wish I knew what was wrong with me. So many ...  
 23820 I need support or encouragement. I (29M) reall...  
 23845 This is a a vent. I (29M) really do not know w...  
 24276 I guess it all started when I was I guess 11, ...  
 38083 this is my first reddit post also my first tim...  
 38255 i m at a very weird place in my life right now...  
 38579 hello thank you for reading my post and any ad...  
 39579 we ve been seeing a worrying increase in pro s...  
 39582 for starter i never really had a childhood whe...  
 39752 it doesn t matter anymore i m going to copy an...  
 40028 this is a long story i m sorry me and my ex br...  
 40208 i m at a very weird place in my life right now...  
 40293 i have come to the conclusion that i am just n...  
 40371 hello thank you for reading my post and any ad...  
 46660 DEPRESSION HAS A PURPOSE: HOW TO USE IT RIGHT ...  
 47949 Don't know what to do anymore Back when I was ...  
 48915 I think I'm in the middle of a nervous breakdo...  
 50253 Manic for 6 months ending up in jail where I h...  
 51396 Please help me understand what I went through ...  
 52775 I don't know what to do. I don't know how to d...

	status	statement_len
7851	Depression	2153

8221	Depression	1602
9504	Depression	2139
10743	Depression	1537
10834	Suicidal	5248
11537	Depression	2391
11581	Depression	2612
11636	Depression	2415
11831	Depression	2187
13188	Depression	1832
13293	Suicidal	6300
13577	Suicidal	1811
14602	Depression	1809
16061	Depression	1558
16498	Suicidal	1566
18215	Suicidal	2066
18323	Suicidal	1559
19321	Depression	1902
19701	Depression	1661
20867	Depression	1625
21285	Depression	1559
21396	Depression	2510
21858	Depression	2599
22243	Suicidal	2364
22351	Depression	1551
22563	Suicidal	2319
23195	Depression	1818
23366	Depression	1654
23820	Depression	2105
23845	Suicidal	2108
24276	Suicidal	1539
38083	Depression	1559
38255	Depression	1584
38579	Depression	1537
39579	Depression	1747
39582	Depression	1653
39752	Depression	4239
40028	Depression	1726
40208	Depression	1584
40293	Depression	1656
40371	Depression	1537
46660	Bipolar	4727
47949	Depression	1663
48915	Stress	1601
50253	Bipolar	1664
51396	Personality disorder	5419
52775	Anxiety	1586

Many of the longest messages are those with depression and suicidal tendencies. This will help us

since if we shorten the output length when preprocessing the data, we are not reducing the number of data points for those that do not have very many data points such as anxiety, bipolar, stress and personality disorder.


Now we want to see a clearer distribution without these outliers so that we can determine the best output length for preprocessing the text.

```
[19]: # Statement Length Distribution Without Outliers
# Calculate Q1 (25th percentile) and Q3 (75th percentile)
Q1 = df1['statement_len'].quantile(0.25)
Q3 = df1['statement_len'].quantile(0.75)
IQR = Q3 - Q1

# Define the lower and upper bound for outliers
lower_bound = Q1 - 1.5 * IQR
upper_bound = Q3 + 1.5 * IQR

# Filter out the outliers
filtered_df = df1[(df1['statement_len'] >= lower_bound) & (df1['statement_len'] <= upper_bound)]

# Plot the distribution of statement lengths without outliers
filtered_df['statement_len'].hist(bins=100)
plt.title('Distribution of Statement Lengths (Without Outliers)')
plt.xlabel('Length of Statements')
plt.ylabel('Frequency')
plt.show()
```

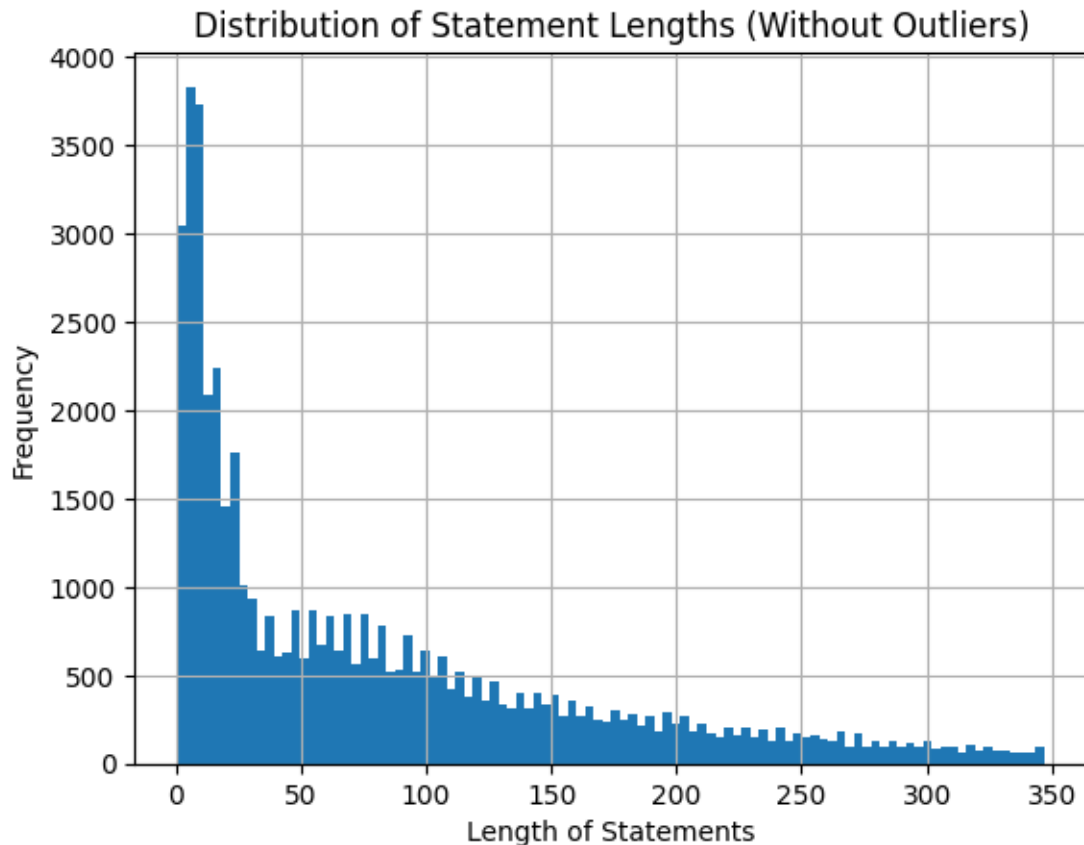

This distribution still shows a right-skewed data distribution. We now have a much clearer distribution where approximately 50% of the statements have 0-50 word lengths, especially with a spike at approximately 25 words with approximately 3700 statements. This will help us immensely to determine the best statement length to run our transformer models to save computational resources and time but not decrease model performance.


Now we want to take a closer look at the word clouds for each status since it will give us even more information about the possible word indicators for each status.

```
[20]: # Create a function to generate and display a word cloud
def generate_word_cloud(text, title):
    wordcloud = WordCloud(width=800, height=400).generate(text)
    plt.figure(figsize=(10, 5))
    plt.imshow(wordcloud, interpolation='bilinear')
    plt.title(title)
    plt.axis('off')
    plt.show()

# Generate word clouds for each status
statuses = df1['status'].unique()
```

```
for status in statuses:
    status_text = ' '.join(df1[df1['status'] == status]['statement'])
    generate_word_cloud(status_text, title=f'Word Cloud for {status}')
```

### Word Cloud for Anxiety

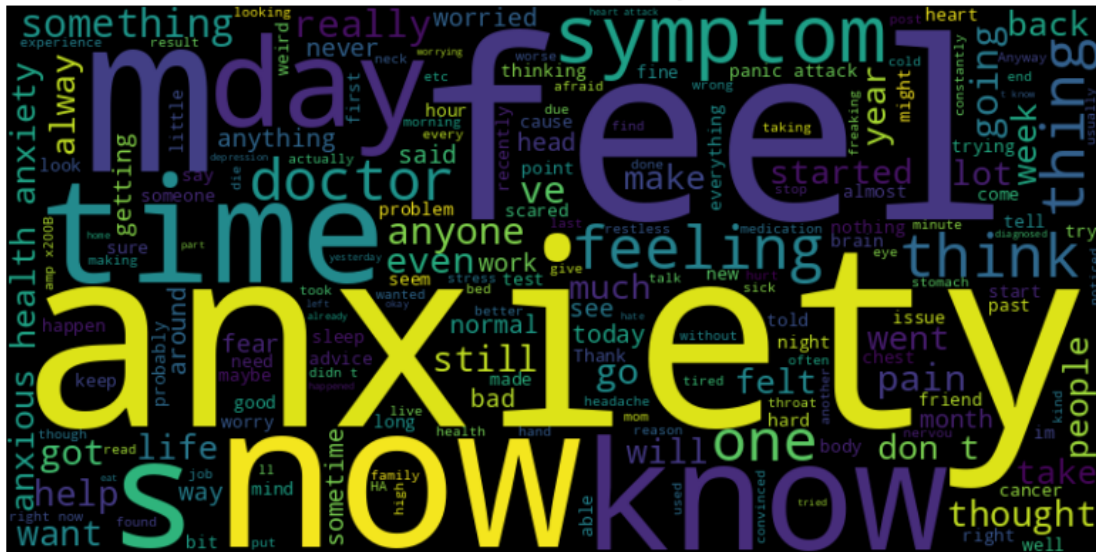

Word Cloud for Normal



[illegible][illegible]

[illegible][illegible]



[illegible]

“Will”, “want”, “know” are the most common words for normal. “Life”, “feel”, “want” are the most common words for suicidal. Many people with suicidal tendencies tend to talk about their lives. The words for “normal” status tend to have positive connotations especially “want” and “will”, especially for a “will” to live.

We want to conduct bi-grams and tri-grams analysis for these reasons: Contextual Insights: Bi-grams and tri-grams capture phrases and context that single words (unigrams) might miss. This is particularly important in mental health, where phrases like “feeling down” or “very anxious” provide more insight than individual words.

Identifying Common Themes: Visualizing bi-grams and tri-grams helps identify common themes and expressions in the dataset. This can reveal patterns in how people express their mental health experiences.

16



```

# Tokenization and N-gram generation
# Create a CountVectorizer object with ngram_range set to (2, 3) to generate
↳ bi-grams and tri-grams
vectorizer = CountVectorizer(ngram_range=(2, 3))

# Fit and transform the 'statement' column of the DataFrame to generate the
↳ n-grams
X = vectorizer.fit_transform(df1['statement'])

# Frequency distribution
# Sum the occurrences of each n-gram across all documents
sum_words = X.sum(axis=0)

# Create a list of tuples where each tuple contains an n-gram and its
↳ corresponding frequency
words_freq = [(word, sum_words[0, idx]) for word, idx in vectorizer.vocabulary_.
↳ items()]

# Sort the list of tuples by frequency in descending order
words_freq = sorted(words_freq, key=lambda x: x[1], reverse=True)

# DataFrame for visualization
# Convert the list of tuples into a DataFrame for easier visualization
df_freq = pd.DataFrame(words_freq, columns=['N-gram', 'Frequency'])



# Bar plot
# Plot the top 10 most frequent n-grams as a bar plot
df_freq.head(10).plot(kind='bar', x='N-gram', y='Frequency', legend=False)
plt.title('Top 10 Bi-grams and Tri-grams')
plt.show()

# Word cloud
# Generate a word cloud from the n-gram frequencies
wordcloud = WordCloud(width=800, height=400).
↳ generate_from_frequencies(dict(words_freq))

# Display the word cloud
plt.figure(figsize=(10, 5))
plt.imshow(wordcloud, interpolation='bilinear')
plt.axis('off')
plt.show()

```

Top 10 Bi-grams and Tri-grams

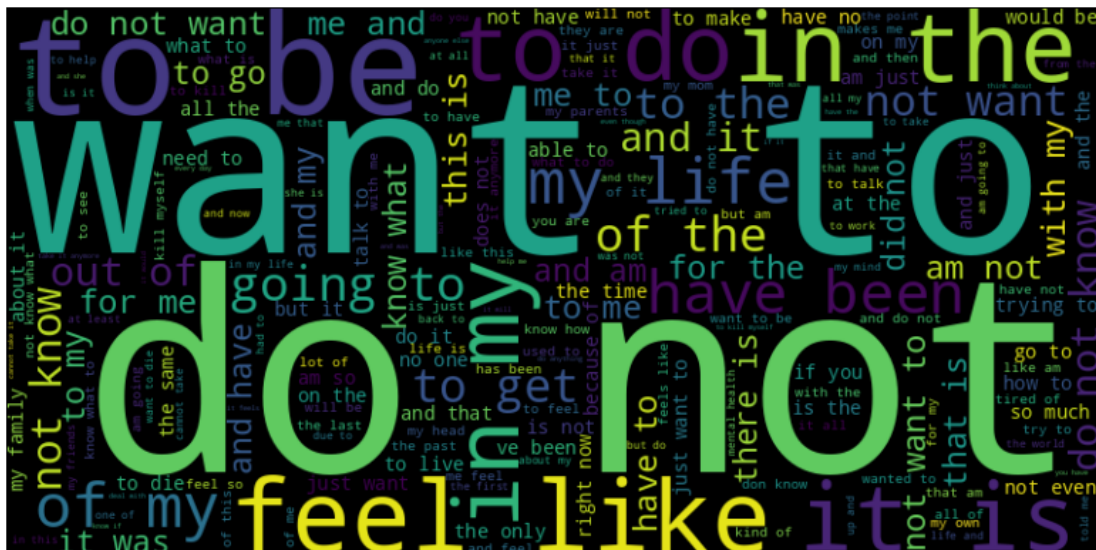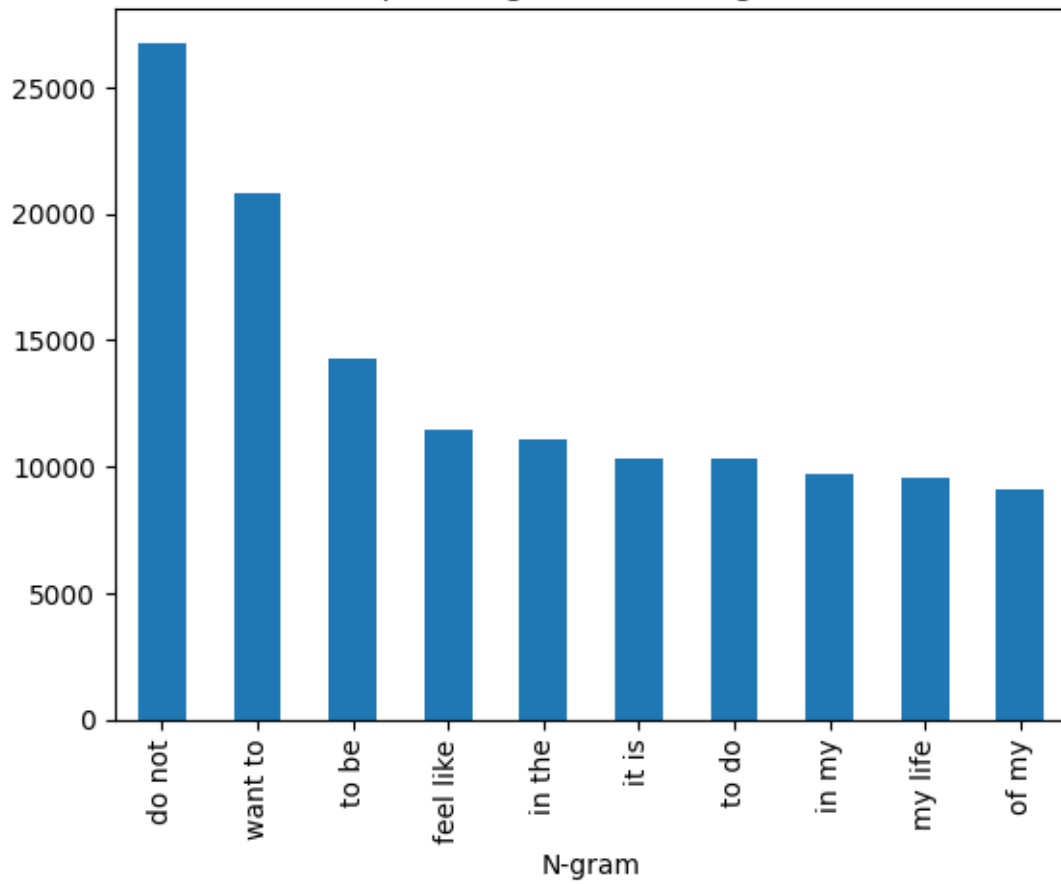

This visualizes the most common bi-grams and tri-grams in our dataset, providing insights into common phrases and patterns, which is particularly useful for sentiment analysis in mental health. It helps identify key expressions and themes that might indicate different emotional states or communication gaps. The top ten are do not, want to, to be, feel like, in the, it is, to do, in my, my life, and of my.

**Negative Sentiments:** Phrases like “do not” and “feel like” might indicate negative sentiments or expressions of reluctance and emotional states. These bi-grams can help identify statements where individuals are expressing dissatisfaction or discomfort.

**Desires and Intentions:** Bi-grams such as “want to” and “to do” suggest expressions of desires, intentions, or plans. Analyzing these can reveal what individuals are striving for or what actions they are considering, which can be linked to their mental state.

**Self-Reflection:** Phrases like “in my,” “my life,” and “of my” indicate self-reflection and personal experiences. These bi-grams can help identify statements where individuals are discussing their personal lives and feelings, which are critical for understanding their mental health.

**General Context:** Bi-grams like “to be,” “in the,” and “it is” provide general context and can be part of various expressions. While they might not directly indicate sentiment, they help in understanding the structure and flow of the text.

## 2.0.2 Week 4 Code- Preprocessing the data

df1 is the dataframe that does not have any of the missing values. filtered\_df is the dataframe with the outliers removed and no missing values. We will keep the outliers since sentiment analysis often has extreme reviews (e.g., very short or long ones) that can hold strong emotions, valuable for classification especially when using non-transformer models. For transformer models, we may remove outliers by shortening the word length input or use filtered\_df to reduce computational time without sacrificing performance. For now, we will use df1 to preprocess the data. Transformer models tend to have different preprocessing techniques anyways.

**Warning:** After installing imbalanced-learn, please **restart the kernel** for the changes to take effect.

You can do this in Jupyter Notebook by clicking:

**Kernel → Restart Kernel**

```
[22]: # install packages
      !pip install imbalanced-learn
```

```
Defaulting to user installation because normal site-packages is not writeable
Requirement already satisfied: imbalanced-learn in /home/jupyter-
geean/.local/lib/python3.12/site-packages (0.13.0)
Requirement already satisfied: numpy<3,>=1.24.3 in
/opt/tljh/user/lib/python3.12/site-packages (from imbalanced-learn) (1.26.4)
Requirement already satisfied: scipy<2,>=1.10.1 in
/opt/tljh/user/lib/python3.12/site-packages (from imbalanced-learn) (1.13.1)
Requirement already satisfied: scikit-learn<2,>=1.3.2 in
/opt/tljh/user/lib/python3.12/site-packages (from imbalanced-learn) (1.6.1)
Requirement already satisfied: sklearn-compat<1,>=0.1 in /home/jupyter-
```

```

geean/.local/lib/python3.12/site-packages (from imbalanced-learn) (0.1.3)
Requirement already satisfied: joblib<2,>=1.1.1 in
/opt/tljh/user/lib/python3.12/site-packages (from imbalanced-learn) (1.4.2)
Requirement already satisfied: threadpoolctl<4,>=2.0.0 in
/opt/tljh/user/lib/python3.12/site-packages (from imbalanced-learn) (3.5.0)

```

```

[23]: # import packages
import seaborn as sns

import re
import random
from imblearn.over_sampling import RandomOverSampler # used for oversampling
from scipy.sparse import hstack, csr_matrix # To combine sparse matrices

import nltk # nlp package
nltk.download('punkt') # install punkt tokenizer
from nltk.tokenize import word_tokenize # tokenize the text
from nltk.stem import PorterStemmer # stem the text

from sklearn.feature_extraction.text import TfidfVectorizer # used for tf-idf
from sklearn.model_selection import GridSearchCV # used to find the best
    ↪ parameters
from sklearn.preprocessing import LabelEncoder # used to encode categorical
    ↪ variables

```

```

[nltk_data] Downloading package punkt to /home/jupyter-
[nltk_data]     geean/nltk_data...
[nltk_data]   Package punkt is already up-to-date!

```

```

[24]: # Remove duplicates based on 'statement'
df_unique = df1.drop_duplicates(subset=['statement'])

df_unique.head()

```

```

[24]:

```

	statement	status	statement_len
0	oh my gosh	Anxiety	3
1	trouble sleeping, confused mind, restless hear...	Anxiety	10
2	All wrong, back off dear, forward doubt. Stay ...	Anxiety	14
3	I've shifted my focus to something else but I'...	Anxiety	11
4	I'm restless and restless, it's been a month n...	Anxiety	14

## 2.1 Why Add Sentence & Character Length in NLP?

Enhancing NLP models like **Naïve Bayes** and **XGBoost** with numerical metadata (e.g., sentence length, character count) improves performance by capturing structural insights.

### 2.1.1 Benefits:

- Structural Insights

- **Sentence Length:** Differentiates concise vs. verbose texts (e.g., tweets vs. articles).
- **Character Length:** Indicates complexity, verbosity, or spam tendencies.
- **Better Model Interpretability**
  - Helps tree-based models (e.g., XGBoost) make effective splits.
  - Useful for readability assessment, spam detection, and authorship identification.
- **Performance Boost**
  - Combines well with TF-IDF, embeddings, and n-grams.
  - Provides independent signals, improving classification accuracy.

### 2.1.2 Key Use Cases:

- **Sentiment Analysis:** Short reviews are often more direct (positive/negative).

```
[25]: # Calculate the number of characters and sentences
# install nltk downloader punkt_tab for sentences
nltk.download('punkt_tab')

df_unique['num_of_characters'] = df_unique['statement'].str.len()
df_unique['num_of_sentences'] = df_unique['statement'].apply(lambda x: len(nltk.
    ↪sent_tokenize(x)))

# Generate descriptive statistics
description = df_unique[['num_of_characters', 'num_of_sentences']].describe()

# Display the descriptive statistics
print(description)
```

```
[nltk_data] Downloading package punkt_tab to /home/jupyter-
[nltk_data]     geean/nltk_data...
[nltk_data]   Package punkt_tab is already up-to-date!
```

	num_of_characters	num_of_sentences
count	51073.000000	51073.000000
mean	575.375051	6.249251
std	847.661079	10.762749
min	2.000000	1.000000
25%	79.000000	1.000000
50%	313.000000	3.000000
75%	745.000000	8.000000
max	32759.000000	1260.000000

## 2.2 Text Preprocessing

### 2.2.1 Convert to lowercase for uniformity

```
[26]: # convert to lowercase
#rename columns
df_unique.rename(columns={'statement': 'original_statement'}, inplace=True)

# create a new cleaned statement column called statement
df_unique['statement']=df_unique['original_statement'].str.lower()
# see the first ten rows
df_unique.head()
```

```
[26]:
```

	original_statement	status	statement_len	\
0	oh my gosh	Anxiety	3	
1	trouble sleeping, confused mind, restless hear...	Anxiety	10	
2	All wrong, back off dear, forward doubt. Stay ...	Anxiety	14	
3	I've shifted my focus to something else but I'...	Anxiety	11	
4	I'm restless and restless, it's been a month n...	Anxiety	14	

	num_of_characters	num_of_sentences	\
0	10	1	
1	64	2	
2	78	2	
3	61	1	
4	72	2	

	statement
0	oh my gosh
1	trouble sleeping, confused mind, restless hear...
2	all wrong, back off dear, forward doubt. stay ...
3	i've shifted my focus to something else but i'...
4	i'm restless and restless, it's been a month n...

### 2.2.2 Remove URLs and other text, punctuation, and special text

To remove specific patterns such as URLs or other unwanted text (like [View Poll](https://www.reddit.com/poll/...)) from a column in a pandas DataFrame, we can use regular expressions with the re module or pandas built-in string methods. This will help us get cleaner relevant text.

```
[27]: def remove_patterns(text):
# Remove URLs
text = re.sub(r'http[s]?://\S+', '', text)
# Remove markdown-style links
text = re.sub(r'\[.*?\]\(.*?\)', '', text)
# Remove handles (that start with '@')
text = re.sub(r'@\w+', '', text)
```

```

# Remove punctuation and other special characters
text = re.sub(r'[\w\s]', '', text)
return text.strip()

# Apply the function to the 'statement' column
df_unique['statement'] = df_unique['statement'].apply(remove_patterns)
# see the first ten rows
df_unique.head()

```

```

[27]:

```

	original_statement	status	statement_len	\
0	oh my gosh	Anxiety	3	
1	trouble sleeping, confused mind, restless hear...	Anxiety	10	
2	All wrong, back off dear, forward doubt. Stay ...	Anxiety	14	
3	I've shifted my focus to something else but I'...	Anxiety	11	
4	I'm restless and restless, it's been a month n...	Anxiety	14	

	num_of_characters	num_of_sentences	\
0	10	1	
1	64	2	
2	78	2	
3	61	1	
4	72	2	

	statement
0	oh my gosh
1	trouble sleeping confused mind restless heart ...
2	all wrong back off dear forward doubt stay in ...
3	ive shifted my focus to something else but im ...
4	im restless and restless its been a month now ...

### 2.2.3 Tokenization

This is when the statements are split into words/tokens. Tokenization is **essential in NLP** as it breaks text into smaller units (tokens), making it **processable by models** like Naïve Bayes, XGBoost, and Transformers.

### 2.2.4 Key Benefits

- **Structures Raw Text** → Converts unstructured text into a usable format.
- **Boosts Model Performance** → Enables better text classification, sentiment analysis, etc.
- **Handles Language Variability**
  - **Word-based:** "I love NLP" → ["I", "love", "NLP"]
  - **Subword-based (BPE, WordPiece):** "unhappiness" → ["un", "happiness"]

– **Character-based:** Useful for languages without spaces (e.g., Chinese).

- **Improves Efficiency** → Reduces complexity for machine learning models.

```
[28]: # Apply word_tokenize to each element in the 'statement' column
df_unique['tokens'] = df_unique['statement'].apply(word_tokenize)
# see the first ten rows
df_unique.head()
```

```
[28]:
```

	original_statement	status	statement_len	\
0	oh my gosh	Anxiety	3	
1	trouble sleeping, confused mind, restless hear...	Anxiety	10	
2	All wrong, back off dear, forward doubt. Stay ...	Anxiety	14	
3	I've shifted my focus to something else but I'...	Anxiety	11	
4	I'm restless and restless, it's been a month n...	Anxiety	14	

	num_of_characters	num_of_sentences	\
0	10	1	
1	64	2	
2	78	2	
3	61	1	
4	72	2	

	statement	\
0	oh my gosh	
1	trouble sleeping confused mind restless heart ...	
2	all wrong back off dear forward doubt stay in ...	
3	ive shifted my focus to something else but im ...	
4	im restless and restless its been a month now ...	

	tokens
0	[oh, my, gosh]
1	[trouble, sleeping, confused, mind, restless, ...
2	[all, wrong, back, off, dear, forward, doubt, ...
3	[ive, shifted, my, focus, to, something, else,...
4	[im, restless, and, restless, its, been, a, mo...

## 2.3 What is Stemming & Why is it Important in NLP?

**Stemming** reduces words to their root form by removing prefixes/suffixes, helping **normalize text** and **reduce dimensionality** in NLP.

### 2.3.1 How It Works

- "running" → "run"
- "happily" → "happi"
- "flies" → "fli"



### 2.3.2 Why It Matters

- **Reduces Vocabulary Size** → Groups similar words.
- **Boosts Search & NLP Models** → "run" and "running" treated alike.
- **Speeds Up Processing** → Fewer unique tokens.

### 2.3.3 Limitation

- Can produce **incorrect roots** ("better" → "bet").
- **Lemmatization** (more accurate) uses a dictionary.

### 2.3.4 Takeaway

Stemming **simplifies text, reduces redundancy, and improves efficiency** in NLP.

```
[29]: # Initialize the stemmer
stemmer = PorterStemmer()

# Function to stem tokens and convert them to strings
def stem_tokens(tokens):
    return ' '.join(stemmer.stem(str(token)) for token in tokens)

# Apply the function to the 'tokens' column
df_unique['tokens_stemmed'] = df_unique['tokens'].apply(stem_tokens)

# print the first ten rows
df_unique.head()
```

```
[29]:
```

	original_statement	status	statement_len	\
0	oh my gosh	Anxiety	3	
1	trouble sleeping, confused mind, restless hear...	Anxiety	10	
2	All wrong, back off dear, forward doubt. Stay ...	Anxiety	14	
3	I've shifted my focus to something else but I'...	Anxiety	11	
4	I'm restless and restless, it's been a month n...	Anxiety	14	

	num_of_characters	num_of_sentences	\
0	10	1	
1	64	2	
2	78	2	
3	61	1	
4	72	2	

	statement	\
0	oh my gosh	
1	trouble sleeping confused mind restless heart ...	
2	all wrong back off dear forward doubt stay in ...	

```

3  ive shifted my focus to something else but im ...
4  im restless and restless its been a month now ...

                                tokens  \
0                                [oh, my, gosh]
1  [trouble, sleeping, confused, mind, restless, ...
2  [all, wrong, back, off, dear, forward, doubt, ...
3  [ive, shifted, my, focus, to, something, else,...
4  [im, restless, and, restless, its, been, a, mo...

                                tokens_stemmed
0                                oh my gosh
1  troubl sleep confus mind restless heart all ou...
2  all wrong back off dear forward doubt stay in ...
3  ive shift my focu to someth els but im still w...
4  im restless and restless it been a month now b...

```

## 2.4 Not Removing Stop Words

Stop words are **frequent words** that may not carry significant meaning in NLP tasks.

### 2.4.1 General Stop Words

- **Articles** → *a, an, the*
- **Prepositions** → *in, on, at, by, with*
- **Pronouns** → *I, you, he, she, it, they*
- **Conjunctions** → *and, but, or, so*
- **Auxiliary Verbs** → *is, are, was, were, have, do, does*

For **mental health sentiment analysis**, it's best to **keep stop words** because:

### 2.4.2 Context Matters

- Words like **“not,” “never,” “very”** can flip sentiment.
  - *“not okay” “okay”*

### 2.4.3 Emotional Expressions

- Stop words are essential for capturing **feelings and emotions**.
  - *“I feel so lost”* carries more meaning than *“feel lost”*.

We can see from the word clouds that there are not many stop words that are in bold so we will not remove them.

```

[30]: # Now we create our dataset for train-validation-test adding the numerical
      ↪ features

```

```
[31]: X = df_unique[['tokens_stemmed', 'num_of_characters', 'num_of_sentences']]
      y = df_unique['status']
```

## 2.5 Why Use Label Encoding for Categorical Variables?

Label encoding converts **categorical target variables (Y)** into numerical format for machine learning models.

### 2.5.1 Why is it Necessary?

- **ML Models Require Numeric Input** → Algorithms like **XGBoost**, **Naïve Bayes**, **SVM** can't process text labels.
- **Standardizes Target Variable** → Maps categories to integers (*e.g.*, “positive” → 2, “neutral” → 1, “negative” → 0).
- **Compatible with Many Models** → Needed for both **classification** and **regression tasks**.

```
[32]: # label encode our categorical variables for y
      lbl_enc = LabelEncoder()
      y = lbl_enc.fit_transform(y.values)
```

### 2.5.2 Train-Validation-Test Split

Most common splits are 80-20 so we will use this split here. We will also create a validation set that is 10% and the test set is 10%. The final splits will be 80-10-10.

I did these splits, since this is a common split in machine learning and data science but also because with 80% of the data as a training dataset, a large portion ensures that the model has enough data to learn from, which helps in capturing the underlying patterns and relationships in the data. With a Validation Set of 10%, it can tune hyperparameters and make decisions about the model architecture and helps prevent overfitting by providing a checkpoint to evaluate the model's performance on unseen data during the training process. With a 10% Test Set, we can evaluate the model's performance after it has been trained and validated and 10% is a large enough size given that we have approximately 50,000 data points. The 80-10-10 split is a balanced approach that ensures the model has sufficient data for training while also providing enough data for validation and testing to ensure robust performance

```
[33]: from sklearn.model_selection import train_test_split

      # Split the data into training (80%) and temporary (20%) sets
      train_x, temp_x, train_y, temp_y = train_test_split(X, y, test_size=0.2,
      ↪random_state=42)

      # Split the temporary set into validation (50%) and test (50%) sets
      val_x, test_x, val_y, test_y = train_test_split(temp_x, temp_y, test_size=0.5,
      ↪random_state=42)

      # Print the sizes of the splits
```

```
print(f"Training set size: {len(train_x)}")
print(f"Validation set size: {len(val_x)}")
print(f"Test set size: {len(test_x)}")
```

```
Training set size: 40858
Validation set size: 5107
Test set size: 5108
```

### 2.5.3 Week 5 Code- Feature Engineering, Data Augmentation and Reducing Dimensionality

We created the number of sentences and the character length as new features from the “statement” column earlier.

Since we only had “statement” column to begin with, we did not need to reduce dimensionality from our original dataset. However, we decided to remove `statement_length` from the data since these are very similar to number of characters and number of sentences.

Enhancing NLP models like Naïve Bayes and XGBoost with numerical metadata significantly improves performance by capturing valuable structural insights. Sentence length, for example, differentiates concise texts like tweets from verbose articles. Character count can indicate text complexity, verbosity, or even spam tendencies. These structural features not only offer better model interpretability, aiding tree-based models like XGBoost in making effective splits, but also boost overall performance. This metadata combines well with traditional NLP features like TF-IDF, embeddings, and n-grams, providing independent signals that enhance classification accuracy. Applications include readability assessment, spam detection, and even authorship identification, demonstrating the broad utility of incorporating numerical metadata into NLP workflows.

```
[34]: # look at training set to see the new features that we built earlier such as
      ↪ num_of_characters and num_of_sentences
      train_x.head()
```

```
[34]:
```

	tokens_stemmed	num_of_characters	\
1488	my children were given a no limit theme whi ar...	131	
21192	i feel complet lost with thing too mani overwh...	5371	
23638	hi i am an incom senior in highscool and my m...	544	
35989	never been to war but i get terribl nightmar t...	101	
44721	justagirl 9 that s great about your licens wis...	78	

	num_of_sentences
1488	1
21192	41
23638	6
35989	2
44721	1

### 2.5.4 Convert Text to Features using tf-idf to reduce dimensionality

Now, we will transform tokens (words) into numerical values that represent the importance of words in a document relative to a collection of documents. This helps highlight unique words

in a document while downplaying common ones, making it easier for machine learning models to identify relevant patterns and make better predictions.

TF-IDF plays a crucial role in sentiment analysis by weighting the importance of words within a document relative to the entire collection of documents (corpus). While it doesn't strictly *reduce* dimensionality like PCA by eliminating features (words), it effectively manages complexity by assigning weights that reflect a word's relevance. Term Frequency (TF) measures how often a word appears in a specific document, while Inverse Document Frequency (IDF) quantifies how rare that word is across the corpus. Common words like "the" or "a" appear frequently in almost all documents, resulting in low IDF scores. Conversely, words that appear frequently in some documents but rarely elsewhere have high IDF scores. The TF-IDF score, the product of TF and IDF, reflects the overall importance of a word in a particular document within the larger context of the corpus.

This weighting scheme is key to sentiment analysis because it downplays the influence of common, often uninformative words that contribute little to sentiment. These words, while frequent, are essentially noise. At the same time, TF-IDF highlights the words that are most discriminative of sentiment, those that appear frequently in documents expressing a particular sentiment but rarely elsewhere. By emphasizing these key terms, TF-IDF effectively reduces the impact of less relevant dimensions (words), allowing sentiment analysis models to focus on the most informative features. This leads to improved performance by making the model more robust to the curse of dimensionality, even though the actual number of features isn't reduced. In short, TF-IDF acts as a feature weighting mechanism, prioritizing the signal (sentiment indicators) over the noise (common words).

```
[35]: # 1. Initialize TF-IDF Vectorizer and fit/transform on the 'tokens_stemmed'
      ↪column
vectorizer = TfidfVectorizer(ngram_range=(1, 2), max_features=50000)
X_train_tfidf = vectorizer.fit_transform(train_x['tokens_stemmed'])
X_val_tfidf = vectorizer.transform(val_x['tokens_stemmed'])
test_x_tfidf = vectorizer.transform(test_x['tokens_stemmed'])

# 3. Numerical Feature Extraction
X_train_num = csr_matrix(train_x[['num_of_characters', 'num_of_sentences']].
      ↪values)
X_val_num = csr_matrix(val_x[['num_of_characters', 'num_of_sentences']].values)
test_x_num = csr_matrix(test_x[['num_of_characters', 'num_of_sentences']].
      ↪values)

# 4. Combine Features
X_train_combined = hstack([X_train_tfidf, X_train_num])
X_val_combined = hstack([X_val_tfidf, X_val_num])
test_x_combined = hstack([test_x_tfidf, test_x_num])

# Print number of feature words
print('Number of feature words:', len(vectorizer.get_feature_names_out()))
```

Number of feature words: 50000

```
[36]: X_train_combined.shape
```

```
[36]: (40858, 50002)
```

## 2.6 Why Oversampling for an Imbalanced Dataset?

In an **imbalanced dataset**, the model may favor the majority class, leading to **biased predictions**. **Oversampling** helps balance the dataset by increasing minority class samples.

### 2.6.1 Why is Oversampling Needed?

- **Prevents Majority Class Bias** → Ensures the model learns patterns from both classes.
- **Improves Model Performance** → Leads to better recall, F1-score, and generalization.
- **Enhances Minority Class Representation** → Avoids underestimating rare but important cases.

### 2.6.2 Why Does Random Over-Sampling Work Best?

**Maintains Original Data Distribution** → Simply duplicates minority class samples, avoiding synthetic noise (SMOTE).

**Preserves Minority Class Variability** → Unlike SMOTE, which may create unrealistic synthetic samples.

**Avoids Data Loss** → Unlike Under-Sampling, which removes majority class samples and risks losing valuable information.

```
[37]: # Apply Random Over-Sampling on the vectorized data
ros = RandomOverSampler(random_state=101)
X_train_resampled, y_train_resampled = ros.
fit_resample(X_train_combined, train_y)
```

```
[38]: # see the new dataset
X_train_resampled.shape
```

```
[38]: (89215, 50002)
```

### 2.6.3 Week 6 Code

### 2.6.4 Logistic Regression for NLP Sentiment Analysis in Mental Health

**Why Logistic Regression is Good for NLP Sentiment Analysis** Logistic regression is a popular choice for sentiment analysis in NLP, especially in the context of mental health, due to several reasons:

- **Simplicity and Interpretability:** Logistic regression is easy to implement and interpret. The coefficients can provide insights into the importance of different features (words or phrases) in predicting sentiment.
- **Efficiency:** It is computationally efficient and can handle large datasets, making it suitable for real-time applications.

- **Performance:** Logistic regression often performs well on text classification tasks, providing a strong baseline for more complex models.
- **Regularization:** It supports regularization techniques (L1 and L2) to prevent overfitting, which is crucial when dealing with high-dimensional text data.

**Multiclass Classification Using Logistic Regression** One-vs-Rest (OvR) Strategy The one-vs-rest (OvR) strategy is used for multi-class classification problems. Here's how it works:

**Binary Classifiers:** For a classification problem with N classes, the OvR strategy involves training N separate binary classifiers. Each classifier is responsible for distinguishing one class from all the others.

**Training:** Each binary classifier is trained to predict whether a given instance belongs to its specific class (positive class) or to any of the other classes (negative class). **Prediction:** When making predictions, each classifier outputs a probability or score indicating how likely an instance belongs to its class. The final prediction is the class with the highest probability or score among all classifiers.

## 2.7 Model Comparisons: Logistic Regression with Regularization

Here's a comparison of three logistic regression models with varying regularization:

### Model 1: Logistic Regression with L1 Regularization

- `solver='liblinear'`: Uses the 'liblinear' solver, suitable for small datasets.
- `penalty='l1'`: Applies L1 regularization (Lasso), which can help with feature selection by shrinking some coefficients to zero.
- `C=10`: Inverse of regularization strength. A higher value of C means less regularization.
- `random_state=101`: Ensures reproducibility by setting a seed for the random number generator.

### Model 2: Logistic Regression with L2 Regularization

- `solver='liblinear'`: Uses the 'liblinear' solver, suitable for small datasets.
- `penalty='l2'`: Applies L2 regularization (Ridge), which helps prevent overfitting by shrinking the coefficients but not to zero.
- `C=10`: Inverse of regularization strength. A higher value of C means less regularization.
- `random_state=101`: Ensures reproducibility by setting a seed for the random number generator.

### Model 3: Logistic Regression with L1 Regularization and Stronger Regularization

- `solver='liblinear'`: Uses the 'liblinear' solver, suitable for small datasets.
- `penalty='l1'`: Applies L1 regularization (Lasso), which can help with feature selection by shrinking some coefficients to zero.
- `C=5`: Inverse of regularization strength. A lower value of C means stronger regularization compared to Model 1.
- `random_state=101`: Ensures reproducibility by setting a seed for the random number generator.

**Summary of Differences:**

The key difference between these models is the type and strength of regularization. Models 1 and 3 use L1 regularization, while Model 2 uses L2. Model 3 applies stronger L1 regularization than Model 1 due to the lower value of C. The choice of L1 vs. L2 and the optimal value of C depends on the specific dataset and the goals of the modeling (e.g., feature selection, preventing overfitting).

```
[39]: # Define a dictionary of classifiers with their specific parameters.
# import packages needed
from sklearn.linear_model import LogisticRegression
from sklearn.metrics import accuracy_score, classification_report, \
    confusion_matrix
classifiers = {
    'Logistic Regression 1': LogisticRegression(solver='liblinear', \
    ↪penalty='l1', C=10, random_state=101),
    'Logistic Regression 2': LogisticRegression(solver='liblinear', \
    ↪penalty='l2', C=10, random_state=101),
    'Logistic Regression 3': LogisticRegression(solver='liblinear', \
    ↪penalty='l1', C=5, random_state=101)
}
```

**Training the Model and Calculating the Metrics** Commenting this out to speed up time!

```
[40]: # # create an empty list to store accuracy scores
# accuracy_scores = []
# training_accuracy_scores = []

# # create for loop to train, predict, and evaluate each model as well as the \
    ↪training, validation accuracy, confusion matrix and classification report
# for name, clf in classifiers.items():
#     clf.fit(X_train_resampled, y_train_resampled)

#     # Calculate and store training accuracy
#     y_train_pred = clf.predict(X_train_resampled)
#     training_accuracy = accuracy_score(y_train_resampled, y_train_pred)
#     training_accuracy_scores.append(training_accuracy)

#     # Calculate and store validation accuracy
#     y_pred = clf.predict(X_val_combined)
#     accuracy = accuracy_score(val_y, y_pred)
#     accuracy_scores.append(accuracy)

#     print("\n")
#     print(f"For {name}:")
#     print(f" Training Accuracy: {training_accuracy}")
#     print(f" Validation Accuracy: {accuracy}")

#     # Compute and display training confusion matrix and classification report
```



```

#     print("\nTraining Set Metrics:")
#     conf_matrix_train = confusion_matrix(y_train_resampled, y_train_pred)
#     print(classification_report(y_train_resampled, y_train_pred,
# ↪target_names=lbl_enc.classes_))

#     sns.heatmap(conf_matrix_train, annot=True, fmt='d', cmap='Blues',
# ↪xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
#     plt.xlabel('Predicted')
#     plt.ylabel('Actual')
#     plt.title(f'Training Confusion Matrix for {name}')
#     plt.show()

#     # Compute and display validation confusion matrix and classification
# ↪report
#     print("\nValidation Set Metrics:")
#     conf_matrix_val = confusion_matrix(val_y, y_pred)
#     print(classification_report(val_y, y_pred, target_names=lbl_enc.classes_))

#     sns.heatmap(conf_matrix_val, annot=True, fmt='d', cmap='Greens',
# ↪xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
#     plt.xlabel('Predicted')
#     plt.ylabel('Actual')
#     plt.title(f'Validation Confusion Matrix for {name}')
#     plt.show()

# # Print a summary of accuracy scores at the end
# print("\nSummary of Accuracy Scores:")
# for i, (name, _) in enumerate(classifiers.items()):
#     print(f"{name}:")
#     print(f"   Training Accuracy: {training_accuracy_scores[i]}")
#     print(f"   Validation Accuracy: {accuracy_scores[i]}")

# # (Optional) You can further analyze or compare accuracy scores here for
# ↪overfitting For example:
# for i, (name, _) in enumerate(classifiers.items()):
#     print(f"{name}:")
#     print(f"   Training Accuracy: {training_accuracy_scores[i]}")
#     print(f"   Validation Accuracy: {accuracy_scores[i]}")
#     difference = training_accuracy_scores[i] - accuracy_scores[i]
#     print(f"   Difference: {difference}") # This would display the difference
# ↪between the training and validation accuracy
#     if difference > 0.1: # difference is greater than 0.1
#         print("       Possible Overfitting")
#     elif difference < 0.02: # difference is less than 0.02
#         print("       Possible Underfitting")
#     else:

```

```
# print("    Model is likely a good fit")
```

## 2.8 Model Comparison

Here's a comparison of three models based on their training and validation accuracies:

Model	Training Accuracy	Validation Accuracy
Model 1	0.99	0.74
Model 2	0.89	0.757
Model 3	0.99	0.751

**Best Model:** Model 2

**Reason:** Model 2 has the highest validation accuracy (0.757) and shows less sign of overfitting compared to Model 1 and Model 3, which have a large gap between training and validation accuracy. A smaller difference between training and validation accuracy suggests better generalization to unseen data. Furthermore, Model 2 had the highest recall scores for more of the classifiers ( 5 highest recall values).

### 2.8.1 Week 7 Code

## 2.9 Bernoulli Naive Bayes for Sentiment Analysis for Mental Health

Bernoulli Naive Bayes is a popular choice for sentiment analysis, especially in domains like mental health, due to several key advantages:

### 2.9.1 1. Focus on Presence of Words

- **Binary Features:** Bernoulli Naive Bayes works with binary features – whether a word is present or absent in a text. This is well-suited for sentiment analysis where the presence of certain words (e.g., “sad,” “anxious,” “hopeless”) can strongly indicate mental health concerns.
- **Simplicity:** It doesn't consider the frequency of words, which can be less important than their mere presence in identifying sentiment related to mental health.

### 2.9.2 2. Efficiency with High-Dimensional Data

- **Text Data:** Mental health texts often involve diverse vocabularies and high dimensionality. Bernoulli Naive Bayes handles this efficiently, making it suitable for large datasets or situations requiring quick analysis.

### 2.9.3 3. Interpretability and Explainability

- **Transparency:** Understanding why a model classifies a text as expressing a particular sentiment is crucial in mental health. Bernoulli Naive Bayes offers some level of interpretability, allowing you to see which words contribute most to the classification. This can be valuable for researchers and clinicians.

#### 2.9.4 4. Sensitivity to Subtle Cues

- **Detecting Subtleties:** In mental health contexts, subtle language cues can be significant. While the “naive” assumption of word independence has limitations, it can sometimes be beneficial. By treating words independently, the model might pick up on subtle signals that would be missed if it focused heavily on word combinations or context.

#### 2.9.5 5. Suitability for Imbalanced Data

- **Prevalence of Challenges:** Mental health datasets often have imbalanced classes, with fewer instances of certain conditions. Bernoulli Naive Bayes can sometimes perform well with imbalanced data, making it relevant for mental health applications where some conditions are less prevalent.

### 2.10 Second Set of Classifiers for Naive Bayes

Each classifier applies **Bernoulli Naive Bayes** with a different **alpha** value. The **alpha** parameter controls **Laplace smoothing**, which prevents the model from assigning zero probability to words that were not seen in the training data. It plays a crucial role in improving generalization and handling unseen words in text classification.

#### 2.10.1 Effect of Different alpha Values:

- **= 0.1:** Low smoothing, making the model more sensitive to rare words.
- **= 1.0:** Default smoothing, providing a balance between sensitivity and generalization.
- **= 10.0:** Higher smoothing, reducing the impact of rare words by distributing probability more evenly.

#### 2.10.2 Importance of binarize=0.0

The **binarize** parameter ensures that the model works with **binary word features** (presence or absence of a word) rather than word frequency. This is particularly useful for **sentiment analysis in mental health** because:

1. **Focus on Important Words:** Instead of considering how many times a word appears, the model only cares **whether** it appears, which can improve classification when key words (e.g., “*anxious*,” “*hopeless*,” “*sad*”) strongly indicate sentiment.
2. **Reduces Noise:** In mental health text data, some words may appear frequently but are not necessarily relevant (e.g., filler words). Binarization helps eliminate this noise.
3. **Works Well with BernoulliNB:** The Bernoulli Naive Bayes model assumes binary features by design, making **binarize=0.0** a natural choice.

```
[41]: # create second set of classifiers for naive bayes
from sklearn.naive_bayes import BernoulliNB
classifiers2 = {
    'Bernoulli NB (alpha=0.1)': BernoulliNB(alpha=0.1, binarize=0.0),
```

```

'Bernoulli NB (alpha=1.0)': BernoulliNB(alpha=1.0, binarize=0.0),
'Bernoulli NB (alpha=10.0)': BernoulliNB(alpha=10.0, binarize=0.0),
}

```

```

[42]: # # Now run the same training code from week 6 for week 7
# # create an empty list to store accuracy scores
# accuracy_scores2 = []
# training_accuracy_scores2 = []

# # create for loop to train, predict, and evaluate each model as well as the
# ↪ training, validation accuracy, confusion matrix and classification report
# for name, clf in classifiers2.items():
#     clf.fit(X_train_resampled, y_train_resampled)

#     # Calculate and store training accuracy
#     y_train_pred = clf.predict(X_train_resampled)
#     training_accuracy = accuracy_score(y_train_resampled, y_train_pred)
#     training_accuracy_scores2.append(training_accuracy)

#     # Calculate and store validation accuracy
#     y_pred = clf.predict(X_val_combined)
#     accuracy = accuracy_score(val_y, y_pred)
#     accuracy_scores2.append(accuracy)

#     print("\n")
#     print(f"For {name}:")
#     print(f"    Training Accuracy: {training_accuracy}")
#     print(f"    Validation Accuracy: {accuracy}")

#     # Compute and display training confusion matrix and classification report
#     print("\nTraining Set Metrics:")
#     conf_matrix_train = confusion_matrix(y_train_resampled, y_train_pred)
#     print(classification_report(y_train_resampled, y_train_pred,
# ↪ target_names=lbl_enc.classes_))

#     sns.heatmap(conf_matrix_train, annot=True, fmt='d', cmap='Blues',
# ↪ xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
#     plt.xlabel('Predicted')
#     plt.ylabel('Actual')
#     plt.title(f'Training Confusion Matrix for {name}')
#     plt.show()

#     # Compute and display validation confusion matrix and classification
# ↪ report
#     print("\nValidation Set Metrics:")
#     conf_matrix_val = confusion_matrix(val_y, y_pred)
#     print(classification_report(val_y, y_pred, target_names=lbl_enc.classes_))

```

```

#     sns.heatmap(conf_matrix_val, annot=True, fmt='d', cmap='Greens',
↳xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
#     plt.xlabel('Predicted')
#     plt.ylabel('Actual')
#     plt.title(f'Validation Confusion Matrix for {name}')
#     plt.show()

# # Print a summary of accuracy scores at the end
# print("\nSummary of Accuracy Scores:")
# for i, (name, _) in enumerate(classifiers2.items()):
#     print(f"{name}:")
#     print(f" Training Accuracy: {training_accuracy_scores2[i]}")
#     print(f" Validation Accuracy: {accuracy_scores2[i]}")

# # (Optional) You can further analyze or compare accuracy scores here for
↳overfitting For example:
# for i, (name, _) in enumerate(classifiers2.items()):
#     print(f"{name}:")
#     print(f" Training Accuracy: {training_accuracy_scores2[i]}")
#     print(f" Validation Accuracy: {accuracy_scores2[i]}")
#     difference = training_accuracy_scores2[i] - accuracy_scores2[i]
#     print(f" Difference: {difference}") # This would display the difference
↳between the training and validation accuracy
#     if difference > 0.1: # difference is greater than 0.1
#         print(" Possible Overfitting")
#     elif difference < 0.02: # difference is less than 0.02
#         print(" Possible Underfitting")
#     else:
#         print(" Model is likely a good fit")

```

## 2.11 Model Comparison

Here's a comparison of three models based on their training and validation accuracies:

Model	Training Accuracy	Validation Accuracy
Model 1	0.75	0.6389
Model 2	0.71	0.6317
Model 3	0.99	0.6052

**Best Model:** Model 2

**Reason:** Model 1 has the highest validation accuracy (0.6389). Furthermore, Model 2 had the highest recall scores for more of the classifiers ( 4 highest recall values) and has less overfitting making it the better model with accuracy close to Model 1.

## 2.12 Week 8 Code

# 3 Why Use XGBoost for Sentiment Analysis in Mental Health?

## 3.1 1. Handles Imbalanced Data Well

Mental health sentiment datasets often have class imbalances (e.g., more neutral or non-anxious posts than highly anxious ones). XGBoost provides:

- `scale_pos_weight` to balance classes
- Custom loss functions to focus on minority class performance

## 3.2 2. Captures Complex Relationships

Mental health sentiment is influenced by nuanced language patterns, and XGBoost can:

- Identify **non-linear** interactions between words and context
- Work well with **engineered features** (e.g., TF-IDF scores, sentiment polarity, linguistic cues)

## 3.3 3. Works Well with Sparse Data

- Sentiment features (TF-IDF, word embeddings) are typically **high-dimensional and sparse**.
- XGBoost efficiently handles sparse matrices with the `gpu_hist` tree method, making it fast even on large text datasets.

## 3.4 4. Robust to Noisy Data

- Mental health text data often contains **spelling errors, slang, and abbreviations**.
- XGBoost's regularization (`reg_alpha`, `reg_lambda`) helps prevent overfitting on noisy text features.

## 3.5 5. Fast and Scalable

- XGBoost is optimized for **parallel computation** and can leverage GPUs for faster training.
- It **scales well** to large datasets, making it ideal for **social media sentiment analysis**.

## 3.6 6. Feature Importance & Interpretability

- Unlike deep learning models, XGBoost provides **feature importance scores**, helping explain **which words or features impact mental health sentiment predictions**.
- This interpretability is crucial for mental health professionals who need actionable insights.

## 3.7 7. Effective with Ensemble Methods

- Can be combined with **logistic regression, LSTMs, or BERT-based models** for improved sentiment classification.

- Hybrid approaches like **XGBoost + Embeddings** can yield strong performance on mental health text data.
- 

### 3.7.1 Conclusion

XGBoost is a **powerful, efficient, and interpretable** model for **sentiment analysis in mental health**, especially when working with **engineered text features** like TF-IDF or word embeddings. It effectively handles imbalanced, sparse, and noisy data while providing insights into key predictive features.

## 3.8 Explanation of the Three XGBoost Models

Here's a breakdown of the three XGBoost classifiers defined in the `classifiers3` dictionary, highlighting the key differences in their hyperparameters and their intended effects:

### 1. XGB\_Conservative

- **learning\_rate=0.05**: This is a very low learning rate. It means the model takes small steps towards minimizing the loss function. This makes the learning process slower but can lead to more accurate models, especially if the data is noisy.
- **max\_depth=3**: This limits the maximum depth of each tree in the ensemble. Shallow trees are less prone to overfitting but might not capture complex relationships in the data.
- **n\_estimators=200**: This sets the number of boosting rounds (trees) to 200. While this is less than a more aggressive model, it is still a substantial number of trees.
- **subsample=0.6**: This means that 60% of the training data is randomly sampled for each tree. This helps reduce overfitting and speeds up training.
- **colsample\_bytree=0.6**: This means that 60% of the columns (features) are randomly sampled for each tree. This also helps reduce overfitting and increases diversity among the trees.
- **reg\_alpha=2 and reg\_lambda=2**: These are L1 and L2 regularization terms, respectively. High values increase regularization, which adds a penalty for complex models, further reducing overfitting.
- **tree\_method='hist'**: This uses the histogram-based algorithm for building trees, which is generally faster than the exact greedy algorithm, especially for large datasets.
- **Intended Effect**: This configuration is designed to be conservative, aiming for robustness and reduced overfitting. The low learning rate and strong regularization should produce a model that generalizes well, but it might take longer to train and might not capture very fine-grained patterns.

### 2. XGB\_Faster

- **learning\_rate=0.1**: This is a moderate learning rate, twice that of the “Conservative” model. It allows the model to learn faster.
- **max\_depth=3**: Same as the “Conservative” model, limiting tree depth.
- **n\_estimators=200**: Same number of trees as the “Conservative” model.
- **subsample=0.7 and colsample\_bytree=0.7**: These values are slightly higher than the “Conservative” model, meaning that more data and features are used for each tree. This can lead to slightly better performance but also slightly increased risk of overfitting.
- **reg\_alpha=1 and reg\_lambda=1**: These regularization values are lower than the “Conservative” model, reducing the strength of regularization.

- **tree\_method='hist'**: Same as the “Conservative” model.
- **Intended Effect**: This model aims for a balance between speed and performance. The increased learning rate and reduced regularization should make it faster than the “Conservative” model while maintaining reasonable accuracy.

### 3. XGB\_Fastest

- **learning\_rate=0.2**: This is a relatively high learning rate, allowing the model to converge even faster.
- **max\_depth=3**: Same as the other models.
- **n\_estimators=200**: Same number of trees as the other models.
- **subsample=0.7 and colsample\_bytree=0.7**: Same as the “Faster” model.
- **reg\_alpha=1 and reg\_lambda=1**: Same as the “Faster” model.
- **tree\_method='hist'**: Same as the other models.
- **Intended Effect**: This model is designed for speed. The high learning rate should result in the fastest training time among the three models. However, it might be more prone to overfitting and might not achieve the same level of accuracy as the other models, especially if the data is complex or noisy.

### Summary of Differences

Parameter	XGB_Conservative	XGB_Faster	XGB_Fastest
learning_rate	0.05	0.1	0.2
subsample	0.6	0.7	0.7
colsample_bytree	0.6	0.7	0.7
reg_alpha	2	1	1
reg_lambda	2	1	1

In essence, the models trade off between speed and potential accuracy:

- “Conservative” prioritizes accuracy and robustness, potentially at the cost of training time.
- “Faster” strikes a balance between speed and accuracy.
- “Fastest” prioritizes speed, potentially sacrificing some accuracy.

```
[43]: # Free up memory
import gc
gc.collect()
```

[43]: 0

```
[44]: from xgboost import XGBClassifier

# Define three versions of the XGBClassifier with different hyperparameters
classifiers3 = {
    # 'XGB_Conservative': XGBClassifier(
    #     learning_rate=0.05,
    #     max_depth=3, # Reduced from 6
    #     n_estimators=200, # Reduced from 800
    #     subsample=0.6,
```



```

#     colsample_bytree=0.6,
#     reg_alpha=2,
#     reg_lambda=2,
#     random_state=101,
#     tree_method='hist',
# ),
# 'XGB_Faster': XGBClassifier(
#     learning_rate=0.1,
#     max_depth=3,
#     n_estimators=200,
#     subsample=0.7,
#     colsample_bytree=0.7,
#     reg_alpha=1,
#     reg_lambda=1,
#     random_state=101,
#     tree_method='hist',
# ),
# 'XGB_Fastest': XGBClassifier(
#     learning_rate=0.2,
#     max_depth=3,
#     n_estimators=200,
#     subsample=0.7,
#     colsample_bytree=0.7,
#     reg_alpha=1,
#     reg_lambda=1,
#     random_state=101,
#     tree_method='hist',
# )
}

```

```

[45]: # Now run the same training code from week 6 for week 8
# create an empty list to store accuracy scores
accuracy_scores3 = []
training_accuracy_scores3 = []

# create for loop to train, predict, and evaluate each model as well as the
# training, validation accuracy, confusion matrix and classification report
for name, clf in classifiers3.items():
    clf.fit(X_train_resampled, y_train_resampled)

    # Calculate and store training accuracy
    y_train_pred = clf.predict(X_train_resampled)
    training_accuracy = accuracy_score(y_train_resampled, y_train_pred)
    training_accuracy_scores3.append(training_accuracy)

    # Calculate and store validation accuracy
    y_pred = clf.predict(X_val_combined)

```

```

accuracy = accuracy_score(val_y, y_pred)
accuracy_scores3.append(accuracy)

print("\n")
print(f"For {name}:")
print(f"  Training Accuracy: {training_accuracy}")
print(f"  Validation Accuracy: {accuracy}")

# Compute and display training confusion matrix and classification report
print("\nTraining Set Metrics:")
conf_matrix_train = confusion_matrix(y_train_resampled, y_train_pred)
print(classification_report(y_train_resampled, y_train_pred,
↪target_names=lbl_enc.classes_))

sns.heatmap(conf_matrix_train, annot=True, fmt='d', cmap='Blues',
↪xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
plt.xlabel('Predicted')
plt.ylabel('Actual')
plt.title(f'Training Confusion Matrix for {name}')
plt.show()

# Compute and display validation confusion matrix and classification report
print("\nValidation Set Metrics:")
conf_matrix_val = confusion_matrix(val_y, y_pred)
print(classification_report(val_y, y_pred, target_names=lbl_enc.classes_))

sns.heatmap(conf_matrix_val, annot=True, fmt='d', cmap='Greens',
↪xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
plt.xlabel('Predicted')
plt.ylabel('Actual')
plt.title(f'Validation Confusion Matrix for {name}')
plt.show()

# Print a summary of accuracy scores at the end
print("\nSummary of Accuracy Scores:")
for i, (name, _) in enumerate(classifiers3.items()):
    print(f"{name}:")
    print(f"  Training Accuracy: {training_accuracy_scores3[i]}")
    print(f"  Validation Accuracy: {accuracy_scores3[i]}")

# (Optional) You can further analyze or compare accuracy scores here for
↪overfitting For example:
for i, (name, _) in enumerate(classifiers3.items()):
    print(f"{name}:")
    print(f"  Training Accuracy: {training_accuracy_scores3[i]}")
    print(f"  Validation Accuracy: {accuracy_scores3[i]}")
    difference = training_accuracy_scores3[i] - accuracy_scores3[i]

```

```

print(f" Difference: {difference}") # This would display the difference
↪ between the training and validation accuracy
if difference > 0.1: # difference is greater than 0.1
    print(" Possible Overfitting")
elif difference < 0.02: # difference is less than 0.02
    print(" Possible Underfitting")
else:
    print(" Model is likely a good fit")

```


For XGB\_Fastest:

Training Accuracy: 0.8924732388051336

Validation Accuracy: 0.7736440180144899


Training Set Metrics:

	precision	recall	f1-score	support
Anxiety	0.95	0.92	0.93	12745
Bipolar	0.97	0.94	0.95	12745
Depression	0.83	0.70	0.76	12745
Normal	0.87	0.92	0.90	12745
Personality disorder	0.96	0.99	0.97	12745
Stress	0.88	0.97	0.92	12745
Suicidal	0.79	0.82	0.80	12745
accuracy			0.89	89215
macro avg	0.89	0.89	0.89	89215
weighted avg	0.89	0.89	0.89	89215

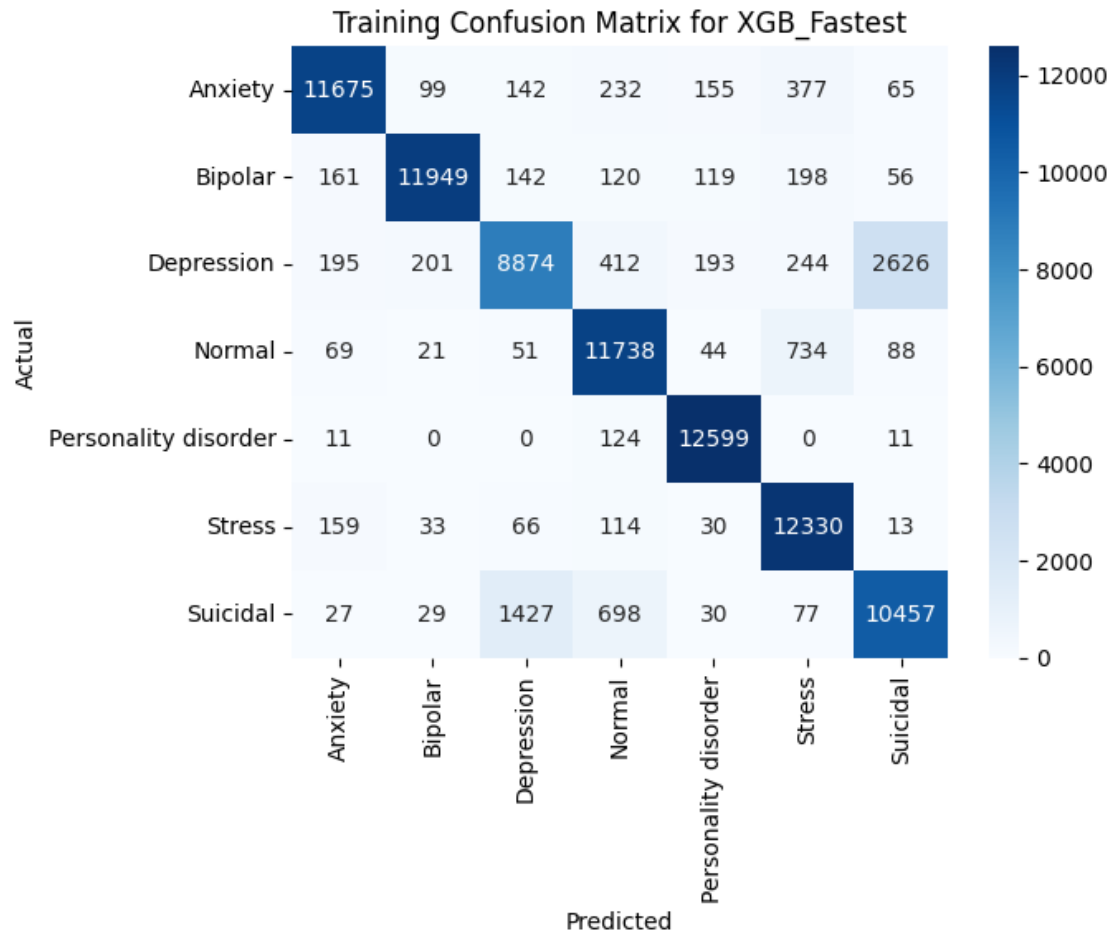

Validation Set Metrics:

	precision	recall	f1-score	support
Anxiety	0.83	0.83	0.83	361
Bipolar	0.78	0.83	0.80	251
Depression	0.82	0.65	0.72	1521
Normal	0.92	0.89	0.91	1662
Personality disorder	0.51	0.72	0.60	92
Stress	0.47	0.84	0.60	224
Suicidal	0.63	0.73	0.68	996
accuracy			0.77	5107
macro avg	0.71	0.78	0.73	5107
weighted avg	0.79	0.77	0.78	5107

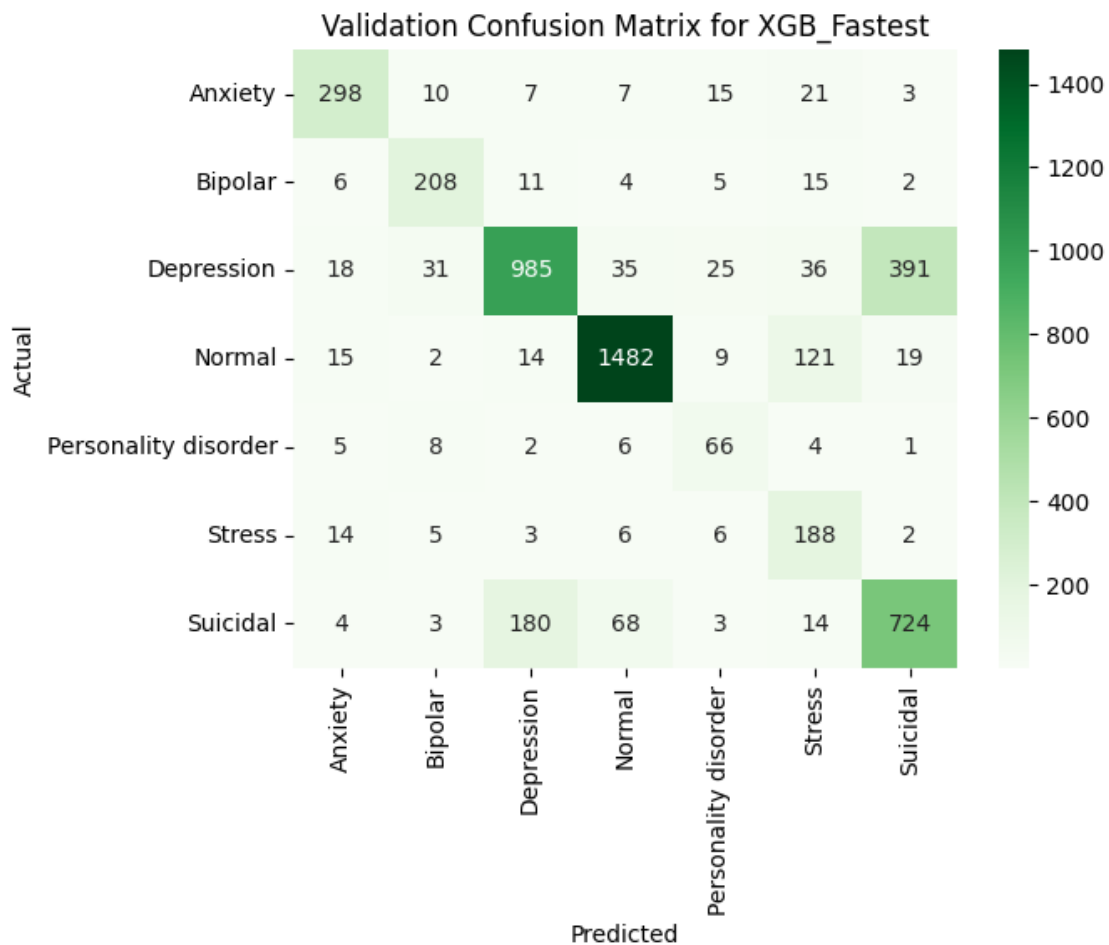

Summary of Accuracy Scores:

XGB\_Fastest:

Training Accuracy: 0.8924732388051336

Validation Accuracy: 0.7736440180144899

XGB\_Fastest:

Training Accuracy: 0.8924732388051336

Validation Accuracy: 0.7736440180144899

Difference: 0.11882922079064373

Possible Overfitting

### 3.9 Model Comparison

Here's a comparison of three models based on their training and validation accuracies:

Model	Training Accuracy	Validation Accuracy
Model 1	0.80	0.74

Model	Training Accuracy	Validation Accuracy
Model 2	0.84	0.76
Model 3	0.89	0.77

**Best Model:** Model 3

**Reason:** Model 3 has the highest validation accuracy (0.77). Furthermore, Model 3 had the highest average recall scores.

### 3.9.1 Week 9 Code

Evaluation of the validation set is shown in previous code. Now we will create plots that show all models and their training accuracies, validation accuracies, training weighted average recall, and validation weighted average recall.

```
[46]: # Comparing Models on Validation and Training Accuracy plots

# Model names for all 9
model_names = ["Logistic Regression 1 (L1, C=10)", "Logistic Regression 2 (L2, C=10)", "Logistic Regression 3 (L1, C=5)",
               "Bernoulli NB 1 (alpha=0.1)", "Bernoulli NB 2 (alpha=1.0)", "Bernoulli NB 3 (alpha=10.0)",
               "XGBoost 1 (0.05 learning rate)", "XGBoost 2 (0.1 learning rate)", "XGBoost 3 (0.2 learning rate)"]

# # Combine the accuracy scores and model names
# training_accuracies_all = training_accuracy_scores + training_accuracy_scores2 + training_accuracy_scores3
# validation_accuracies_all = accuracy_scores + accuracy_scores2 + accuracy_scores3

# # Create a DataFrame for easy sorting and plotting
# data = pd.DataFrame({
#     'Model': model_names,
#     'Training Accuracy': training_accuracies_all,
#     'Validation Accuracy': validation_accuracies_all
# })

# # Plot training accuracies
# plt.figure(figsize=(14, 7))
# sns.barplot(x='Model', y='Training Accuracy', data=data)
# plt.title("Training Accuracies (Simple to Complex Models)")
# plt.xlabel("Models")
# plt.ylabel("Training Accuracy")
# plt.xticks(rotation=45, ha="right")
# plt.tight_layout()
```

```

# plt.show()

# # Plot validation accuracies (sorted)
# plt.figure(figsize=(14, 7))
# sns.barplot(x='Model', y='Validation Accuracy', data=data)
# plt.title("Validation Accuracies (Simple to Complex Models)")
# plt.xlabel("Models")
# plt.ylabel("Validation Accuracy")
# plt.xticks(rotation=45, ha="right")
# plt.tight_layout()
# plt.show()

# #Combined Bar plot
# plt.figure(figsize=(14,7))

# plt.bar(data['Model'], data['Training Accuracy'], label = 'Training_
    ↳Accuracy', alpha = 0.7)
# plt.bar(data['Model'], data['Validation Accuracy'], label = 'Validation_
    ↳Accuracy', alpha = 0.7)
# plt.xticks(rotation=45, ha='right')
# plt.title('Training and Validation Accuracies Combined (Simple to Complex_
    ↳Models)')
# plt.ylabel('Accuracy')
# plt.xlabel('Models')
# plt.legend()
# plt.tight_layout()
# plt.show()

```

```

[47]: # Training and Validation Weighted Average Charts

# weight_avg_recalls_all for training and validation pulled from_
    ↳classification report in the same order as the model names above.
weight_avg_recalls_all_train = [1.00, 0.89, 0.99, 0.75, 0.71, 0.64, 0.80, 0.84,
    ↳0.89]
weight_avg_recalls_all_val = [0.74, 0.76, 0.75, 0.64, 0.63, 0.61, 0.74, 0.76, 0.
    ↳77]

# Create DataFrames for easy plotting
data_train = pd.DataFrame({
    'Model': model_names,
    'Training Recall': weight_avg_recalls_all_train
})

data_val = pd.DataFrame({
    'Model': model_names,
    'Validation Recall': weight_avg_recalls_all_val
})


```

```


# Bar plot for Training Recall
plt.figure(figsize=(14, 7))
sns.barplot(x='Model', y='Training Recall', data=data_train)
plt.xlabel("Models")
plt.ylabel("Weighted Average Recall")
plt.xticks(rotation=45, ha="right")
plt.title("Weighted Average Recall - Training")
plt.tight_layout()
plt.show()

# Bar plot for Validation Recall
plt.figure(figsize=(14, 7))
sns.barplot(x='Model', y='Validation Recall', data=data_val)
plt.xlabel("Models")
plt.ylabel("Weighted Average Recall")
plt.xticks(rotation=45, ha="right")
plt.title("Weighted Average Recall - Validation")
plt.tight_layout()
plt.show()

```

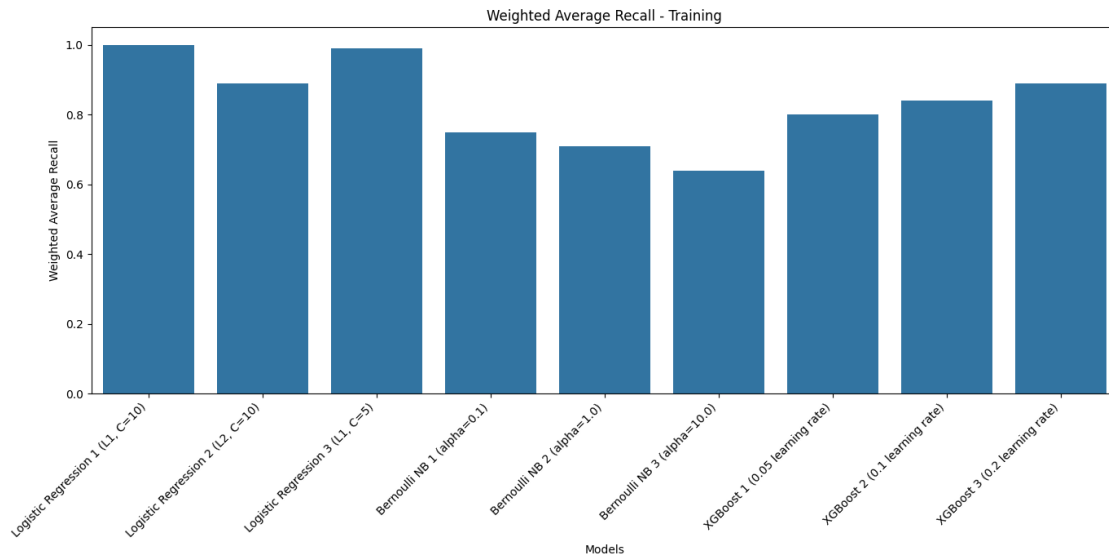



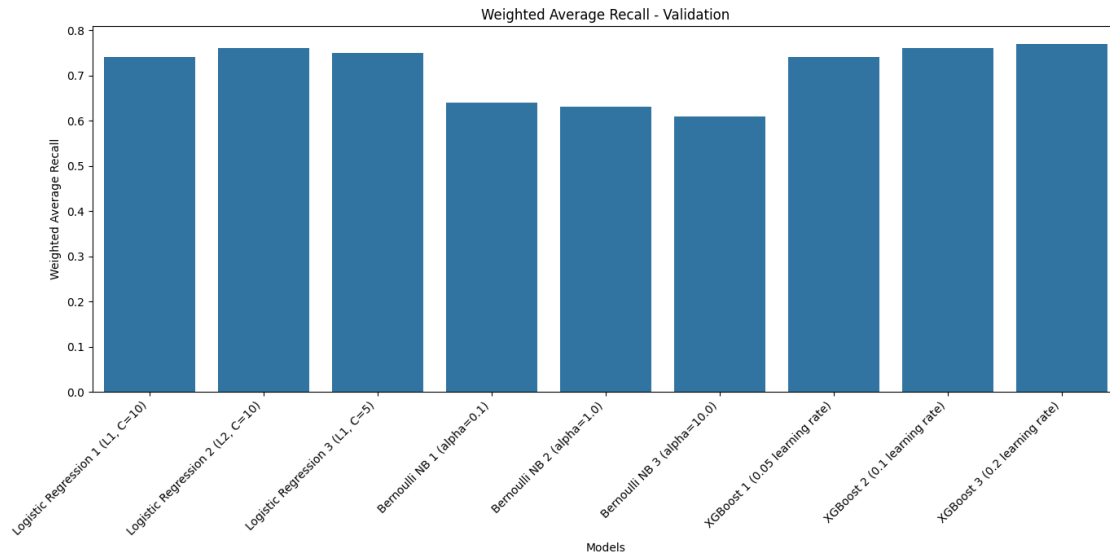

```
[48]: import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt

# Training and Validation Weighted Average Charts

# weight_avg_recalls_all for training and validation pulled from classification_
# report in the same order as the model names above.
weight_avg_recalls_all_train = [1.00, 0.89, 0.99, 0.75, 0.71, 0.64, 0.80, 0.84,
0.89]
weight_avg_recalls_all_val = [0.74, 0.76, 0.75, 0.64, 0.63, 0.61, 0.74, 0.76, 0.
77]

# Model names for all 9
model_names = ["Logistic Regression 1 (L1, C=10)", "Logistic Regression 2 (L2,
C=10)", "Logistic Regression 3 (L1, C=5)",
"Bernoulli NB 1 (alpha=0.1)", "Bernoulli NB 2 (alpha=1.0)",
"Bernoulli NB 3 (alpha=10.0)",
"XGBoost 1 (0.05 learning rate)", "XGBoost 2 (0.1 learning
rate)", "XGBoost 3 (0.2 learning rate)"]

# Calculate False Negative Rate (FNR)
false_negative_all_train = [1 - recall for recall in
weight_avg_recalls_all_train]
weight_avg_recalls_all_val = [1 - recall for recall in
weight_avg_recalls_all_val]

# Create DataFrames for easy plotting
```

```


data_train = pd.DataFrame({
    'Model': model_names,
    'Training FNR': false_negative_all_train
})


data_val = pd.DataFrame({
    'Model': model_names,
    'Validation FNR': weight_avg_recalls_all_val
})

# Bar plot for Training FNR
plt.figure(figsize=(14, 7))
sns.barplot(x='Model', y='Training FNR', data=data_train)
plt.xlabel("Models")
plt.ylabel("False Negative Rate (FNR)")
plt.xticks(rotation=45, ha="right")
plt.title("False Negative Rate (FNR) - Training")
plt.tight_layout()
plt.show()

# Bar plot for Validation FNR
plt.figure(figsize=(14, 7))
sns.barplot(x='Model', y='Validation FNR', data=data_val)
plt.xlabel("Models")
plt.ylabel("False Negative Rate (FNR)")
plt.xticks(rotation=45, ha="right")
plt.title("False Negative Rate (FNR) - Validation")
plt.tight_layout()
plt.show()

```

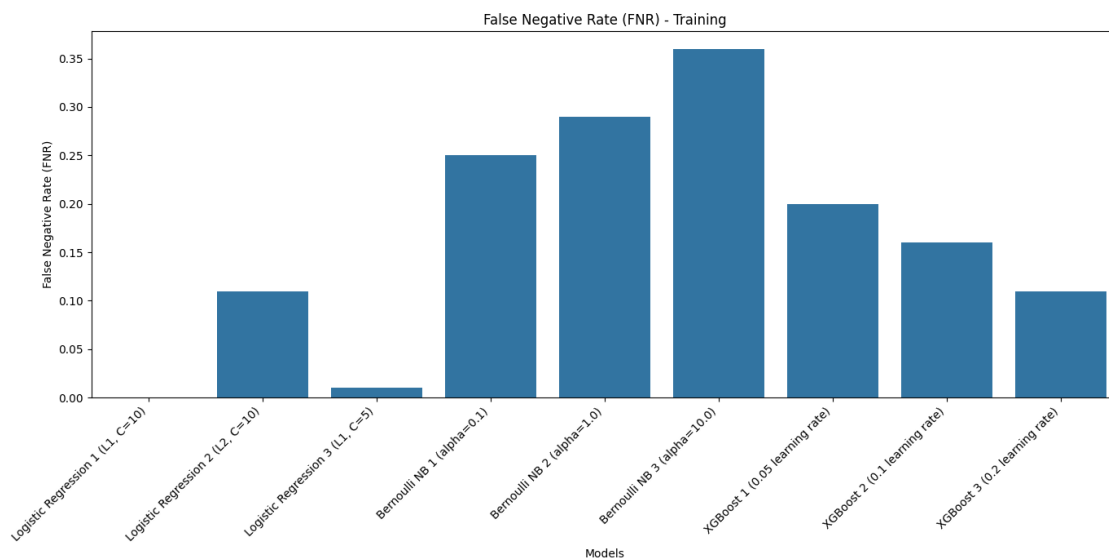

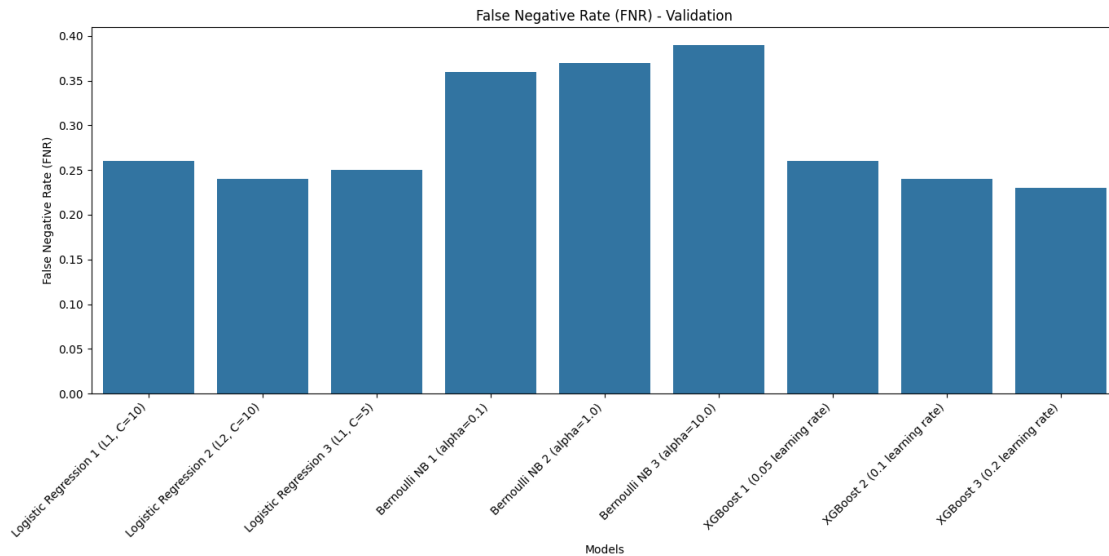

### 3.9.2 Best Model

The best model is XGBoost 3 with 0.2 learning rate because it has the highest validation accuracy and highest validation average recall. Furthermore, it has a lower difference between training and validation accuracy, which means there is a lower chance of overfitting.

```
[49]: # Now evaluate the test set using the best model XGBoost Fastest

# Get the last model from classifiers3
last_model_name, last_model = list(classifiers3.items())[-1]

# Predict on the test set using the last model (using test_x_combined)
y_test_pred = last_model.predict(test_x_combined)

# Calculate and print test accuracy
test_accuracy = accuracy_score(test_y, y_test_pred)
print("\n")
print(f"For {last_model_name}:")
print(f"  Test Accuracy: {test_accuracy}")

# Compute and display test confusion matrix and classification report
print("\nTest Set Metrics:")
conf_matrix_test = confusion_matrix(test_y, y_test_pred)
print(classification_report(test_y, y_test_pred, target_names=lbl_enc.classes_))

sns.heatmap(conf_matrix_test, annot=True, fmt='d', cmap='Reds',
            xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
```

```

plt.xlabel('Predicted')
plt.ylabel('Actual')
plt.title(f'Test Confusion Matrix for {last_model_name}')
plt.show()

# Optional: Compare Training, Validation, and Test scores.
print(f"{last_model_name}:")
print(f" Training Accuracy: {training_accuracy_scores3[-1]}")
print(f" Validation Accuracy: {accuracy_scores3[-1]}")
print(f" Test Accuracy: {test_accuracy}")


```

For XGB\_Fastest:

Test Accuracy: 0.7846515270164448

Test Set Metrics:

	precision	recall	f1-score	support
Anxiety	0.82	0.84	0.83	377
Bipolar	0.77	0.84	0.80	257
Depression	0.83	0.65	0.73	1468
Normal	0.91	0.90	0.91	1632
Personality disorder	0.54	0.73	0.62	102
Stress	0.51	0.83	0.64	230
Suicidal	0.67	0.76	0.71	1042
accuracy			0.78	5108
macro avg	0.72	0.79	0.75	5108
weighted avg	0.80	0.78	0.79	5108

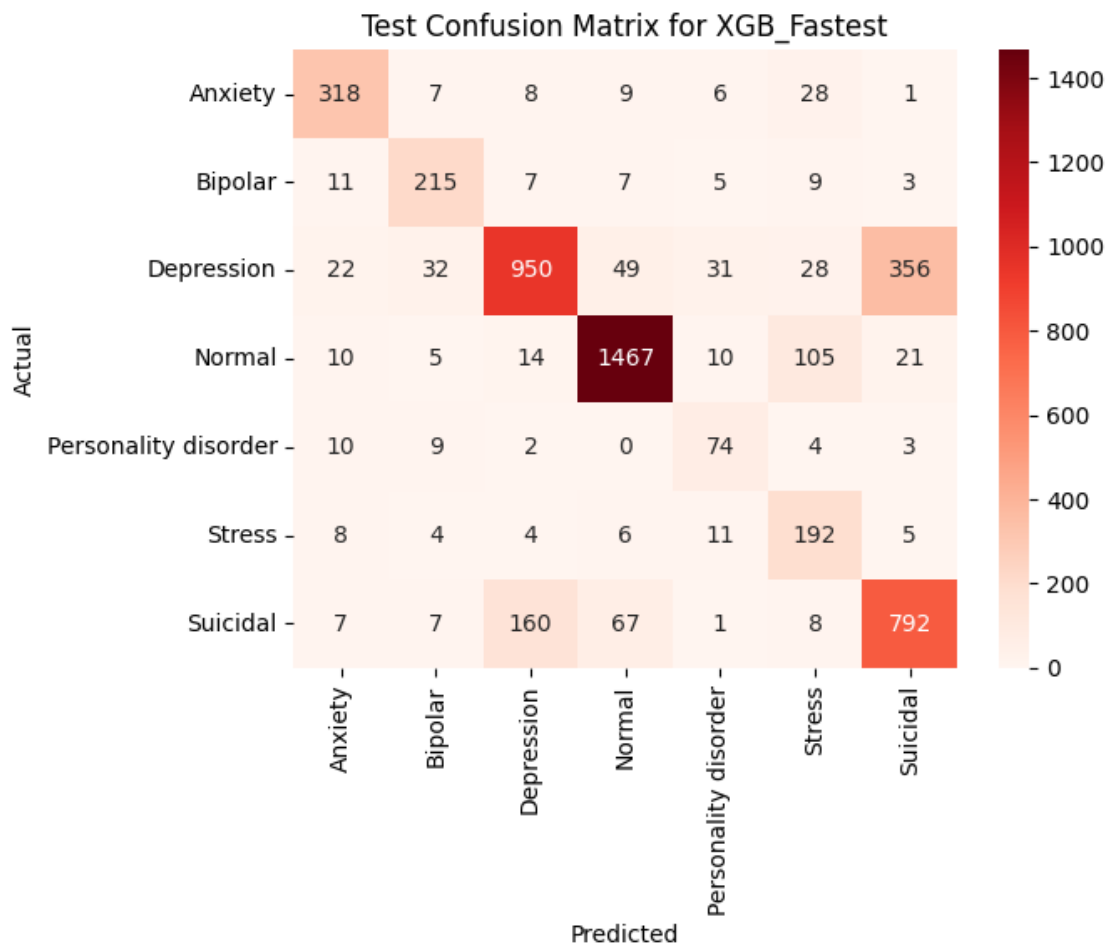

XGB\_Fastest:

Training Accuracy: 0.8924732388051336

Validation Accuracy: 0.7736440180144899

Test Accuracy: 0.7846515270164448

## 4 Week 10 Code Data Centric AI and Error Analysis

We have already done quite a bit of data centric AI techniques from earlier but here are three new ones we would like to test out.

Note: I also commented out a lot of code previously so that it will run faster (comment out all logistic, all naive bayes, only the best XGBoost Model). If you want to see all the code and its output, please check previous weeks code and code output.

### 4.0.1 Error Analysis on Training Dataset

Let's calculate the True Positives (TP), True Negatives (TN), False Positives (FP), and False Negatives (FN) which represents the performance of the XGBoost "XGB\_Fastest" model on the

training dataset.

## **Class-wise Calculations**

### **1. Anxiety**

- **TP:** 11675
- **TN:** 58686 (Sum of all other values excluding row and column of Anxiety)
- **FP:** 621 (Sum of column Anxiety excluding TP)
- **FN:** 1070 (Sum of row Anxiety excluding TP)

### **2. Bipolar**

- **TP:** 11949
- **TN:** 58586 (Sum of all other values excluding row and column of Bipolar)
- **FP:** 383 (Sum of column Bipolar excluding TP)
- **FN:** 796 (Sum of row Bipolar excluding TP)

### **3. Depression**

- **TP:** 8874
- **TN:** 61632 (Sum of all other values excluding row and column of Depression)
- **FP:** 1828 (Sum of column Depression excluding TP)
- **FN:** 3871 (Sum of row Depression excluding TP)

### **4. Normal**

- **TP:** 11738
- **TN:** 58681 (Sum of all other values excluding row and column of Normal)
- **FP:** 1700 (Sum of column Normal excluding TP)
- **FN:** 1007 (Sum of row Normal excluding TP)

### **5. Personality Disorder**

- **TP:** 12599
- **TN:** 57948 (Sum of all other values excluding row and column of Personality Disorder)
- **FP:** 571 (Sum of column Personality Disorder excluding TP)
- **FN:** 146 (Sum of row Personality Disorder excluding TP)

### **6. Stress**

- **TP:** 12330
- **TN:** 58498 (Sum of all other values excluding row and column of Stress)
- **FP:** 1630 (Sum of column Stress excluding TP)
- **FN:** 415 (Sum of row Stress excluding TP)

### **7. Suicidal**

- **TP:** 10457
- **TN:** 59247 (Sum of all other values excluding row and column of Suicidal)
- **FP:** 2859 (Sum of column Suicidal excluding TP)
- **FN:** 2288 (Sum of row Suicidal excluding TP)

## **Analysis**

- **Very High Performance on Training Data:** The model performs exceptionally well on the training data, with very high TP values across all classes. This is expected, as models tend to fit training data very closely.
- **Potential Overfitting:** The significant difference in performance between the training and validation sets (from the previous confusion matrix) suggests potential overfitting. The model might be memorizing the training data rather than learning generalizable patterns.
- **Challenges with Depression and Suicidal:** Even on the training data, the model shows relatively higher FN for “Depression” and “Suicidal” compared to other classes. This indicates that these classes might be inherently more challenging to distinguish.
- **Class Imbalance:** Similar to the validation set, the training data likely also has a class imbalance, which can affect the model’s ability to learn equally well for all classes.

```
[50]: # Calculate the error analysis for training dataset

# in array form the training confusion matrix for XGBoost Fastest
confusionmatrix1 = np.array([
    [11675, 99, 142, 232, 155, 377, 65],
    [161, 11949, 142, 120, 119, 198, 56],
    [195, 201, 8874, 412, 193, 244, 2626],
    [69, 21, 51, 11738, 44, 734, 88],
    [11, 0, 0, 124, 12599, 0, 11],
    [159, 33, 66, 114, 30, 12330, 13],
    [27, 29, 1427, 698, 30, 77, 10457]
])

classes = ["Anxiety", "Bipolar", "Depression", "Normal", "Personality_
Disorder", "Stress", "Suicidal"]

results = {}

for i, class_name in enumerate(classes):
    tp = confusionmatrix1[i, i]
    tn = np.sum(np.delete(np.delete(confusionmatrix1, i, axis=0), i, axis=1))
    fp = np.sum(confusionmatrix1[:, i]) - tp
    fn = np.sum(confusionmatrix1[i, :]) - tp

    results[class_name] = {
        "TP": tp,
        "TN": tn,
        "FP": fp,
        "FN": fn
    }

for class_name, metrics in results.items():
    print(f"Class: {class_name}")
    print(f"  TP: {metrics['TP']}")
    print(f"  TN: {metrics['TN']}")
```

```
print(f"  FP: {metrics['FP']}")
print(f"  FN: {metrics['FN']}")
print("-" * 20)
```

Class: Anxiety

TP: 11675

TN: 75848

FP: 622

FN: 1070

-----  
Class: Bipolar

TP: 11949

TN: 76087

FP: 383

FN: 796

-----  
Class: Depression

TP: 8874

TN: 74642

FP: 1828

FN: 3871

-----  
Class: Normal

TP: 11738

TN: 74770

FP: 1700

FN: 1007

-----  
Class: Personality Disorder

TP: 12599

TN: 75899

FP: 571

FN: 146

-----  
Class: Stress

TP: 12330

TN: 74840

FP: 1630

FN: 415

-----  
Class: Suicidal

TP: 10457

TN: 73611

FP: 2859

FN: 2288

-----



#### 4.0.2 Error Analysis on Validation Dataset (XGBoost Fastest)

We decided to focus our error analysis on the validation confusion matrix on our best model XGBoost Fastest.

##### Class-wise Calculations

###### 1. Anxiety

- **TP:** 298
- **TN:** 4308 (Sum of all other values excluding row and column of Anxiety)
- **FP:** 62 (Sum of column Anxiety excluding TP)
- **FN:** 63 (Sum of row Anxiety excluding TP)

###### 2. Bipolar

- **TP:** 208
- **TN:** 4363 (Sum of all other values excluding row and column of Bipolar)
- **FP:** 59 (Sum of column Bipolar excluding TP)
- **FN:** 43 (Sum of row Bipolar excluding TP)

###### 3. Depression

- **TP:** 985
- **TN:** 3948 (Sum of all other values excluding row and column of Depression)
- **FP:** 210 (Sum of column Depression excluding TP)
- **FN:** 536 (Sum of row Depression excluding TP)

###### 4. Normal

- **TP:** 1482
- **TN:** 3451 (Sum of all other values excluding row and column of Normal)
- **FP:** 121 (Sum of column Normal excluding TP)
- **FN:** 180 (Sum of row Normal excluding TP)

###### 5. Personality Disorder

- **TP:** 66
- **TN:** 4267 (Sum of all other values excluding row and column of Personality Disorder)
- **FP:** 81 (Sum of column Personality Disorder excluding TP)
- **FN:** 26 (Sum of row Personality Disorder excluding TP)

###### 6. Stress

- **TP:** 188
- **TN:** 4145 (Sum of all other values excluding row and column of Stress)
- **FP:** 566 (Sum of column Stress excluding TP)
- **FN:** 36 (Sum of row Stress excluding TP)

###### 7. Suicidal

- **TP:** 724
- **TN:** 4016 (Sum of all other values excluding row and column of Suicidal)
- **FP:** 418 (Sum of column Suicidal excluding TP)
- **FN:** 272 (Sum of row Suicidal excluding TP)

## Analysis

- **High Performance for Normal and Depression:** The model performs exceptionally well in classifying “Normal” and “Depression” with high TP and relatively low FP and FN.
- **Challenges with Suicidal and Stress:** The model struggles with classifying “Suicidal” and “Stress,” showing higher FP and FN rates. This suggests potential confusion between these classes and others.
- **Class Imbalance:** There seems to be an imbalance in the dataset. Some classes, like “Normal” and “Depression,” have significantly more samples than others, which could affect the model’s performance.

```
[51]: # Validation Error Analysis
# similar to above except for validation confusion matrix for xgboost
confusionmatrix2 = np.array([
    [298, 10, 7, 7, 15, 21, 3],
    [6, 208, 11, 4, 5, 15, 2],
    [18, 31, 985, 35, 25, 36, 391],
    [15, 2, 14, 1482, 9, 121, 19],
    [5, 8, 2, 6, 66, 4, 1],
    [14, 5, 3, 6, 6, 188, 2],
    [4, 3, 180, 68, 3, 14, 724]
])

classes = ["Anxiety", "Bipolar", "Depression", "Normal", "Personality_
Disorder", "Stress", "Suicidal"]

results = {}

for i, class_name in enumerate(classes):
    tp1 = confusionmatrix2[i, i]
    tn1 = np.sum(np.delete(np.delete(confusionmatrix2, i, axis=0), i, axis=1))
    fp1 = np.sum(confusionmatrix2[:, i]) - tp1
    fn1 = np.sum(confusionmatrix2[i, :]) - tp1

    results[class_name] = {
        "TP": tp1,
        "TN": tn1,
        "FP": fp1,
        "FN": fn1
    }

for class_name, metrics in results.items():
    print(f"Class: {class_name}")
    print(f"  TP: {metrics['TP']}")
    print(f"  TN: {metrics['TN']}")
    print(f"  FP: {metrics['FP']}")
    print(f"  FN: {metrics['FN']}")
    print("-" * 20)
```

Class: Anxiety

TP: 298

TN: 4684

FP: 62

FN: 63

-----

Class: Bipolar

TP: 208

TN: 4797

FP: 59

FN: 43

-----

Class: Depression

TP: 985

TN: 3369

FP: 217

FN: 536

-----

Class: Normal

TP: 1482

TN: 3319

FP: 126

FN: 180

-----

Class: Personality Disorder

TP: 66

TN: 4952

FP: 63

FN: 26

-----

Class: Stress

TP: 188

TN: 4672

FP: 211

FN: 36

-----

Class: Suicidal

TP: 724

TN: 3693

FP: 418

FN: 272

-----

## 5 Data-Centric AI Techniques for Sentiment Analysis in Mental Health

In our approach to **sentiment analysis for mental health**, we focus on improving the **quality and structure of the dataset** rather than modifying the model itself. Below are three **new Data-Centric AI techniques** we will implement:

### 5.1 1. Adding Statement Length as a Feature

#### 5.1.1 Why It Helps

- Longer statements may **contain more context** and emotional depth, which can improve sentiment classification.
- Shorter statements might be more ambiguous or lack sufficient emotional cues.
- By including **statement length** as a numerical feature, the model can learn patterns between text length and sentiment, improving overall performance.

### 5.2 2. Using SMOTE Instead of Random Oversampling

#### 5.2.1 Why It Helps

- Instead of simple duplication (random oversampling), **SMOTE (Synthetic Minority Over-sampling Technique)** creates **synthetic examples** of the minority class. This may help with predicting stress and suicidal, which it has a hard time doing.
- This technique **reduces bias toward majority sentiment classes**, making the model more balanced.
- For mental health sentiment analysis, where **negative and neutral sentiments** might be underrepresented, **SMOTE ensures these classes have sufficient data for learning**.

### 5.3 3. Removing Outliers from the Data

#### 5.3.1 Why It Helps

- **Outliers in sentiment data** could be caused by noisy, irrelevant, or misclassified text (e.g., sarcastic or off-topic responses).
- Removing outliers **improves the overall consistency of the dataset**, reducing potential confusion for the model especially since the outliers tended to be depression and normal, which have many cases already and create a more balanced dataset.
- This is especially important in **mental health sentiment analysis**, where extreme or anomalous responses might not align with general sentiment patterns.

#### 5.3.2 Conclusion

By focusing on **data quality enhancements**, these techniques aim to **make sentiment predictions more accurate and fair**, ensuring that the model effectively captures mental health-related sentiments in a meaningful way.

### 5.3.3 1. Removing Outliers from the Data

From the outliers plot way back in the beginning of this notebook, we calculated the outliers for upper and lower bound. We will use those upper and lower bounds and remove them from `df_unique`.

```
[52]: df_ai = df_unique[(df_unique['statement_len'] >= lower_bound) &
    ↪ (df_unique['statement_len'] <= upper_bound)]
```

### 5.3.4 2. Add Statement Length

When we created our X and y, our training and test data, we dropped the statement length column since they seemed similar to number of characters and number of sentences. We will add it back in now, run the train-test split again and tf-idf.

```
[53]: X1 = df_ai[['tokens_stemmed', 'num_of_characters',
    ↪ 'num_of_sentences', 'statement_len']]
y1 = df_ai['status']
```

```
[54]: # label encode our categorical variables for y
lbl_enc = LabelEncoder()
y1 = lbl_enc.fit_transform(y1.values)
```

```
[55]: from sklearn.model_selection import train_test_split

# Split the data into training (80%) and temporary (20%) sets
train_x1, temp_x1, train_y1, temp_y1 = train_test_split(X1, y1, test_size=0.2,
    ↪ random_state=42)

# Split the temporary set into validation (50%) and test (50%) sets
val_x1, test_x1, val_y1, test_y1 = train_test_split(temp_x1, temp_y1,
    ↪ test_size=0.5, random_state=42)

# Print the sizes of the splits
print(f"Training set size: {len(train_x1)}")
print(f"Validation set size: {len(val_x1)}")
print(f"Test set size: {len(test_x1)}")
```

```
Training set size: 38188
Validation set size: 4773
Test set size: 4774
```

```
[56]: # 1. Initialize TF-IDF Vectorizer and fit/transform on the 'tokens_stemmed'
    ↪ column
vectorizer = TfidfVectorizer(ngram_range=(1, 2), max_features=50000)
X_train_tfidf1 = vectorizer.fit_transform(train_x1['tokens_stemmed'])
X_val_tfidf1 = vectorizer.transform(val_x1['tokens_stemmed'])
test_x_tfidf1 = vectorizer.transform(test_x1['tokens_stemmed'])
```

```

# 3. Numerical Feature Extraction
X_train_num1 = csr_matrix(train_x1[['num_of_characters',
    ↳ 'num_of_sentences', 'statement_len']].values)
X_val_num1 = csr_matrix(val_x1[['num_of_characters',
    ↳ 'num_of_sentences', 'statement_len']].values)
test_x_num1 = csr_matrix(test_x1[['num_of_characters',
    ↳ 'num_of_sentences', 'statement_len']].values)

# 4. Combine Features
X_train_combined1 = hstack([X_train_tfidf1, X_train_num1])
X_val_combined1 = hstack([X_val_tfidf1, X_val_num1])
test_x_combined1 = hstack([test_x_tfidf1, test_x_num1])

# Print number of feature words
print('Number of feature words:', len(vectorizer.get_feature_names_out()))

```

Number of feature words: 50000

### 5.3.5 3. Now Use SMOTE instead of Random Oversampling

```

[57]: # View the mapping of categorical labels to numeric labels
print(lbl_enc.classes_)
# this means anxiety-0, bipolar-1 etc. depression-2, normal-3, personality_
    ↳ disorder-4, stress-5, suicidal-6

```

```

['Anxiety' 'Bipolar' 'Depression' 'Normal' 'Personality disorder' 'Stress'
 'Suicidal']

```

```

[58]: # Check the distribution of your target labels for SMOTE
import pandas as pd

df = pd.DataFrame({'status': y1}) # Assuming y1 is your label data
print(df['status'].value_counts())

```

```

status
3    16039
2    13440
6     9671
0     3328
1     2229
5     2224
4      804
Name: count, dtype: int64

```

```

[59]: # Free up memory
import gc
gc.collect()

```

[59]: 32412

```
[60]: # Use SMOTE to oversample the training data
from imblearn.over_sampling import SMOTE
# I would like to add 3000 samples to all classes except 3,2 and 6. I would do
↳ more but computationally intensive
sampling_strategy = {
    0: 6328, # Class 0: 3328 + 3000 = 6328
    1: 5229, # Class 1: 2229 + 3000 = 5229
    4: 3804, # Class 4: 804 + 3000 = 3804
    5: 5224 # Class 5: 2224 + 3000 = 5224
}

smote = SMOTE(sampling_strategy = sampling_strategy, random_state=0)
X_train_resampled1, y_train_resampled1 = smote.
↳ fit_resample(X_train_combined1, train_y1)
```

```
[61]: ### Now Train Using these new techniques using XGBoost
# Now run the same training code from week 6 for week 8
# create an empty list to store accuracy scores
accuracy_scores4 = []
training_accuracy_scores4 = []

# create for loop to train, predict, and evaluate each model as well as the
↳ training, validation accuracy, confusion matrix and classification report
for name, clf in classifiers3.items():
    clf.fit(X_train_resampled1, y_train_resampled1)

    # Calculate and store training accuracy
    y_train_pred = clf.predict(X_train_resampled1)
    training_accuracy = accuracy_score(y_train_resampled1, y_train_pred)
    training_accuracy_scores4.append(training_accuracy)

    # Calculate and store validation accuracy
    y_pred = clf.predict(X_val_combined1)
    accuracy = accuracy_score(val_y1, y_pred)
    accuracy_scores4.append(accuracy)

    print("\n")
    print(f"For {name}:")
    print(f"  Training Accuracy: {training_accuracy}")
    print(f"  Validation Accuracy: {accuracy}")

    # Compute and display training confusion matrix and classification report
    print("\nTraining Set Metrics:")
    conf_matrix_train = confusion_matrix(y_train_resampled1, y_train_pred)
```

```

    print(classification_report(y_train_resampled1, y_train_pred,
↪target_names=lbl_enc.classes_))

    sns.heatmap(conf_matrix_train, annot=True, fmt='d', cmap='Blues',
↪xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
    plt.xlabel('Predicted')
    plt.ylabel('Actual')
    plt.title(f'Training Confusion Matrix for {name}')
    plt.show()

    # Compute and display validation confusion matrix and classification report
    print("\nValidation Set Metrics:")
    conf_matrix_val = confusion_matrix(val_y1, y_pred)
    print(classification_report(val_y1, y_pred, target_names=lbl_enc.classes_))

    sns.heatmap(conf_matrix_val, annot=True, fmt='d', cmap='Greens',
↪xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
    plt.xlabel('Predicted')
    plt.ylabel('Actual')
    plt.title(f'Validation Confusion Matrix for {name}')
    plt.show()

# Print a summary of accuracy scores at the end
print("\nSummary of Accuracy Scores:")
for i, (name, _) in enumerate(classifiers3.items()):
    print(f"{name}:")
    print(f"  Training Accuracy: {training_accuracy_scores4[i]}")
    print(f"  Validation Accuracy: {accuracy_scores4[i]}")

# (Optional) You can further analyze or compare accuracy scores here for
↪overfitting For example:
for i, (name, _) in enumerate(classifiers3.items()):
    print(f"{name}:")
    print(f"  Training Accuracy: {training_accuracy_scores4[i]}")
    print(f"  Validation Accuracy: {accuracy_scores4[i]}")
    difference = training_accuracy_scores4[i] - accuracy_scores4[i]
    print(f"  Difference: {difference}") # This would display the difference
↪between the training and validation accuracy
    if difference > 0.1: # difference is greater than 0.1
        print("    Possible Overfitting")
    elif difference < 0.02: # difference is less than 0.02
        print("    Possible Underfitting")
    else:
        print("    Model is likely a good fit")

```




For XGB\_Fastest:

Training Accuracy: 0.8838867582724662

Validation Accuracy: 0.7986591242405195


Training Set Metrics:

	precision	recall	f1-score	support
Anxiety	0.95	0.93	0.94	6328
Bipolar	0.97	0.93	0.95	5229
Depression	0.81	0.80	0.80	10741
Normal	0.90	0.97	0.93	12855
Personality disorder	0.98	0.96	0.97	3804
Stress	0.92	0.92	0.92	5224
Suicidal	0.78	0.73	0.75	7708
accuracy			0.88	51889
macro avg	0.90	0.89	0.90	51889
weighted avg	0.88	0.88	0.88	51889

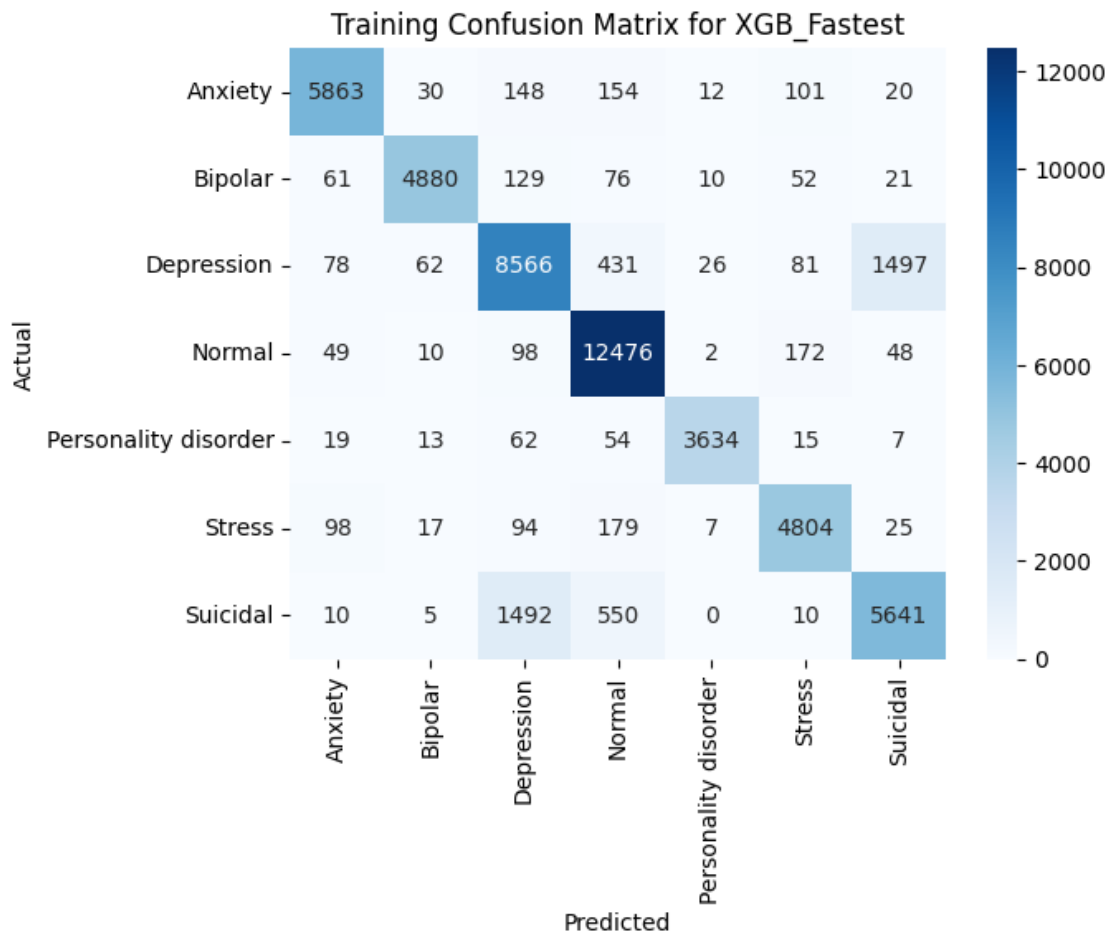

# Validation Set Metrics:

	precision	recall	f1-score	support
Anxiety	0.82	0.80	0.81	335
Bipolar	0.83	0.76	0.79	233
Depression	0.76	0.76	0.76	1307
Normal	0.88	0.94	0.91	1624
Personality disorder	0.76	0.55	0.64	87
Stress	0.63	0.65	0.64	231
Suicidal	0.73	0.68	0.70	956
accuracy			0.80	4773
macro avg	0.77	0.73	0.75	4773
weighted avg	0.80	0.80	0.80	4773

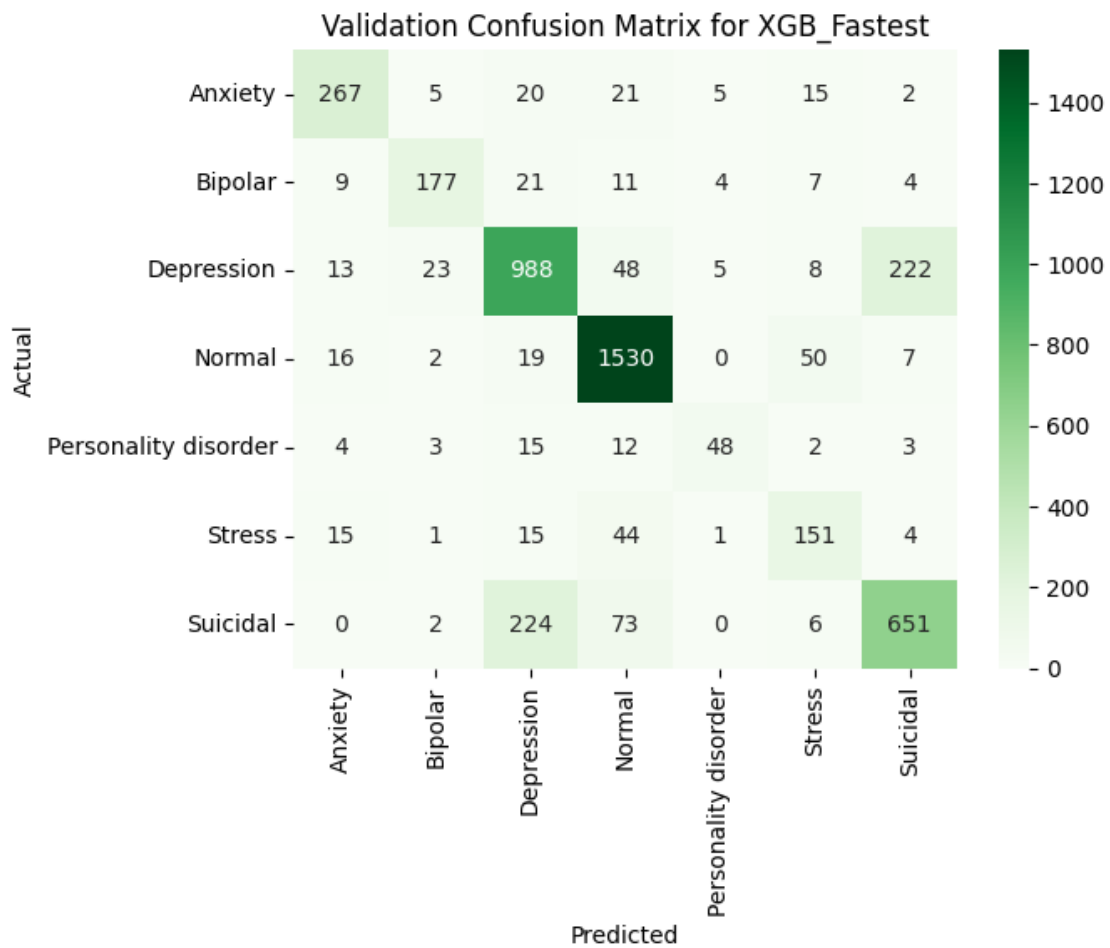

Summary of Accuracy Scores:

XGB\_Fastest:

Training Accuracy: 0.8838867582724662

Validation Accuracy: 0.7986591242405195

XGB\_Fastest:

Training Accuracy: 0.8838867582724662

Validation Accuracy: 0.7986591242405195

Difference: 0.08522763403194666

Model is likely a good fit

### 5.3.6 Which Model is better?

The XGBoost model where we did the three new data centric ai techniques performed better than the XGBoost Model we selected last week. This may be because we produced a more balanced dataset by looking at the imbalance and using SMOTE to balance it better as well as removing outliers, which also created a more balanced dataset since it removed a lot of normal and depression ( 2 classes with lots of samples) but not the other classes. It also had a lot less overfitting because the gap between training and validation accuracy was not as big. It also had a higher validation accuracy. It also has higher average recall score.

Model	Training Accuracy	Validation Accuracy	Validation Recall
XGBoost	0.89	0.77	0.77
XGBoost SMOTE	0.88	0.80	0.80

```
[62]: # Now evaluate the test set using the best model and the best training and test
      ↪ dataset.

# Get the last model from classifiers3
last_model_name, last_model = list(classifiers3.items())[-1]

# Predict on the test set using the last model (using test_x_combined)
y_test_pred = last_model.predict(test_x_combined1)

# Calculate and print test accuracy
test_accuracy = accuracy_score(test_y1, y_test_pred)
print("\n")
print(f"For {last_model_name}:")
print(f" Test Accuracy: {test_accuracy}")

# Compute and display test confusion matrix and classification report
print("\nTest Set Metrics:")
conf_matrix_test = confusion_matrix(test_y1, y_test_pred)
print(classification_report(test_y1, y_test_pred, target_names=lbl_enc.
      ↪classes_))
```

```

sns.heatmap(conf_matrix_test, annot=True, fmt='d', cmap='Reds',
             xticklabels=lbl_enc.classes_, yticklabels=lbl_enc.classes_)
plt.xlabel('Predicted')
plt.ylabel('Actual')
plt.title(f'Test Confusion Matrix for {last_model_name}')
plt.show()

# Optional: Compare Training, Validation, and Test scores.
print(f"{last_model_name}:")
print(f"  Training Accuracy: {training_accuracy_scores4[-1]}")
print(f"  Validation Accuracy: {accuracy_scores4[-1]}")
print(f"  Test Accuracy: {test_accuracy}")


```

For XGB\_Fastest:

Test Accuracy: 0.7855048177628823

Test Set Metrics:

	precision	recall	f1-score	support
Anxiety	0.81	0.82	0.82	302
Bipolar	0.90	0.77	0.83	224
Depression	0.74	0.72	0.73	1392
Normal	0.87	0.95	0.91	1560
Personality disorder	0.72	0.58	0.64	83
Stress	0.65	0.63	0.64	206
Suicidal	0.70	0.67	0.68	1007
accuracy			0.79	4774
macro avg	0.77	0.73	0.75	4774
weighted avg	0.78	0.79	0.78	4774

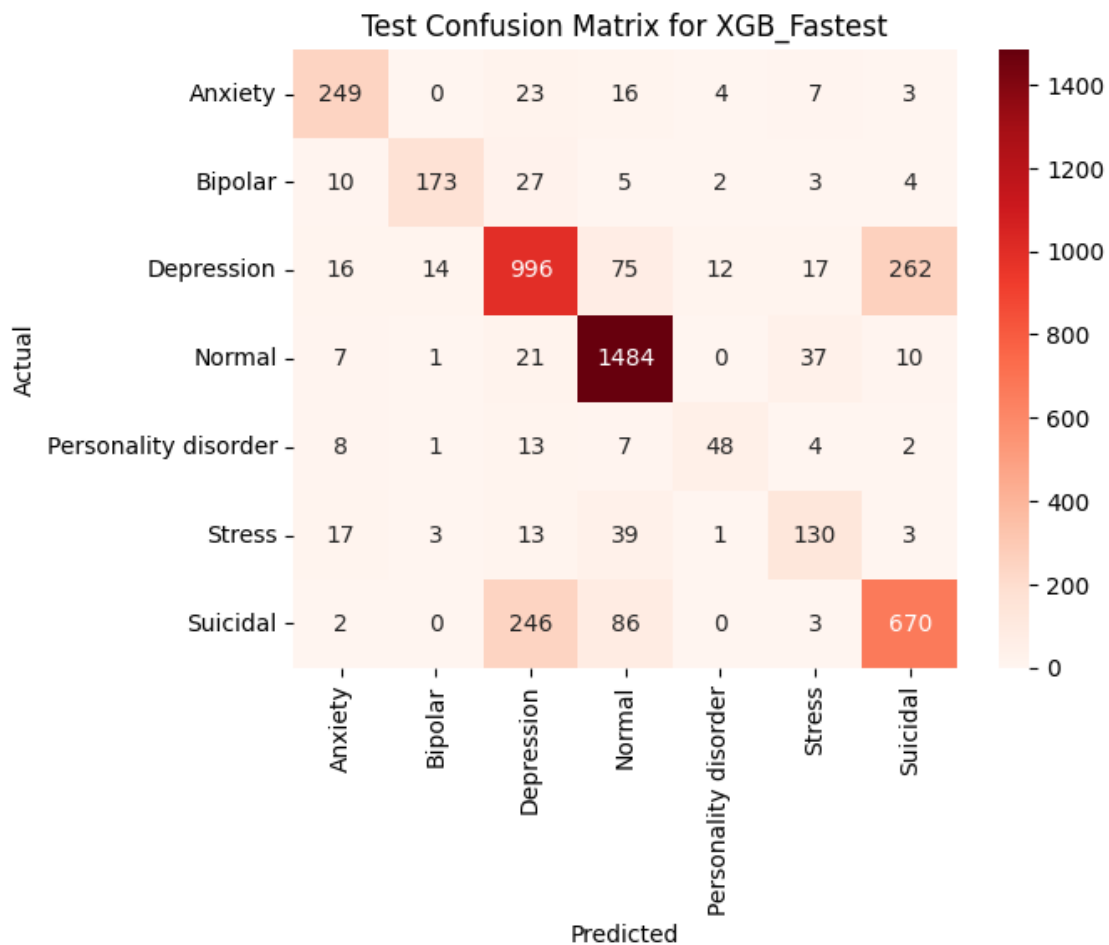

XGB\_Fastest:

Training Accuracy: 0.8838867582724662

Validation Accuracy: 0.7986591242405195

Test Accuracy: 0.7855048177628823

```
[71]: ### Error Analysis for the Model on the Training Set
# confusion matrix as array for training set
confusionmatrix4 = np.array([
    [5863, 30, 148, 154, 12, 101, 20],
    [61, 4880, 129, 76, 10, 52, 21],
    [78, 62, 8566, 431, 26, 81, 1497],
    [49, 10, 98, 12476, 2, 172, 48],
    [19, 13, 62, 54, 3634, 15, 7],
    [98, 17, 94, 179, 7, 4804, 25],
    [10, 5, 1492, 550, 0, 10, 5641]
])
```

```

classes = ["Anxiety", "Bipolar", "Depression", "Normal", "Personality_
↳Disorder", "Stress", "Suicidal"]

results = {}

for i, class_name in enumerate(classes):
    tp = confusionmatrix4[i, i]
    tn = np.sum(np.delete(np.delete(confusionmatrix4, i, axis=0), i, axis=1))
    fp = np.sum(confusionmatrix4[:, i]) - tp
    fn = np.sum(confusionmatrix4[i, :]) - tp

    results[class_name] = {
        "TP": tp,
        "TN": tn,
        "FP": fp,
        "FN": fn
    }

for class_name, metrics in results.items():
    print(f"Class: {class_name}")
    print(f"   TP: {metrics['TP']}")
    print(f"   TN: {metrics['TN']}")
    print(f"   FP: {metrics['FP']}")
    print(f"   FN: {metrics['FN']}")
    print("-" * 20)

```

Class: Anxiety

TP: 5863

TN: 45246

FP: 315

FN: 465

-----  
Class: Bipolar

TP: 4880

TN: 46523

FP: 137

FN: 349

-----  
Class: Depression

TP: 8566

TN: 39125

FP: 2023

FN: 2175

-----  
Class: Normal

TP: 12476

TN: 37590

FP: 1444

FN: 379

-----  
Class: Personality Disorder

TP: 3634

TN: 48028

FP: 57

FN: 170  
-----

Class: Stress

TP: 4804

TN: 46234

FP: 431

FN: 420  
-----

Class: Suicidal

TP: 5641

TN: 42563

FP: 1618

FN: 2067  
-----

```
[72]: # False Positive and False Negative Rate Calculation Weighted Average Recall
fnr_train = 1-0.88 # 1- recall
fpr_train = 1-0.88 # 1- precision

# Print the results
print("Weighted Average False Negative Rate (FNR):", fnr_train)
print("Estimated Weighted Average False Positive Rate (FPR):", fpr_train)
```

Weighted Average False Negative Rate (FNR): 0.12

Estimated Weighted Average False Positive Rate (FPR): 0.12

```
[73]: ### Error Analysis for the Model on Validation Set

#confusion matrix as array for validation set
confusionmatrix3 = np.array([
    [267, 5, 20, 21, 5, 15, 2],
    [9, 177, 21, 11, 4, 7, 4],
    [13, 23, 988, 48, 5, 8, 222],
    [16, 2, 19, 1530, 0, 50, 7],
    [4, 3, 15, 12, 48, 2, 3],
    [15, 1, 15, 44, 1, 151, 4],
    [0, 2, 224, 73, 0, 6, 651]
])

classes = ["Anxiety", "Bipolar", "Depression", "Normal", "Personality_
Disorder", "Stress", "Suicidal"]
```

```

results = {}

for i, class_name in enumerate(classes):
    tp = confusionmatrix3[i, i]
    tn = np.sum(np.delete(np.delete(confusionmatrix3, i, axis=0), i, axis=1))
    fp = np.sum(confusionmatrix3[:, i]) - tp
    fn = np.sum(confusionmatrix3[i, :]) - tp

    results[class_name] = {
        "TP": tp,
        "TN": tn,
        "FP": fp,
        "FN": fn
    }

for class_name, metrics in results.items():
    print(f"Class: {class_name}")
    print(f"    TP: {metrics['TP']}")
    print(f"    TN: {metrics['TN']}")
    print(f"    FP: {metrics['FP']}")
    print(f"    FN: {metrics['FN']}")
    print("-" * 20)

```

Class: Anxiety

TP: 267

TN: 4381

FP: 57

FN: 68

-----

Class: Bipolar

TP: 177

TN: 4504

FP: 36

FN: 56

-----

Class: Depression

TP: 988

TN: 3152

FP: 314

FN: 319

-----

Class: Normal

TP: 1530

TN: 2940

FP: 209

FN: 94

-----

Class: Personality Disorder



TP: 48  
TN: 4671  
FP: 15  
FN: 39

-----  
Class: Stress

TP: 151  
TN: 4454  
FP: 88  
FN: 80

-----  
Class: Suicidal

TP: 651  
TN: 3575  
FP: 242  
FN: 305

```
[74]: # False Positive and False Negative Rate Calculation Weighted Average Recall
      ↪ Validation
      fnr_val = 1-0.80 # 1- recall
      fpr_val = 1-0.80 # 1- precision

      # Print the results
      print("Weighted Average False Negative Rate (FNR):", fnr_val)
      print("Estimated Weighted Average False Positive Rate (FPR):", fpr_val)
```

Weighted Average False Negative Rate (FNR): 0.19999999999999996

Estimated Weighted Average False Positive Rate (FPR): 0.19999999999999996

```
[75]: ### Error Analysis on the Test Set
      # confusion matrix for test set as array
      confusionmatrix5 = np.array([
          [249, 0, 23, 16, 4, 7, 3],
          [10, 173, 27, 5, 2, 3, 4],
          [16, 14, 996, 75, 12, 17, 262],
          [7, 1, 21, 1484, 0, 37, 10],
          [8, 1, 13, 7, 48, 4, 2],
          [17, 3, 13, 39, 1, 130, 3],
          [2, 0, 246, 86, 0, 3, 670]
      ])

      classes = ["Anxiety", "Bipolar", "Depression", "Normal", "Personality",
          ↪ "Disorder", "Stress", "Suicidal"]

      results = {}

      for i, class_name in enumerate(classes):
```

```

tp = confusionmatrix5[i, i]
tn = np.sum(np.delete(np.delete(confusionmatrix5, i, axis=0), i, axis=1))
fp = np.sum(confusionmatrix5[:, i]) - tp
fn = np.sum(confusionmatrix5[i, :]) - tp

results[class_name] = {
    "TP": tp,
    "TN": tn,
    "FP": fp,
    "FN": fn
}

for class_name, metrics in results.items():
    print(f"Class: {class_name}")
    print(f"    TP: {metrics['TP']}")
    print(f"    TN: {metrics['TN']}")
    print(f"    FP: {metrics['FP']}")
    print(f"    FN: {metrics['FN']}")
    print("-" * 20)

```

Class: Anxiety

TP: 249

TN: 4412

FP: 60

FN: 53

-----

Class: Bipolar

TP: 173

TN: 4531

FP: 19

FN: 51

-----

Class: Depression

TP: 996

TN: 3039

FP: 343

FN: 396

-----

Class: Normal

TP: 1484

TN: 2986

FP: 228

FN: 76

-----

Class: Personality Disorder

TP: 48

TN: 4672

FP: 19

```

    FN: 35
-----
Class: Stress
    TP: 130
    TN: 4497
    FP: 71
    FN: 76
-----
Class: Suicidal
    TP: 670
    TN: 3483
    FP: 284
    FN: 337
-----

```

```

[76]: # False Positive and False Negative Rate Calculation Weighted Average Recall
      ↪Test
      fnr_ts = 1-0.79 # 1- recall
      fpr_ts = 1-0.78 # 1- precision

      # Print the results
      print("Weighted Average False Negative Rate (FNR):", fnr_ts)
      print("Estimated Weighted Average False Positive Rate (FPR):", fpr_ts)

```

```

Weighted Average False Negative Rate (FNR): 0.20999999999999996
Estimated Weighted Average False Positive Rate (FPR): 0.21999999999999997

```

Overall, this model has the lowest false negative rate of 0.21, also making this the best model.