

17. 購物網站介面



shopcart


一. 商品列表

奈兒購物

59




- 當季上衣(一)
- 當季上衣(二)



Some quick example text to build on the card title and make up the bulk of the card's content.


XL L M

訂購




Some quick example text to build on the card title and make up the bulk of the card's content.

XL L M




Some quick example text to build on the card title and make up the bulk of the card's content.

XL L M




Some quick example text to build on the card title and make up the bulk of the card's content.

XL L M



Some quick example text to build on the card title and make up the bulk of the card's content.

XL L M



Some quick example text to build on the card title and make up the bulk of the card's content.

XL L M

1. 製作navbar

```

<nav class="navbar navbar-light bg-light">
  <a class="navbar-brand font-weight-bold" href="#">
    <i class="fas fa-biohazard fa-1x"></i>
    奈兒購物
  </a>

  <div class="dropdown">
  </div>
</nav>


```

設定css使得button 與 badge 可重疊顯示


```

.btn-cart{
  background-color: transparent;
  position: relative;
}
.btn-cart .badge{
  position: absolute;
  top: 2px;
  right: -2pxpx;
}

```

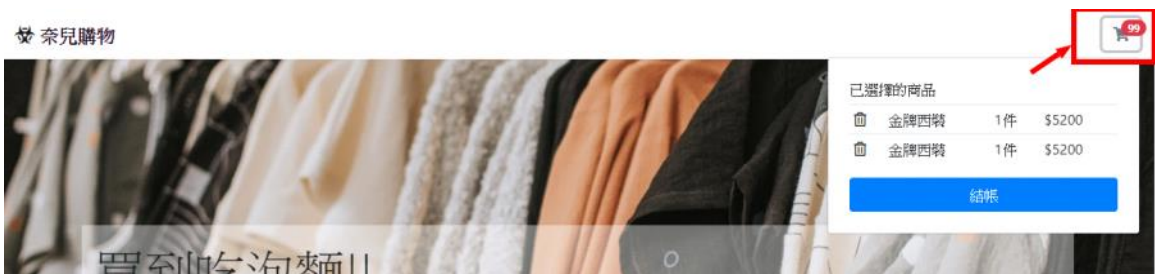

參考官網 使用 dropdown-menu --> form

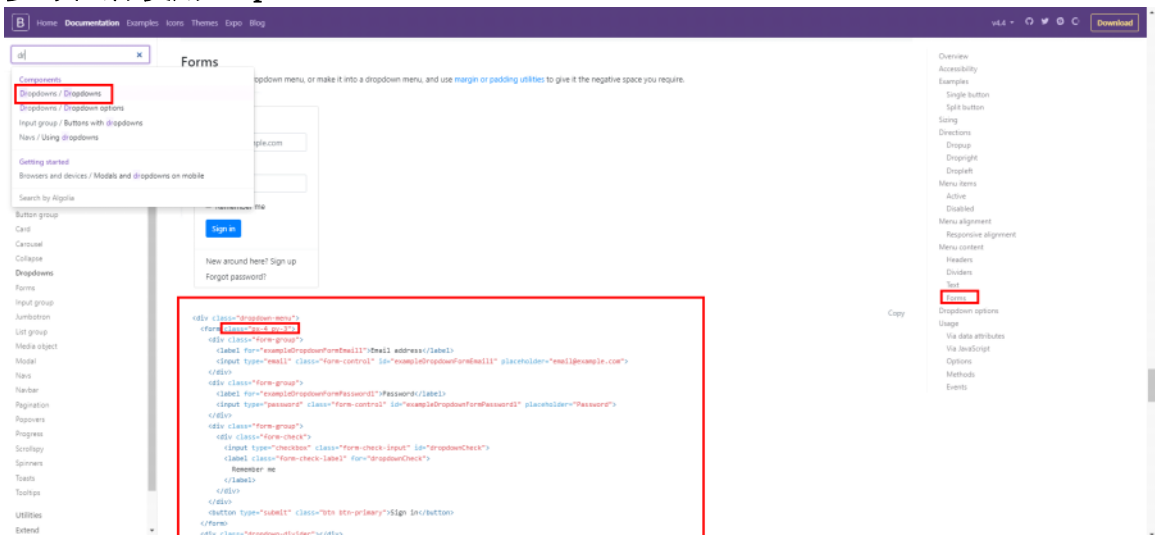


dropdown-menu-right 可使得 表單向左邊彈出

```

<nav class="navbar navbar-light bg-light">
  <a class="navbar-brand font-weight-bold" href="#">
    <i class="fas fa-biohazard fa-1x"></i>
    奈兒購物
  </a>

  <div class="dropdown">
    <button class="btn btn-secondary btn-cart text-secondary border-0" type="button" data-toggle="dropdown">
      <i class="fas fa-shopping-cart fa-1x"></i>
      <span class="badge badge-pill badge-danger">99</span>
    </button>
    <div class="dropdown-menu mt-2 dropdown-menu-right">
      <div class="px-4 py-3">
        <h6>已選擇的商品</h6>
        <table class="table table-sm" style="min-width: 300px;">
        </table>
        <button type="submit" class="btn btn-primary btn-block">結帳</button>
      </div>
    </div>
  </div>
</nav>

```

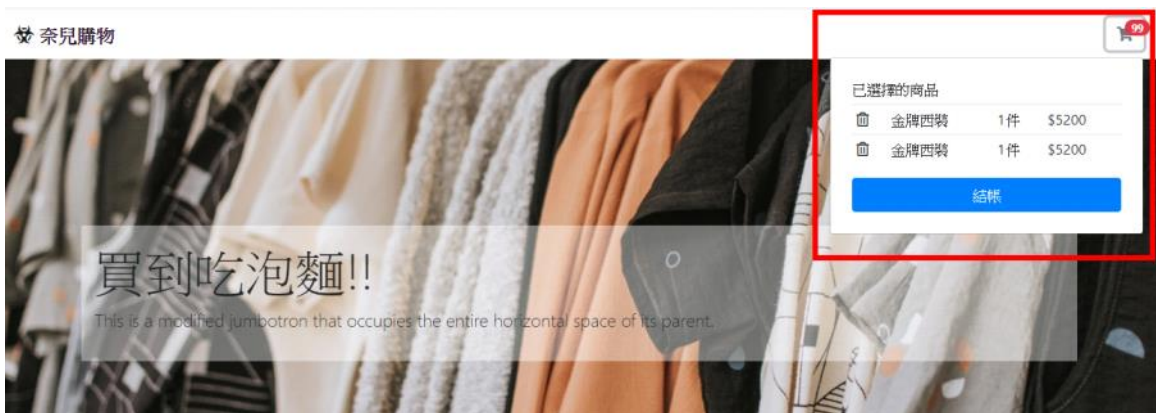

2. 製作jumbotron

```

<div class="jumbotron jumbotron-fluid bg-light jumbotron-bg d-flex align-items-end">
  <div class="container">
    <div class="jumbotron-lighter">
      <h1 class="display-4">買到吃泡麵!!</h1>
      <p class="lead">This is a modified jumbotron that occupies the entire horizontal space of its parent.</p>
    </div>
  </div>
</div>

```


```

.jumbotron-bg{
  background-image: url(../images/clothes04.jpg);
  -webkit-background-size: cover;
  background-size: cover;
  background-position: center center;
  min-height: 400px;
}
.jumbotron-lighter{
  background-color: rgba(255, 255, 255, 0.4);
  padding: 15px;
}


```

3. 製作list-group


利用tab-content 使內容產生變化

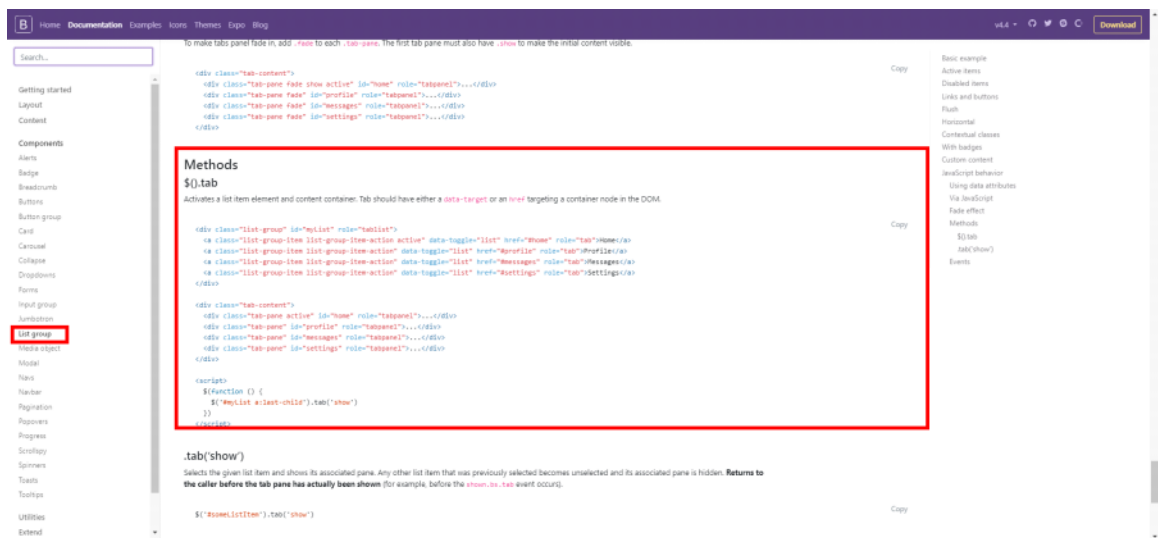

分割版面以3比9排版, 以sticky-top將list固定在最上方

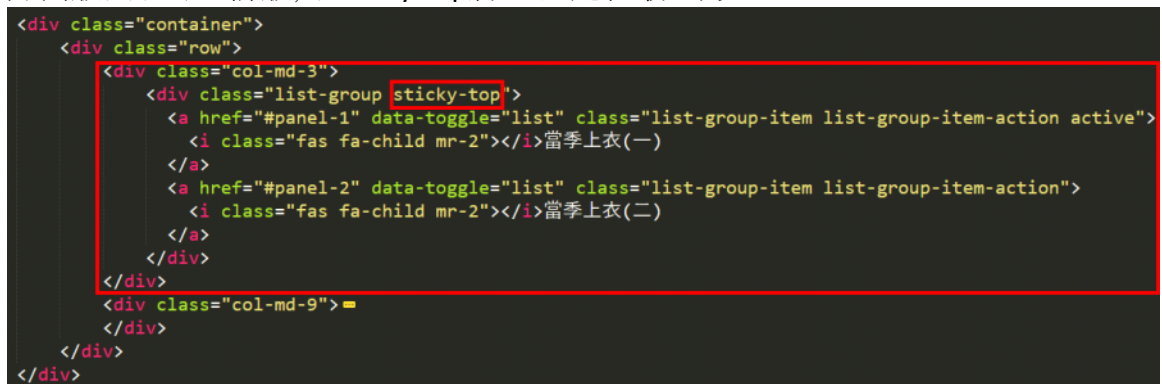

設定tab-content

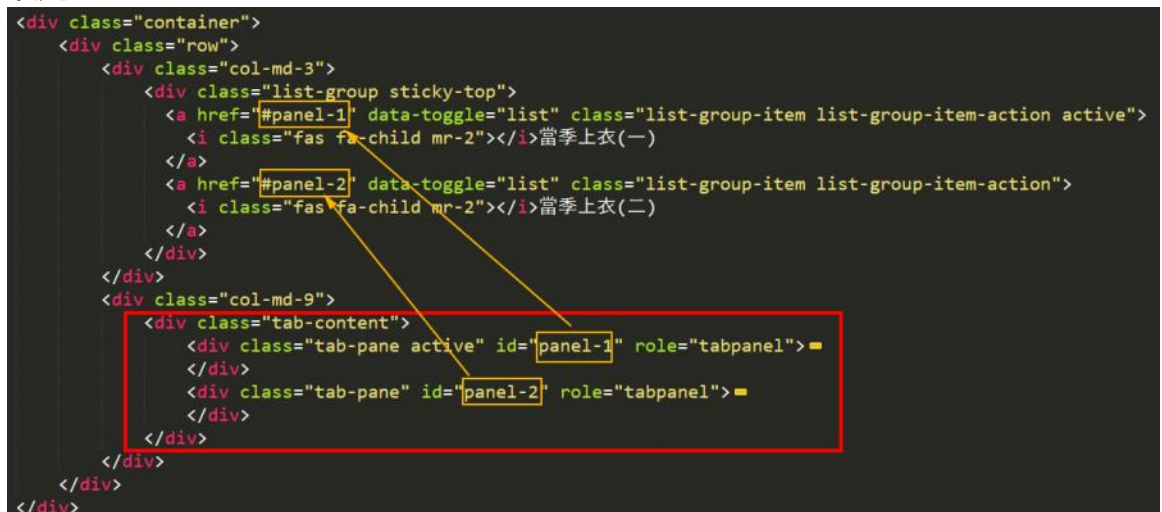


加入card並作適合之排版

```

<div class="row">
  <div class="col-md-3">
  </div>
  <div class="col-md-9">
    <div class="tab-content">
      <div class="tab-pane active" id="panel-1" role="tabpanel">
        <div class="row">
          <div class="col-md-4 mt-3">
            <div class="card h-100 box-shadow">
            </div>
          </div>
          <div class="col-md-4 mt-3">
            <div class="card h-100 box-shadow">
            </div>
          </div>
          <div class="col-md-4 mt-3">
            <div class="card h-100 box-shadow">
            </div>
          </div>
          <div class="col-md-4 mt-3">
            <div class="card h-100 box-shadow">
            </div>
          </div>
          <div class="col-md-4 mt-3">
            <div class="card h-100 box-shadow">
            </div>
          </div>
          <div class="col-md-4 mt-3">
            <div class="card h-100 box-shadow">
            </div>
          </div>
        </div>
      </div>
      <div class="tab-pane" id="panel-2" role="tabpanel">
      </div>
    </div>
  </div>
</div>

```

在card加入btn-group

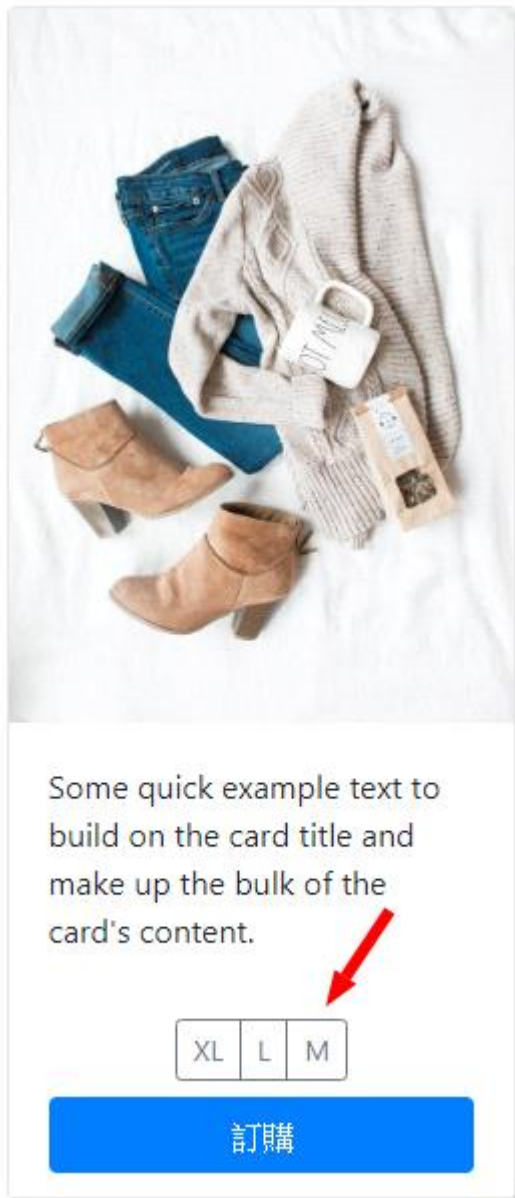

```
<div class="col-md-4 mt-3">
  <div class="card h-100 box-shadow">
    
    <div class="card-body">
      <p class="card-text">Some quick example text to build on the card title and
        make up the bulk of the card's content.</p>
    </div>
    <div class="card-footer bg-white border-top-0 bg-light text-center">
      <div class="btn-group btn-group-sm bg-light" role="group" aria-label="Basic
        example">
        <button type="button" class="btn btn-outline-secondary">XL</button>
        <button type="button" class="btn btn-outline-secondary">L</button>
        <button type="button" class="btn btn-outline-secondary">M</button>
      </div>
      <a href="shoppingcart-product.html" class="btn btn-primary btn-block mt-2">
        訂購</a>
    </div>
  </div>
</div>
```

二. 商品細節

修身長褲(變漂亮版本)

售價 1299

網路價 NT\$520

尺寸

刷新感謝士兵場所難道

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Voluptate aspernatur voluptatum quidem nemo veritatis, tenetur doloribus est sed qui iste sit voluptas, sint, magni duclius quos at tempora consectetur recusandae.

修身長褲



1. 製作navbar
2. 製作breadcrumb與排版

```
<div class="container">
  <nav aria-label="breadcrumb">
    <ol class="breadcrumb bg-white">
      <li class="breadcrumb-item"><a href="shoppingcart.html">首頁</a></li>
      <li class="breadcrumb-item"><a href="#">女裝專賣店</a></li>
      <li class="breadcrumb-item active" aria-current="page">修身長褲</li>
    </ol>
  </nav>
  <div class="row">
    <div class="col-md-4">
    </div>
    <div class="col-md-8">
    </div>
  </div>
</div>
```

3. 製作產品規格選項

首頁 / 女裝專賣店 / 修身長褲

修身長褲(變漂亮版本)

售價 1299

網路價 NT\$520

尺寸

1件



加入購物車


```

<div class="col-md-4">
  <div class="sticky-top">
    <h1 class="h3 font-weight-bold">修身長褲<small class="text-secondary font-weight-bold">(變漂亮版本)</small></h1>
    <div class="d-flex justify-content-end mt-3 align-items-end">
      <small class="text-secondary font-weight-bold text-muted"><del>售價 1299</del></small>
      <h4 class="text-danger font-weight-bold ml-auto">網路價 NT$520</h4>
    </div>
  </div>
  <hr>
  尺寸:
  <div class="btn-group btn-group-sm btn-group-toggle" data-toggle="buttons">
    <label class="btn btn-outline-secondary active">
      <input type="radio" name="options" id="option1" autocomplete="off" checked>SM
    </label>
    <label class="btn btn-outline-secondary">
      <input type="radio" name="options" id="option2" autocomplete="off">M
    </label>
    <label class="btn btn-outline-secondary">
      <input type="radio" name="options" id="option3" autocomplete="off">L
    </label>
    <label class="btn btn-outline-secondary">
      <input type="radio" name="options" id="option3" autocomplete="off">XL
    </label>
  </div>
  <div class="input-group mt-3">
    <select class="custom-select">
      <option value="1">1件</option>
      <option value="2">2件</option>
      <option value="3">3件</option>
    </select>
    <a href="#" class="btn btn-primary ml-1">加入購物車</a>
  </div>
</div>
</div>

```

4. 產品細節說明

```

<div class="row">
  <div class="col-md-4">
  </div>
  <div class="col-md-8">
    <h3 class="font-weight-bold">刷新感謝士兵場所難道</h3>
    <p>Lorem ipsum dolor sit amet, consectetur adipisicing elit. Voluptate aspernatur voluptatum quidem nemo veritatis, tenetur doloribus est sed qui iste sit voluptas, sint, magni ducimus quos at tempora consectetur recusandae.</p>
    <h3 class="text-center font-weight-bold">修身長褲</h3>
    
  </div>
</div>

```

三. 結帳畫面

奈兒購物

奈兒血拚 結帳

1. 輸入訂單資料

2. 金流付款

3. 完成

顯示購物車細節

#	商品名稱	數量	小計
	 金牌西裝	1件	\$5200
	 金牌西裝	1件	\$5200
運費			\$60
合計			\$3360

1. navbar製作與上步驟相同
2. 結帳步驟

```
graph LR; A[1. 輸入訂單資料] --> B[2. 金流付款]; B --> C[3. 完成];
```

奈兒血拚 結帳

1. 輸入訂單資料

2. 金流付款

3. 完成

顯示購物車細節

使用alert

```
<div class="container">
  <h1 class="font-weight-bold text-secondary text-center mt-4">奈兒血拚 結帳</h1>
  <div class="row">
    <div class="col-md-4">
      <div class="alert alert-success alert-radius" role="alert">
        1. 輸入訂單資料
      </div>
    </div>
    <div class="col-md-4">
      <div class="alert alert-secondary alert-radius" role="alert">
        2. 金流付款
      </div>
    </div>
    <div class="col-md-4">
      <div class="alert alert-secondary alert-radius" role="alert">
        3. 完成
      </div>
    </div>
  </div>
</div>

<div class="row justify-content-center mt-4">■
</div>
</div>
```

- ### 3. 購物車細節

1. 輸入訂單資料

2. 金流付款

3. 完成

顯示購物車細節

#	商品名稱	數量	小計
	 金牌西裝	1件	\$5200
	 金牌西裝	1件	\$5200
運費			\$60
合計			\$3360

使用collapse

[Home](#)
[Documentation](#)
[Examples](#)
[Icons](#)
[Themes](#)
[Expo](#)
[Blog](#)

v4.4

[Download](#)

[Getting started](#)
[Layout](#)
[Content](#)

- `..collapse` hides content
- `..collapsing` is applied during transitions
- `..collapse.show` shows content

You can use a link with the `href` attribute, or a button with the `data-target` attribute. In both cases, the `data-toggle="collapse"` is required.

[How it works](#)
[Example](#)
[Multiple targets](#)
[Accordion example](#)
[Accessibility](#)
[Usage](#)


```

<table class="table table-sm">
  <thead>
    <tr>
      <th width="30">#</th>
      <th width="100"></th>
      <th width="100">商品名稱</th>
      <th width="100">數量</th>
      <th width="80">小計</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>
        <i class="far fa-trash-alt"></i>
      </td>
      <td class="text-right">
        
      </td>
      <td>金牌西裝</td>
      <td>1件</td>
      <td>$5200</td>
    </tr>
    <tr>
      <td colspan="4" class="text-right">運費</td>
      <td class="text-right">$60</td>
    </tr>
    <tr>
      <td colspan="4" class="text-right">合計</td>
      <td class="text-right">$3360</td>
    </tr>
  </tbody>
</table>

```

--	--

