


12. 元件(1)

星期一 2022年九月5日 下午 01:55

1. Accordion

`data-bs-target="#collapseOne"` 被摺疊項目須有獨立ID名稱與按鈕搭配呼叫
`data-bs-parent="#accordionExample"` 內層摺疊項目需對應父層, 以確保只會開啟一個

```
<div class="accordion" id="accordionExample">
  <div class="accordion-item">
    <h2 class="accordion-header" id="headingOne">
      <button class="accordion-button" type="button" data-bs-toggle="collapse"
        data-bs-target="#collapseOne" aria-expanded="true" aria-controls="collapseOne">
        Accordion Item #1
      </button>
    </h2>
    <div id="collapseOne" class="accordion-collapse collapse show" aria-labelledby="headingOne"
      data-bs-parent="#accordionExample">
      <div class="accordion-body">
        <strong>This is the first item's accordion body.</strong> It is shown by default, until
        the collapse
        plugin adds the appropriate classes that we use to style each element. These classes
        control the overall
        appearance, as well as the showing and hiding via CSS transitions. You can modify any
        this with
        custom CSS or overriding our default variables. It's also worth noting that just about
        any HTML can go
        within the <code>.accordion-body</code>, though the transition does limit overflow.
      </div>
    </div>
  </div>
  <div class="accordion-item">...
</div>
<div class="accordion-item">...
</div>
</div>
```

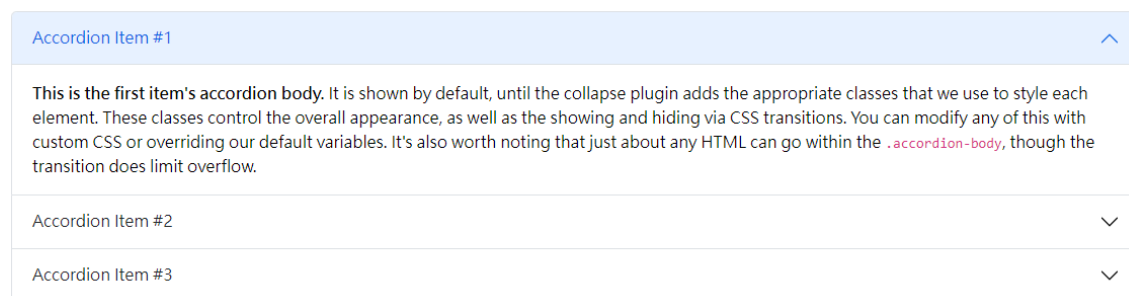

2. alert

```
<div class="col-auto">
  <div class="alert alert-primary" role="alert">
    A simple primary alert—check it out!
  </div>
  <div class="alert alert-secondary" role="alert">
    A simple secondary alert—check it out!
  </div>
  <div class="alert alert-success" role="alert">
    A simple success alert—check it out!
  </div>
  <div class="alert alert-danger" role="alert">
    A simple danger alert—check it out!
  </div>
  <div class="alert alert-warning" role="alert">
    A simple warning alert—check it out!
  </div>
  <div class="alert alert-info" role="alert">
    A simple info alert—check it out!
  </div>
  <div class="alert alert-light" role="alert">
    A simple light alert—check it out!
  </div>
  <div class="alert alert-dark" role="alert">
    A simple dark alert—check it out!
  </div>
</div>
```

A simple primary alert—check it out!

A simple secondary alert—check it out!

A simple success alert—check it out!

A simple danger alert—check it out!

A simple warning alert—check it out!

A simple info alert—check it out!

A simple light alert—check it out!

A simple dark alert—check it out!

alert link

```
<div class="alert alert-primary" role="alert">
  A simple primary alert with <a href="#" class="alert-link">an example link</a>. Give it a click if
  you like.
</div>
<div class="alert alert-secondary" role="alert">
  A simple secondary alert with <a href="#" class="alert-link">an example link</a>. Give it a click if
  you like.
</div>
<div class="alert alert-success" role="alert">
  A simple success alert with <a href="#" class="alert-link">an example link</a>. Give it a click if
  you like.
</div>
<div class="alert alert-danger" role="alert">
  A simple danger alert with <a href="#" class="alert-link">an example link</a>. Give it a click if
  you like.
</div>
```


A simple primary alert with [an example link](#). Give it a click if you like.

A simple secondary alert with [an example link](#). Give it a click if you like.

A simple success alert with [an example link](#). Give it a click if you like.

A simple danger alert with [an example link](#). Give it a click if you like.

加入icon font

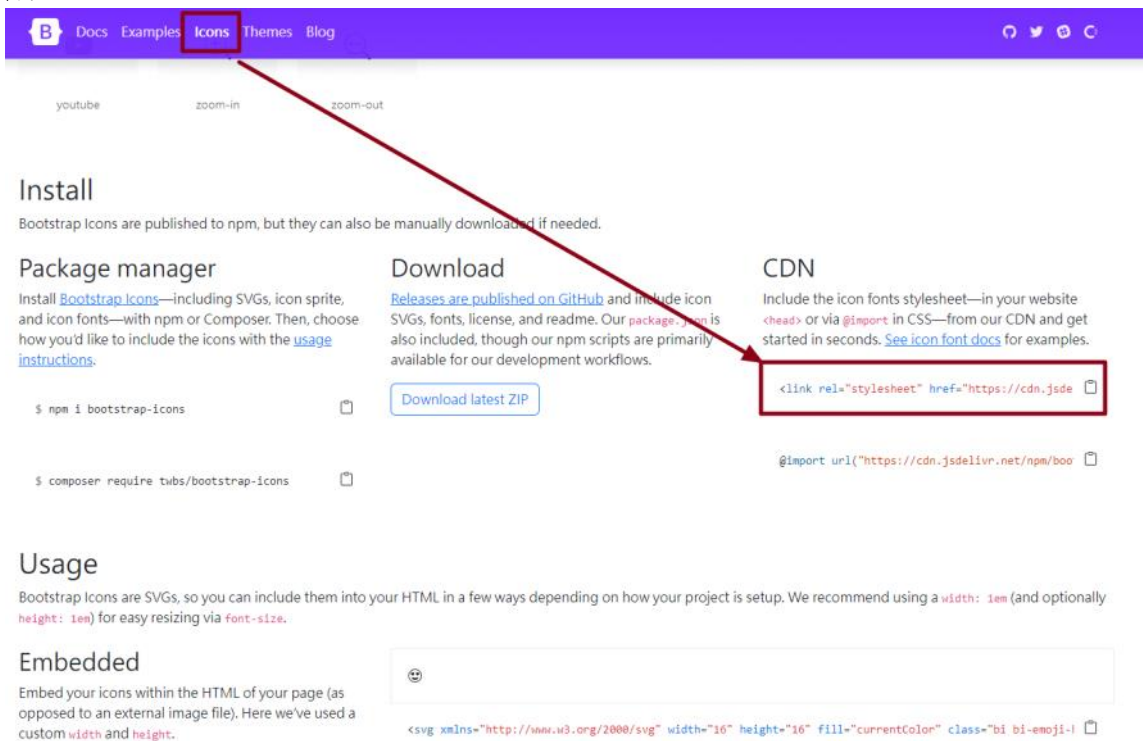

The screenshot shows the Bootstrap Icons website. A red arrow points from the 'Icons' tab in the top navigation bar to the 'CDN' section. The 'CDN' section contains the following code snippets:

```
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.3.0/font/bootstrap-icons.css">
```

```
@import url("https://cdn.jsdelivr.net/npm/bootstrap-icons@1.3.0/font/bootstrap-icons.css");
```

The 'Usage' section shows an example of embedding an icon in HTML:

```
<svg xmlns="http://www.w3.org/2000/svg" width="16" height="16" fill="currentColor" class="bi bi-emoji-laughing">
```

```
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.9.1/font/bootstrap-icons.css">
<div class="row">
  <div class="col-auto">
    <div class="alert alert-primary" role="alert">
      <i class="bi bi-usb-fill fs-3 me-2"></i>A simple primary alert with <a href="#" class="alert-link">an
      example link</a>. Give it a click if
      you like.
    </div>
  </div>
</div>
```



A simple primary alert with [an example link](#). Give it a click if you like.


3. Badges

```
<span class="badge text-bg-success">success</span>
<span class="badge bg-success">success</span>
<button type="button" class="btn btn-primary">
  Notifications <span class="badge text-bg-secondary">4</span>
</button>
```



Positioned

```
<button type="button" class="btn btn-primary position-relative">
  Inbox
  <span class="position-absolute top-0 start-100 translate-middle badge rounded-pill bg-danger">
    99+
    <span class="visually-hidden">unread messages</span>
  </span>
</button>
```



Pill badges



```
<div class="col">
  <span class="badge rounded-pill text-bg-primary">Primary</span>
  <span class="badge rounded-pill text-bg-secondary">Secondary</span>
</div>
```

4. breadcrumb


```
<nav aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="#">Home</a></li>
    <li class="breadcrumb-item"><a href="#">Library</a></li>
    <li class="breadcrumb-item active" aria-current="page">Data</li>
  </ol>
</nav>
```

[Home](#) / [Library](#) / Data

Dividers

[Home](#) > Library

```
<nav style="--bs-breadcrumb-divider: '>';" aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="#">Home</a></li>
    <li class="breadcrumb-item active" aria-current="page">Library</li>
  </ol>
</nav>
```

6. Buttons

```
<div class="row my-3">
  <div class="col">
    <button type="button" class="btn btn-primary">Primary</button>
    <button type="button" class="btn btn-secondary">Secondary</button>
    <button type="button" class="btn btn-success">Success</button>
    <button type="button" class="btn btn-danger">Danger</button>
    <button type="button" class="btn btn-warning">Warning</button>
    <button type="button" class="btn btn-info">Info</button>
    <button type="button" class="btn btn-light">Light</button>
    <button type="button" class="btn btn-dark">Dark</button>
    <button type="button" class="btn btn-link">Link</button>
  </div>
</div>
<div class="row">
  <div class="col">
    <a class="btn btn-primary" href="#" role="button">Link</a>
    <button class="btn btn-primary" type="submit">Button</button>
    <input class="btn btn-primary" type="button" value="Input">
    <input class="btn btn-primary" type="submit" value="Submit">
    <input class="btn btn-primary" type="reset" value="Reset">
  </div>
</div>
```


Primary Secondary Success Danger Warning Info Light Dark [Link](#)
 Link Button Input Submit Reset

btn-outline

```

<button type="button" class="btn btn-outline-primary">Primary</button>
<button type="button" class="btn btn-outline-secondary">Secondary</button>
<button type="button" class="btn btn-outline-success">Success</button>
<button type="button" class="btn btn-outline-danger">Danger</button>
<button type="button" class="btn btn-outline-warning">Warning</button>
<button type="button" class="btn btn-outline-info">Info</button>
<button type="button" class="btn btn-outline-light">Light</button>
<button type="button" class="btn btn-outline-dark">Dark</button>

```




Sizes, Disabled state

```

<button type="button" class="btn btn-primary btn-lg">Large button</button>
<button type="button" class="btn btn-secondary btn-lg">Large button</button>
<button type="button" class="btn btn-primary btn-sm">Small button</button>
<button type="button" class="btn btn-secondary btn-sm">Small button</button>
<button type="button" class="btn btn-primary"
  style="--bs-btn-padding-y: .25rem; --bs-btn-padding-x: .5rem; --bs-btn-font-size: .75rem;">
  Custom button
</button>
<hr>
<button type="button" class="btn btn-primary disabled">Primary button</button>
<button type="button" class="btn btn-secondary disabled">Button</button>
<button type="button" class="btn btn-outline-primary disabled">Primary button</button>
<button type="button" class="btn btn-outline-secondary disabled">Button</button>

```

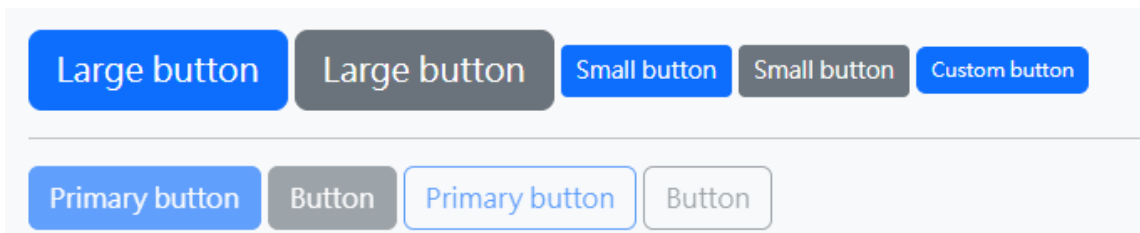


Block buttons

```

<div class="d-grid gap-2">
  <button class="btn btn-primary" type="button">Button</button>
  <button class="btn btn-primary" type="button">Button</button>
</div>

```


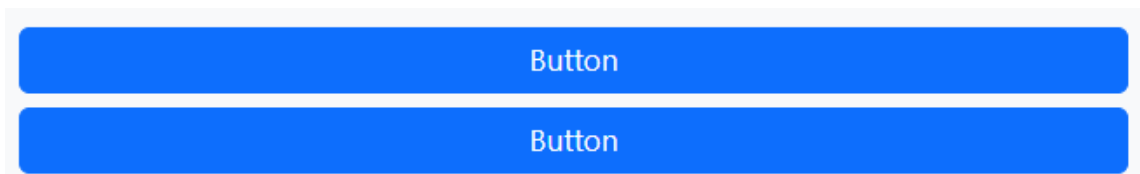


Responsive button

```



<div class="d-grid gap-2 d-md-block">
  <button class="btn btn-primary" type="button">Button</button>
  <button class="btn btn-primary" type="button">Button</button>
</div>

```

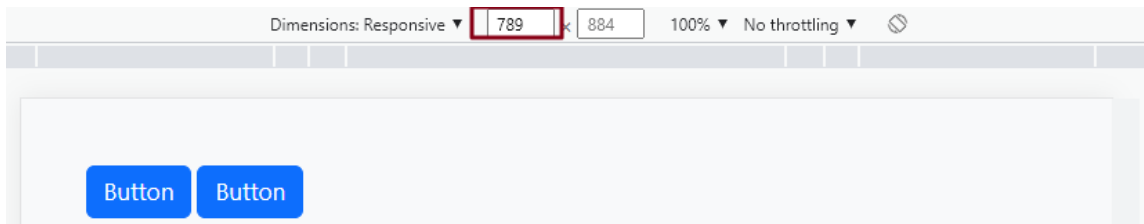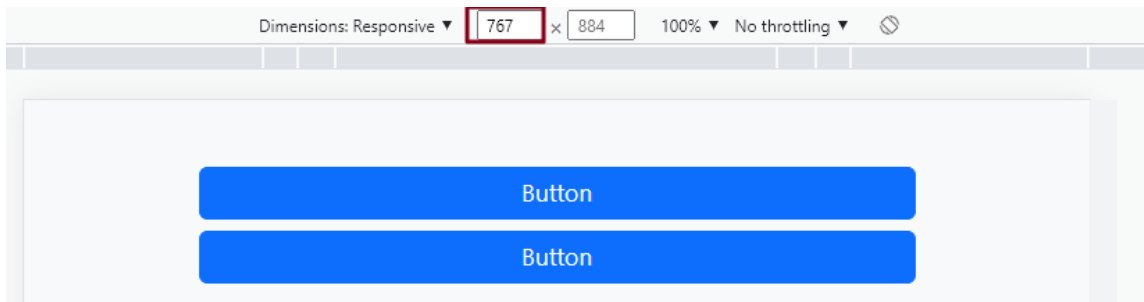

mx-auto d-md-flex justify-content-md-end

```
<div class="row my-5">
  <div class="col">
    <div class="d-grid gap-2 col-6 mx-auto">
      <button class="btn btn-primary" type="button">Button</button>
      <button class="btn btn-primary" type="button">Button</button>
    </div>
    <div class="d-grid gap-2 d-md-flex justify-content-md-end my-3">
      <button class="btn btn-primary me-md-2" type="button">Button</button>
      <button class="btn btn-primary" type="button">Button</button>
    </div>
  </div>
</div>
```

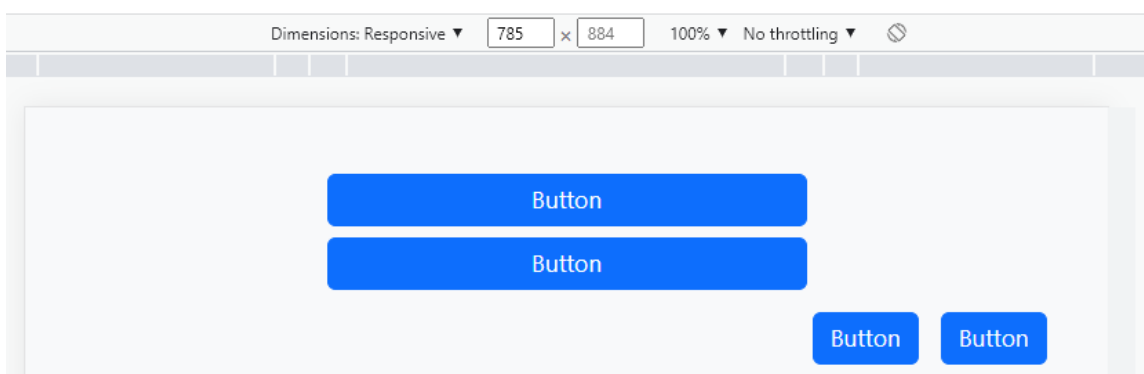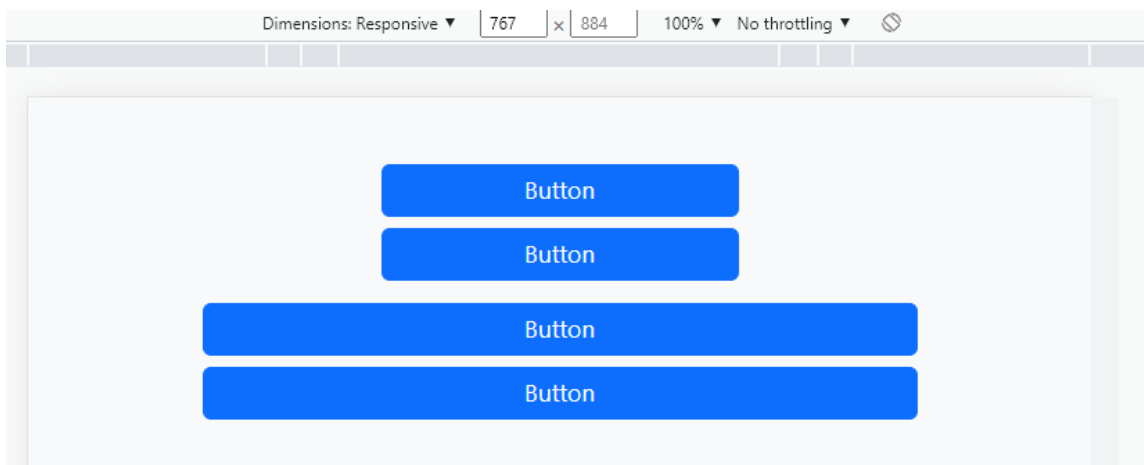

7. Card

card-img-top

```
<div class="card" style="width: 18rem;">
  
  <div class="card-body">
    <h5 class="card-title">Card title</h5>
    <p class="card-text">Some quick example text to build on the card title and make up
    the card's
      content.</p>
    <a href="#" class="btn btn-primary">Go somewhere</a>
  </div>
</div>
```



Card title

Some quick example text to build on the card title and make up the bulk of the card's content.


[Go somewhere](#)

List groups


```

<div class="card" style="width: 18rem;">
  <div class="card-header">
    Featured
  </div>
  <ul class="list-group list-group-flush">
    <li class="list-group-item">An item</li>
    <li class="list-group-item">A second item</li>
    <li class="list-group-item">A third item</li>
  </ul>
  <div class="card-footer">
    Card footer
  </div>
</div>

```

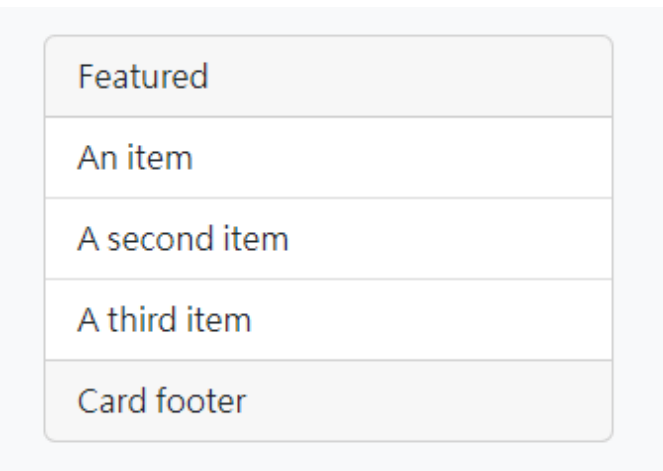

綜合排版

```

<div class="col-12">
  <div class="card" style="width: 18rem;">
    
    <div class="card-body">
      <h5 class="card-title">Card title</h5>
      <p class="card-text">Some quick example text to build on the card title and make up
      the card's
      content.</p>
    </div>
    <ul class="list-group list-group-flush">
      <li class="list-group-item">An item</li>
      <li class="list-group-item">A second item</li>
      <li class="list-group-item">A third item</li>
    </ul>
    <div class="card-body">
      <a href="#" class="card-link">Card link</a>
      <a href="#" class="card-link">Another link</a>
    </div>
  </div>
</div>

```



Card title

Some quick example text to build on the card title and make up the bulk of the card's content.

An item

A second item

A third item

[Card link](#) [Another link](#)

Navigation

nav nav-tabs card-header-tabs

```
<div class="card text-center">
  <div class="card-header">
    <ul class="nav nav-tabs card-header-tabs">
      <li class="nav-item">
        <a class="nav-link active" aria-current="true" href="#">Active</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">Link</a>
      </li>
      <li class="nav-item">
        <a class="nav-link disabled">Disabled</a>
      </li>
    </ul>
  </div>
  <div class="card-body">
    <h5 class="card-title">Special title treatment</h5>
    <p class="card-text">With supporting text below as a natural lead-in to additional content.</p>
    <a href="#" class="btn btn-primary">Go somewhere</a>
  </div>
</div>
```


Active

Link

Disabled


Special title treatment

With supporting text below as a natural lead-in to additional content.

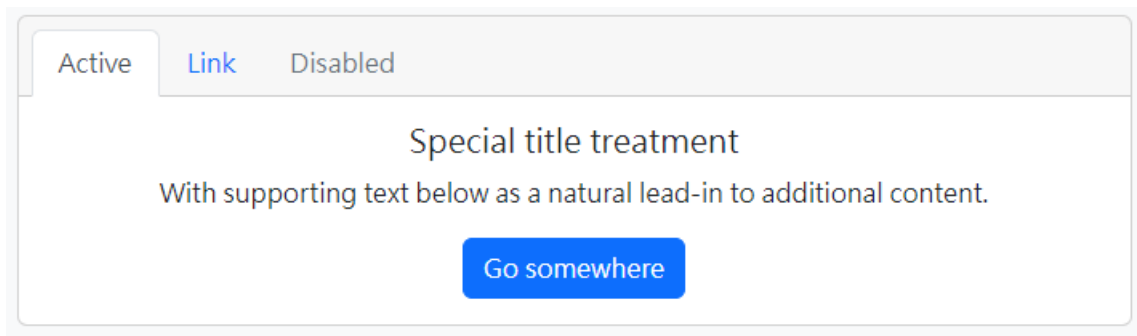

nav nav-pills card-header-pills

```
<div class="card text-center">
  <div class="card-header">
    <ul class="nav nav-pills card-header-pills">
      <li class="nav-item">
        <a class="nav-link active" href="#">Active</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">Link</a>
      </li>
      <li class="nav-item">
        <a class="nav-link disabled">Disabled</a>
      </li>
    </ul>
  </div>
  <div class="card-body">
    <h5 class="card-title">Special title treatment</h5>
    <p class="card-text">With supporting text below as a natural lead-in to additional content.</p>
    <a href="#" class="btn btn-primary">Go somewhere</a>
  </div>
</div>
```

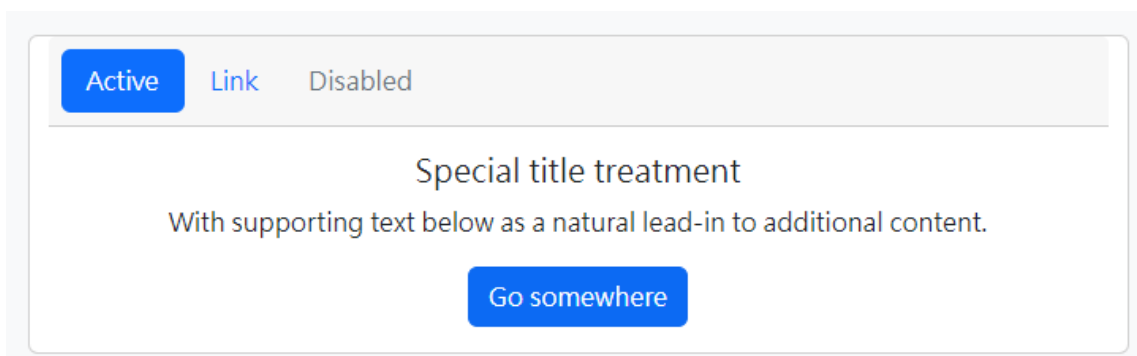

水平排列

```
<div class="card mb-3" style="max-width: 540px;">
  <div class="row g-0">
    <div class="col-md-4">
      
    </div>
    <div class="col-md-8">
      <div class="card-body">
        <h5 class="card-title">Card title</h5>
        <p class="card-text">This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.</p>
        <p class="card-text"><small class="text-muted">Last updated 3 mins ago</small></p>
      </div>
    </div>
  </div>
</div>
```



Card title



Card title

This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.

Last updated 3 mins ago