Read from STDIN, Write to STDOUT

3.8 (781 votes)
Very Easy

56.0% success
828,168 attempts
1s time
256MB memory
1024KB max code

Read different types of data from standard input, process them as shown in output format and print the answer to standard output.

Input format:
First line contains integer N.
Second line contains string S.

Output format:
First line should contain N x 2.
Second line should contain the same string S.

Constraints:

$0 \leq N \leq 10$

$1 \leq |S| \leq 15$ where S length of string S

Examples

Input

C

```c
#include <stdio.h>

int main() {
    long long n;
    char s[100005];

    scanf("%lld", &n);
    getchar();                      // consume the newline after N
    fgets(s, sizeof(s), stdin);     // read the full line (spaces allowed)

    printf("%lld\n", n * 2);
    printf("%s", s);
    return 0;
}
```

Results
Test against custom input

Accepted
Refer judge environment

Time	Memory	Language
0.009s	2KiB	C

leetcode.com/problems/count-the-digits-that-divide-a-number/submissions/2191298385/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 56 / 56 testcases passed

alankrit_173 submitted at Nov 07, 2026 19:24

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.30 MB | Beats 65.58%



Code | C

```c
int countDigits(int num) {
    int count = 0;
    int temp = num;
```

Code

C | Auto

```c
    while (temp > 0) {
        int digit = temp % 10;    // take the last digit

        if (num % digit == 0) {
            count++;
        }

        temp /= 10;               // drop the last digit
    }

    return count;
}
```

Saved | Ln 16, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

num =
7

Output

1

Expected

leetcode.com/problems/subtract-the-product-and-sum-of-digits-of-an-integer/submissions/2191297778/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 123 / 123 testcases passed

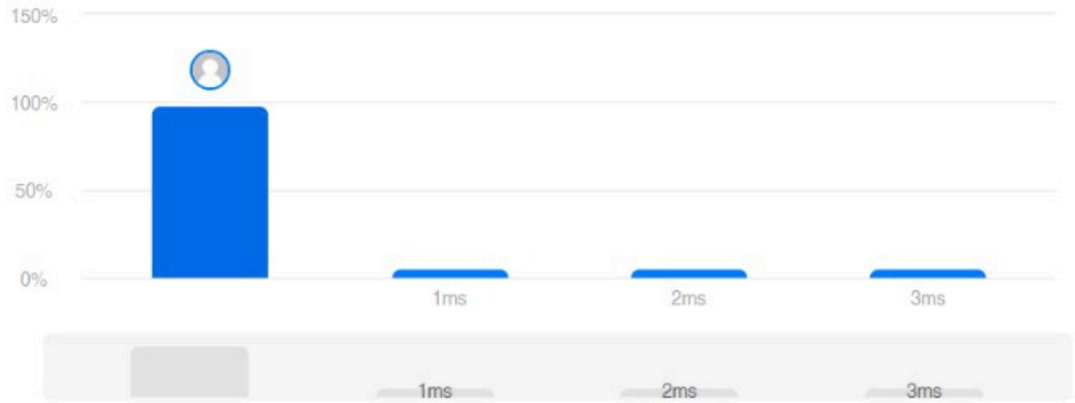
alankrit_173 submitted at Nov 07, 2026 19:23

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.29 MB | Beats 84.56%



Code | C

```c
int subtractProductAndSum(int n) {
    int product = 1;
    int sum = 0;
```

Code

C | Auto

```c
int subtractProductAndSum(int n) {
    int product = 1;
    int sum = 0;

    while (n > 0) {
        int digit = n % 10;    // take the last digit
        product *= digit;
        sum += digit;
        n /= 10;               // drop the last digit
    }

    return product - sum;
}
```

Saved | Ln 13, Col 2

Testcase | Test Result

You must run your code first

Click to go back, hold to see history

Find Digits

You made this submission a few seconds ago.

Score: 25.00 **Status:** Accepted

People who solved **Find Digits** attempted this next:

Extra Long Factorials

Calculate a very large factorial that doesn't fit in the conventional numeric data types.

Solve Challenge

Submitted Code

Language: C

Open in editor

Test case 0

Compiler Message

Click to go back, hold to see history

A.Digit Sum / Submission (132680146) by Alankrit (alankrit1726)

Submission ID: 132680146 / 15 seconds ago

RESULT: Accepted — Refer judge environment

Score	Time (sec)	Memory (KiB)	Language
20	0.04563	2	C

Input	Result	Time (sec)	Memory (KiB)	Score	Your Output	Correct Output	Diff
Input #1	Accepted	0.009023	2	20			
Input #2	Accepted	0.009191	2	20			
Input #3	Accepted	0.009186	2	20			
Input #4	Accepted	0.009042	2	20			
Input #5	Accepted	0.009189	2	20			

Submission:

Theme: Light

```c
#include <stdio.h>

int main() {
    int t;
```

Number Line Jumps

Your Number Line Jumps submission got 10.00 points. Share Post

You are now 9 points away from the 1st star for your problem solving badge.

Try the next challenge | Try a Random Challenge

You made this submission a few seconds ago.

Score: 10.00 **Status:** Accepted

People who solved **Number Line Jumps** attempted this next:

Between Two Sets

Find the number of integers that satisfies certain criteria relative to two sets.

Solve Challenge

NEED HELP?

View discussions

View editorial

View top submissions

Submitted Code

leetcode.com/problems/sum-multiples/submissions/2191294208/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 1000 / 1000 testcases passed

alankrit_173 submitted at Nov 07, 2026 19:16

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
9.06 MB | Beats 82.31%



Code | C

```c
int sumOfMultiples(int n) {
    int sum = 0;

    for (int i = 1; i <= n; i++) {
```

Code

C | Auto

```c
int sumOfMultiples(int n) {
    int sum = 0;

    for (int i = 1; i <= n; i++) {
        if (i % 3 == 0 || i % 5 == 0 || i % 7 == 0) {
            sum += i;
        }
    }

    return sum;
}
```

Saved | Ln 11, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

n =
7

Output

21

Expected

Accepted 84 / 84 testcases passed

alankrit_173 submitted at Nov 07, 2026 19:12

Analysis | Solution

Save 41%

Big Diwali Dhamaka

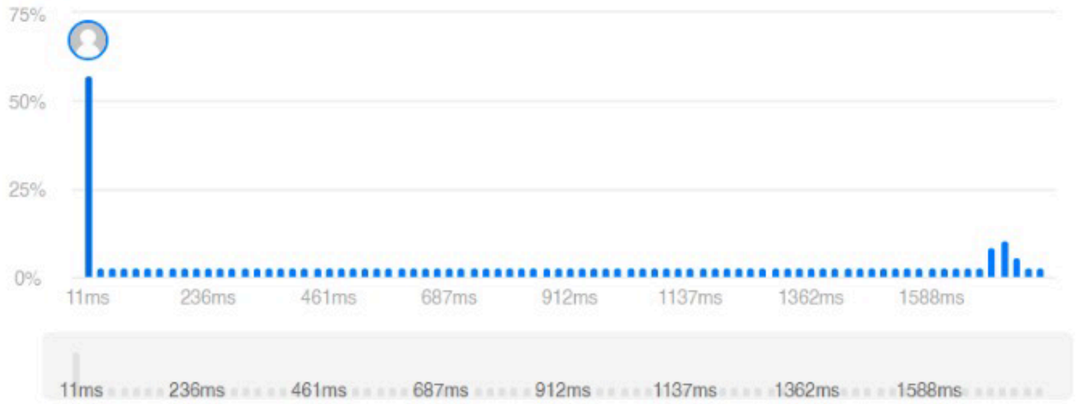
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime

3 ms | Beats 61.21%

Memory

8.34 MB | Beats 65.74%



Code | C

```c
#include <stdio.h>
int countOdds(int low, int high) {
    int count = 0;
    if (low % 2 == 0) {
```

Code

C | Auto

```c
#include <stdio.h>
int countOdds(int low, int high) {
    int count = 0;
    if (low % 2 == 0) {
        low = low + 1;
    }
    if (high % 2 == 0) {
        high = high - 1;
    }
    if (low > high) {
        return 0;
    }
    count = ((high - low) / 2) + 1;
```

Saved

Ln 1, Col 19

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

low =

3

high =

7

Output

leetcode.com/problems/count-operations-to-obtain-zero/submissions/2191291323/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 161 / 161 testcases passed

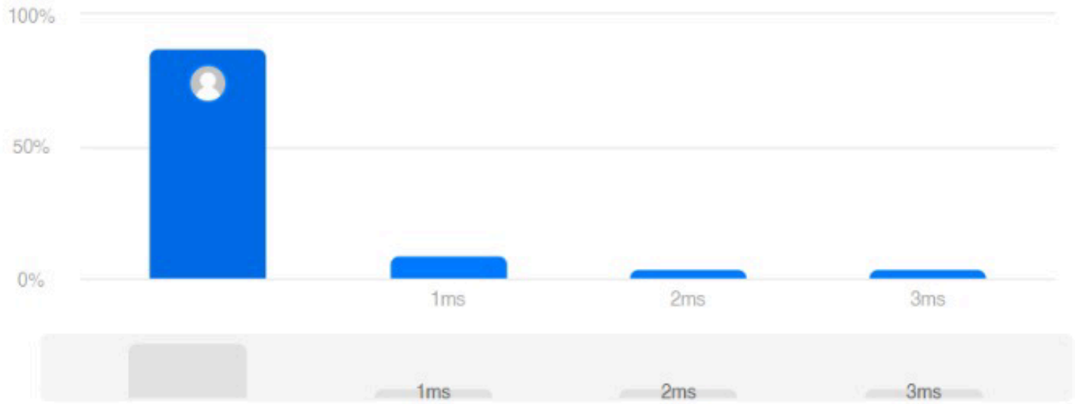
alankrit_173 submitted at Nov 07, 2026 19:10

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.05 MB | Beats 100.00%



Code | C

```c
int countOperations(int num1, int num2) {
    int count = 0;

    while (num1 != 0 && num2 != 0) {
```

Code

C | Auto

```c
    int count = 0;

    while (num1 != 0 && num2 != 0) {
        if (num1 >= num2) {
            num1 -= num2;
        } else {
            num2 -= num1;
        }
        count++;
    }

    return count;
}
```

Saved | Ln 14, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

num1 =
2

num2 =
3

Output

leetcode.com/problems/number-of-steps-to-reduce-a-number-to-zero/submissions/2191290531/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 204 / 204 testcases passed

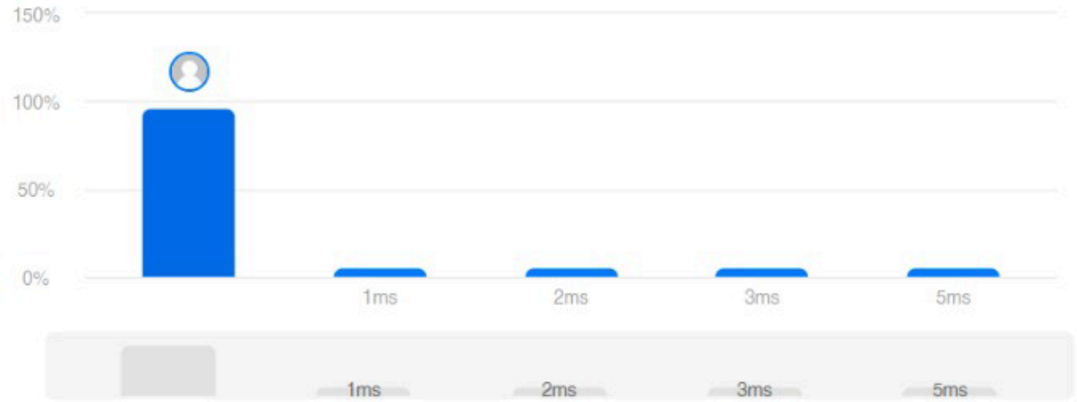
alankrit_173 submitted at Nov 07, 2026 19:08

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.37 MB | Beats 86.47%



Code | C

```c

    int numberOfSteps(int num) {
    int steps = 0;
```

Code

C | Auto

```c

    int numberOfSteps(int num) {
    int steps = 0;

    while (num > 0) {
        if (num % 2 == 0) {
            num /= 2;
        } else {
            num--;
        }
        steps++;
    }

    return steps;
```

Saved | Ln 17, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

num =
14

Output

6

Expected

For Loop in C

You made this submission a few seconds ago.

Score: 10.00 **Status:** Accepted

People who solved **For Loop in C** attempted this next:

Sum of Digits of a Five Digit Number

to calculate the sum of digits of a five digit number.

Solve Challenge

Submitted Code

Language: C

Open in editor

NEED HELP?

View discussions

View editorial

View top submissions

Test case 0

Compiler Message

Click to go back, hold to see history

FizzBuzz

FizzBuzz

Problem Submissions Leaderboard Discussions

You made this submission a few seconds ago.

Score: 11.60 **Status:** Accepted

Submitted Code

Language: C Open in editor

NEED HELP?

View discussions

View top submissions

Test case 0

Compiler Message

```
0.58Success
```

Print appropriate text for each photo in a new line.

Constraints:

1 <= **L,W,H** <= 10000

1 <= **N** <= 1000

Examples

Input

```
180
3
640 480
120 300
180 180
```

Output

```
CROP IT
UPLOAD ANOTHER
ACCEPTED
```

C

```c
#include <stdio.h>
int main() {
    int l, n;
    scanf("%d", &l);
    scanf("%d", &n);
    for (int i = 0; i < n; i++) {
        int w, h;
        scanf("%d %d", &w, &h);

        if (w < l || h < l) {
            printf("UPLOAD ANOTHER\n");
        } else if (w == h) {
            printf("ACCEPTED\n");
        } else {
            printf("CROP IT\n");
        }
    }

    return 0;
```

Results Test against custom input

Accepted Refer judge environment

Score	Time	Memory	Language
20	0.064s	2KiB	C

Grading Students

19 more points to get your first star!
Rank: 3982546 | Points: 11/30

Your Grading Students submission got 10.00 points. Share Post

You are now 19 points away from the 1st star for your problem solving badge.

Try the next challenge | Try a Random Challenge

You made this submission 2 minutes ago.

Score: 10.00 **Status:** Accepted

People who solved **Grading Students** attempted this next:

Apple and Orange

Find the respective numbers of apples and oranges that fall on Sam's house.

Solve Challenge

Submitted Code

Language: C

Open in editor

NEED HELP?

View discussions

View editorial

View top submissions

leetcode.com/problems/smallest-even-multiple/submissions/2191284586/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 150 / 150 testcases passed

alankrit_173 submitted at Nov 07, 2026 18:56

Analysis | Solution



Big Diwali Dhamaka

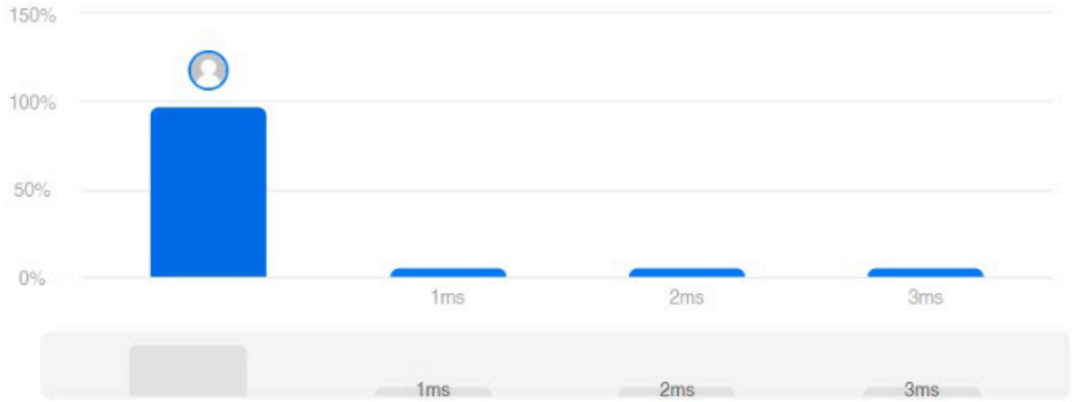
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime

0 ms | Beats 100.00%

Memory

8.33 MB | Beats 74.08%



Code | C

```c

int smallestEvenMultiple(int n) {
    if (n % 2 == 0) {
        return n;
```

Code

C | Auto

```c

int smallestEvenMultiple(int n) {
    if (n % 2 == 0) {
        return n;
    }
    return n * 2;
}

```

Saved

Ln 8, Col 1

Testcase | Test Result

Compile Error

```
Line 8: Char 1: error: expected identifier or '(' before '}' token [solution.c]
    8 | }
      | ^
```

Upload Code as File | Test against custom input | Run Code | Submit Code

C language

You have earned 10.00 points!

You are now 5 points away from the 1st star for your c badge.

67% 10/15

Congratulations

You solved this challenge. Would you like to challenge your friends?

Next Challenge

- Test case 0
- Test case 1
- Test case 2
- Test case 3
- Test case 4

Compiler Message

```
Success
```

Input (stdin) Download

```
1 5
```

Expected Output Download

```
1 five
```

leetcode.com/problems/total-distance-traveled/submissions/2191271730/

Problem List

Submit

Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 10000 / 10000 testcases passed

alankrit_173 submitted at Nov 07, 2026 18:29

Analysis

Solution



Big Diwali Dhamaka

Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime

8 ms | Beats 15.74%

Memory

11.06 MB | Beats 63.89%



Code | C

```c
int distanceTraveled(int mainTank, int additionalTank) {
    int distance = 0;

    while (mainTank >= 5) {
        mainTank -= 5;
        distance += 50;
        if (additionalTank > 0) {
            additionalTank--;
            mainTank++;
        }
    }

    distance += mainTank * 10;
    return distance;
```

Code

C | Auto

```c
int distanceTraveled(int mainTank, int additionalTank) {
    int distance = 0;

    while (mainTank >= 5) {
        mainTank -= 5;
        distance += 50;
        if (additionalTank > 0) {
            additionalTank--;
            mainTank++;
        }
    }

    distance += mainTank * 10;
    return distance;
```

Saved

Ln 15, Col 2

Testcase | Test Result

You must run your code first

leetcode.com/problems/calculate-delayed-arrival-time/submissions/2191271381/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 556 / 556 testcases passed

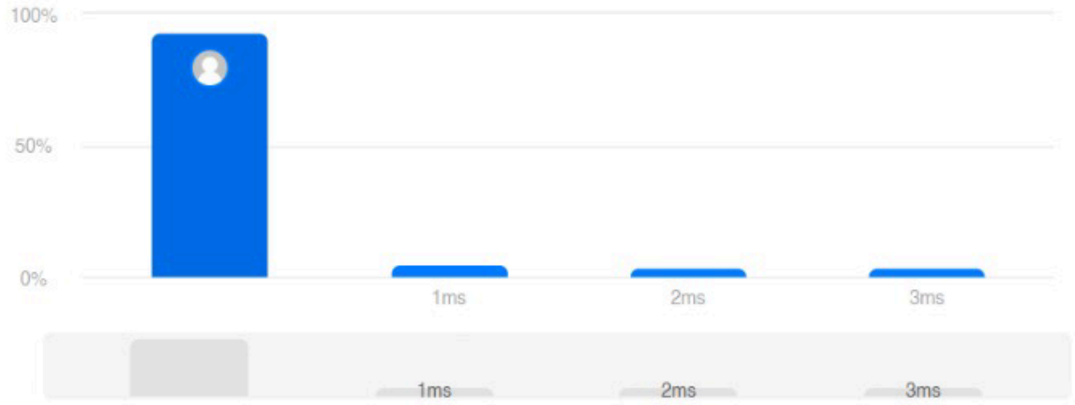
alankrit_173 submitted at Nov 07, 2026 18:28

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.49 MB | Beats 94.89%



Code | C

```c
int findDelayedArrivalTime(int arrivalTime, int delayedTime) {
    int total = arrivalTime + delayedTime;

    if (total >= 24) {
```

Code

C | Auto

```c
int findDelayedArrivalTime(int arrivalTime, int delayedTime) {
    int total = arrivalTime + delayedTime;

    if (total >= 24) {
        return total - 24;
    } else {
        return total;
    }
}
```

Saved | Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

arrivalTime =
15

delayedTime =
5

Output

leetcode.com/problems/add-two-integers/submissions/2191270572/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 262 / 262 testcases passed

alankrit_173 submitted at Nov 07, 2026 18:26

Analysis | Solution

Save 41%

Big Diwali Dhamaka

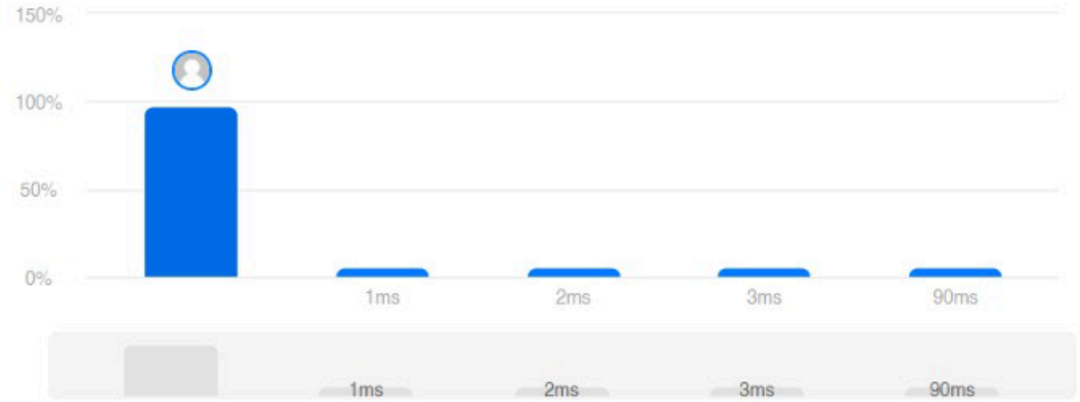
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime

0 ms | Beats 100.00%

Memory

8.54 MB | Beats 56.86%



Code | C

```c
int sum(int num1, int num2) {
    int sum = num1 + num2 ;
    return sum ;
}
```

Code

C | Auto

```c
int sum(int num1, int num2) {
    int sum = num1 + num2 ;
    return sum ;
}
```

Saved

Ln 1, Col 1

Testcase | Test Result

You must run your code first

Change Theme Language C

```c
#include <stdio.h>

int main() {
    int a, b;
    scanf("%d %d", &a, &b);
    printf("%d\n", a + b);
    return 0;
}

```

Line: 9 Col: 1

Run Code Submit Code

Sample Output

```
5
```

Explanation

$2 + 3 = 5$.

CHOOSE A TRANSLATION

English


```c
#include <stdio.h>
int solveMeFirst(int a, int b) {
    return a + b;
}

int main() {
    int a, b;
    scanf("%d %d", &a, &b);
    printf("%d\n", solveMeFirst(a, b));
    return 0;
}
```

Add files via upload

main

1 parent d72beed commit 23f18d0

1 file changed

Filter files...

platform program ss

Search within code

...g Practice Coding Platform Question Bank.pdf 4.98 MB

Binary file not shown.

Comments 0

Comment

Subscribe You're not receiving notifications from this thread.

leetcode.com/problems/palindrome-number/submissions/2191300507/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 11513 / 11513 testcases passed

alankrit_173 submitted at Nov 07, 2026 19:28

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
9 ms | Beats 12.74%

Memory
8.65 MB | Beats 82.87%



Code | C

```c
#include <stdbool.h>

bool isPalindrome(int x) {
    if (x < 0) {
```

Code

C | Auto

```c
    }

    long long reversed = 0;
    int temp = x;

    while (temp > 0) {
        int digit = temp % 10;
        reversed = reversed * 10 + digit;
        temp /= 10;
    }

    return reversed == x;
}
```

Saved | Ln 13, Col 43

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

x =
121

Output

true

Expected

File Edit Selection View Go Run Terminal Help

c programming

Sign In

Explorer

c pro...

- .vscode
- ap and gp
- assisment1 focp
- decreasingloop
- Hands on coding pra...
- projects in c
- QUESTIONS

Outline

Timeline

q14_floyds_triangle.c | q15_butterfly_pattern.c | q16_diamond_pattern.c

assisment1 focp > C_Programming_Assignments-main > C q16_diamond_pattern.c > ...

```c
#include <stdio.h>
int main(){
    int n;
    scanf("%d", &n);
    for (int i = 1; i <= n; i++)
    {
        for (int j = 1; j <= n - i; j++)
            printf(" ");
        for (int j = 1; j <= 2 * i - 1; j++)
            printf("*");
        printf("\n");
    }
    for (int i = n - 1; i >= 1; i--)
    {
        for (int j = 1; j <= n - i; j++)
            printf(" ");
        for (int j = 1; j <= 2 * i - 1; j++)
            printf("*");
        printf("\n");
    }
    return 0;
}

```

Problems Output Debug Console Terminal Ports

```
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q16_diamond_pattern.c -o q16_diamond_pattern } ; if ($?) { .\q16_diamond_pattern }
5
    *
   ***
  *****
 *******
*********
 *******
  *****
   ***
    *
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
```

powershell
Code
Code
Code
Code

Ln 23, Col 1 Spaces: 4 UTF-8 CRLF { } C Win32

File Edit Selection View Go Run Terminal Help

c programming

Sign In

Explorer

c pro...

- .vscode
- ap and gp
- assisment1 focp
- decreasingloop
- Hands on coding pra...
- projects in c
- QUESTIONS

Outline

Timeline

q14_floyds_triangle.c | q15_butterfly_pattern.c

assisment1 focp > C_Programming_Assignments-main > q15_butterfly_pattern.c > main()

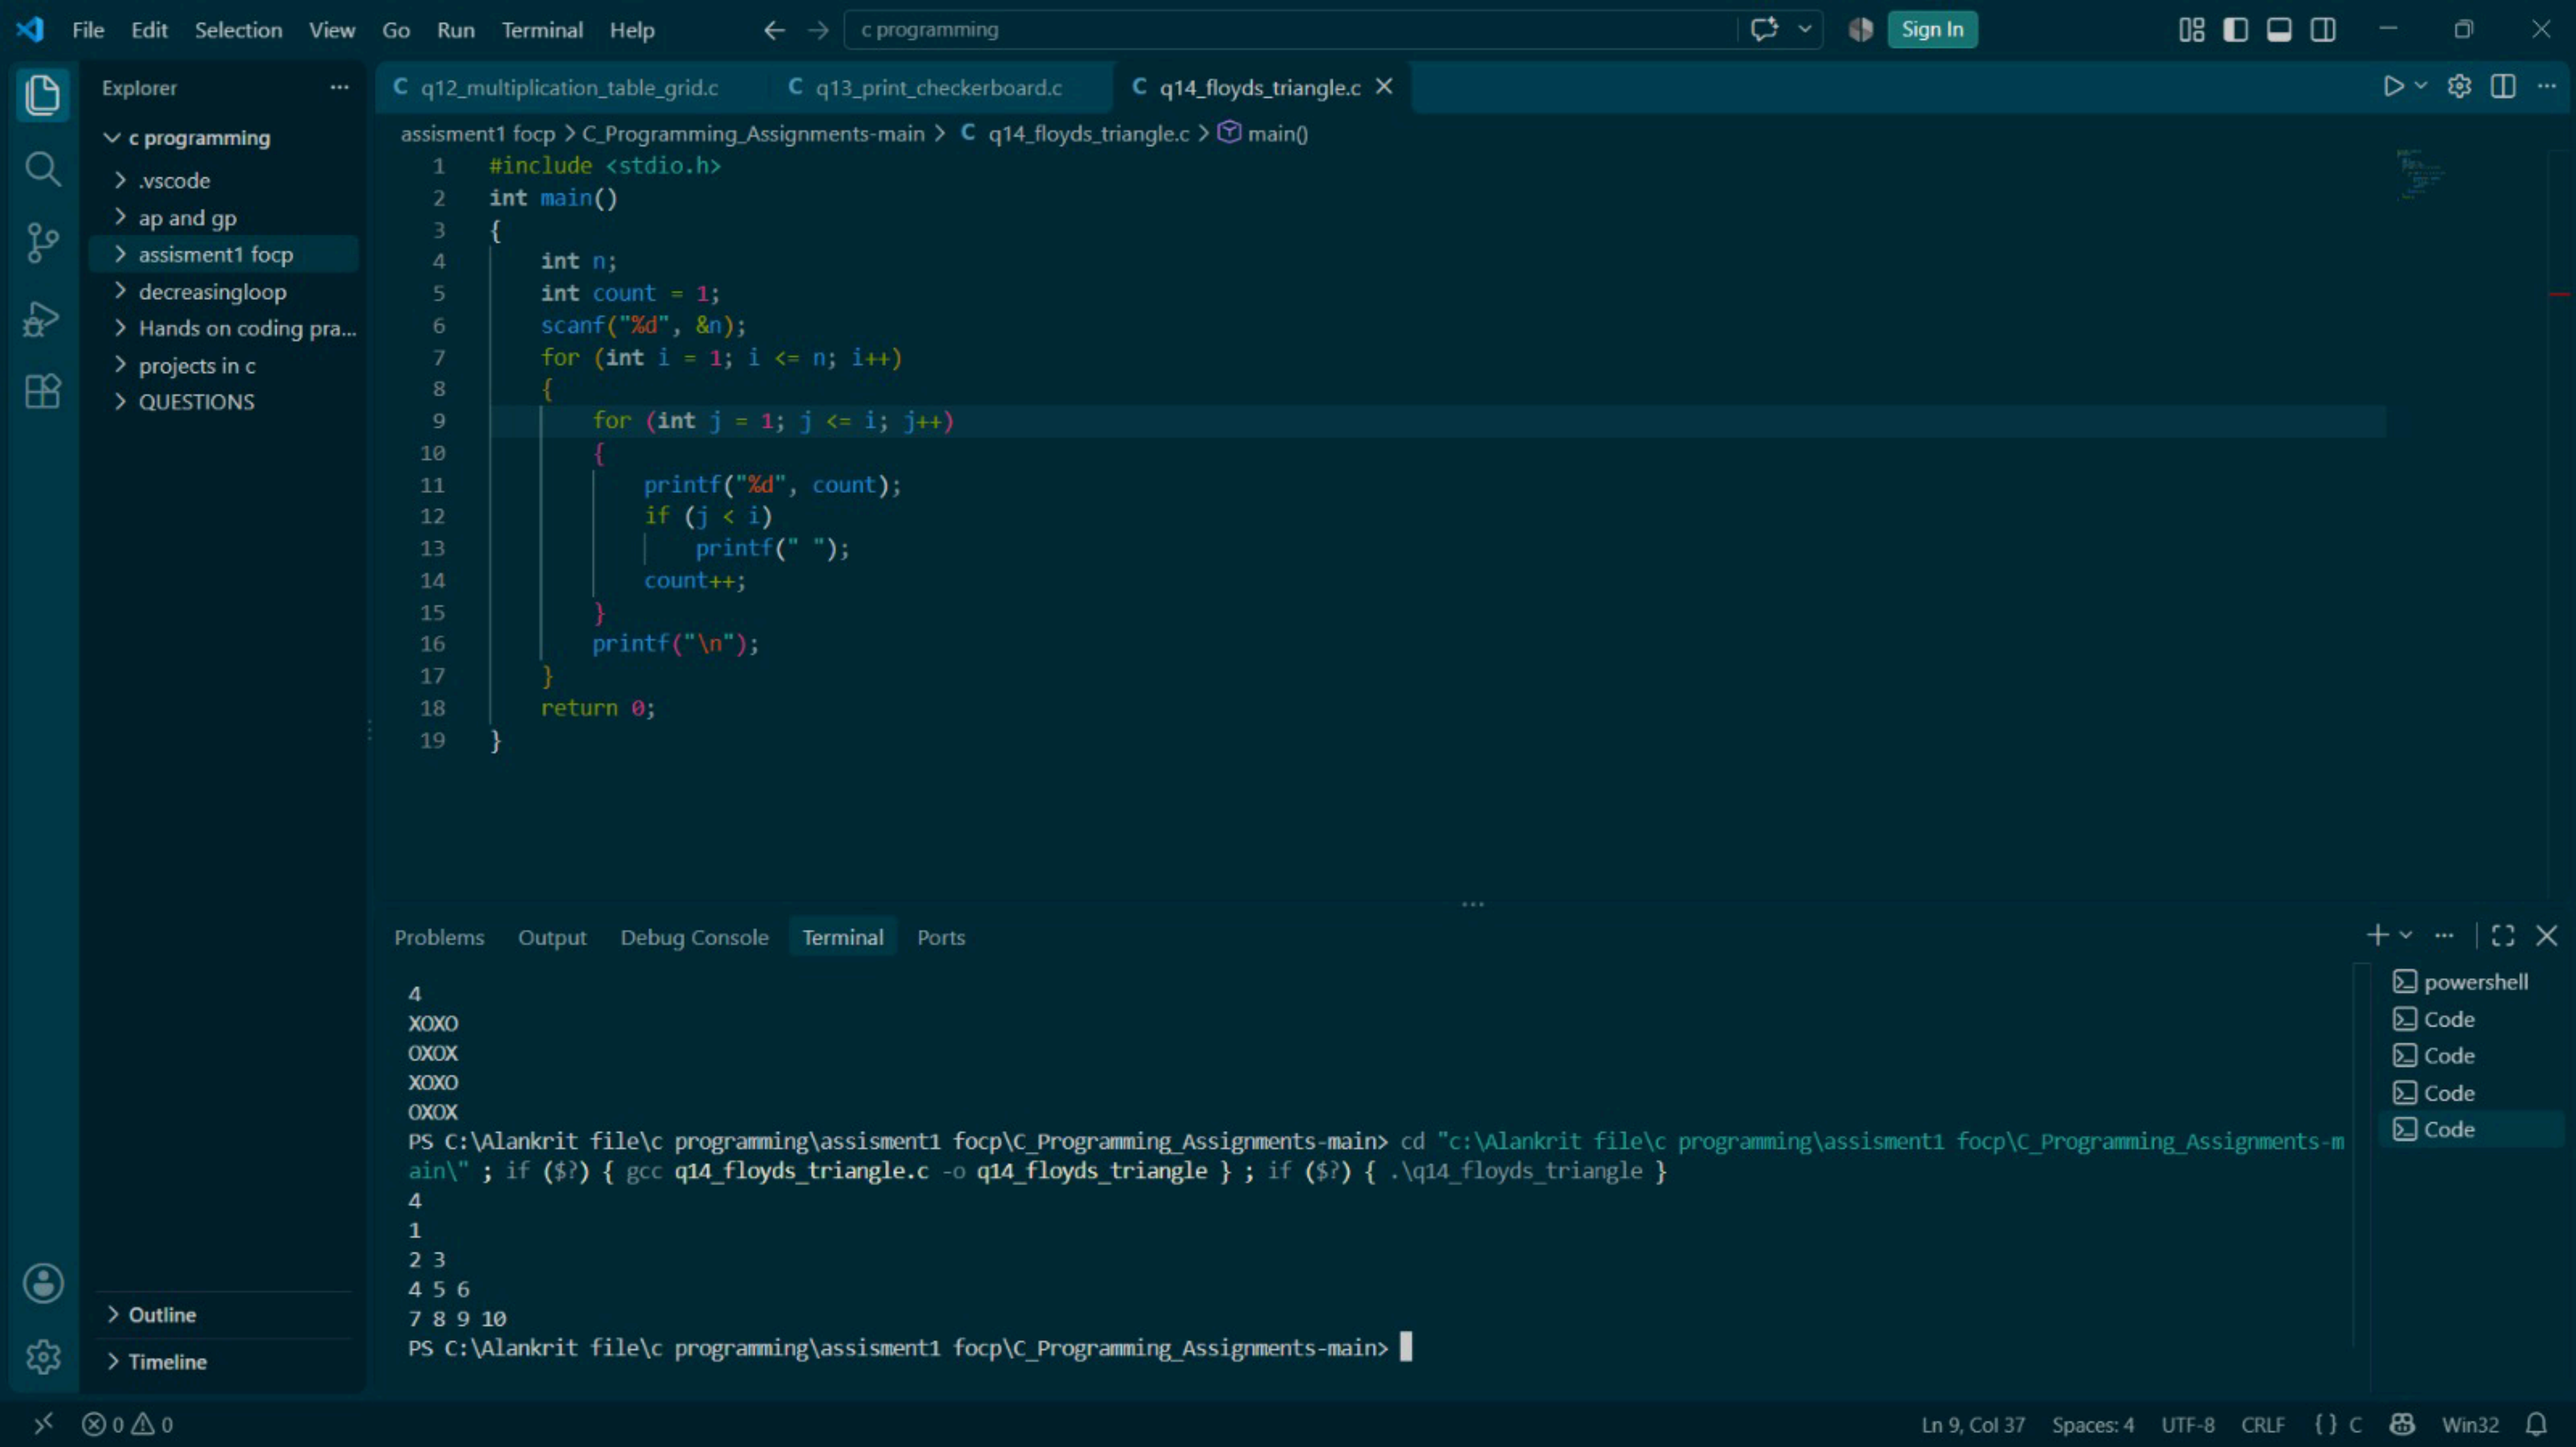
```c
#include <stdio.h>
int main(){
    int n;
    scanf("%d", &n);
    int mid = (n + 1) / 2;
    for (int i = 1; i <= n; i++)
    {
        int stars;
        if (i <= mid)
            stars = i;
        else
            stars = n - i + 1;
        int spaces = 2 * (n - stars) - 1;
        for (int j = 1; j <= stars; j++)
            printf("*");
        for (int j = 1; j <= spaces; j++)
            printf(" ");
        for (int j = 1; j <= stars; j++)
            printf("*");
        printf("\n");
    }
    return 0;
}
```

Problems Output Debug Console Terminal Ports

```
****    ****
***      ***
**        **
*          *
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q15_butterfly_pattern.c -o q15_butterfly_pattern } ; if ($?) { .\q15_butterfly_pattern }
5
*       *
**     **
***   ***
**     **
*       *
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
```

powershell
Code
Code
Code
Code

Ln 5, Col 27 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS
q12_multiplication_table_grid.c
q13_print_checkerboard.c
q14_floyds_triangle.c
assisment1 focp > C_Programming_Assignments-main > q14_floyds_triangle.c > main()
#include <stdio.h>
int main()
{
int n;
int count = 1;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= i; j++)
{
printf("%d", count);
if (j < i)
printf(" ");
count++;
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
4
XOXO
OXOX
XOXO
OXOX
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q14_floyds_triangle.c -o q14_floyds_triangle } ; if ($?) { .\q14_floyds_triangle }
4
1
2 3
4 5 6
7 8 9 10
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
Code
Outline
Timeline
Ln 9, Col 37 Spaces: 4 UTF-8 CRLF { } C Win32

File Edit Selection View Go Run Terminal Help

c programming

Sign In

Explorer

c programming

- .vscode
- ap and gp
- assisment1 focp
- decreasingloop
- Hands on coding pra...
- projects in c
- QUESTIONS

Outline

Timeline

q12_multiplication_table_grid.c

q13_print_checkerboard.c

assisment1 focp > C_Programming_Assignments-main > q13_print_checkerboard.c > main()

```c
#include <stdio.h>
int main()
{
    int n;
    scanf("%d", &n);
    for (int i = 1; i <= n; i++)
    {
        for (int j = 1; j <= n; j++)
        {
            if ((i + j) % 2 == 0)
                printf("X");
            else
                printf("O");
        }
        printf("\n");
    }
    return 0;
}
```

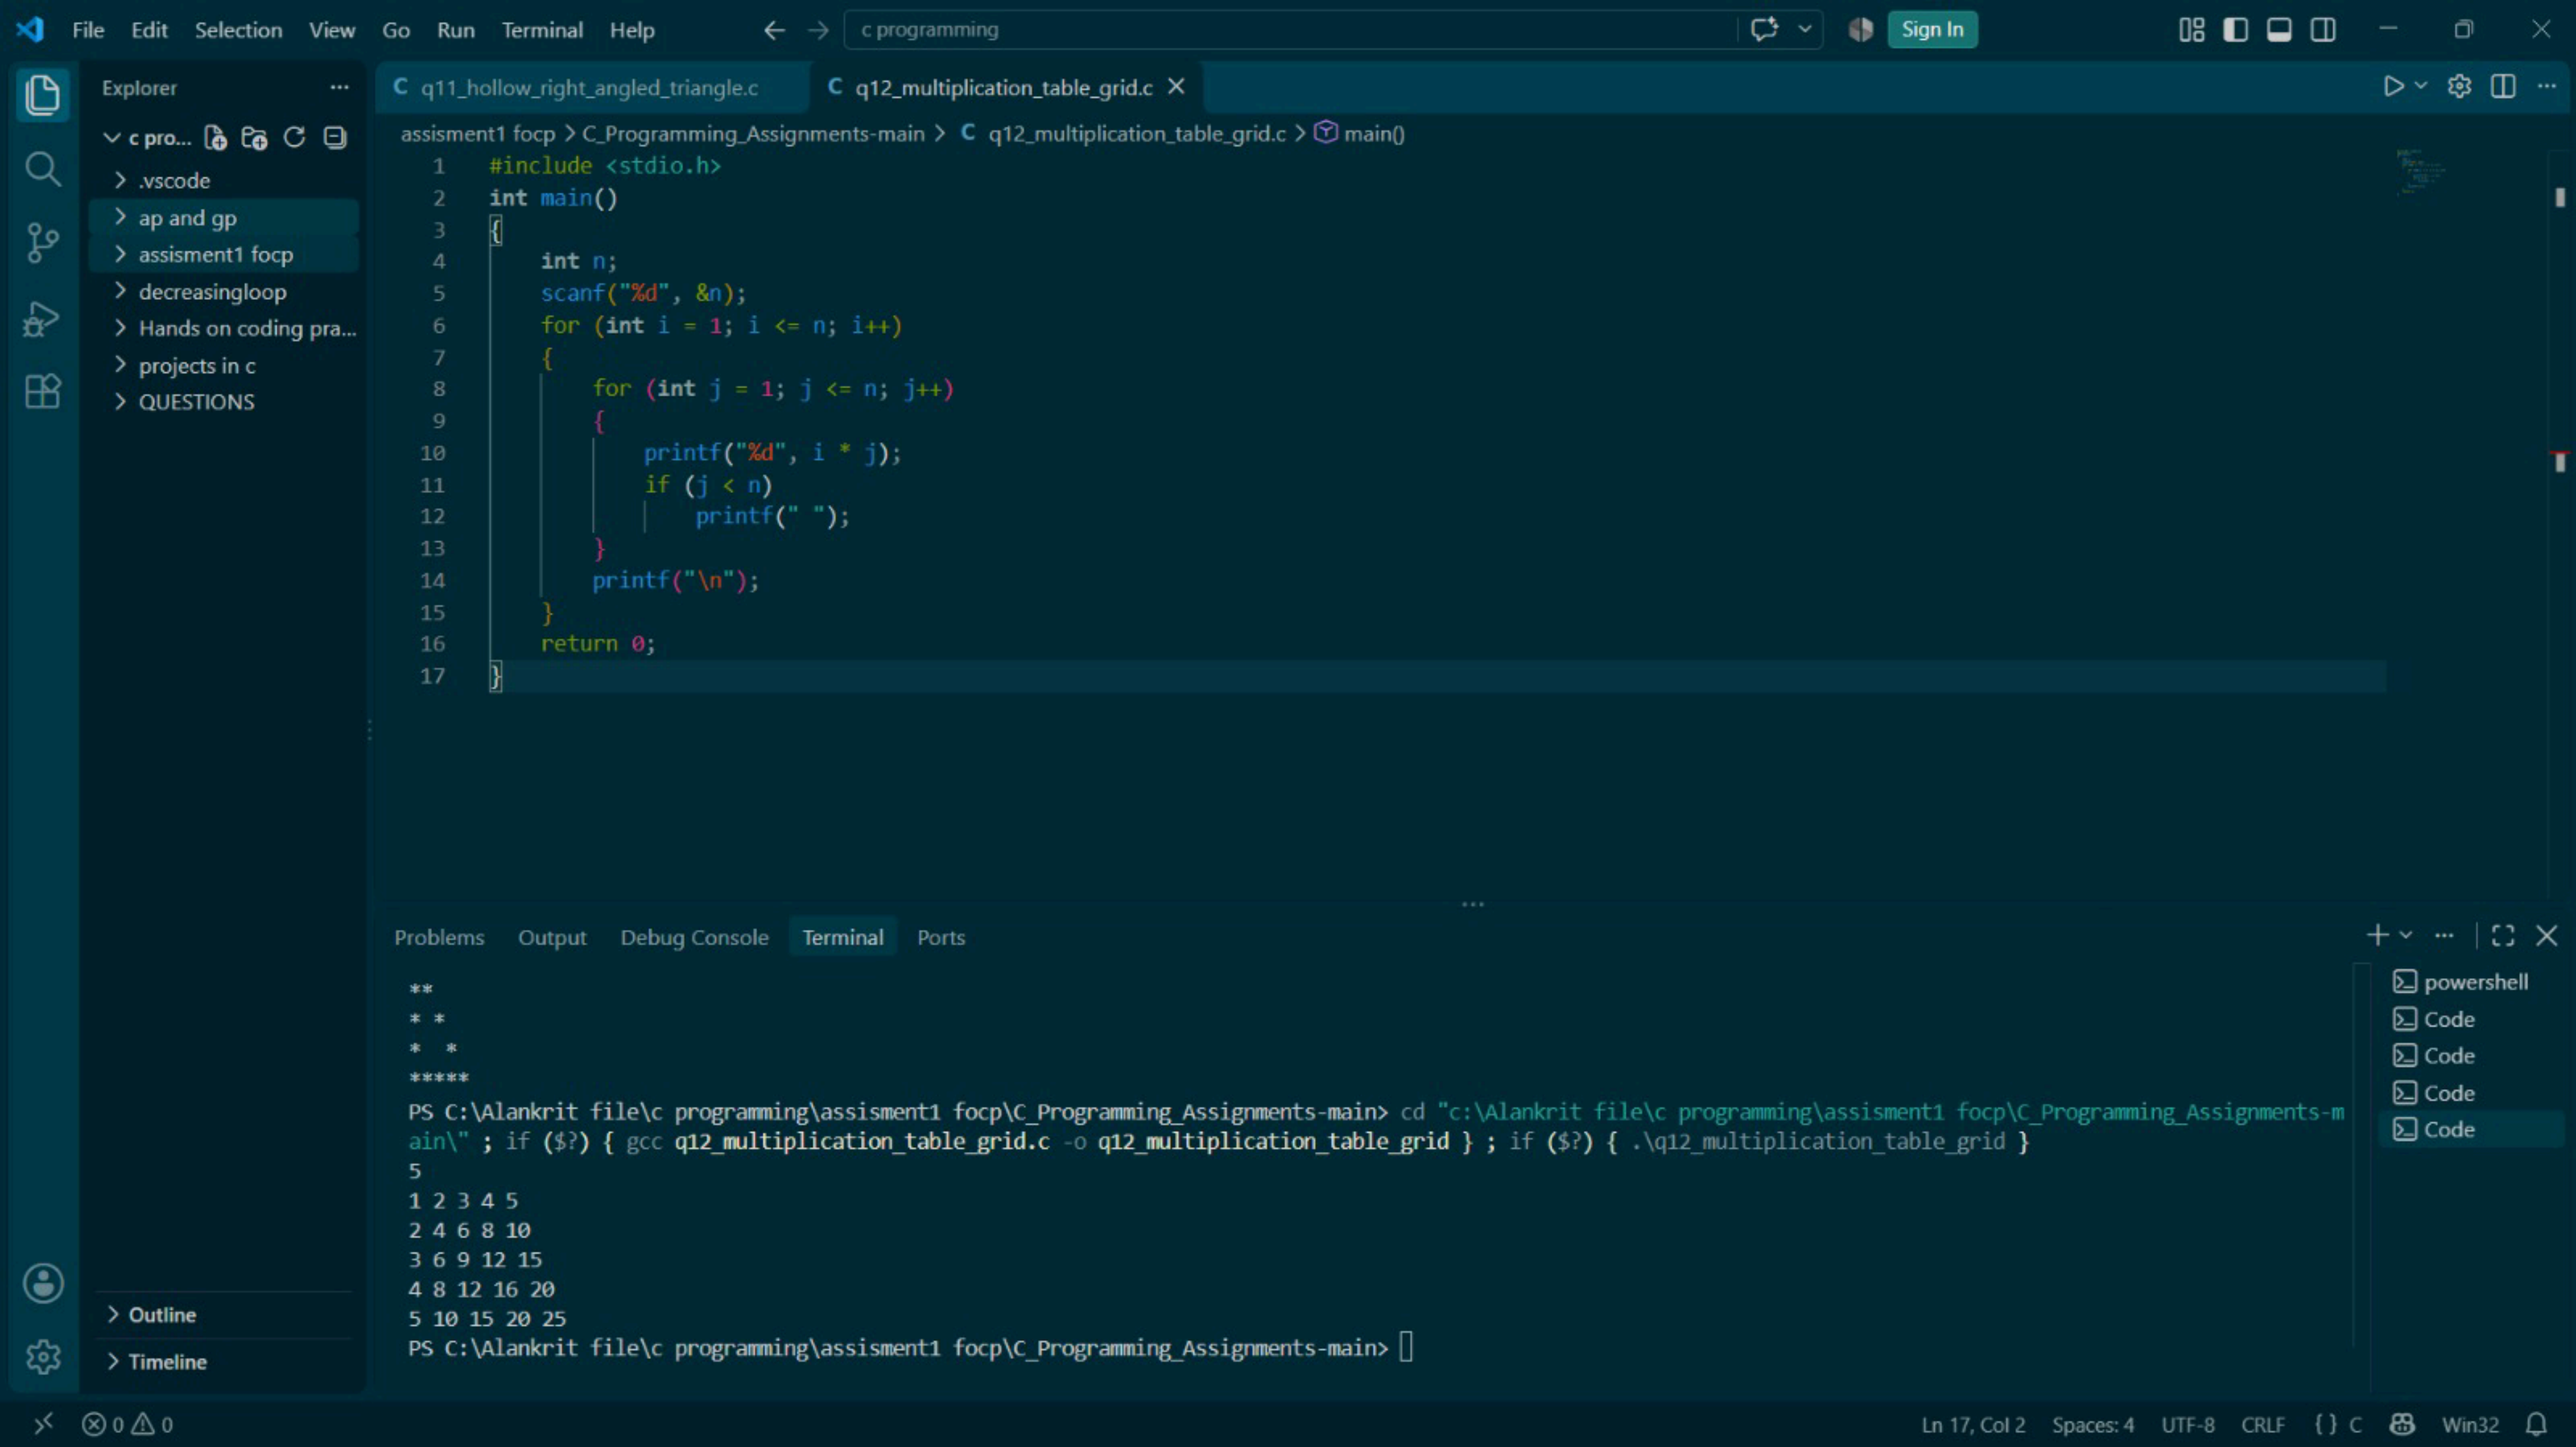
Problems Output Debug Console Terminal Ports

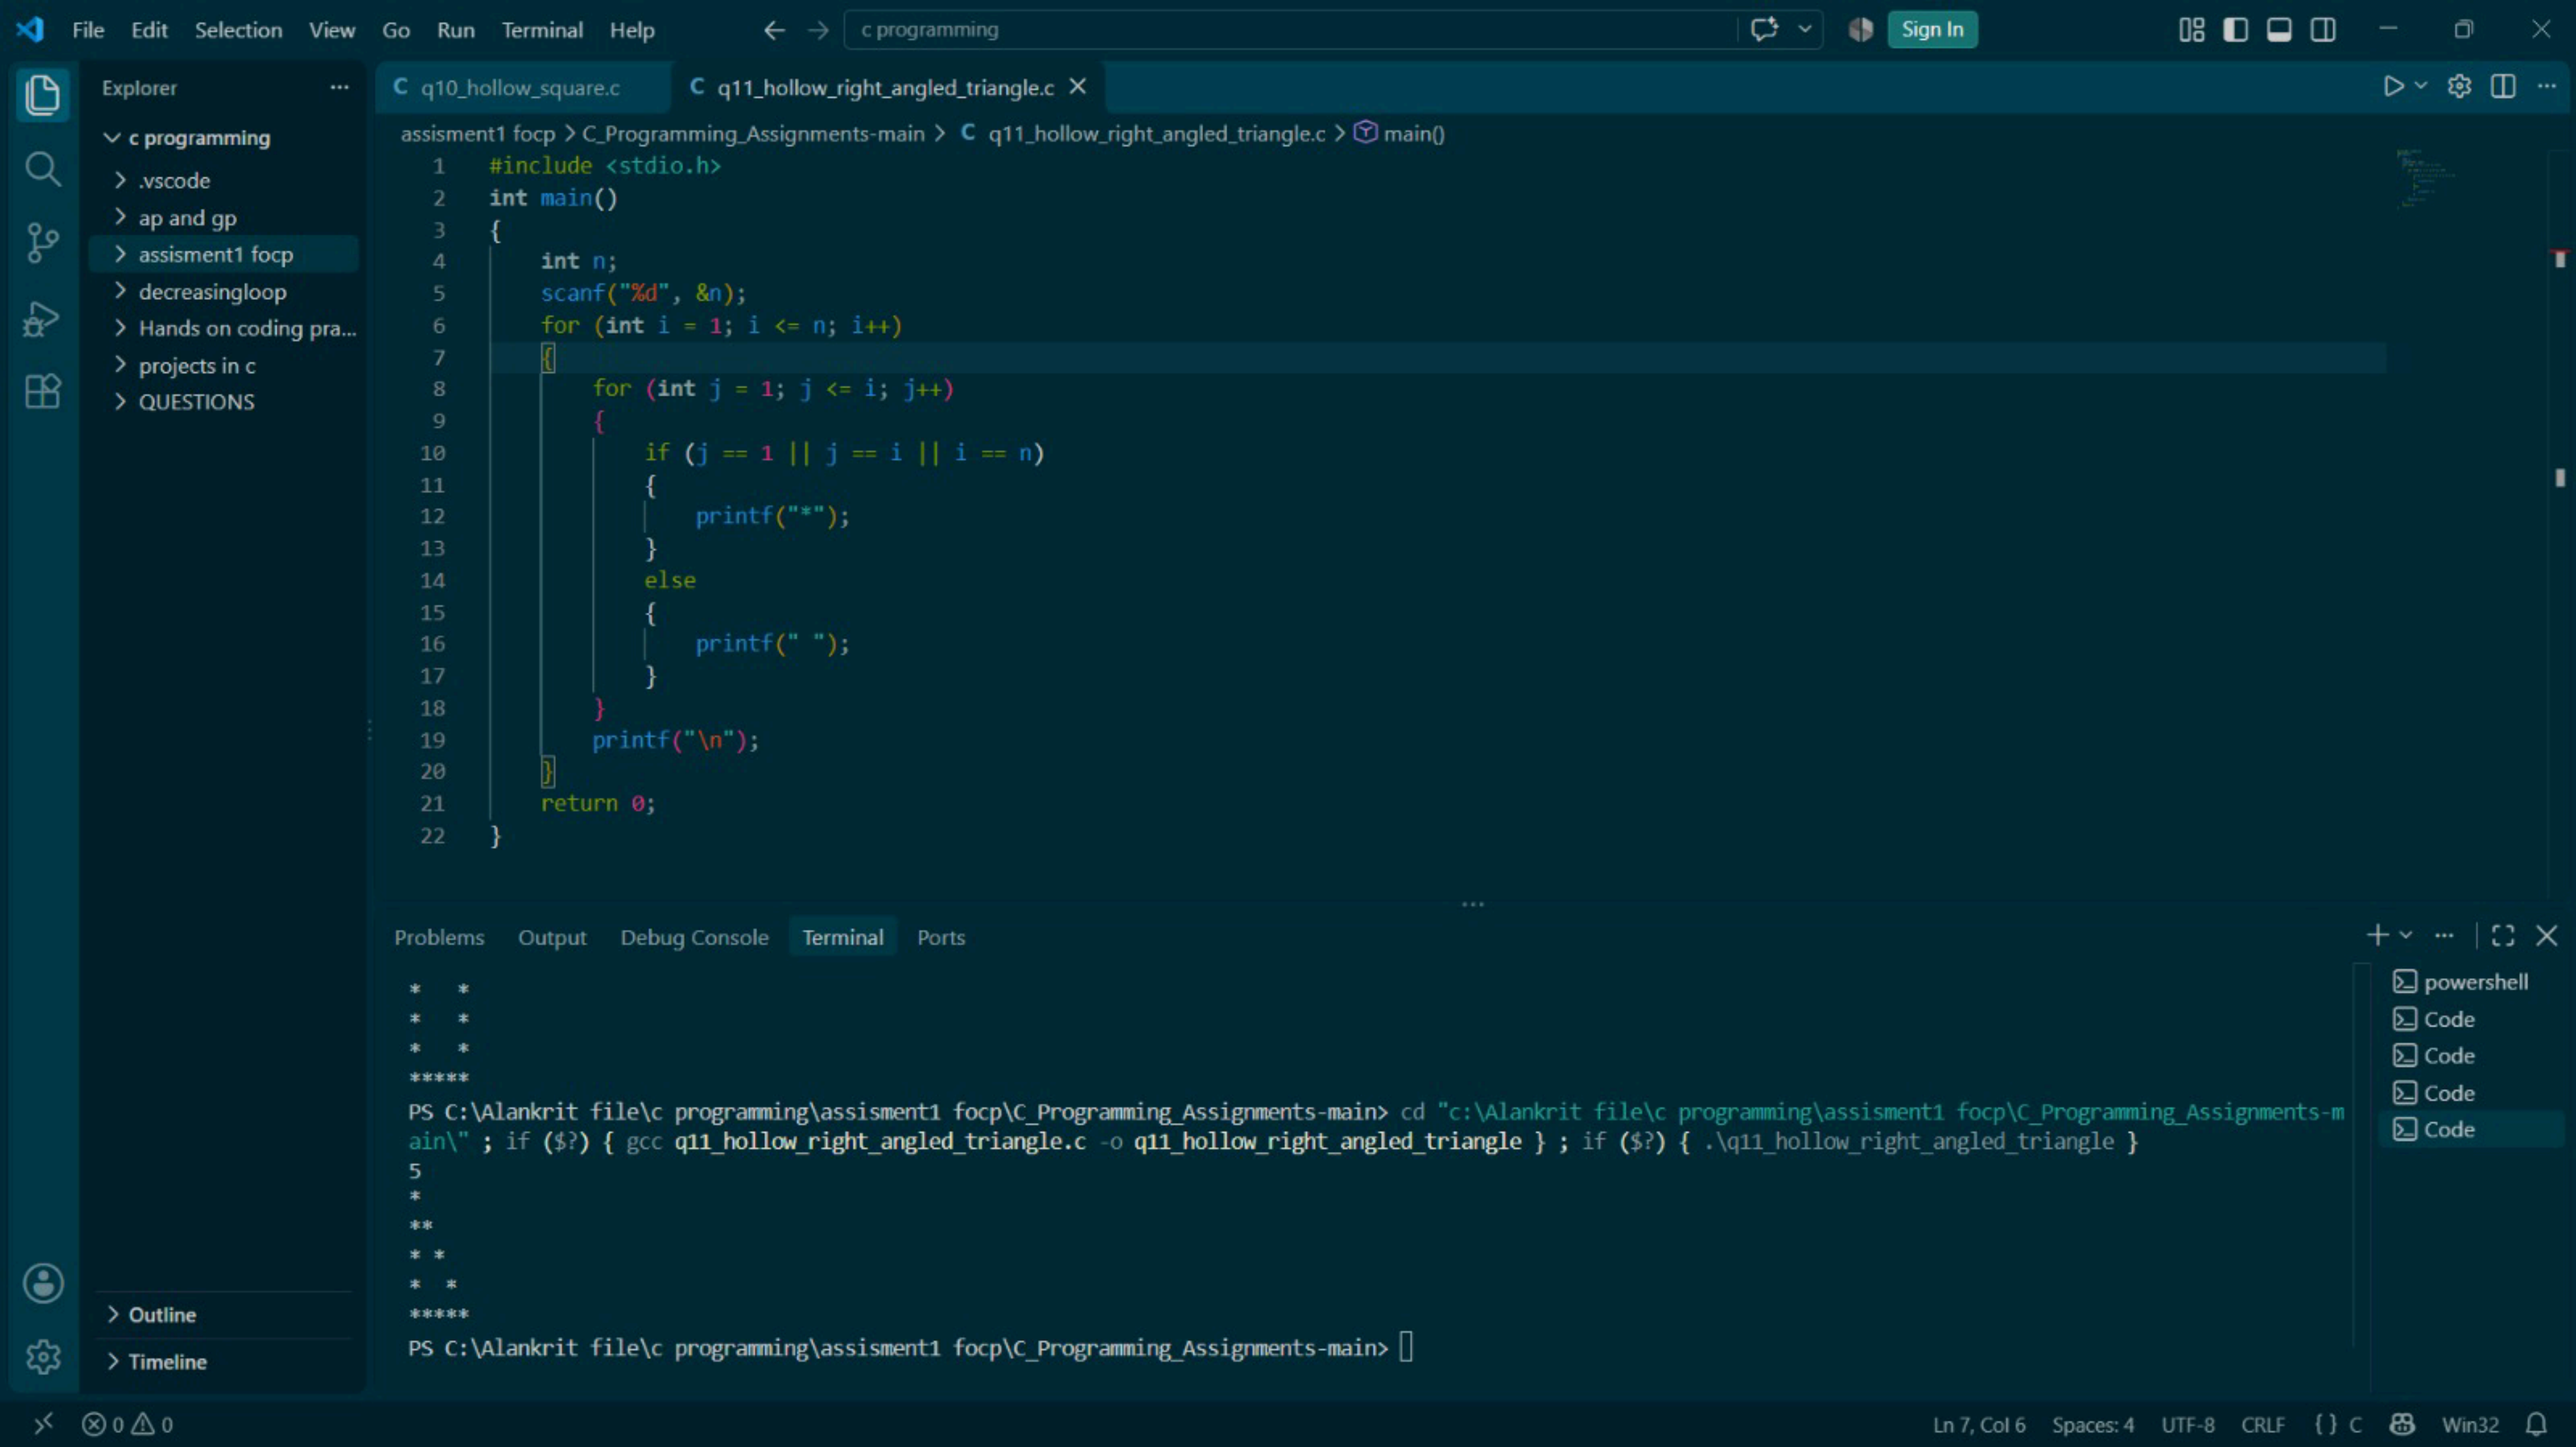
```
1 2 3 4 5
2 4 6 8 10
3 6 9 12 15
4 8 12 16 20
5 10 15 20 25
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q13_print_checkerboard.c -o q13_print_checkerboard } ; if ($?) { .\q13_print_checkerboard }
4
XOXO
OXOX
XOXO
OXOX
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
```

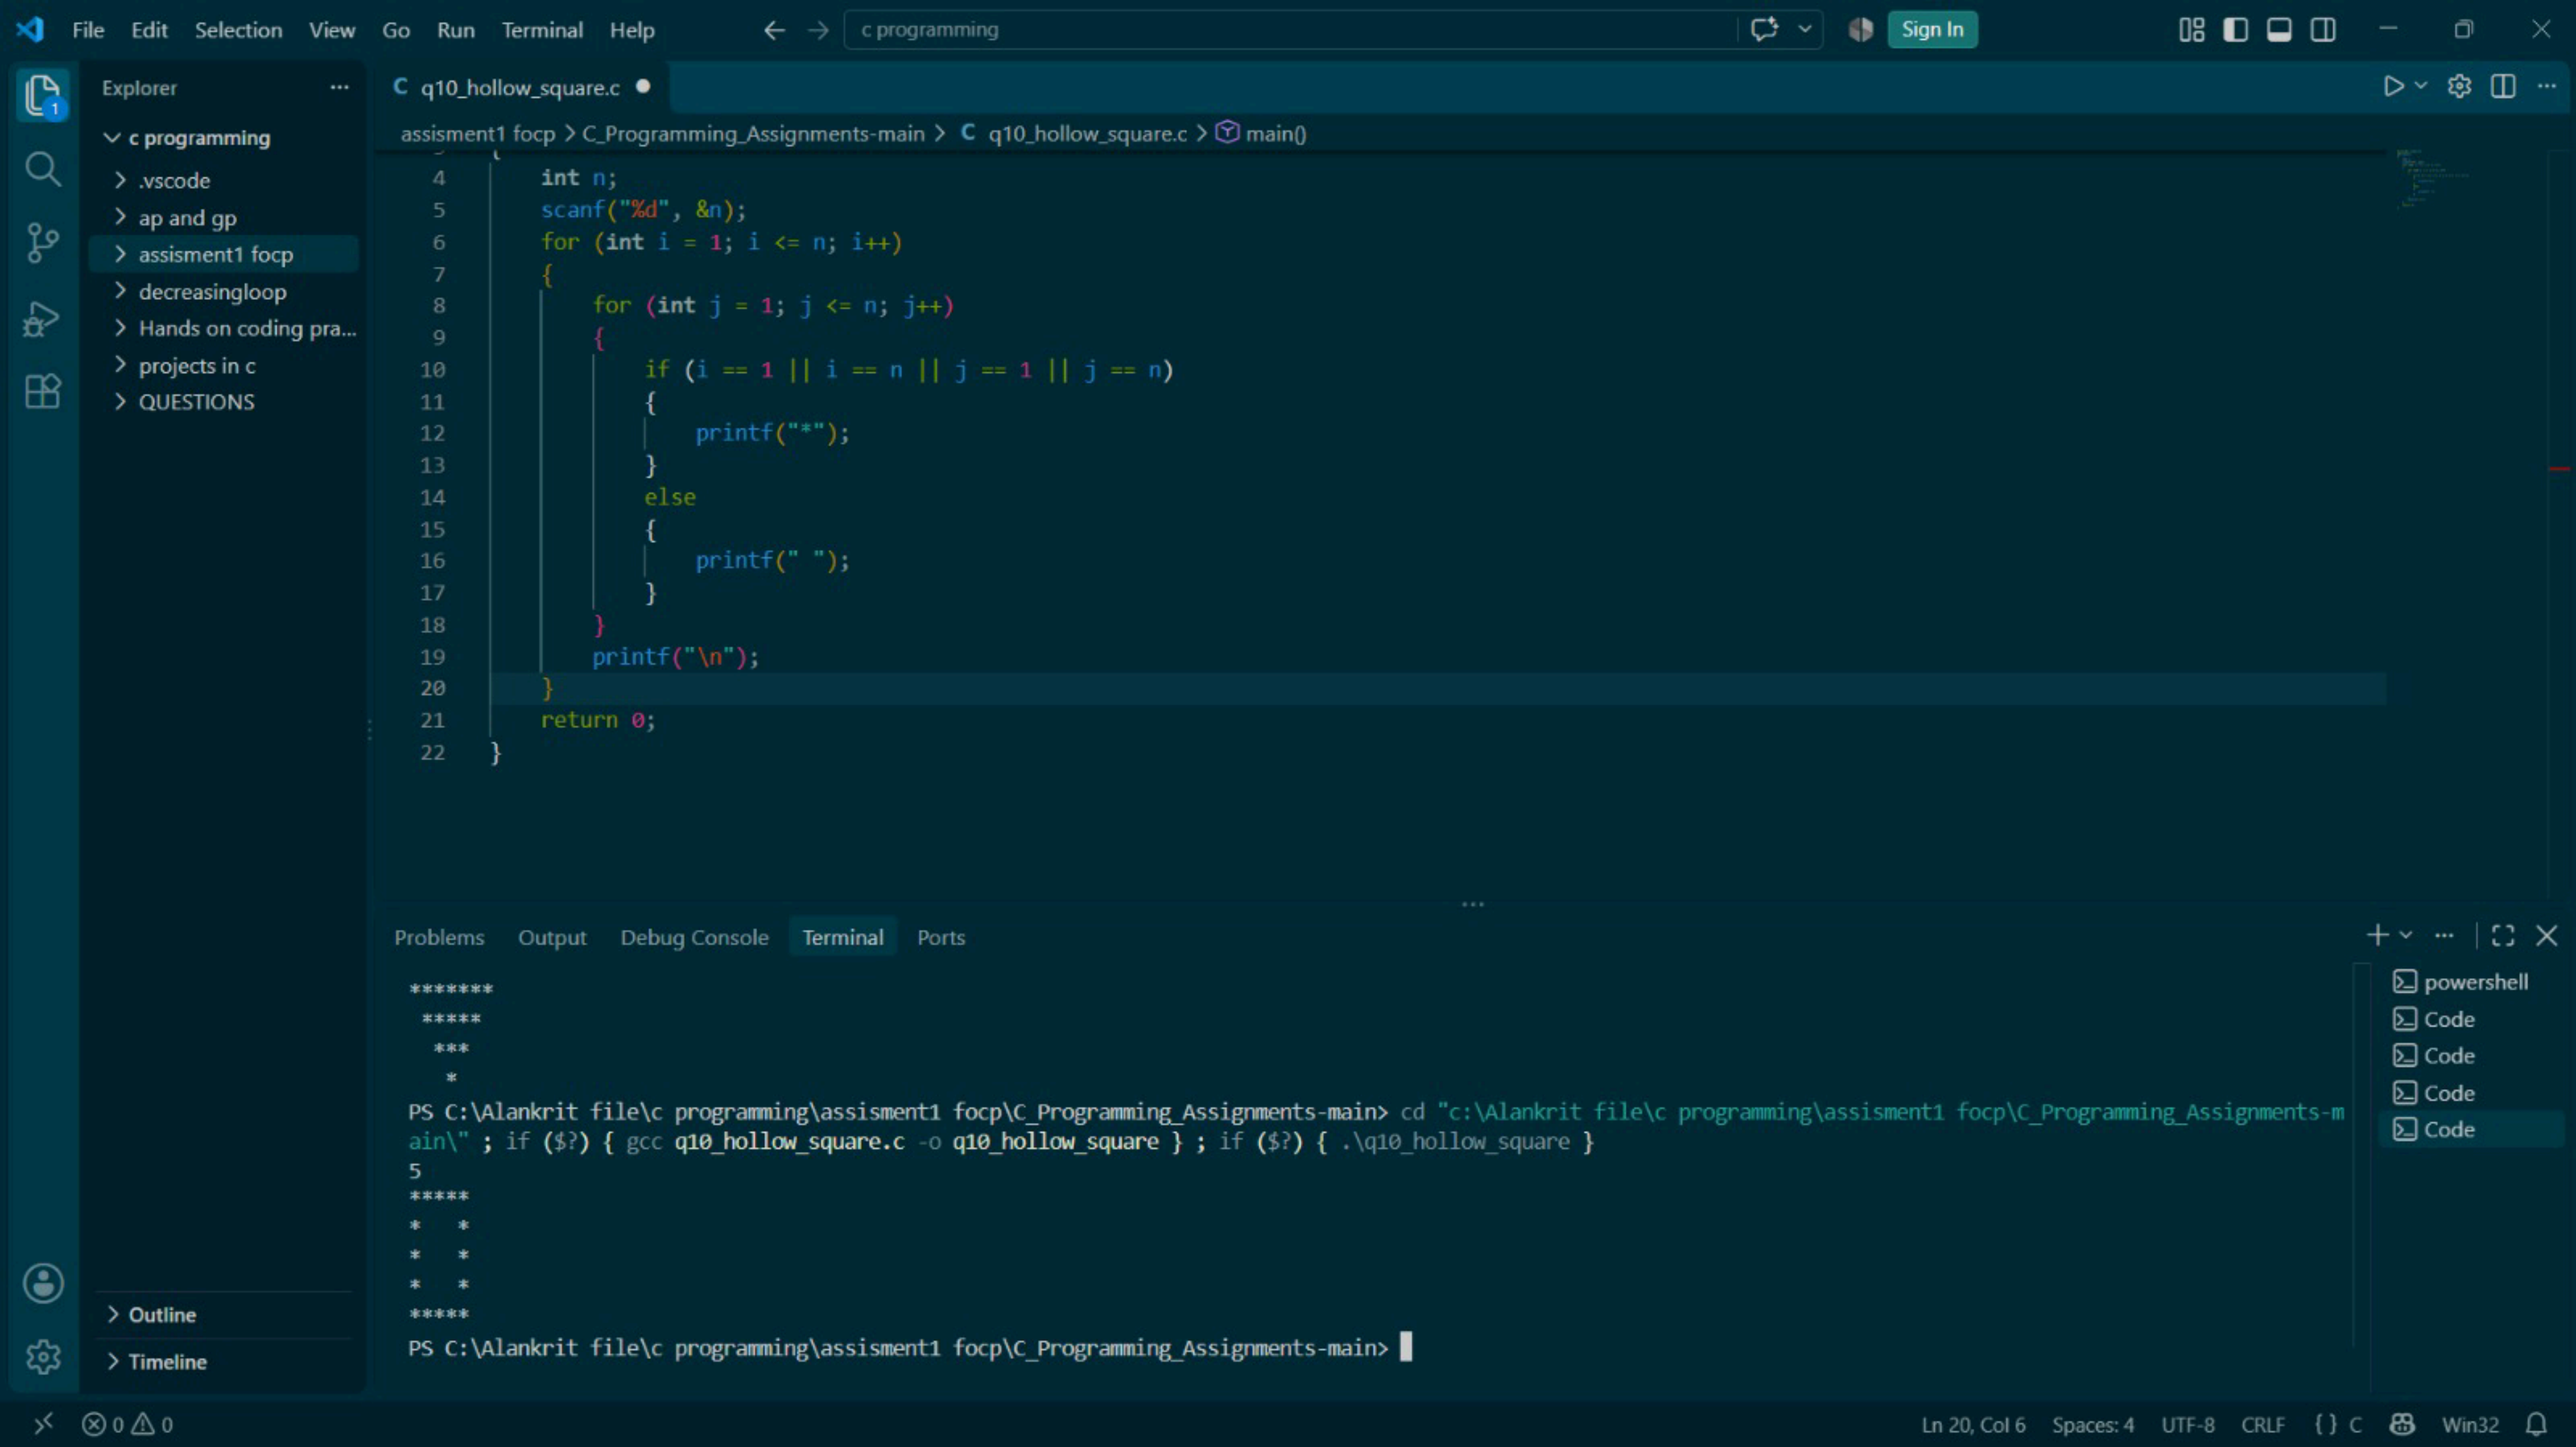
powershell
Code
Code
Code
Code

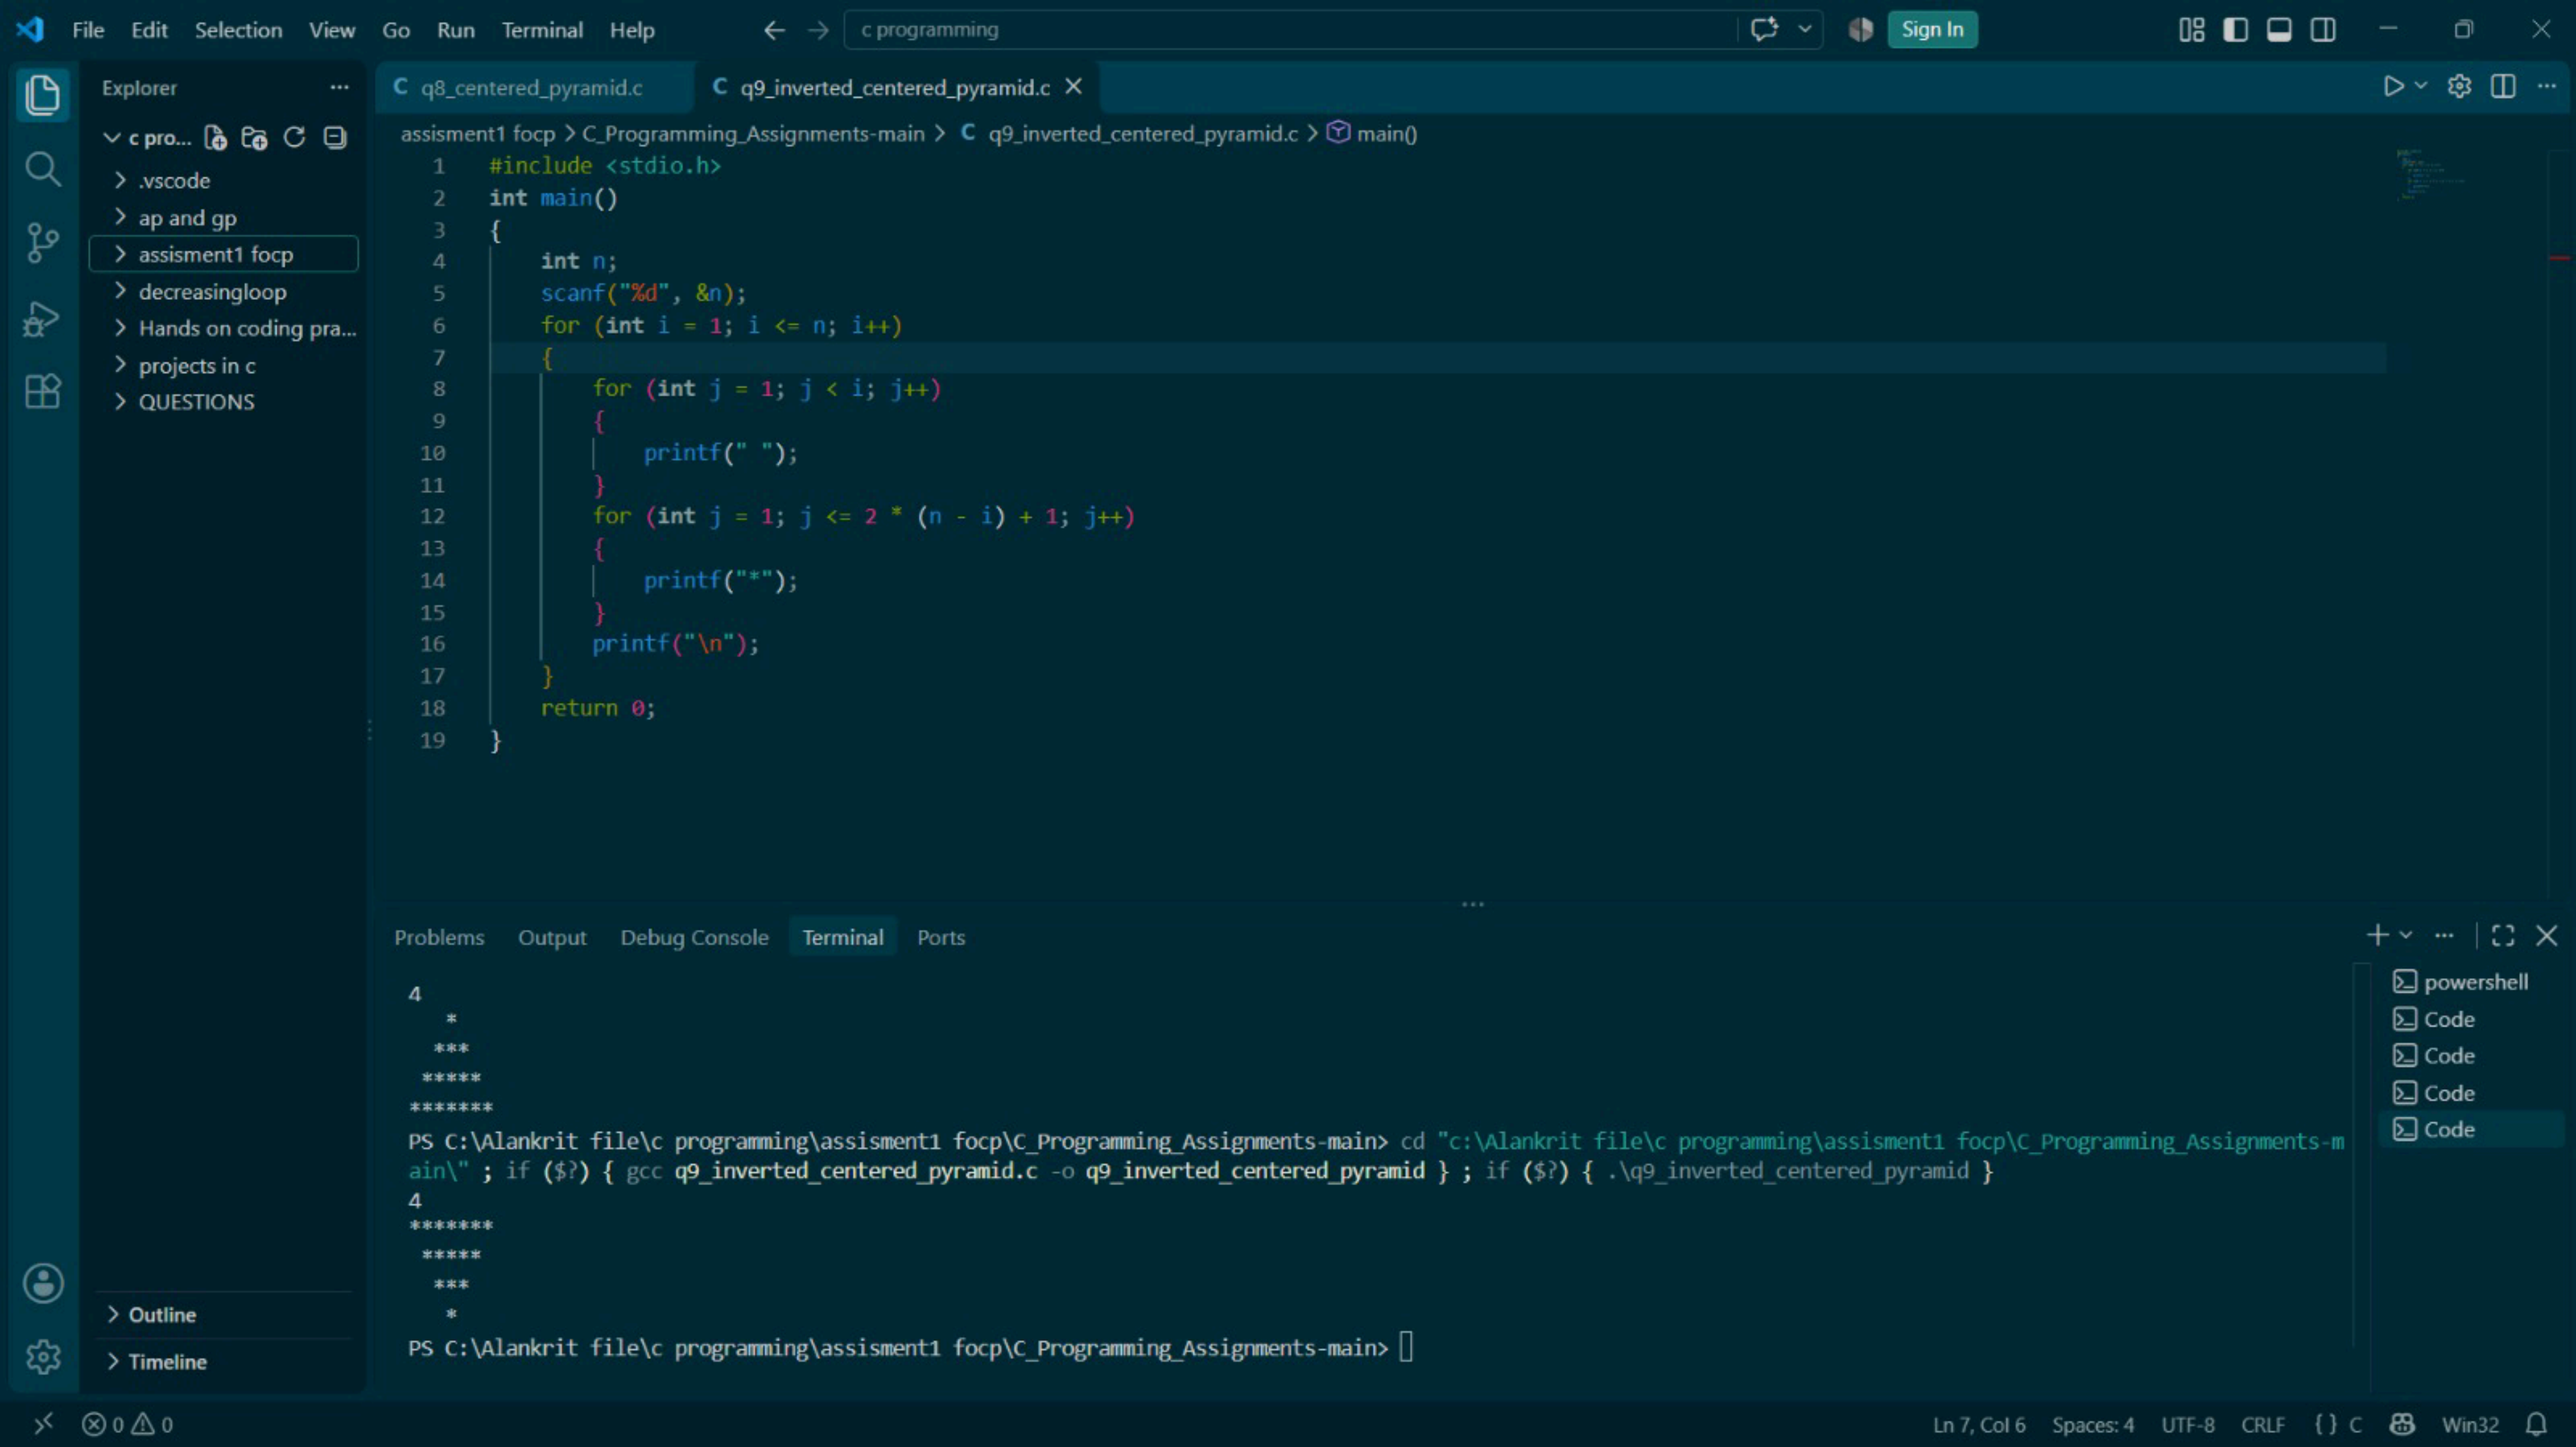
0 0

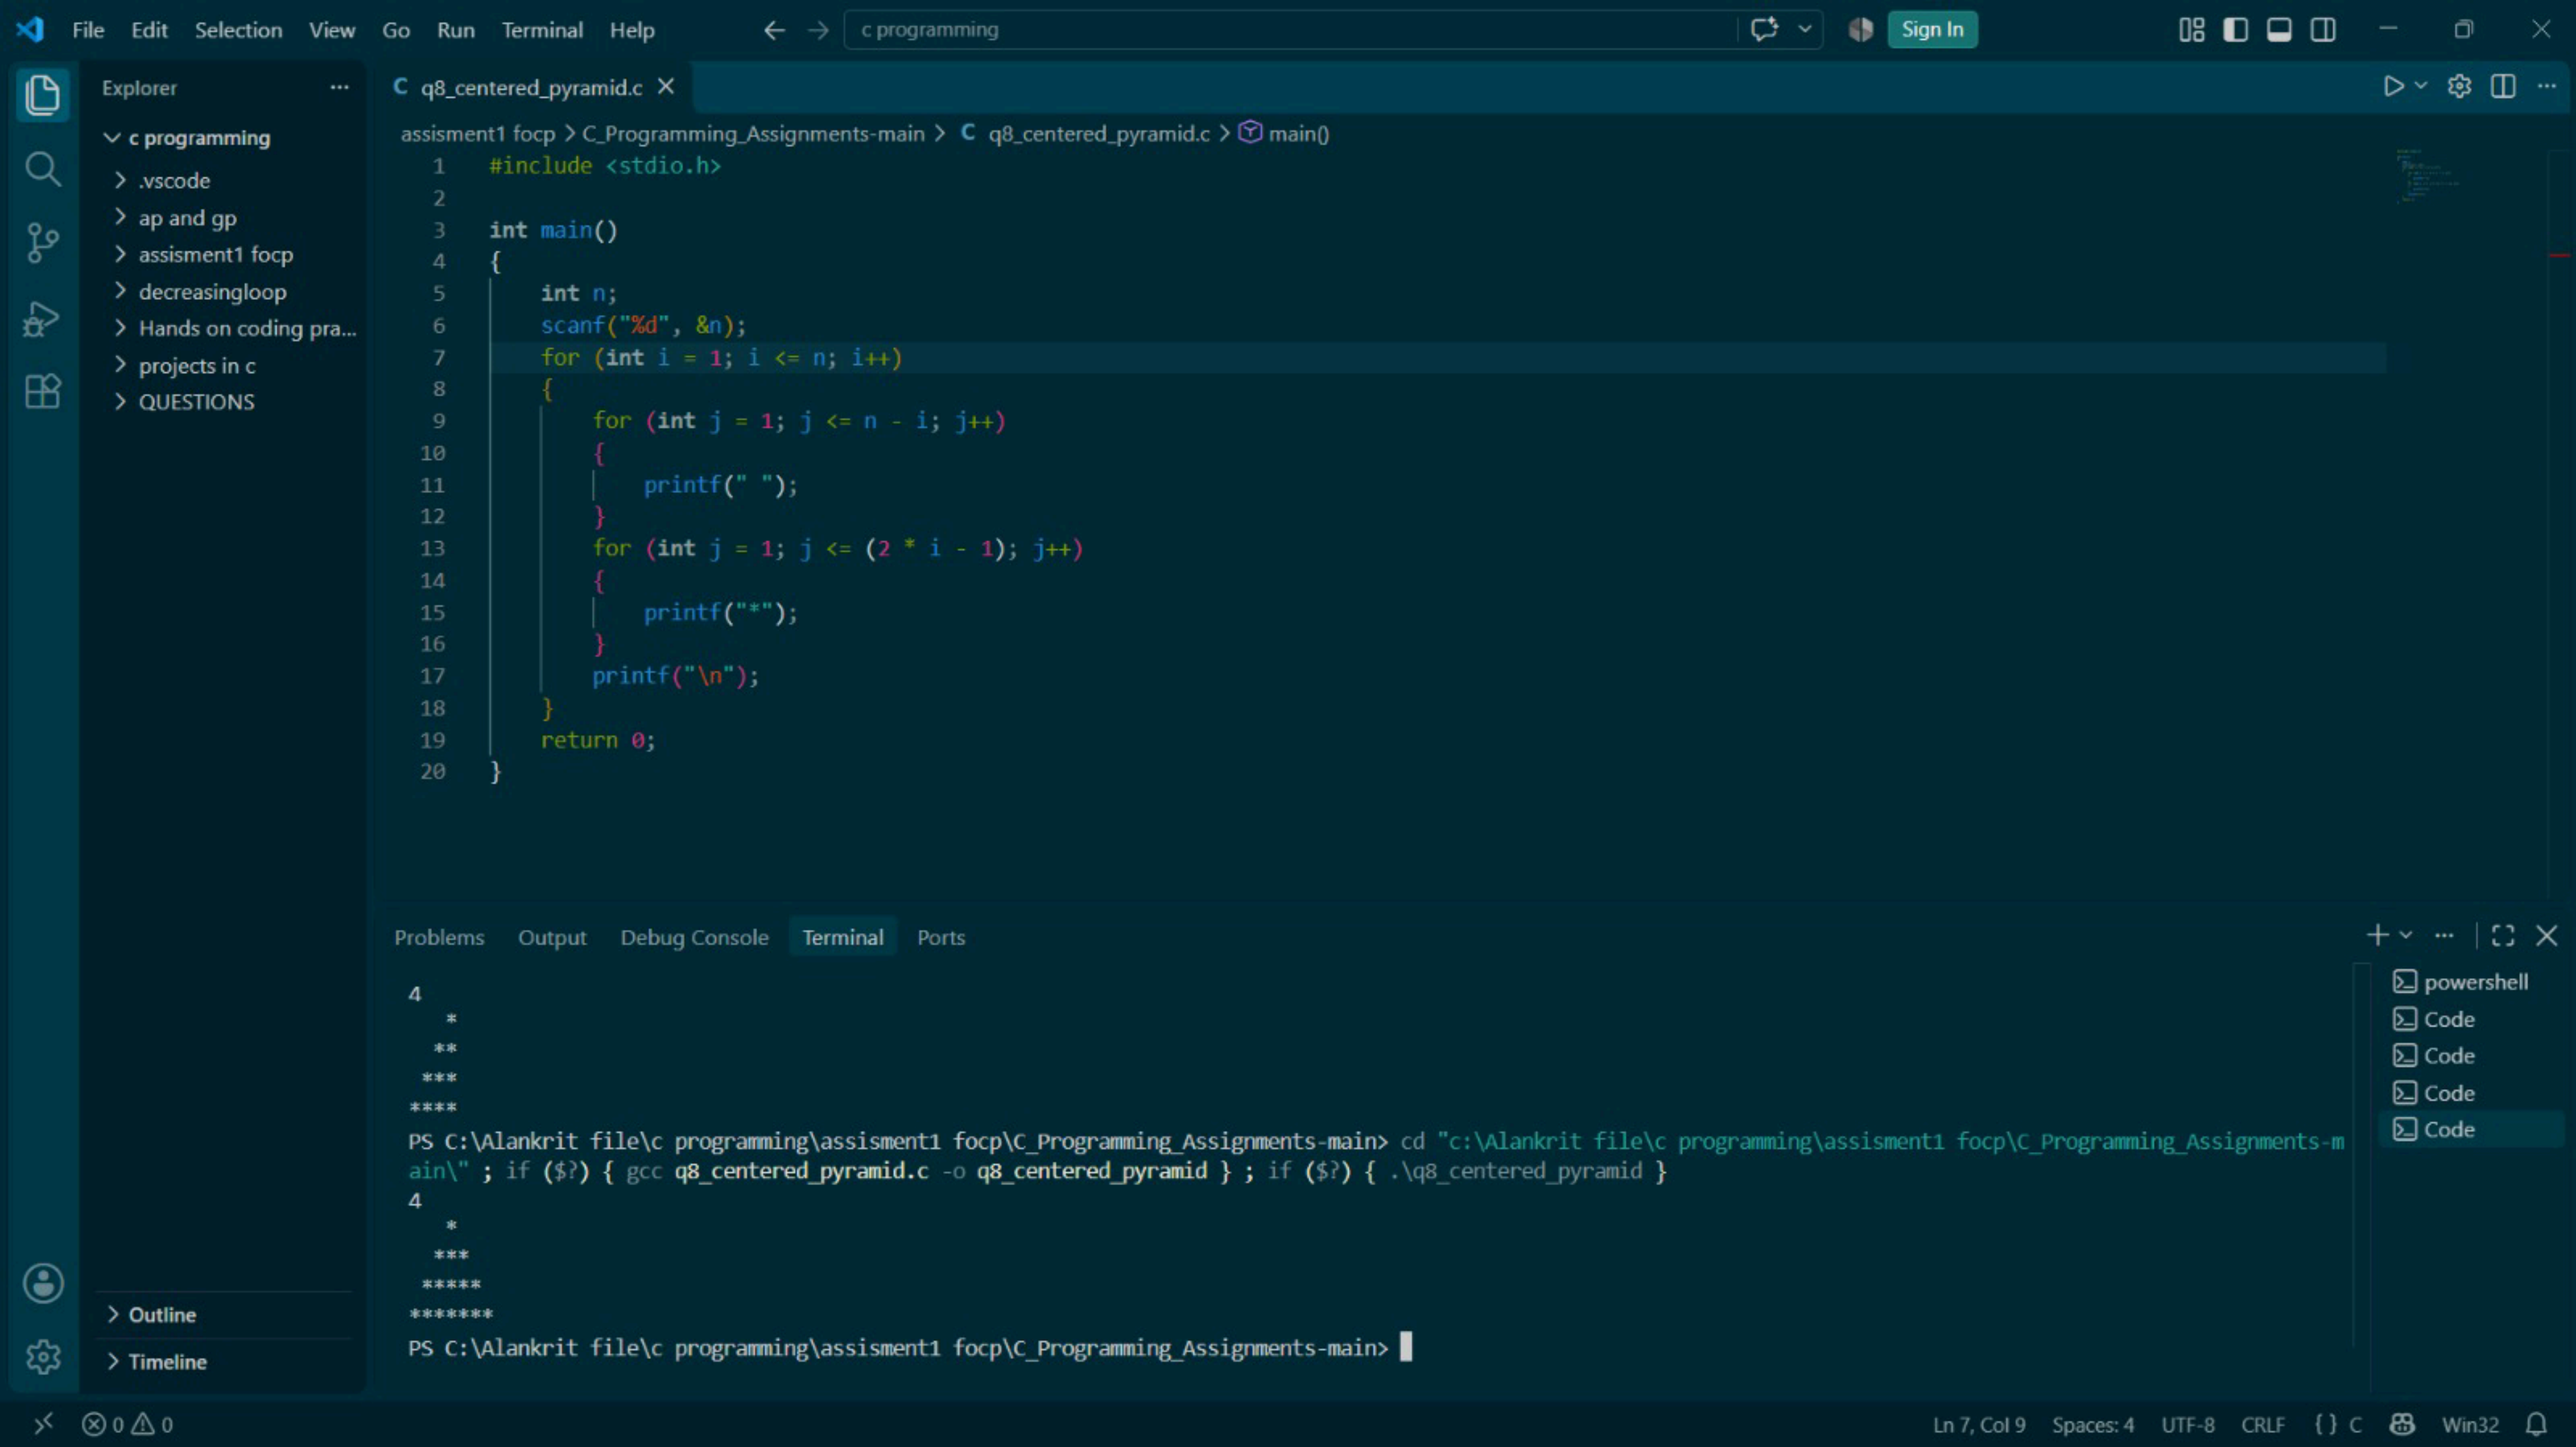
Ln 6, Col 33 Spaces: 4 UTF-8 CRLF { } C Win32

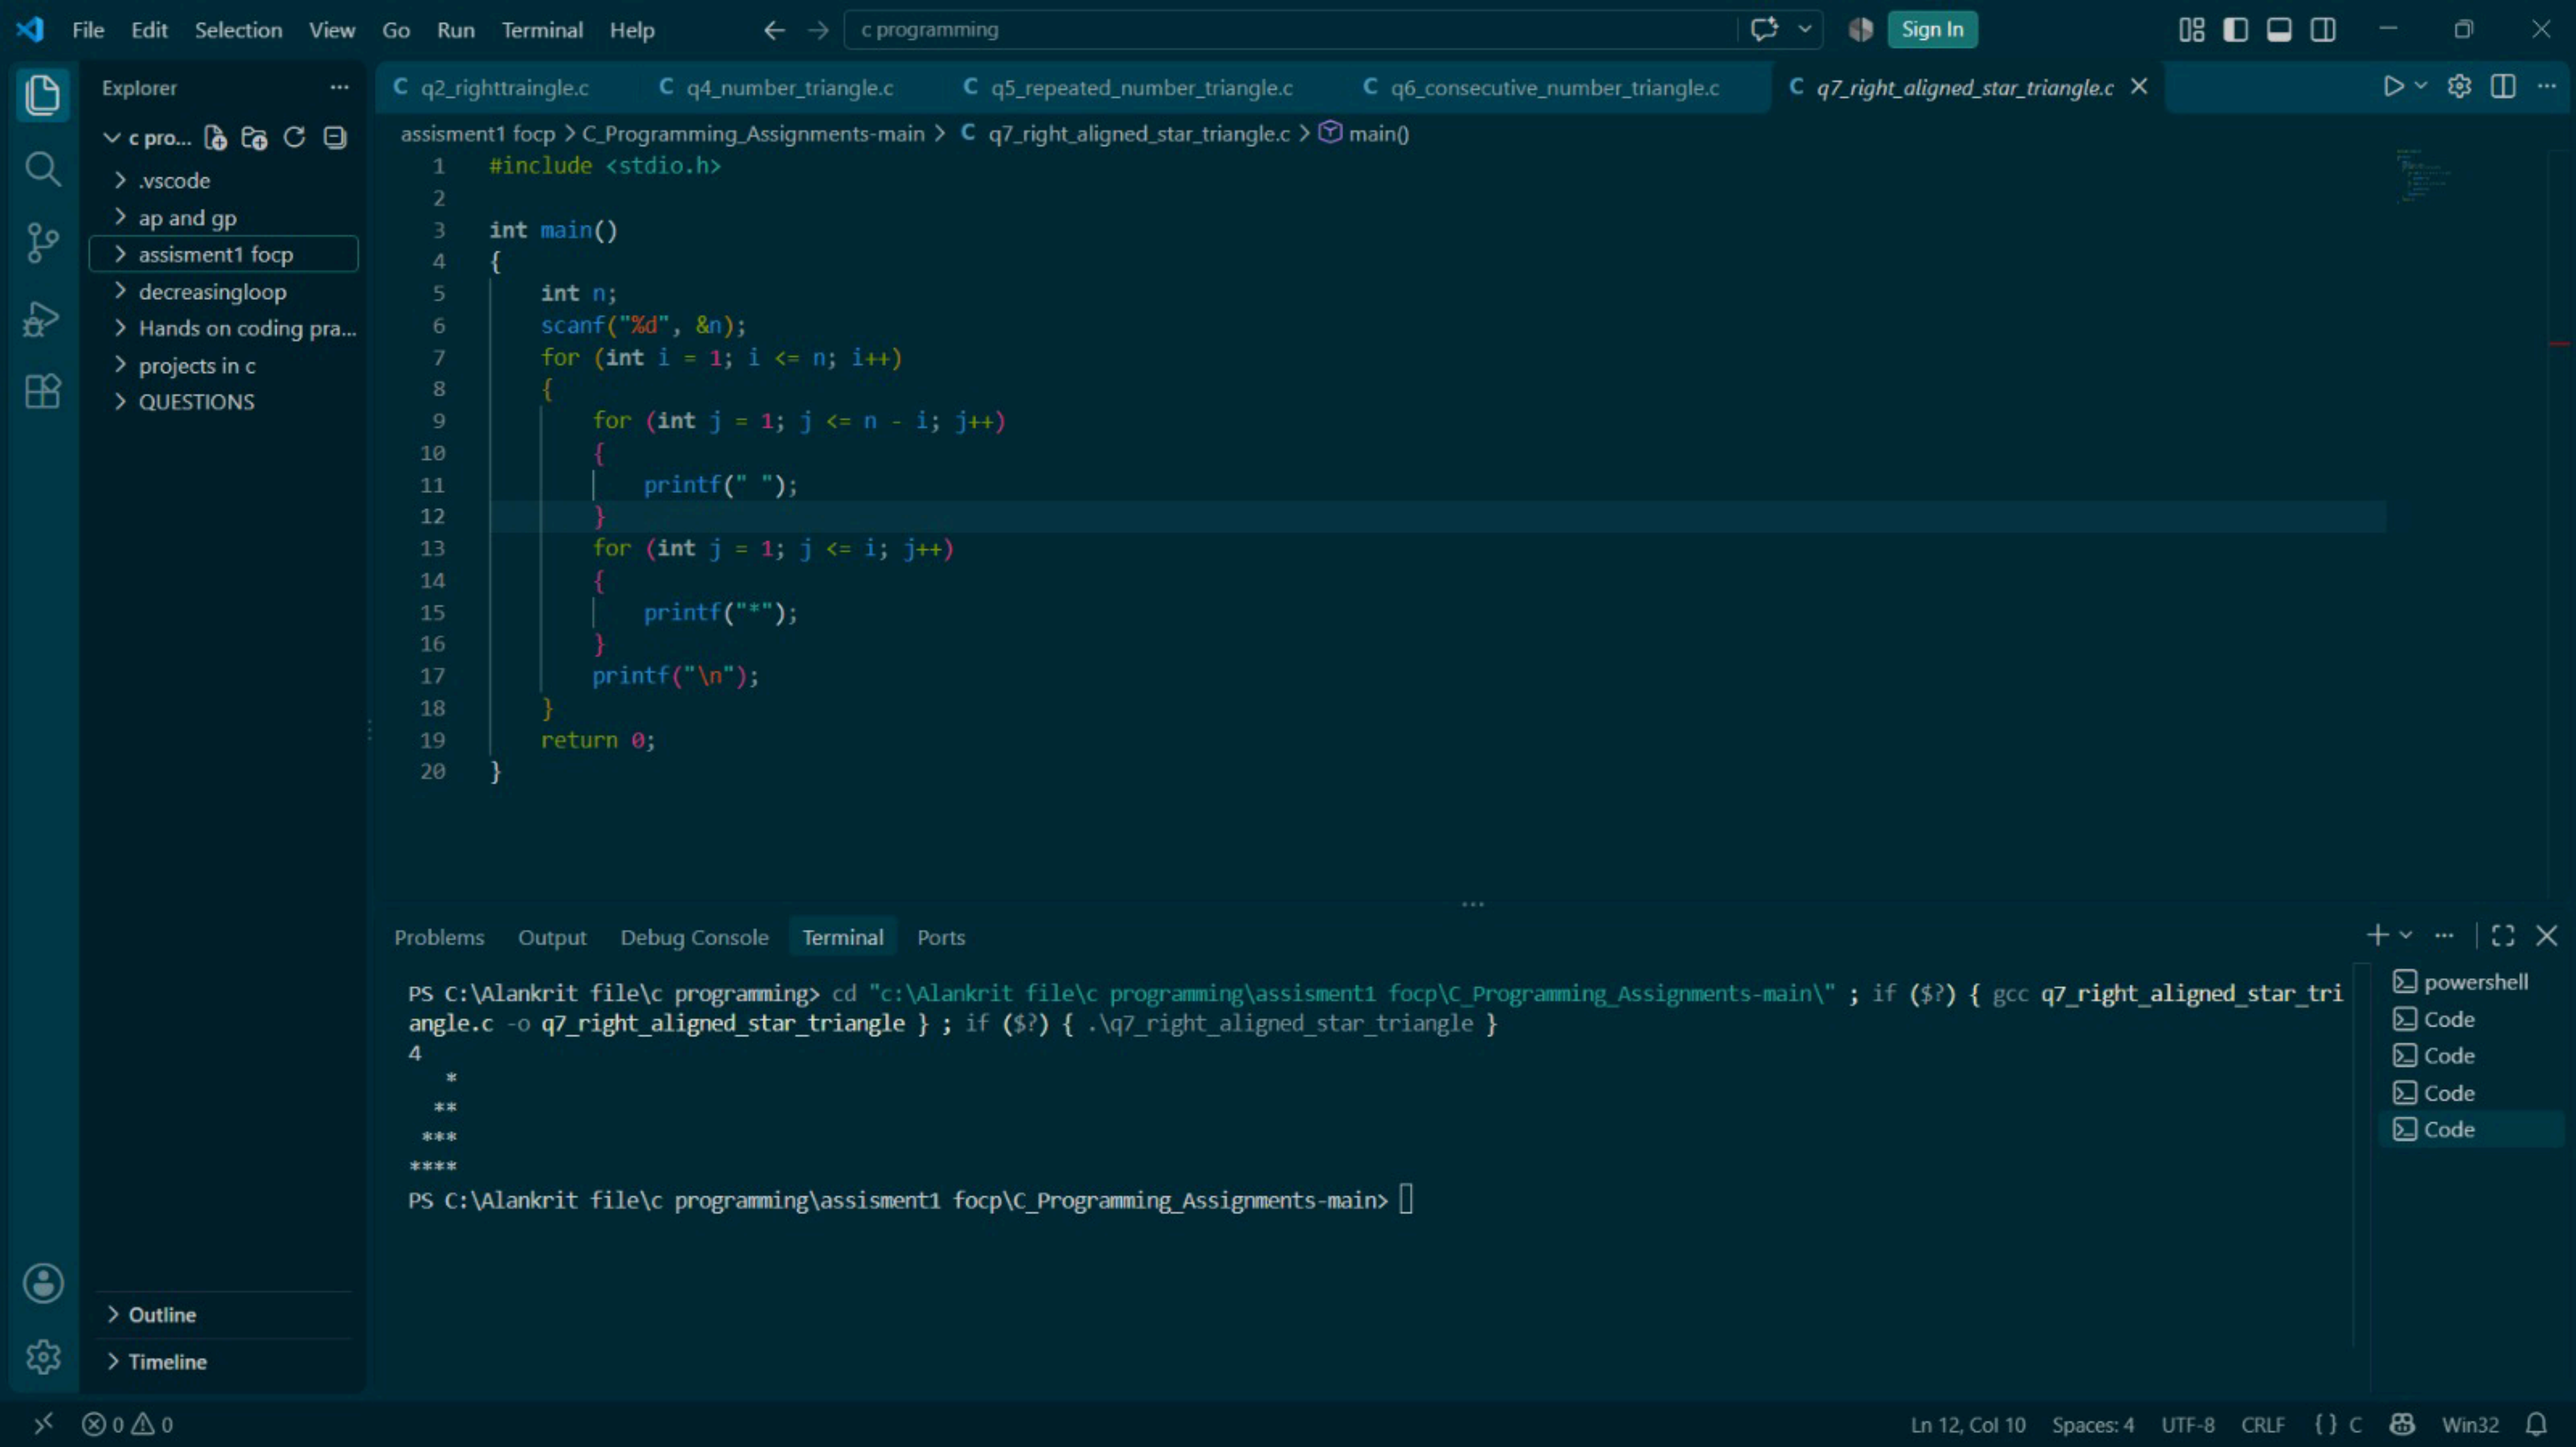

File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c pro...
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q11_hollow_right_angled_triangle.c
q12_multiplication_table_grid.c
assisment1 focp > C_Programming_Assignments-main > q12_multiplication_table_grid.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= n; j++)
{
printf("%d", i * j);
if (j < n)
printf(" ");
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
**
* *
* *
*****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q12_multiplication_table_grid.c -o q12_multiplication_table_grid } ; if ($?) { .\q12_multiplication_table_grid }
5
1 2 3 4 5
2 4 6 8 10
3 6 9 12 15
4 8 12 16 20
5 10 15 20 25
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
Code
Ln 17, Col 2 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS
q10_hollow_square.c
q11_hollow_right_angled_triangle.c
assisment1 focp > C_Programming_Assignments-main > q11_hollow_right_angled_triangle.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= i; j++)
{
if (j == 1 || j == i || i == n)
{
printf("*");
}
else
{
printf(" ");
}
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
powershell
Code
Code
Code
Code
*
* *
* *
*****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q11_hollow_right_angled_triangle.c -o q11_hollow_right_angled_triangle } ; if ($?) { .\q11_hollow_right_angled_triangle }
5
*
**
* *
* *
*****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
Outline
Timeline
Ln 7, Col 6 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q10_hollow_square.c
assisment1 focp > C_Programming_Assignments-main > q10_hollow_square.c > main()
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= n; j++)
{
if (i == 1 || i == n || j == 1 || j == n)
{
printf("*");
}
else
{
printf(" ");
}
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
******
*****
***
*
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q10_hollow_square.c -o q10_hollow_square } ; if ($?) { .\q10_hollow_square }
5
*****
* *
* *
* *
*****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
Code
Ln 20, Col 6 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c pro...
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q8_centered_pyramid.c
q9_inverted_centered_pyramid.c
assisment1 focp > C_Programming_Assignments-main > q9_inverted_centered_pyramid.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j < i; j++)
{
printf(" ");
}
for (int j = 1; j <= 2 * (n - i) + 1; j++)
{
printf("*");
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
powershell
Code
Code
Code
Code
4
*
***
*****
****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q9_inverted_centered_pyramid.c -o q9_inverted_centered_pyramid } ; if ($?) { .\q9_inverted_centered_pyramid }
4
****
*****
***
*
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
Ln 7, Col 6 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q8_centered_pyramid.c
assisment1 focp > C_Programming_Assignments-main > q8_centered_pyramid.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= n - i; j++)
{
printf(" ");
}
for (int j = 1; j <= (2 * i - 1); j++)
{
printf("*");
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
powershell
Code
Code
Code
Code
4
*
**
***
****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q8_centered_pyramid.c -o q8_centered_pyramid } ; if ($?) { .\q8_centered_pyramid }
4
*
***
*****
****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
Ln 7, Col 9 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c pro...
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q2_righttraingle.c
q4_number_triangle.c
q5_repeated_number_triangle.c
q6_consecutive_number_triangle.c
q7_right_aligned_star_triangle.c
assisment1 focp > C_Programming_Assignments-main > q7_right_aligned_star_triangle.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= n - i; j++)
{
printf(" ");
}
for (int j = 1; j <= i; j++)
{
printf("*");
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
PS C:\Alankrit file\c programming> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q7_right_aligned_star_triangle.c -o q7_right_aligned_star_triangle } ; if ($?) { .\q7_right_aligned_star_triangle }
4
*
**
***
****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
Code
Ln 12, Col 10
Spaces: 4
UTF-8
CRLF
C
Win32

File Edit Selection View Go Run Terminal Help

c programming

Sign In

Explorer

- c programming
  - .vscode
  - ap and gp
  - assisment1 focp
  - decreasingloop
    - arrays in c
    - loops
    - Maths function
    - patternsc
    - some prog
  - Hands on coding pra...
  - projects in c
  - QUESTIONS

Outline

Timeline

q2_righttraingle.c | q4_number_triangle.c | q5_repeated_number_triangle.c | q6_consecutive_number_triangle.c

assisment1 focp > C_Programming_Assignments-main > q6_consecutive_number_triangle.c > ...

```c
#include <stdio.h>
int main()
{
    int n;
    int count = 1;
    scanf("%d", &n);
    for (int i = 1; i <= n; i++)
    {
        for (int j = 1; j <= i; j++)
        {
            printf("%d", count);

            if (j < i)
            {
                printf(" ");
            }
            count++;
        }
        printf("\n");
    }
    return 0;
}
```

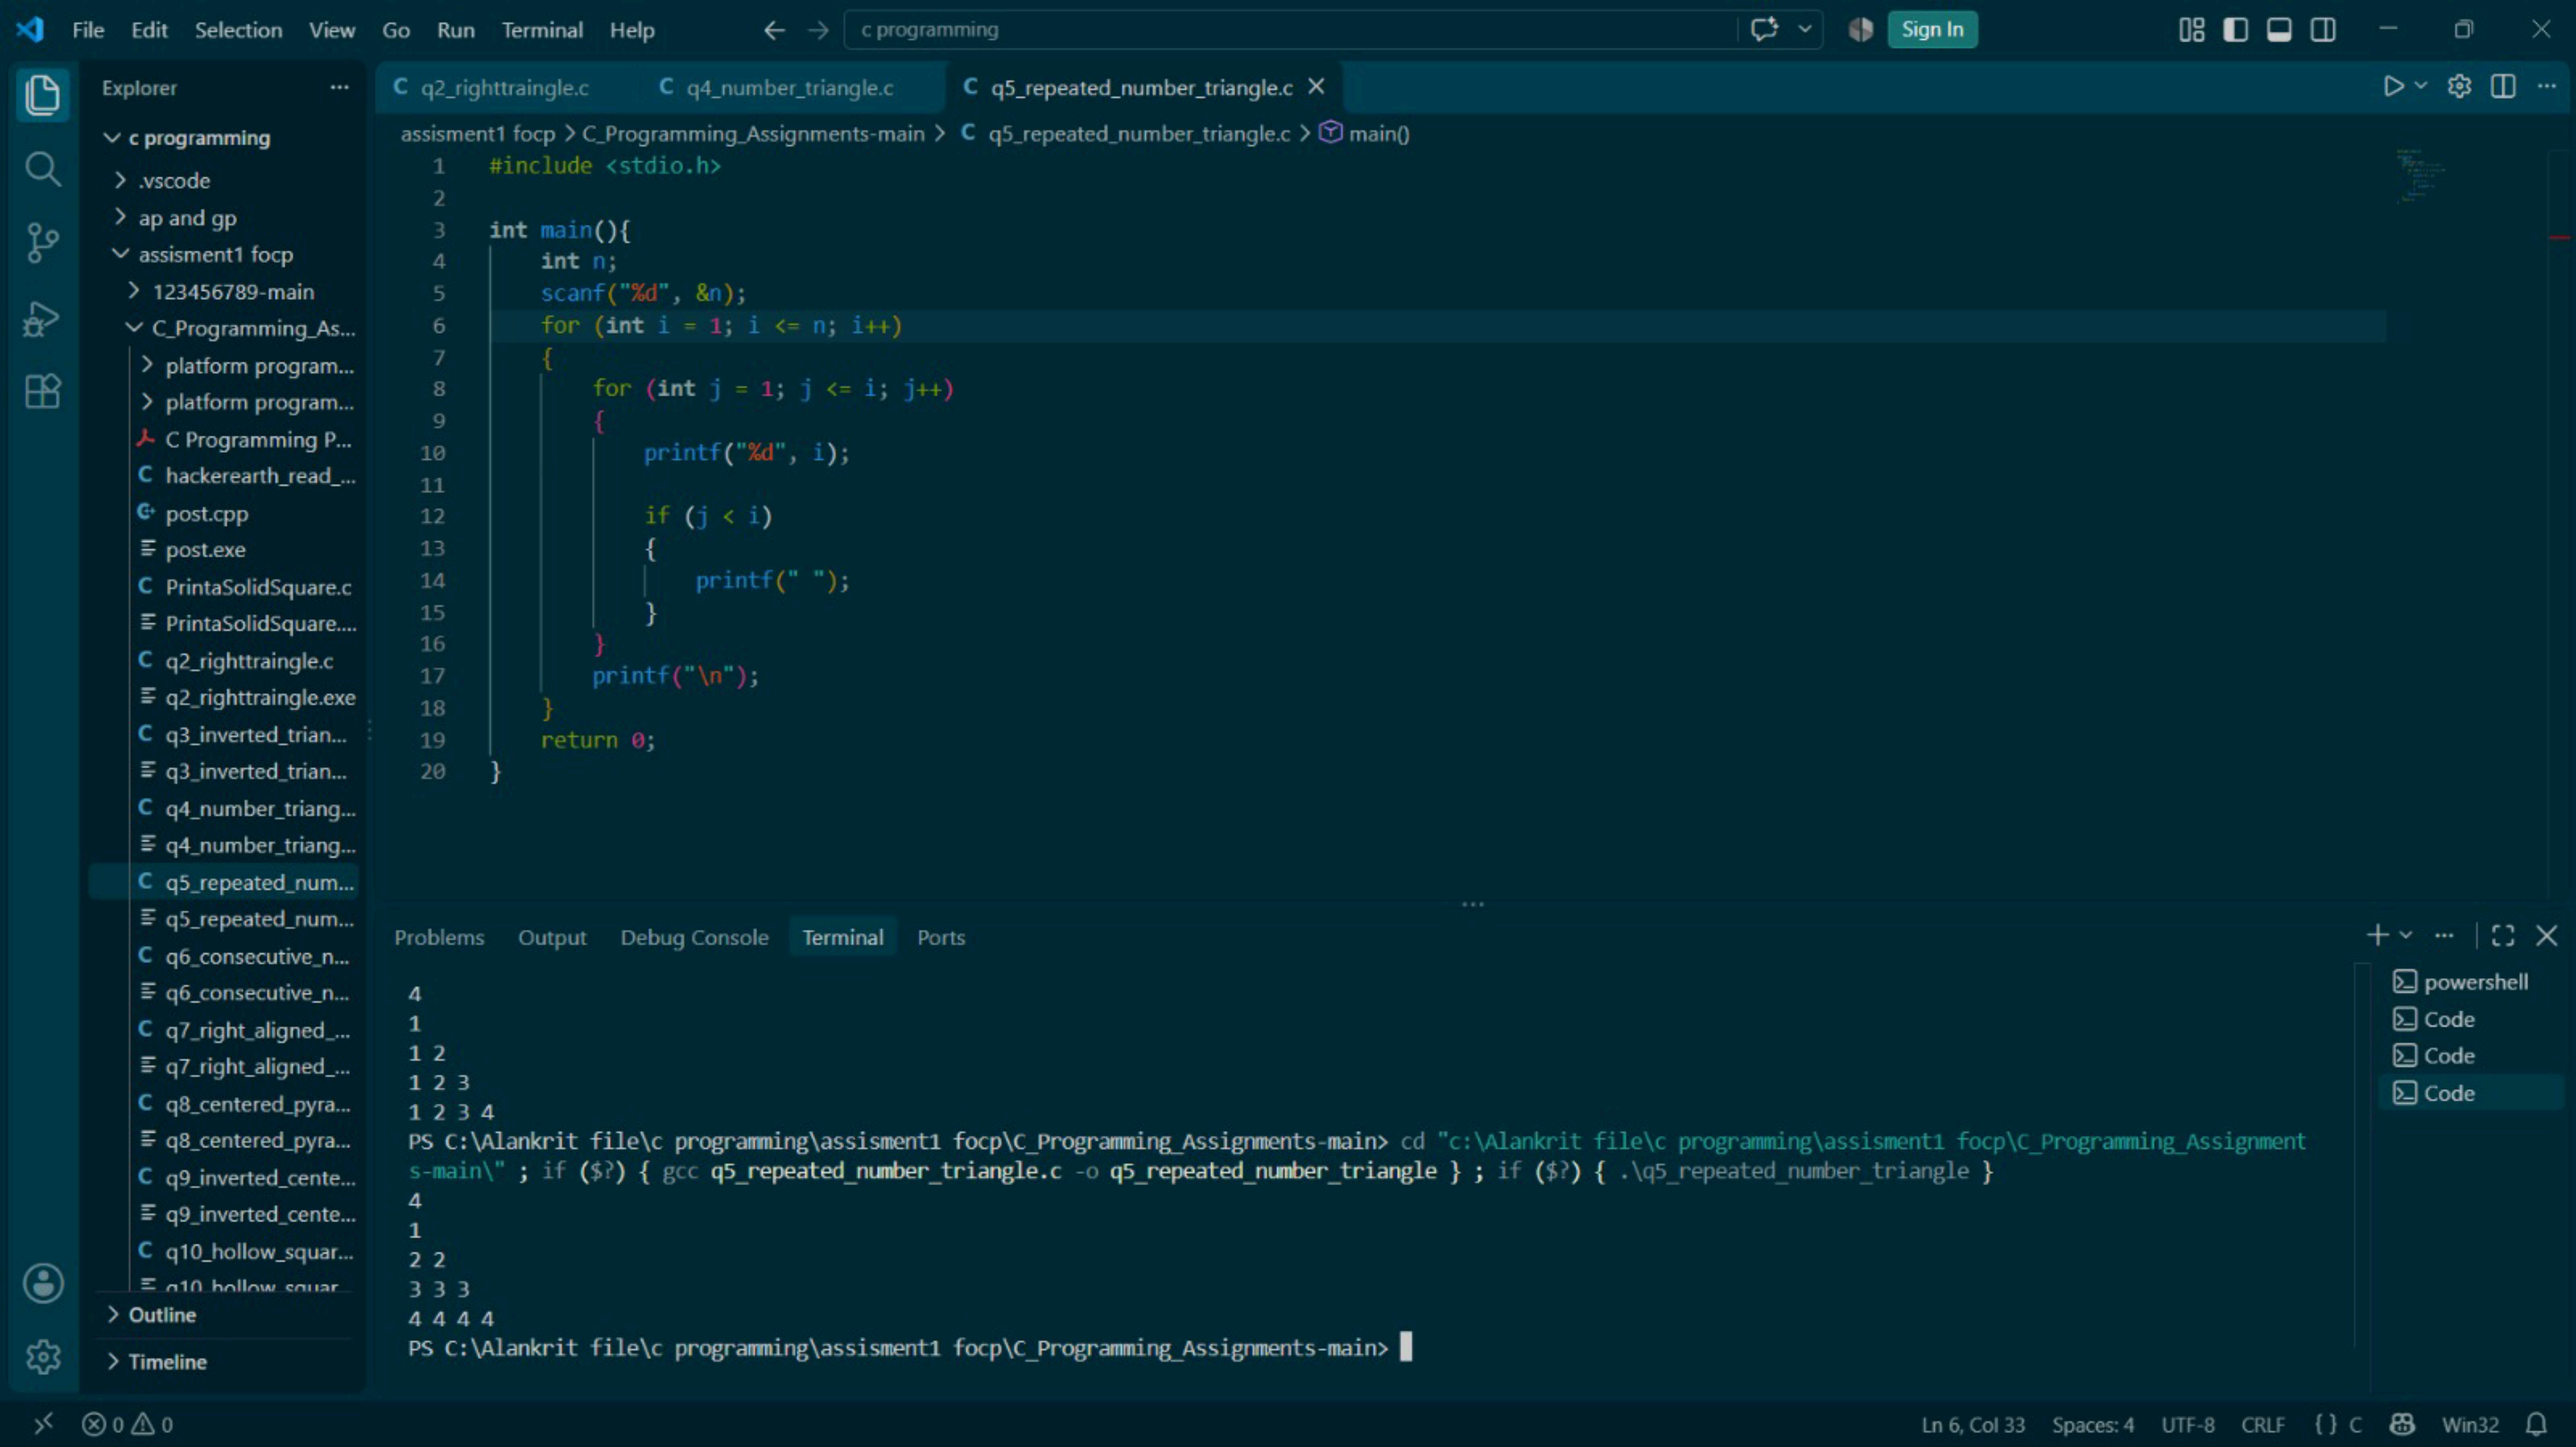
Problems Output Debug Console Terminal Ports

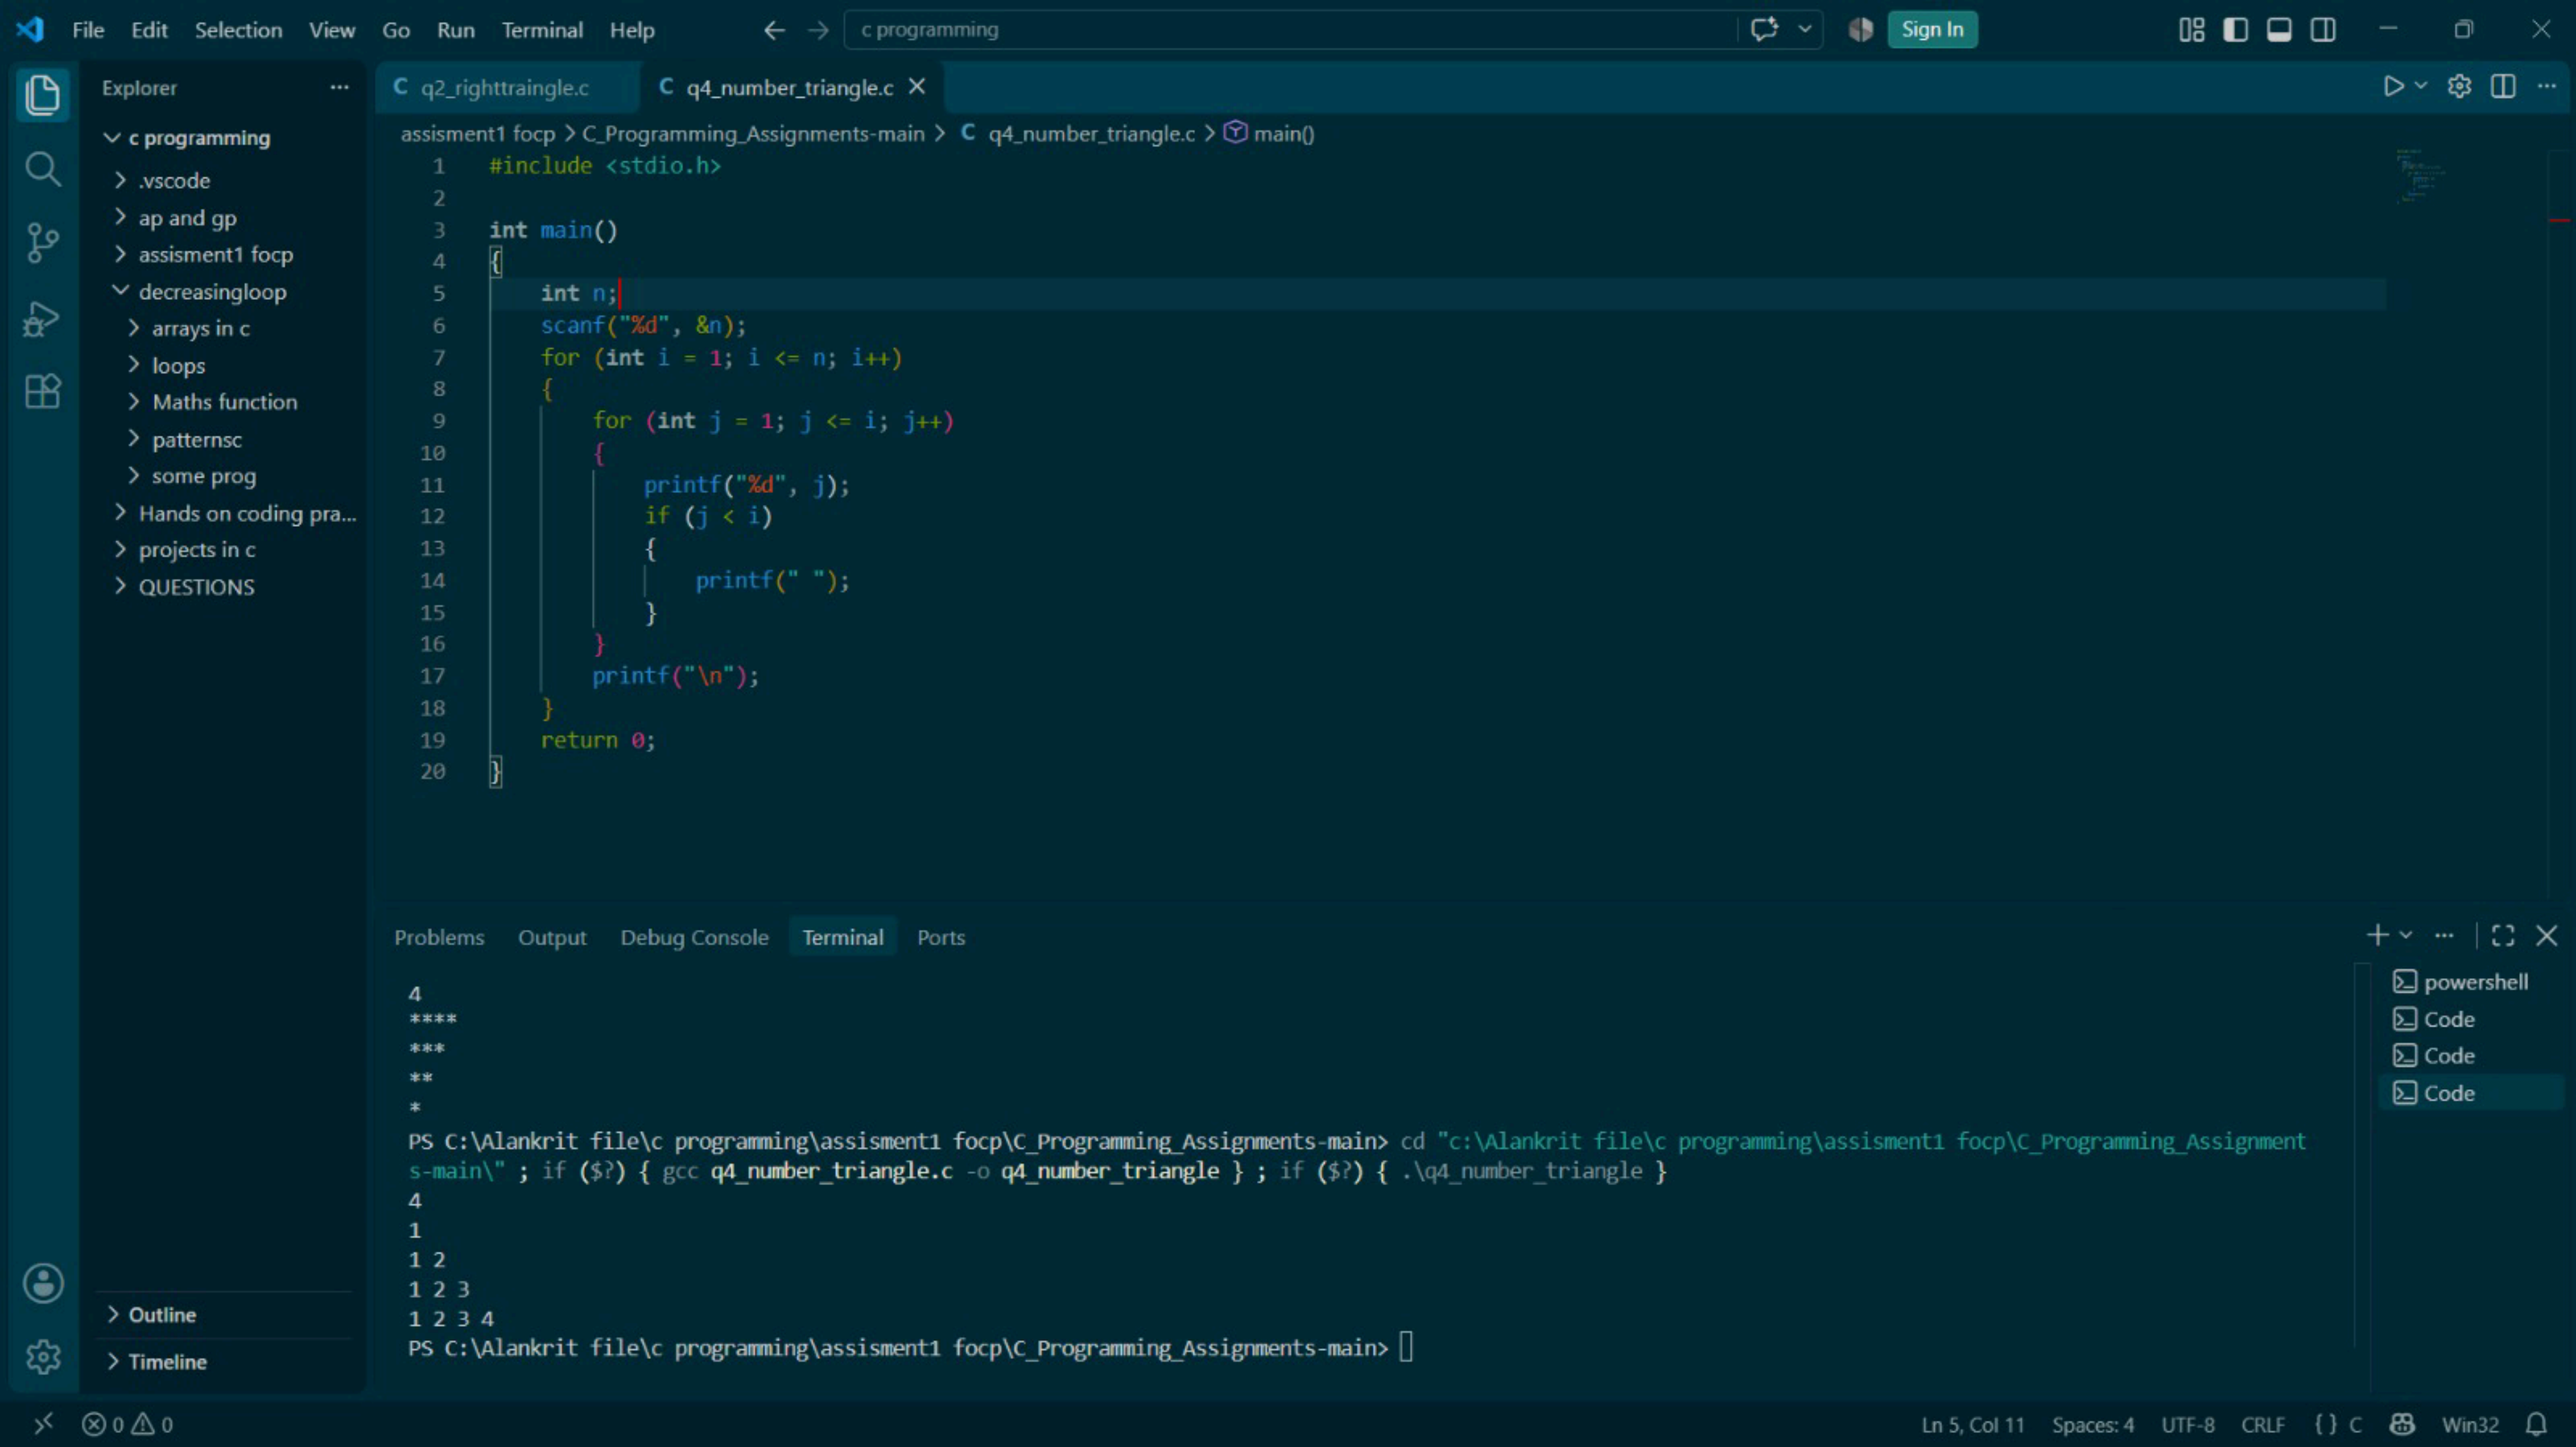
```
4
1
2 2
3 3 3
4 4 4 4
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q6_consecutive_number_triangle.c -o q6_consecutive_number_triangle } ; if ($?) { .\q6_consecutive_number_triangle }
4
1
2 3
4 5 6
7 8 9 10
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> 1
```

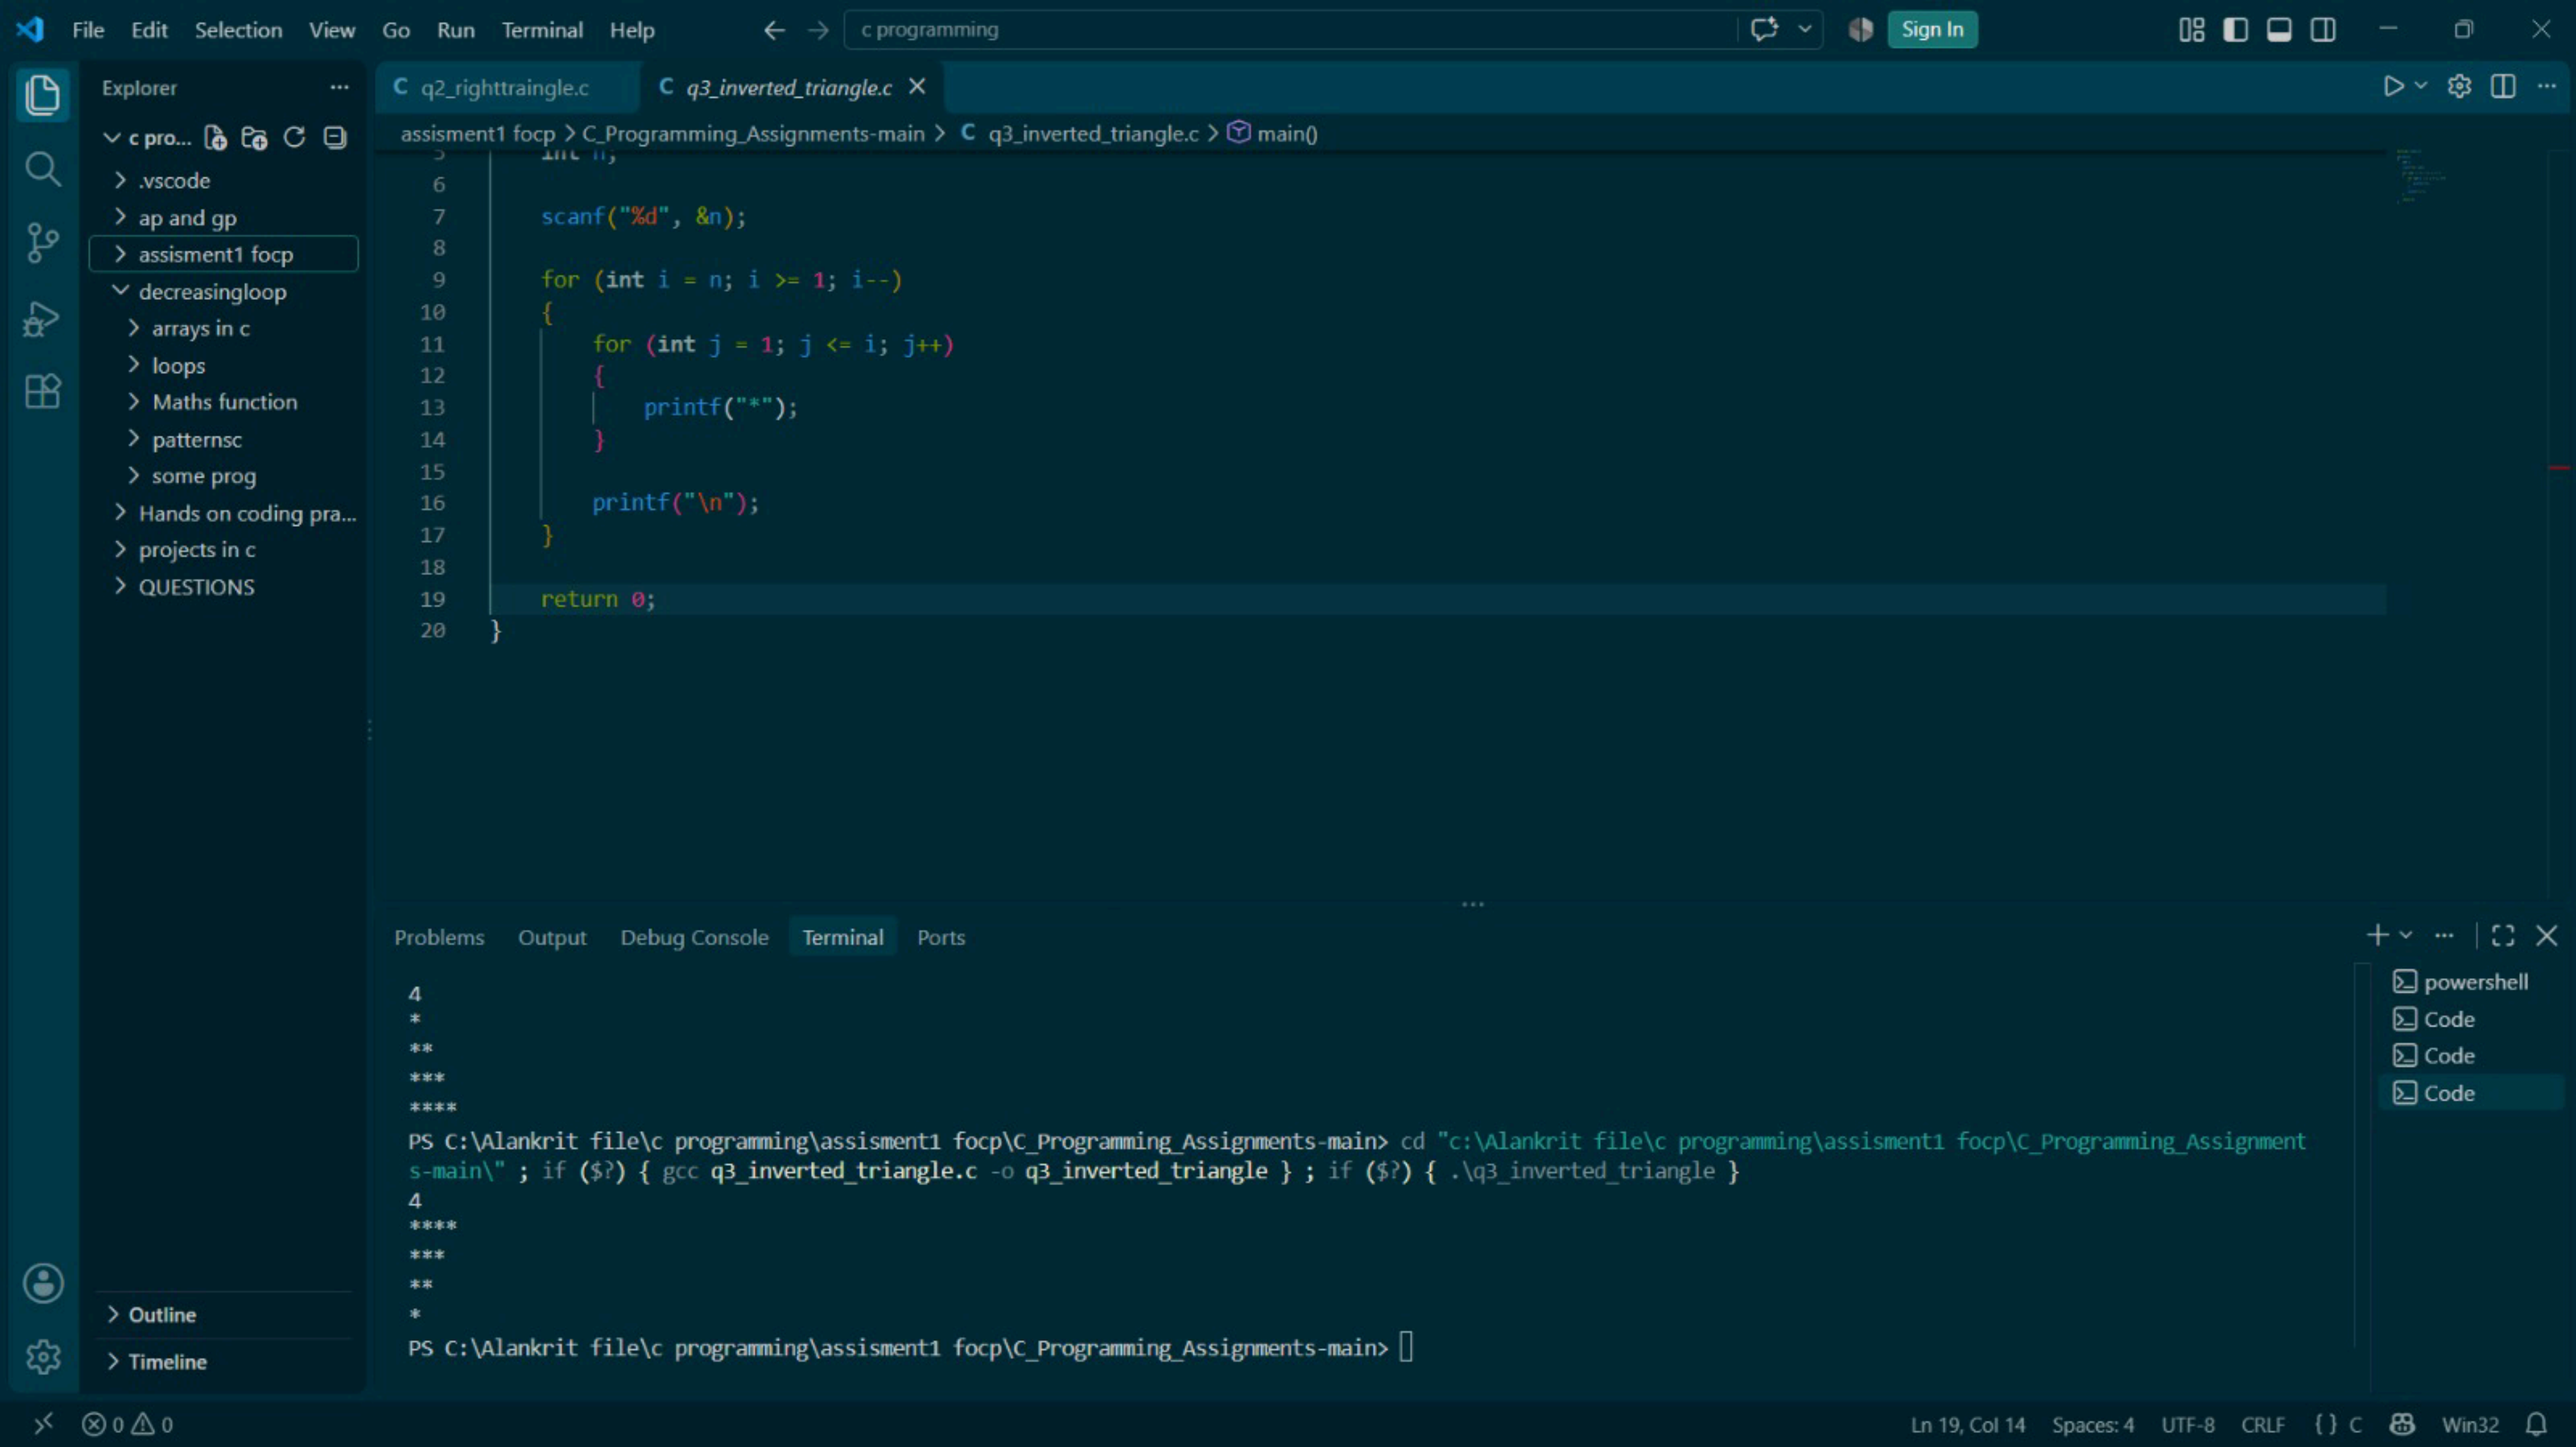
powershell
Code
Code
Code

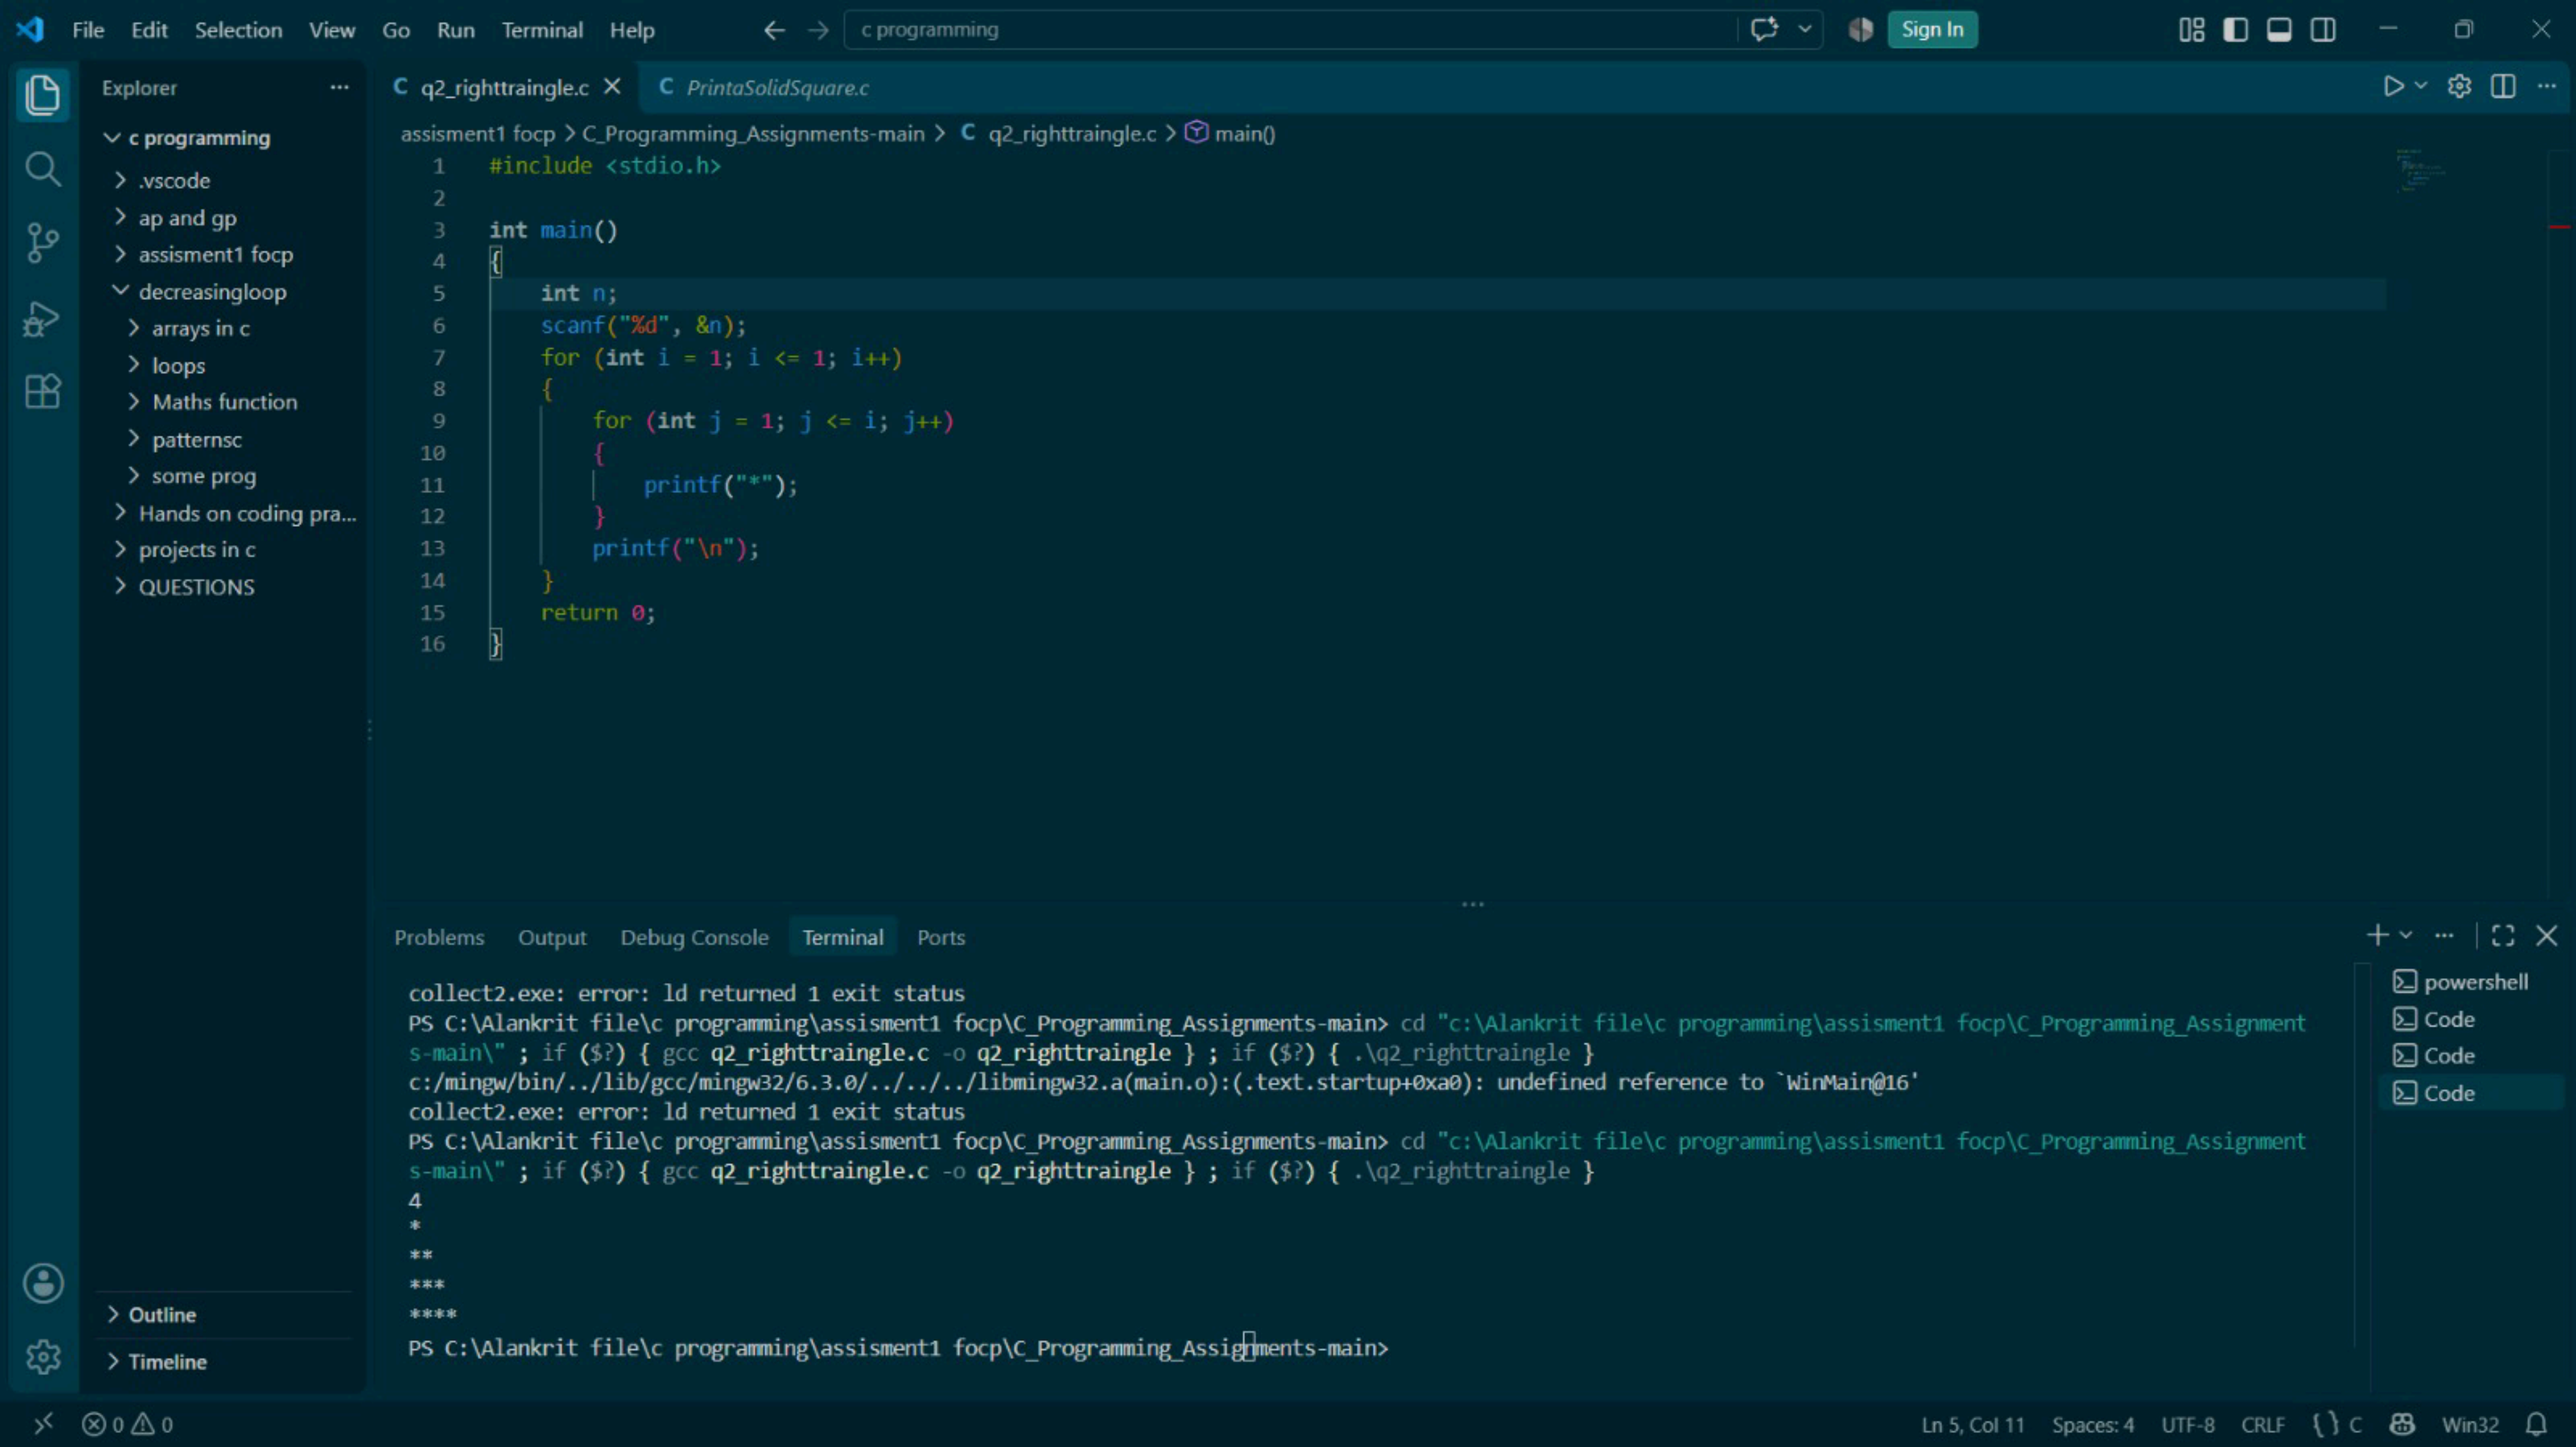
0 0

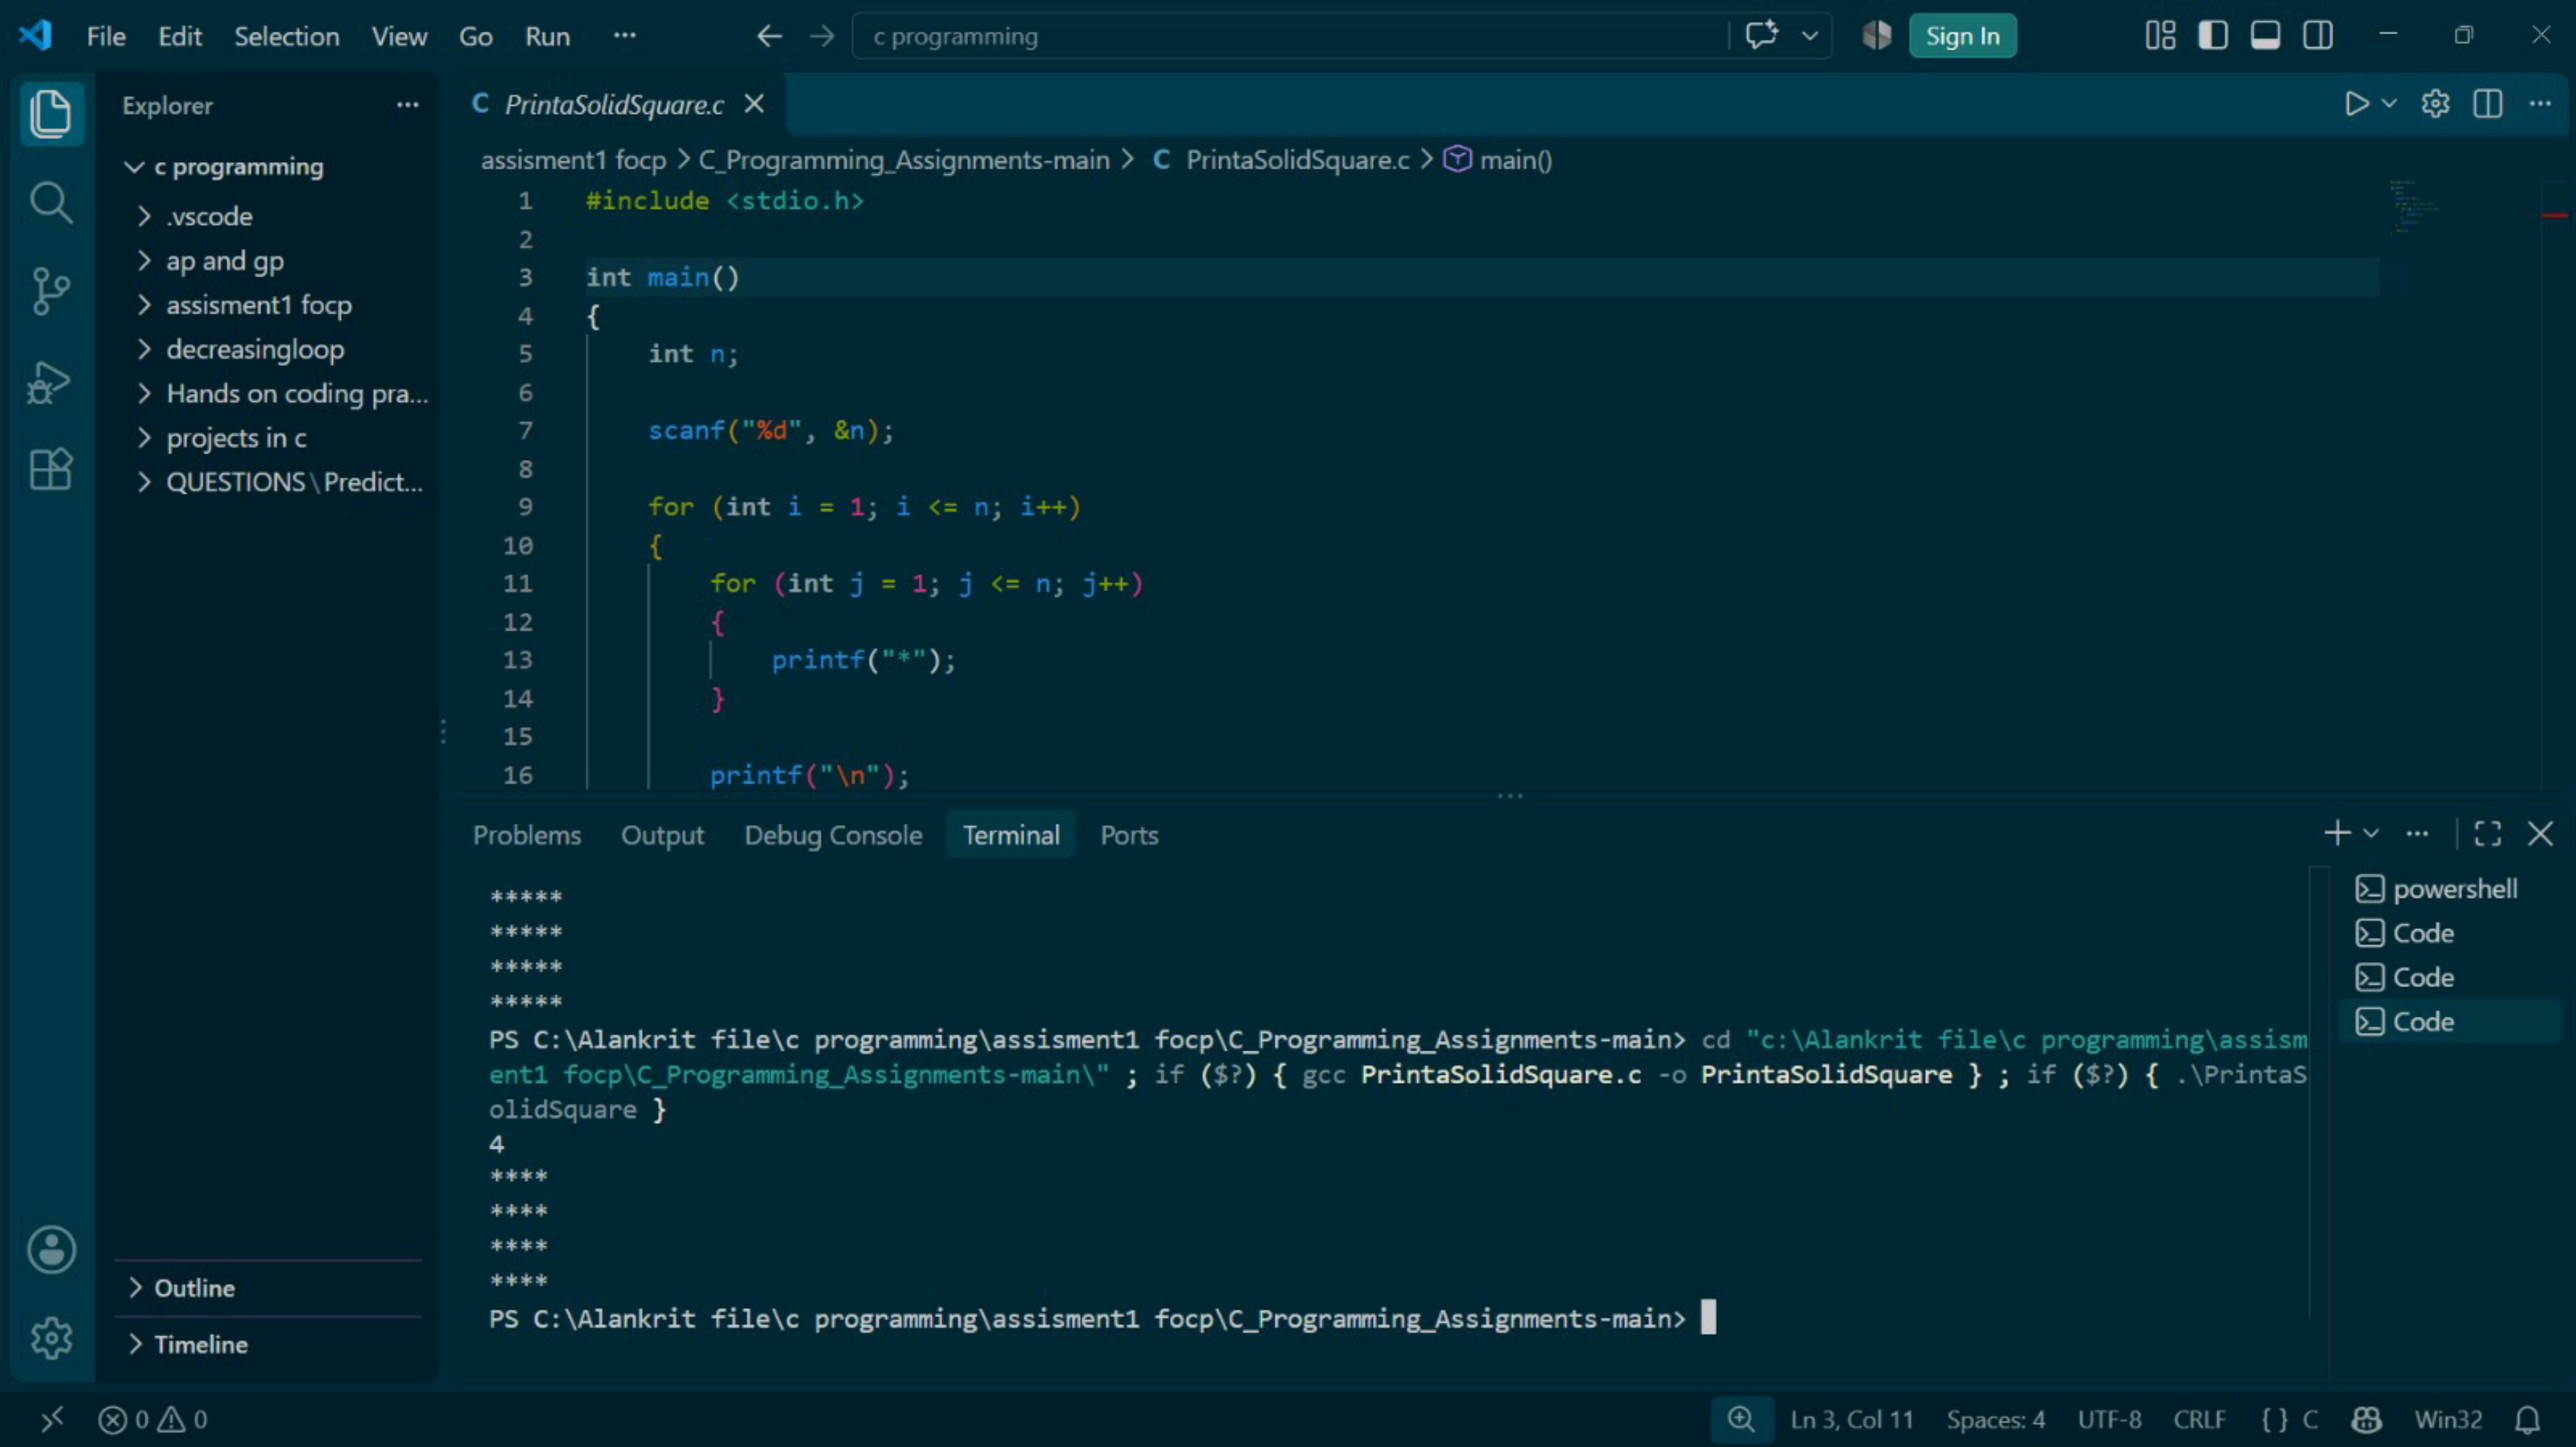
Ln 1, Col 19 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
123456789-main
C_Programming_As...
platform program...
platform program...
C Programming P...
hackerearth_read_...
post.cpp
post.exe
PrintaSolidSquare.c
PrintaSolidSquare....
q2_righttraingle.c
q2_righttraingle.exe
q3_inverted_trian...
q3_inverted_trian...
q4_number_triang...
q4_number_triang...
q5_repeated_num...
q5_repeated_num...
q6_consecutive_n...
q6_consecutive_n...
q7_right_aligned_...
q7_right_aligned_...
q8_centered_pyra...
q8_centered_pyra...
q9_inverted_cente...
q9_inverted_cente...
q10_hollow_squar...
Outline
Timeline
q2_righttraingle.c
q4_number_triangle.c
q5_repeated_number_triangle.c
assisment1 focp > C_Programming_Assignments-main > q5_repeated_number_triangle.c > main()
1 #include <stdio.h>
2
3 int main(){
4 int n;
5 scanf("%d", &n);
6 for (int i = 1; i <= n; i++)
7 {
8 for (int j = 1; j <= i; j++)
9 {
10 printf("%d", i);
11
12 if (j < i)
13 {
14 printf(" ");
15 }
16 }
17 printf("\n");
18 }
19 return 0;
20 }
Problems Output Debug Console Terminal Ports
4
1
1 2
1 2 3
1 2 3 4
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q5_repeated_number_triangle.c -o q5_repeated_number_triangle } ; if ($?) { .\q5_repeated_number_triangle }
4
1
2 2
3 3 3
4 4 4 4
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
Ln 6, Col 33 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
decreasingloop
arrays in c
loops
Maths function
patternsc
some prog
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q2_righttraingle.c
q4_number_triangle.c
assisment1 focp > C_Programming_Assignments-main > q4_number_triangle.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= i; j++)
{
printf("%d", j);
if (j < i)
{
printf(" ");
}
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
powershell
Code
Code
Code
4
****
***
**
*
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q4_number_triangle.c -o q4_number_triangle } ; if ($?) { .\q4_number_triangle }
4
1
1 2
1 2 3
1 2 3 4
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
Ln 5, Col 11 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c pro...
.vscode
ap and gp
assisment1 focp
decreasingloop
arrays in c
loops
Maths function
patternsc
some prog
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q2_righttraingle.c
q3_inverted_triangle.c
assisment1 focp > C_Programming_Assignments-main > q3_inverted_triangle.c > main()
int n;
scanf("%d", &n);
for (int i = n; i >= 1; i--)
{
for (int j = 1; j <= i; j++)
{
printf("*");
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
4
*
**
***
****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q3_inverted_triangle.c -o q3_inverted_triangle } ; if ($?) { .\q3_inverted_triangle }
4
****
***
**
*
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
Ln 19, Col 14 Spaces: 4 UTF-8 CRLF { } C Win32


File Edit Selection View Go Run Terminal Help
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
decreasingloop
arrays in c
loops
Maths function
patternsc
some prog
Hands on coding pra...
projects in c
QUESTIONS
Outline
Timeline
q2_righttraingle.c
PrintaSolidSquare.c
assisment1 focp > C_Programming_Assignments-main > q2_righttraingle.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= 1; i++)
{
for (int j = 1; j <= i; j++)
{
printf("*");
}
printf("\n");
}
return 0;
}
Problems Output Debug Console Terminal Ports
collect2.exe: error: ld returned 1 exit status
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q2_righttraingle.c -o q2_righttraingle } ; if ($?) { .\q2_righttraingle }
c:/mingw/bin/../lib/gcc/mingw32/6.3.0/../../../libmingw32.a(main.o):(.text.startup+0xa0): undefined reference to `WinMain@16'
collect2.exe: error: ld returned 1 exit status
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc q2_righttraingle.c -o q2_righttraingle } ; if ($?) { .\q2_righttraingle }
4
*
**
***
****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
Ln 5, Col 11 Spaces: 4 UTF-8 CRLF C Win32


File Edit Selection View Go Run
c programming
Sign In
Explorer
c programming
.vscode
ap and gp
assisment1 focp
decreasingloop
Hands on coding pra...
projects in c
QUESTIONS \ Predict...
Outline
Timeline
PrintaSolidSquare.c
assisment1 focp > C_Programming_Assignments-main > PrintaSolidSquare.c > main()
#include <stdio.h>
int main()
{
int n;
scanf("%d", &n);
for (int i = 1; i <= n; i++)
{
for (int j = 1; j <= n; j++)
{
printf("*");
}
printf("\n");
Problems Output Debug Console Terminal Ports
*****
*****
*****
*****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main> cd "c:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main\" ; if ($?) { gcc PrintaSolidSquare.c -o PrintaSolidSquare } ; if ($?) { .\PrintaSolidSquare }
4
****
****
****
****
PS C:\Alankrit file\c programming\assisment1 focp\C_Programming_Assignments-main>
powershell
Code
Code
Code
0 0
Ln 3, Col 11
Spaces: 4
UTF-8
CRLF
{} C
Win32

Printing Pattern Using Loops

Your Printing Pattern Using Loops submission got 30.00 points. Share Post

You are now 50 points away from the 3rd star for your c badge.

Try the next challenge | Try a Random Challenge

You made this submission a few seconds ago.

Score: 30.00 **Status:** Accepted

People who solved **Printing Pattern Using Loops** attempted this next:

Students Marks Sum

An easy challenge on pointers

Solve Challenge

Submitted Code

NEED HELP?

View discussions

View top submissions

Staircase

You made this submission a few seconds ago.

Score: 10.00 **Status:** Accepted

People who solved **Staircase** attempted this next:

Mini-Max Sum

Find the maximum and minimum values obtained by summing four of five integers.

Solve Challenge

Submitted Code

Language: C

Open in editor

NEED HELP?

View discussions

View editorial

View top submissions

Test case 0

Compiler Message

leetcode.com/problems/perfect-number/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 98 / 98 testcases passed

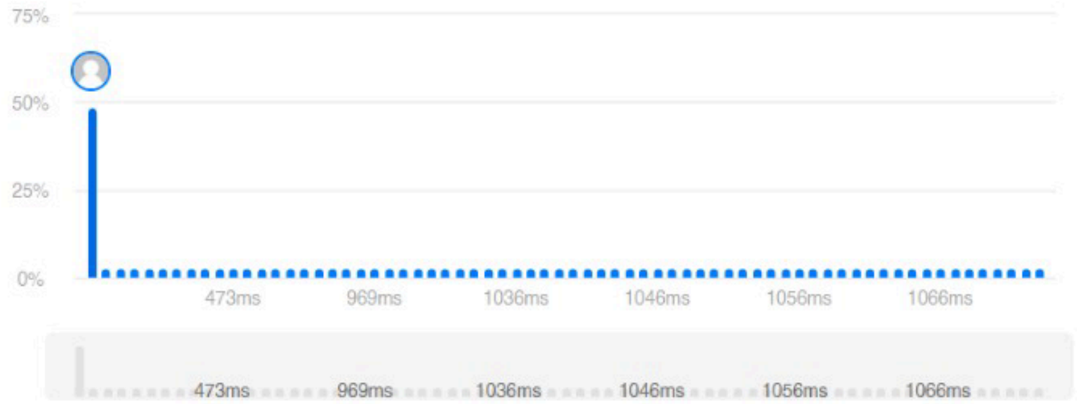
alankrit_173 submitted at Nov 07, 2026 19:48

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.26 MB | Beats 86.32%



Code | C

```c
#include <stdbool.h>

bool checkPerfectNumber(int num) {
    if (num <= 1) {
```

Code

C | Auto

```c
#include <stdbool.h>
bool checkPerfectNumber(int num) {
    if (num <= 1) {
        return false;
    }
    int sum = 1;
    for (int i = 2; i * i <= num; i++) {
        if (num % i == 0) {
            sum += i;
            if (i != num / i) {
                sum += num / i;
            }
        }
    }
```

Saved | Ln 6, Col 17

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

num =
28

Output

true

Expected

Prime Numbers / Submission (132680301) by Alankrit (alankrit1726)

Submission ID: 132680301 / 27 seconds ago

RESULT: Accepted — Refer judge environment

Score	Time (sec)	Memory (KiB)	Language
20	0.03652	2	C

Input	Result	Time (sec)	Memory (KiB)	Score	Your Output	Correct Output	Diff
Input #1	Accepted	0.009039	2	25			
Input #2	Accepted	0.009532	2	25			
Input #3	Accepted	0.008868	2	25			
Input #4	Accepted	0.009077	2	25			

Submission:

Theme: Light

```c
#include <stdio.h>

int main() {
    int n;
    scanf("%d", &n);

    int isPrime = 1;
```

divisible by k. You do not need to print these numbers, you just have to find their count.

Input Format

The first and only line of input contains 3 space separated integers *l*, *r* and *k*.

Output Format

Print the required answer on a single line.

Constraints

$1 \leq l \leq r \leq 1000$

$1 \leq k \leq 1000$

Examples

Input

```
1 10 1
```

Output

```
10
```

C

```c
#include <stdio.h>

int main() {
    long long l, r, k;
    scanf("%lld %lld %lld", &l, &r, &k);

    long long count = r / k - (l - 1) / k;

    printf("%lld\n", count);
    return 0;
}
```

Results Test against custom input

Accepted Refer judge environment

Score	Time	Memory	Language
20	0.037s	2KiB	C

hackerearth

Dashboard
Learn
Practice
AI Interviews
Compete
Jobs
VibeCode Arena
Resume Builder
Leaderboard
Profile

Theme
Feedback
Support

Description | Editorial | Submissions | Similar Problems | Disc

Factorial!

3.9 (2395 votes) Easy

73.0% success | 313,956 attempts | 1s time | 256MB memory | 1024KB max code

You have been given a positive integer *N*. You need to find and print the **Factorial** of this number. The Factorial of a positive integer *N* refers to the product of all number in the range from *1* to *N*. You can read more about the factorial of a number here.

Input Format:
The first and only line of the input contains a single integer *N* denoting the number whose factorial you need to find.

Output Format
Output a single line denoting the factorial of the number *N*.

Constraints
$1 \leq N \leq 10$

Examples

Input
2

C

```c
int main() {
    scanf("%d", &n);

    long long fact = 1;
    for (int i = 1; i <= n; i++) {
        fact *= i;
    }

    printf("%lld\n", fact);
    return 0;
}
```

Results | Test against custom input

Accepted | Refer judge environment

Score	Time	Memory	Language
20	0.037s	2KiB	C

leetcode.com/problems/power-of-three/submissions/2191306047/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 21040 / 21040 testcases passed

alankrit_173 submitted at Nov 07, 2026 19:39

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
13 ms | Beats 19.41%

Memory
8.87 MB | Beats 91.63%



Code | C

```c
#include <stdbool.h>

bool isPowerOfThree(int n) {
```

Code

C | Auto

```c
#include <stdbool.h>

bool isPowerOfThree(int n) {
    if (n <= 0) {
        return false;
    }

    while (n % 3 == 0) {
        n /= 3;
    }

    return n == 1;
}
```

Saved | Ln 13, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

n =
27

Output

true

Expected

leetcode.com/problems/power-of-two/submissions/2191302136/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 1110 / 1110 testcases passed

alankrit_173 submitted at Nov 07, 2026 19:31

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.27 MB | Beats 86.43%



Code | C

```c
#include <stdbool.h>

bool isPowerOfTwo(int n) {
    if (n <= 0) {
```

Code

C | Auto

```c
#include <stdbool.h>

bool isPowerOfTwo(int n) {
    if (n <= 0) {
        return false;
    }

    return (n & (n - 1)) == 0;
}
```

Saved | Ln 9, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

n =
1

Output

true

Expected

leetcode.com/problems/reverse-integer/submissions/2191301481/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 1046 / 1046 testcases passed

alankrit_173 submitted at Nov 07, 2026 19:30

Analysis | Solution

Save 41%
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime
0 ms | Beats 100.00%

Memory
8.94 MB | Beats 95.03%



Code | C

```c
#include <limits.h>

int reverse(int x) {
    int rev = 0;
    while (x != 0) {
        int digit = x % 10;
        x = x / 10;

        if (rev > INT_MAX / 10 || (rev == INT_MAX / 10 && digit > 7)) {
            return 0;
        }
        if (rev < INT_MIN / 10 || (rev == INT_MIN / 10 && digit < -8)) {
            return 0;
        }

        rev = rev * 10 + digit;
    }

    return rev;
}
```

Saved | Ln 21, Col 2

Testcase | Test Result

Accepted Runtime: 2 ms

Case 1 | Case 2 | Case 3

Input

x =
123

Output

321

Expected