Schema Architecture — Site-Wide Map

Alan Ranger Photography — Schema Tools / alanranger-schema
Document date: 2026-06-01
Purpose: Precise map of how JSON-LD is generated, hosted, and injected before indexing or collection-page optimisation decisions.

Executive summary

Question	Answer
Where is schema hosted?	`https://schema.alanranger.com/` (GitHub repo `alanranger/alanranger-schema`)
Product/Offer source of truth	**Individual product URLs** under `/photography-services-near-me/` and `/photo-workshops-uk/` — **not** collection parents
Event/Offer source of truth	**Individual event URLs** (`{slug}_event_schema.json`) — collection hubs **also duplicate** full event catalog in aggregate JSON
Safe to noindex product collections?	**Yes** for Product/Offer rich results (detail pages hold schema)
Safe to noindex event collections only?	**Low risk** if detail pages stay indexed — removes hub duplicate schema, not per-event schema
Keep URLs in 06-site-urls.csv?	**Yes** — inventory, audits, chat event mapping, manifests; separate from indexation

---

1. Hosting and pipeline

Layer	What
Generator	Schema Tools: `index.html` + `scripts/generate-product-schema.py`
Published JSON	Submodule/repo: `alanranger/alanranger-schema`
CDN	`https://schema.alanranger.com/{filename}.json` (GitHub Pages + custom domain)
Squarespace	Site header injection and/or per-page Code blocks (not versioned in Schema Tools git)

Production uses **`schema.alanranger.com`**, not `raw.githubusercontent.com` at page load.

Update workflow: Generate in Schema Tools → deploy JSON to `alanranger-schema` → push → GitHub Pages refreshes → Squarespace scripts reference new URLs.

---

2. Dynamic (GitHub-hosted) schema — by mechanism

2.1 Product detail pages

Item	Detail

Generator function	`schema_to_script_tag_html()` in `scripts/generate-product-schema.py` (approx. lines 2132–2314)
Hosted files	`{slug}_schema.json`, optional `{slug}_faq.json`
Manifest	`products-manifest.json` (path → file mapping; ~57 products)
Injection	Documented as site-wide Squarespace **header** loader; per-product `{slug}_schema_script_tag.html` also generated
Mechanism	Client-side `fetch(schema.alanranger.com/…)` → inline `<script type="application/ld+json">` appended to `document.head`
Suppressor	Schema Suppressor v1.3 (`partials/schema-suppressor-v1.3.html`) removes thin Squarespace native Product JSON-LD before inject
URL patterns	`/photography-services-near-me/{slug}` and `/photo-workshops-uk/{slug}` only — **not** parent collection URLs

Schema types injected: `Organization`, `LocalBusiness`, `BreadcrumbList`, `Product` (with `Brand`, `Offer`, shipping/return policy). Optional second fetch: `FAQPage`.

Not in product fetch script: `Event`, `Course` (product generator is Product-only in script-tag output).

2.2 Event detail pages

Item	Detail
Generator	`buildPerEventArtifacts()` in Schema Tools `index.html` (approx. lines 13944–13999)
Hosted files	`{slug}_event_schema.json`, `{slug}_event_faq.json`
Manifest	`events-manifest.json` (~99 entries)
Loader	`getEventPostsLoaderScript()` — **ARP Event Loader v1.0** (approx. lines 14002–14167)
Injection	Squarespace **header** ("Copy Global Event Posts Loader")
URL patterns	`/photographic-workshops-near-me/{slug}` and `/beginners-photography-lessons/{slug}`

Schema types on detail: Hybrid `["Product","Event"]`, `BreadcrumbList`, nested `Organization`, `Place`, `PostalAddress`, `GeoCoordinates`, `Person` (performer), **`Offer`** (price), `WebPage`; optional `FAQPage` from `_event_faq.json`.

Not used: Standalone `Course` type (events use Product+Event hybrid).

Hub behaviour: On collection hub paths, loader runs but **`appendJsonLd` is skipped** for the full event graph (`isHubPath`). Hub gets minimal inline `WebPage` + optional TLDR only.

2.3 Event collection pages (aggregate)

Page	Hosted file	Injection
`/photographic-workshops-near-me`	`workshops-schema.json`	Page **Code block**: `<script type="application/ld+json" src="https://schema.alanranger.com/workshops-schema.json">`

`/beginners-photography-lessons`	`lessons-schema.json`	Same pattern

Generator: `generateEventSchema()` builds `@graph` : `[ItemList, …breadcrumbs, …all event nodes]` .

Schema types on collection (not navigational-only):

- `ItemList` (URLs to all events)
- One `BreadcrumbList` per event (embedded in aggregate)
- Full `["Product","Event"]` node per event with dates, location, `Offer` **/price**
- Optional `EventSeries` when "group repeating events" is enabled

Plus on hub: ARP Event Loader adds inline `WebPage` + TLDR; does **not** re-inject per-event graph from manifest on hub paths.

2.4 Product collection pages

Page	Hosted aggregate?	Loader?
`/photography-services-near-me`	**No** aggregate JSON in repo	**No** manifest-driven schema for parent
`/photo-workshops-uk`	**No**	**No**

These are Squarespace **store listing grids**. Rich `Product` / `Offer` schema lives on **child product URLs** only.

2.5 Blog

Page type	File	Injection
Blog index `/blog-on-photography`	`blog-schema.json` (large `@graph`)	Paste or `src=` script tag
Blog posts `/blog-on-photography/{slug}`	`{slug}_schema.json`, `_blogposting.json`, `_breadcrumb.json`, `_faq.json`, `_howto.json`, `_image.json`	Documented global blog header loader (not in Schema Tools source tree)

Blog index types: `WebSite` , `Organization` , `Blog` , `ItemList` , `WebPage` , many `BlogPosting` , `BreadcrumbList` , etc.

2.6 Editorial landing pages

Examples: `/photography-courses-coventry` , `/landscape-photography-workshops` .

Item	Detail
Generator	Landing tab in Schema Tools `index.html`
Injection	Static copy into page header or code block (per-page export)
Types	Typically `Service`, `WebPage`, `LocalBusiness/Organization`, sometimes `ItemList` / `Product` — varies per page

---

3. Static vs dynamic — raw HTML vs rendered DOM

Page type	In raw served HTML	Full JSON-LD only after JavaScript
Event collection hubs	`<script src="…/lessons-schema.json">` or `workshops-schema.json` (external ref, not inline JSON body)	ARP loader: inline `WebPage` + TLDR; no full event graph on hub
Event detail	ARP loader script + minimal `WebPage` stub	**Yes** — fetch → inline `{slug}_event_schema.json` + FAQ
Product detail	Suppressor + fetch IIFE (if in header/code)	**Yes** — inline Product graph (fetch replaces broken `src=` for products)
Product collection	Usually no ARP/schema loader	Maybe thin Squarespace commerce markup only
Blog index	Often `src=` to `blog-schema.json` or pasted inline	Blog post loader (if deployed) = client-side
Blog post	Loader script in header (if deployed)	**Yes** for hosted post schemas
Landing pages	Usually static inline JSON-LD in header/code	Mostly **static**

Audit implication: A raw HTML fetch (curl, simple scraper) on product/event **detail** pages often looks **empty or partial**. Event/product **collection hubs** show a `src=` tag but not the megabyte JSON inline. **AI GEO schema-audit** fetches `lessons-schema.json` / `workshops-schema.json` server-side for hub paths when configured.

---

4. Collection pages — schema SOURCE vs shell

4.1 Product collections

URLs: `/photography-services-near-me` , `/photo-workshops-uk`

Question	Answer
Do collection pages inject Product/Offer from pipeline?	**No**
Where is Product/Offer?	**Only on detail URLs** via `{slug}_schema.json` + fetch loader
Safe to noindex or change collection?	**Yes for Product/Offer rich results** — canonical schema on detail pages
Caveat	Squarespace may emit thin native Product on commerce pages; suppressor runs on product **detail** scripts, not necessarily collection grids

---

4.2 Event collections

URLs: `/photographic-workshops-near-me` , `/beginners-photography-lessons`

Question	Answer

Do collection pages carry Product/Event/Offer?	**Yes — heavily** — `lessons-schema.json` / `workshops-schema.json` embed every event with Product+Event+Offer
Do detail pages also carry it?	**Yes** — `{slug}_event_schema.json` per URL via ARP loader
Duplicate?	**Yes** — same events in aggregate on hub and per-event file on detail
Safe to noindex collection only?	**For indexing:** noindex stops Google using that URL's schema; **detail URLs** keep schema if still indexable
What you lose on hub noindex	Hub as single page carrying dozens of Offer/Event entities (duplicate signals); detail pages remain per-event sources
06-site-urls.csv	Keep rows for inventory, chat mapping, audits; separate from indexation
`events-manifest.json`	Maps path → `{slug}_event_schema.json` for ARP loader

Note: Noindex affects **indexing**, not whether a `src=lessons-schema.json` code block remains in HTML. Remove aggregate script only if you want to stop shipping that markup entirely.

---

5. Page-type reference matrix


Page type	URL pattern	Delivery	Primary @types	Raw HTML vs JS
Product detail	`…/photography-services-near-me/{slug}`, `…/photo-workshops-uk/{slug}`	Header fetch + suppressor	Org, LocalBusiness, BreadcrumbList, **Product**, Offer; optional FAQPage	**JS-injected**
Product collection	`/photography-services-near-me`, `/photo-workshops-uk`	None from pipeline	— (nav grid)	No ARP schema
Event detail	`…/beginners-photography-lessons/{slug}`, `…/photographic-workshops-near-me/{slug}`	Header ARP loader + manifest	**Product+Event**, Offer, BreadcrumbList; FAQPage	**JS-injected**
Event collection	`/beginners-photography-lessons`, `/photographic-workshops-near-me`	Code block `src=` aggregate + header ARP (WebPage/TLDR)	**ItemList** + full **Product+Event+Offer** per event + BreadcrumbLists	`src=` in HTML; JSON at CDN
Blog index	`/blog-on-photography`	`src=` or paste `blog-schema.json`	WebSite, Org, Blog, ItemList, BlogPosting…	`src=` or static
Blog post	`/blog-on-photography/{slug}`	Header loader (documented)	WebPage, BlogPosting, BreadcrumbList, FAQ/HowTo/Image…	**JS-injected**

Landing / editorial	e.g. `/photography-courses-coventry`	Per-page header/code paste	Service, WebPage, Org/LocalBusiness, sometimes ItemList	Usually **static inline**

---

6. Data flow diagram

The diagram below shows how Schema Tools publishes JSON to `schema.alanranger.com`, how Squarespace injects it (header vs code-block `src=`), and which URLs are canonical vs hub "full graph" sources for Google/audits.

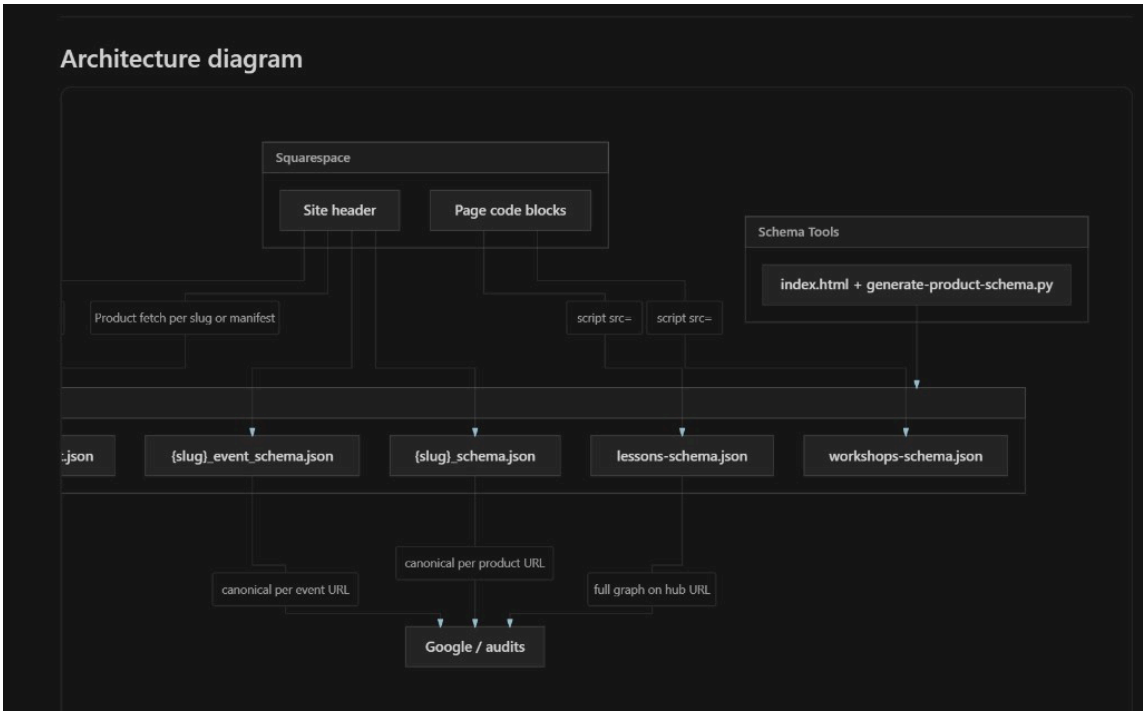

Reading the diagram:

- **Schema Tools** → hosted JSON on `schema.alanranger.com` (manifests + per-slug files + aggregate `lessons-schema.json` / `workshops-schema.json`).
- **Squarespace site header** → product fetch (manifest/per slug) and ARP Event Loader → detail URLs get **canonical** `{slug}_schema.json` / `{slug}_event_schema.json`.
- **Squarespace page code blocks** → `script src=` on event collection hubs → **full graph on hub URL** (`lessons-schema.json`, `workshops-schema.json`).
- **Google / audits** → detail pages = canonical per product/event; hub pages = duplicate full catalog in one JSON file.

Text summary (same flow):

```
Schema Tools → schema.alanranger.com
  ├── products-manifest + header fetch → {slug}_schema.json (canonical per product URL)
  ├── events-manifest + ARP Event Loader → {slug}_event_schema.json (canonical per event URL)
  ├── lessons-schema.json + code block src= → full graph on /beginners-photography-lessons hub
  ├── workshops-schema.json + code block src= → full graph on /photographic-workshops-near-me
```

```
hub
  └── blog-schema.json → blog index
```

---

7. Key file paths (Schema Tools repo)

Purpose	Path
Main UI / generators	`Schema Tools/index.html`
Product JSON + fetch script	`Schema Tools/scripts/generate-product-schema.py`
Suppressor partial	`Schema Tools/partials/schema-suppressor-v1.3.html`
Hosted schemas (submodule)	`Schema Tools/alanranger-schema/`
GitHub Pages quick ref	`Schema Tools/GITHUB_PAGES_QUICK_REF.md`
Canonical URL inventory	`alan-shared-resources/csv/06-site-urls.csv`
AI GEO hub schema fetch	`AI GEO Audit/api/schema-audit.js` (lines ~75–80)

---

8. Related indexability policy (AI GEO Audit)

Separate from schema delivery:

- **`page_indexability_policy`** — e.g. prefix `intentional_noindex` on `/beginners-photography-lessons`, `/photographic-workshops-near-me`
- **`lib/retired-money-pages.mjs`** — e.g. `/photography-shop-services` excluded from live money KPIs
- **06-site-urls.csv** — keep URLs for audit/chat; do not delete rows only to express noindex

---

9. Decision checklist

Before noindexing or changing a **collection** page:

1. Is it a **product** collection (`/photography-services-near-me`, `/photo-workshops-uk`)? → Product/Offer schema is on **detail pages only**; collection change is **low risk** for rich product schema.
2. Is it an **event** collection (`/beginners-photography-lessons`, `/photographic-workshops-near-me`)? → Hub carries **duplicate** full event/Offer graph in aggregate JSON; noindex hub **does not** remove detail-page schema if those URLs stay indexed.
3. Will you remove the **`src=` aggregate script** from Squarespace? → That stops shipping hub markup entirely (separate from robots noindex).
4. Keep **06 CSV** and **manifests** updated for chat bot and audit tooling regardless of indexation.

Generated for Alan Ranger Photography schema architecture review. Source: Schema Tools codebase and alanranger-schema hosted files, June 2026.