

--	--	--	--

Doom rspress Alauda

□ □ □ □

Markdown MDX

--	--	--	--

- □□□□□□□□□□□□□□□□□□
- □□□□□□□□
- □□□□□

□□ **Markdown** □□□□ **MDX**

MDX                                          



0000000000 MDX 0 000

0000

000000000000 Doom 00

00

00

0000

000000

00

11

□□ `doom` □□□□

4/4

□ □ □ □

API ☐ ☐ ☐ ☐

□ □ □ □ □ □ □ □

Page 10 of 10

Page 10

□ □ □ □ □

□ □ □ □ □ □ □ □

□ □ □ □ □ □ □ □ □

sites.yaml □□

□ □ □ □

□ □ □ □ □ □ □ □ □

Page 10 of 10

11

□ □ □ □

333

11

11

## Markdown

## Callouts

Mermaid

MDX

00 MDX 000000000000000000

rspress 00

doom 00

00000000

000

000000000000000000

i18n.json

.ts/.tsx

.mdx

API 00

00 API

CRD

0000

00 openapi 00

000000

props

00

0000

000000

00

00000000000000000000 ACP 00

00000

0000

000 ACP

📄📄

📄📄

📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄

📄📄📄📄📄📄

📄📄📄

📄📄 PDF


📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
mkdir my-docs && cd my-docs
```

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom:`



```
npm install -D @alauda/doom typescript
```

📄📄📄📄📄📄📄📄📄:

```
# 创建 docs 目录
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 文档' > docs/zh/index.md
```

在 `package.json` 中添加脚本:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

在 `doom.config.yml` 中添加:

```
title: My Docs
```

在 `tsconfig.json` 中添加:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
    "skipLibCheck": true,
    "strict": true,
    "target": "ESNext",
  },
  "mdx": {
    "checkMdx": true,
  }
}
```

```
  },
}
```

global.d.ts

```
/// <reference types="@alauda/doom/runtime" />
```

.mdx doom

```
doom -h
```

```
# output
```

```
Usage: doom [options] [command]
```

```
Doctor Doom making docs.
```

```
Options:
```

```
-V, --version
```

output the version number

```
-c, --config <config>
```

Specify the path to the config file

```
-v <version>
```

Specify the version of the documentation, c

```
-b, --base <base>
```

Override the base of the documentation

```
-p, --prefix <prefix>
```

Specify the prefix of the documentation bas

```
-f, --force [boolean]
```

Force to

1. fetch latest reference remotes or scaffo

2. translate ignore hash equality check and

```
-i, --ignore [boolean]
```

Ignore internal routes (default: false)

```
-d, --download [boolean]
```

Display download pdf link on nav bar (defau

```
-e, --export [boolean]
```

Run or build in exporting PDF mode, `apis/\*

```
-I, --include <language...>
```

Include **only** the specific language(s),

```
-E, --exclude <language...>
```

Include all languages except the specific l

```
-o, --out-dir <path>
```

Override the `outDir` defined in the config

```
-r, --redirect <enum>
```

Whether to redirect to the locale closest t

```
-R, --edit-repo [boolean|url]
```

Whether to enable or override the `editRepo

```
-n, --no-open [boolean]
```

Do not open the browser after starting the

```
-h, --help
```

display help for command



### Commands:

<code>dev</code> [options] [root]	Start the development server
<code>build</code> [root]	Build the documentation
<code>preview serve</code> [options] [root]	Preview the built documentation
<code>new</code> [template]	Generate scaffolding from templates
<code>translate</code> [options] [root]	Translate the documentation
<code>export</code> [options] [root]	Export the documentation as PDF, <code>`apis/**`</code>
<code>help</code> [command]	display help <code>for</code> command

📄📄📄📄📄📄

📄📄📄📄📄

📄 `yarn dev` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

`doom dev -h`

# output

Usage: `doom dev` [options] [root]

Start the development server

### Arguments:

<code>root</code>	Root directory of the documentation
-------------------	-------------------------------------

### Options:

<code>-H, --host</code> [host]	Dev server host name
<code>-P, --port</code> [port]	Dev server port number
<code>-l, --lazy</code> [boolean]	Whether to enable <code>`lazyCompilation`</code> which could i
<code>-h, --help</code>	display help for command

📄📄📄📄📄

📄 `yarn build` 📄📄📄📄📄📄📄📄📄📄 `dist` 📄📄📄📄📄

📄📄📄📄

`yarn serve` 启动服务，`-b` 指定本地地址，`-p` 指定本地端口

安装依赖

`yarn new` 创建新项目

编译

```
doom translate -h
```

```
# output
```

```
Usage: doom translate [options] [root]
```

```
Translate the documentation
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -s, --source <language>  Document source language, one of en, zh, ru (default: en)
  -t, --target <language>  Document target language, one of en, zh, ru (default: zh)
  -g, --glob <path...>     Glob patterns for source dirs/files
  -C, --copy [boolean]      Whether to copy relative assets to the target directory
  -h, --help                display help for command
```

- `-g, --glob` 指定源文件的路径，`glob` 指定 glob 模式

1. `yarn translate -g abc xyz` 将 `<root>/<source>/abc` 目录下的文件复制到 `<root>/<target>/xyz` 目录下

2. `yarn translate -g '*'` 将 `<root>/<source>` 目录下的所有文件复制到 `<root>/<target>` 目录下

- `-C, --copy` 指定是否复制相对资产，`false` 表示不复制

- 编译

1. `</source>/abc.jpg` 000000 `<root>/public/<source>/abc.jpg` 0  
`<root>/public/<target>/abc.jpg` 0000000000000000 `</target>/abc.jpg`
2. `<root>/<source>/abc.mdx` 0000 `./assets/xyz.jpg` 000000  
`<root>/<source>/assets/xyz.jpg` 0 `<root>/<target>/assets/xyz.jpg` 0000  
00000000
3. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000  
`<root>/<source>/assets/<source>/xyz.jpg` 0  
`<root>/<target>/assets/<target>/xyz.jpg` 0000000000000000  
`./assets/<target>/xyz.jpg`

• 0000000000

1. `</source>/abc.jpg` 000000 `<root>/public/<target>/abc.jpg` 0000000000  
00000000 `</target>/abc.jpg` 000000000000000000
2. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000  
`<root>/<target>/assets/<target>/xyz.jpg` 000000000000000000  
`./assets/<target>/xyz.jpg` 00000000  
`../<source>/assets/<target>/xyz.jpg`

## WARNING

0000000000 `-g '*'` 00000000000000 `source` 0 `target` 0000000000  
`internalRoutes` 00000000 `target` 0000000000

## TIP

000000000000 `AZURE_OPENAI_API_KEY` 00000000000000 Leader 00

0000000000000000000000

```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: '0000 Connectors 0000000000'
```

```
disableAutoTranslation: false
title: DevOps □□□
```

PDF

## WARNING

```

yarn build

```

```
doom export -h
```

```
# output
```

Usage: doom export [options] [root]

Export the documentation as PDF, ``apis/**`` and ``*/apis/**`` routes will be ign

### Arguments:

```
root      Root directory of the documentation
```

Options:

```
-H, --host [host]  Serve host name
-P, --port [port]  Serve port number (default: "4173")
-h, --help          display help for command
```

```
❯ yarn export -b -p -b -p
```

```

playwright build-harbor.alauda.cn/frontend/playwright-
runner:doom

```

`.env.yarn`

```
PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmirror.com/binaries/playwright"
```

0000

```
doom lint -h
```

```
# output
```

```
Usage: doom lint [options] [root]
```

```
Lint the documentation
```

```
Arguments:
```

```
  root          Root directory of the documentation
```

```
Options:
```

```
  -h, --help  display help for command
```

0000000000000000



📄

📄 `doom` 📄📄

📄📄

📄📄

API 📄📄

📄📄📄📄📄

📄📄📄

📄📄📄

📄📄📄

📄📄📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄

`sites.yaml` 📄

📄📄

📄📄📄📄📄📄

📄📄📄

📄

📄“📄📄📄📄”📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄

📄📄

📄

📄

## Markdown

Callouts

Mermaid

## MDX

📄 MDX 📄📄📄📄📄📄📄📄📄📄

rspress 📄

doom 📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄📄

i18n.json

.ts/.tsx

.mdx

## API 📄

📄 API

CRD

📄📄📄

📄 openapi 📄

📄📄📄📄📄

props

📄

0000

000000

00

00000000000000000000 ACP 00

00000

0000

000 ACP



--	--

□ □ □ □

□ □ □ □

API    

--	--	--	--	--	--	--	--

--	--	--	--	--	--

## frontmatterMode

--	--	--	--	--	--

□ □ □ □ □

--	--	--	--	--	--	--	--

□ □ □ □ □ □ □ □

sites.yaml □□

□ □ □ □



--	--	--	--	--	--

--	--	--	--

```
0000000000000000 yml 00000000 doom.config.yml 0
```

```
doom.config.yml  rspress  js/ts
```

```
□□□□ .js/.ts/.mjs/.mts/.cjs/.cts □□□□□□□□
```

```

js/ts  @alauda/doom/config  defineConfig

```

--	--	--	--	--	--	--	--

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```

--	--	--	--

- `lang` `en` `null` `undefined`
- `title`
- `logo` `public` `doom` `alauda logo`
- `logoText` `logo`
- `icon` `favicon` `logo`
- `base` `product-docs` `/`
- `outDir` `dist/{base}/{version}` `dist/{outDir}/{version}` `version`

API ☐ ☐ ☐ ☐

```
api:
# CRD doooooooooo doom.config.* dooooooo glob ooojson/yaml oo

crds:
- docs/shared/crds/*.yaml

# OpenAPI doooooooooo doom.config.* dooooooo glob ooojson/yaml oo

openapis:
- docs/shared/openapis/*.json

# oo openapi doooooooooooooooooooooooooooooooooooooooooooooooooooooooo
# oo https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQ

references:
v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.C
```

```
# API gateway
pathPrefix: /apis
```

API

```
# doom.config.* glob json/yaml
permission:
  functionresources:
    # `kubectl get functionresources`
    - docs/shared/functionresources/*.yaml
  roletemplates:
    # `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
    - docs/shared/roletemplates/*.yaml
```

```
reference:
- repo: alauda-public/product-doc-guide #
  branch: # [string]
  publicBase: # [string] /images/xx.png do
  sources:
    - name: anchor #
      path: docs/index.mdx# # doom.conf
      ignoreHeading: # [boolean] true
      processors: #
        - type: ejTemplate
          data: # ejs `<%= data.xx %>`
      frontmatterMode: merge # frontmatter ignore ign
```

## frontmatterMode

- `ignore` 忽略所有 frontmatter 块
- `merge` 合并所有 frontmatter 块中的 key 值
- `replace` 替换所有 frontmatter 块中的 frontmatter
- `remove` 移除所有 frontmatter

🔒🔒🔒🔒🔒

🔒🔒🔒🔒🔒

```
releaseNotes:
  queryTemplates:
    fixed: # 🐛 ejs 🐛 jql 🐛
    unfixed:
```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

🔒🔒 `template=fixed&project=DevOps` 🔒🔒 `fixed` 🔒 `queryTemplates` 🔒🔒🔒🔒🔒🔒  
🔒🔒 `query` 🔒🔒 `project=DevOps` 🔒🔒 `ejs` 🔒🔒🔒🔒🔒 `fixed` 🔒🔒🔒🔒🔒 `jira` `jql` 🔒🔒  
`https://jira.alauda.cn/rest/api/2/search?jql=<jql>` 🔒🔒🔒 `API` 🔒🔒🔒🔒🔒🔒  
`JIRA_USERNAME` 🔒 `JIRA_PASSWORD` 🔒🔒🔒🔒🔒🔒🔒

🔒🔒🔒🔒🔒

sidebar:

```
collapsed: false # [] false
```



```
internalRoutes: # glob docs cli -i, --ignore`
- '*/internal/**'
```

```
onlyIncludeRoutes: # 匹配 glob 匹配的 docs 中的 cli 且 不以 --ignore 开头的
- '*/internal/**'
```

```
internalRoutes:
  - '*/internal/overview.mdx'
```

--	--	--	--	--	--	--	--

shiki:

```
theme: # optional, https://shiki.style/themes
```

**langs:** # optional, <https://shiki.style/languages>

**transformers:** # optional, only available in js/ts config, <https://shiki.style>

## WARNING

plaintext

## sites.yaml 📄

sites.yaml 配置网站元数据，包括名称、基础 URL、版本、显示名称、仓库 URL 和图像 URL。

```
- name: connectors # 名称
  base: /devops-connectors # 基础 URL
  version: v1.1 # 版本 ExternalSite/ExternalSiteLink 配置

  displayName: # 显示名称 name
    en: DevOps Connectors
    zh: DevOps 连接

  # 仓库 URL
  # 图像 URL
  repo: https://github.com/AlaudaDevops/connectors-operator # 仓库 URL gi
  image: devops/connectors-docs # 图像 URL
```

## 📄

```
translate:
  # 配置ejs 模板 `sourceLang`, `targetLang`, `userPrompt` 和 `additionalPrompts`
  # 配置 `sourceLang` 和 `targetLang` 的 `en` 和 `zh` 语言
  # 配置 `userPrompt` 模板
  # 配置 `additionalPrompts` 模板 `frontmatter.i18n` 和 `additionalPrompts` 模板
  # 配置 `systemPrompt` 模板
  systemPrompt: |
    ## 配置
    <%= targetLang %>配置 <%= sourceLang %>配置

    ## 配置
    - 配置 <%= sourceLang %>配置 <%= targetLang %>配置
    - 配置 MDX 配置 MDX 配置 jsx 配置 <Overview />配置
    - 配置
    - MDX 配置 MDX 配置 MDX 配置
```

```

- <Overview /> Overview
- <Tab label="value">label key "value"

<%= terms %>

-
- {/* release-notes-for-bugs */}
- <!-- release-notes-for-bugs -->

-
- {/* reference-start */}
- {/* reference-end */}
- <!-- reference-start -->
- <!-- reference-end -->

- \< \{
- Markdown frontmatter, frontmatter.i18n

##

1. <%= sourceLang %><%= targetLang %>
2.
  - <%= targetLang %>
  -
  -
3. <%= targetLang %>
4. <%= targetLang %><%= targetLang %>

<%= userPrompt %>

<%= additionalPrompts %>
  userPrompt: # `systemPrompt` `ejs`

```

editRepoBaseUrl: [alauda/doom/tree/main/docs](https://github.com/lauda/doom/tree/main/docs) # [https://github.com/](https://github.com/lauda/doom/tree/main/docs)

📄📄📄📄📄

```
lint:
```

```
  cspellOptions: # 📄📄cspell 📄📄📄📄 https://github.com/streetsidesoftware/csp
```





🐱🐱

🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

```
---
title: 🐱
description: 🐱
author: 🐱
category: 🐱
---
```

🐱🐱🐱🐱🐱🐱 `MDX` 🐱 `.mdx` 🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱

🐱🐱

🐱 `index.md` 🐱 `index.mdx` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱  
`weight` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `weight` 🐱🐱🐱🐱🐱🐱

```
---
weight: 1
---
```

**WARNING**  
🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

🐱🐱

index.mdx Overview

```
#  
  
<Overview />
```

# Markdown

関数 [gfm](#) 関数Doom 関数関数関数関数 Markdown 関数関数

関数

Callouts

Mermaid

## Callouts

関数関数関数

### NOTE

- 関数関数関数関数関数関数関数 ; , % , # , // , /\*\* \*/ , -- 関数 <!-- --> 関数
- 関数関数関数関数関数関数関数 [ \ ! code callout ] 関数関数
- 関数 関数 ::callouts 関数関数関数関数関数関数関数関数 <div class="doom-callouts"> 関数  
    <Callouts> 関数関数

```
```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
    + 218 MiB \ ①
    + 8 MiB × (number of vCPUs) \ ②
    + 16 MiB × (number of graphics devices) \ ③
    + (additional memory overhead) ④
...

:::callouts
```

1. Required for the processes that run in the ``virt-launcher`` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

...

Memory overhead per virtual machine  $\approx (1.002 \times \text{requested memory}) \setminus$   
 $+ 218 \text{ MiB} \setminus$  ①  
 $+ 8 \text{ MiB} \times (\text{number of vCPUs}) \setminus$  ②  
 $+ 16 \text{ MiB} \times (\text{number of graphics devices}) \setminus$  ③  
 $+ (\text{additional memory overhead})$  ④


- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers

## Mermaid

```
mermaid
graph TD;
  A-->B;
  A-->C;
  B-->D;
  C-->D;

```

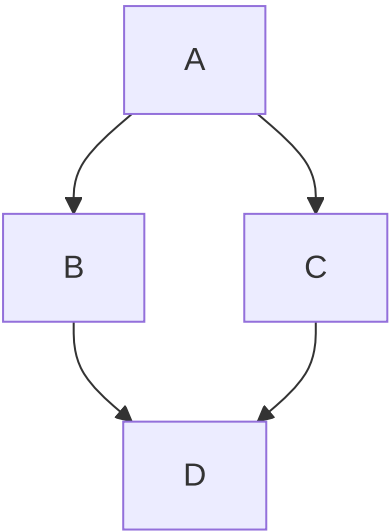

# MDX

MDX Markdown Markdown JSX [rspress MDX](#)

rspress

doom

Overview

Directive

ExternalSite

ExternalSiteLink

AcpApisOverview ExternalApisOverview

Term

props

TermsTable

props

JsonViewer

## rspress

rspress .mdx

- Badge
- Card
- LinkCard

- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

在 `preview.mdx` 文件中引入 `@rspress/core/theme` 包

```
preview.mdx

import { SourceCode } from '@rspress/core/theme'

<SourceCode href="/" />
```

# doom 文档

`doom` 是一个用于生成文档的工具，它支持 MDX 格式，并提供了丰富的主题和布局选项。

## Overview

本文将介绍 `doom` 的基本用法和配置选项。

## Directive

在 MDX 文件中，你可以使用 `Directive` 来定义文档的元数据。

```
- 在 `doc/en` 目录下创建 `doc/zh` 目录，用于存放中文文档。

<Directive type="danger" title="警告">
  这是一个警告信息，请仔细阅读。
</Directive>
```



- ( doc/en ) □□□□□□□□ doc/zh □□□□□□□□□□□□□□□□□□□□□□□□  
□□□□

11

doc/zh

11

## ExternalSite

--	--	--	--	--	--	--	--

```
<ExternalSite name="connectors" />
```

### Note

DevOps DevOps

DevOps ☐ ☐ ☐ ☒

## ExternalSiteLink

□ □ □ □ □ □ □ □ □ □

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" /
```

[Content ↗](#)

**TIP**

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```



```
<ExternalSiteLink name="connectors" href="link">
  Content {/* □□□□ `p` □□□ */}
```

```
</ExternalSiteLink>
```

□□□□□□□□□□ **p** □□□□□□□□□□□□□□□□ **children** □□□□

## AcpApisOverview □ ExternalApisOverview

□□□□□□ API □□□□

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

### Note

□□ ACP APIs □□□□□□□□□□ [ACP APIs □□ ↗](#)□

### Note

□□ DevOps □□□ APIs □□□□□□□□□□ [DevOps □□□ APIs □□ ↗](#)□

## Term

□□□□□□□□□□□□□□□□

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
```

□□□ □□□□□□□ ACP

### props

- **name** : □□□□□□□□□□□□□□□□
- **textCase** : □□□□□□□□□□□□ **lower** , **upper** , **capitalize**

TermsTable

```
<TermsTable />
```

Key	Value	Label	Category	Icon	Color
company	Alauda	-	Alauda	-	Blue
product	Alauda Container Platform	-	Alauda Container Platform	-	Blue
productShort	ACP	-	ACP	-	Blue

props

- terms : NormalizedTermItem[]

JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

```
yaml  json
key: value
```

shared

```
import CommonContent from './shared/CommonContent.mdx'
```

```
<CommonContent />
```

runtime API .jsx/.tsx .mdx

```
// shared/CommonContent.tsx
```

```
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}
```

```
// showcase/content.mdx
```

```
import { CommonContent } from './shared/CommonContent'
<CommonContent />
```

## WARNING

.mdx props issue props  
.jsx/.tsx

📄📄📄

`alauda` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄  
📄 `public` 📄📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄

`i18n.json`

`.ts/.tsx`

`.mdx`

## `i18n.json`

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `docs` 📄📄📄📄 `i18n.json` 📄📄  
📄📄📄📄📄📄 `useI18n` 📄📄📄📄📄📄📄📄📄📄

docs/i18n.json

```
{
  "title": {
    "zh": "📄📄",
    "en": "Title"
  },
  "description": {
    "zh": "📄📄",
    "en": "description"
  }
}
```

## .ts/.tsx

```
import { useI18n } from '@rspress/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

## .mdx

```
import { useI18n } from '@rspress/runtime'

# {useI18n()('title')}

{useI18n()('description')}
```

# API 文档

本页面提供 API 文档 API 文档 CRD (Custom Resource Definition) 文档文档文档文档文档文档文档文档

```
├─ apis
│   └─ advanced-apis # 高级 API
│   └─ crds # CRDs
│   └─ references # 参考
```

## 文档

- API 文档
  - props
- CRD 文档
  - props
- 文档文档
  - props
- openapi 文档

## API 文档

```
advanced-apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ
```

CodeQualityTaskSummary

props

- path : OpenAPI schema paths
- pathPrefix : api.pathPrefix
- openapiPath : openapi

CRD

```
crds/ArtifactCleanupRun.mdx

# ArtifactCleanupRun

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

ArtifactCleanupRun

props

- name : CRD metadata.name
- crdPath : openapi CRD

```
references/CodeQuality.mdx

# CodeQuality

<OpenAPIRef schema="v1alpha1.CodeQuality" />
```



props

- schema : OpenAPI schema definitions (v2) or component/schemas (v3)
- openapiPath : openapi

openapi

OpenAPIPath OpenAPIRef openapi  
openapi openapiPath

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```

权限管理

```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodules']} />
```

权限

props

权限

props

- functions: string[] - 权限资源 FunctionResource 列表

权限

权限	权限	权限 资源	权限 资源	权限 资源	权限 资源	权限 资源	权限 资源
权限 devops- testplans	权限	✓	✓	✓	✓	✓	✗
	权限	✓	✗	✓	✓	✓	✗
	权限	✓	✗	✓	✓	✓	✗
	权限	✓	✗	✓	✓	✓	✗
权限 devops-	权限	✓	✓	✓	✓	✓	✗

模块	测试	测试用例 通过	测试用例 失败	测试用例 通过	测试用例 通过	测试用例 通过	测试用例 通过
testmodules	测试	✓	✗	✓	✓	✓	✗
	测试	✓	✗	✓	✓	✓	✗
	测试	✓	✗	✓	✓	✓	✗

--	--	--	--

☐ Markdown ☐☐☐☐

```
<!-- reference-start#name -->
```

```
<!-- reference-end -->
```

□ MDX □□□□

```
{/* reference-start#name */}
```

```
{/* reference-end */}
```

name

```
□□□□□□ <root>/public/_remotes/<name> □□□□
```

```
□□□□□ <!-- reference-start#ref --> □□□□□
```

11

□ □ □ □ □ □

frontmatterMode

--	--	--	--	--	--

reference:

```
- repo: alauda-public/product-doc-guide # 
branch: # [string]
```

```

publicBase: # [string] /images/xx.png do
sources:
- name: anchor #
  path: docs/index.mdx# # doom.conf
  ignoreHeading: # [boolean] true
  processors: #
    - type: ejstemplate
      data: # ejstemplate `<%= data.xx %>`
  frontmatterMode: merge # frontmatter ignore ign

```

## frontmatterMode

- **ignore** frontmatter frontmatter
- **merge** frontmatter key
- **replace** frontmatter frontmatter
- **remove** frontmatter

□ □ □ □ □

--	--	--	--

□□□ ACP

□ □ □ □ □

--	--	--	--	--	--



--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

[illegible]

doom build # □□□□□□

doom serve # □□□□□□□□□□

--	--	--	--

[ci.yaml](#) [Dockerfile](#)

```
FROM build-harbor.alauda.cn/ops/alpine:latest
```

```
WORKDIR /docs
```

```
COPY . dist
```

## ACP

`doom build` `dist` `-v`

```
# release-4.0 4.0
doom build -v 4.0 # 4.0 dist/4.0 {base}/4.0
doom build -v master # master dist/master {base}/master
doom build -v {other} # dist/{other} {base}/{other}

# unversioned unversioned-x.y
doom build -v unversioned # dist/unversioned {base}
doom build -v unversioned-4.0 # 4.0 dist/unversioned-4.0
```

```
├─ console-platform
│   ├── 4.0
│   ├── 4.1
│   ├── index.html
│   ├── overrides.yaml
│   └─ versions.yaml
├─ console-devops-docs
│   ├── 4.0
│   ├── 4.1
│   ├── index.html
│   ├── overrides.yaml
│   └─ versions.yaml
├─ console-tekton-docs
│   └─ 1.0
```

```
| └─ 1.1
| └─ index.html
| └─ overrides.yaml
| └─ versions.yaml
```

## index.html

```
<!DOCTYPE html>
<html>
  <head>
    <title>Redirecting...</title>
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
  </head>
  <body>
    <p>Redirecting to <a href="/console-docs/4.1">/console-docs/4.1</a></p>
  </body>
</html>
```

目录

## overrides.yaml

```
# console-platform
# https://gitlab-ce.alauda.cn/idp/Doom/-/blob/master/src/terms.ts#L11
terms:
  company:
    en: Alauda
    zh: 奥达
  product:
    en: Alauda Container Platform
    zh: 奥达容器平台
  productShort:
    en: ACP

#
title:
  en: Doom - Alauda
  zh: Doom - 奥达
logoText:
```



en: Doom - Alauda  
zh: Doom - 文档

versions.yaml

- '4.1'
- '4.0'

📄📄📄📄📄📄📄

📄📄📄📄📄 [chart-frontend](#) 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 [alauda-docs](#) 📄📄📄📄📄  
📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
📄📄

📄📄📄📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

INFO

📄📄📄📄 PR 📄📄📄gitops 📄📄📄📄