

--	--	--	--

Doom  [rspress](#)   Alauda                  

10

□ □ □ □

Markdown MDX

□ □ □ □

--	--	--	--

- □□□□□□□□□□□□□□□□□□
- □□□□□□□□
- □□□□□

□□ **Markdown** □□□□ **MDX**

MDX



0000000000 MDX 00 ↗ 0

0000

0000000000 Doom 00

00

00

0000

000000

00

11

□□ `doom` □□□□

4/4

API ☐ ☐ ☐ ☐

8/8/20

Page 10 of 10

6/6/2020

□ □ □ □ □

Page 10 of 10

□ □ □ □ □ □ □ □ □

--	--	--	--	--	--	--	--

sites.yaml □□

□ □ □ □

□ □ □ □ □ □ □ □ □

Page 10 of 10

11

□ □ □ □

333

11

11

Markdown

Callouts

Mermaid

MDX

00 MDX 000000000000000000

rspress 00

doom 00

00000000

000

000000000000000000

i18n.json

.ts/.tsx

.mdx

API 00

00 API

CRD

0000

00 openapi 00

000000

props

00

0000

000000

00

00000000000000000000 ACP 00

000000

000000

0000000

000000000

📄📄

📄📄

📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄

📄📄📄📄📄📄

📄📄📄

📄📄 PDF


📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
mkdir my-docs && cd my-docs
```

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom:`



```
npm install -D @alauda/doom typescript
```

📄📄📄📄📄📄📄📄📄:

```
# 创建 docs 目录
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 你好' > docs/zh/index.md
```

在 `package.json` 中添加脚本:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

在 `doom.config.yml` 中添加:

```
title: My Docs
```

在 `tsconfig.json` 中添加:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
    "skipLibCheck": true,
    "strict": true,
    "target": "ESNext",
  },
  "mdx": {
    "checkMdx": true,
  },
}
```

global.d.ts

```
/// <reference types="@alauda/doom/runtime" />
```

.mdx doom


```
doom -h
```

```
# output
```

```
Usage: doom [options] [command]
```

```
Doctor Doom making docs.
```

Options:

<code>-V, --version</code>	output the version number
<code>-c, --config <config></code>	Specify the path to the config file
<code>-v <version></code>	Specify the version of the documentation, c
<code>-b, --base <base></code>	Override the base of the documentation
<code>-p, --prefix <prefix></code>	Specify the prefix of the documentation bas
<code>-f, --force [boolean]</code>	Force to <ol style="list-style-type: none"> 1. fetch latest reference remotes or scaffo 2. translate ignore hash equality check and
<code>-i, --ignore [boolean]</code>	Ignore internal routes (default: false)
<code>-d, --download [boolean]</code>	Display download pdf link on nav bar (defau
<code>-e, --export [boolean]</code>	Run or build in exporting PDF mode, `apis/*
<code>-I, --include <language...></code>	Include **only** the specific language(s),
<code>-E, --exclude <language...></code>	Include all languages except the specific l
<code>-o, --out-dir <path></code>	Override the `outDir` defined in the config
<code>-r, --redirect <enum></code>	Whether to redirect to the locale closest t
<code>-R, --edit-repo [boolean url]</code>	Whether to enable or override the `editRepo
<code>-n, --no-open [boolean]</code>	Do not open the browser after starting the
<code>-h, --help</code>	display help for command

Commands:

<code>dev [options] [root]</code>	Start the development server
<code>build [root]</code>	Build the documentation
<code>preview serve [options] [root]</code>	Preview the built documentation
<code>new [template]</code>	Generate scaffolding from templates
<code>translate [options] [root]</code>	Translate the documentation
<code>export [options] [root]</code>	Export the documentation as PDF, `apis/**`
<code>help [command]</code>	display help for command

```
📄📄📄📄📄📄📄
```

```
📄📄📄📄📄
```

```
📄 yarn dev 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄
```

```
doom dev -h
```

```
# output
```

```
Usage: doom dev [options] [root]
```

```
Start the development server
```

```
Arguments:
```

```
  root
```

```
Root directory of the documentation
```

```
Options:
```

```
  -H, --host [host]
```

```
Dev server host name
```

```
  -P, --port [port]
```

```
Dev server port number
```

```
  -l, --lazy [boolean]
```

```
Whether to enable `lazyCompilation` which could i
```

```
  -h, --help
```

```
display help for command
```

```
~~~~~
```

```
❯ yarn build ~~~~~ dist ~~~~~
```

```
~~~~~
```

```
❯ yarn serve ~~~~~ -b, -p ~~~~~ -b, -p
```

```
❯
```

```
~~~~~
```

```
❯ yarn new ~~~~~
```

```
~~~~~
```

```
doom translate -h
```

```
# output
```

```
Usage: doom translate [options] [root]
```

Translate the documentation

Arguments:

root Root directory of the documentation

Options:

-s, --source <language> Document source language, one of en, zh, ru (default is en)

-t, --target <language> Document target language, one of en, zh, ru (default is en)

-g, --glob <path...> Glob patterns for source dirs/files

-C, --copy [boolean] Whether to copy relative assets to the target directory

-h, --help display help for command

- -g, --glob 指定源文件的路径 glob 指定源文件的路径

1. yarn translate -g abc xyz 将 <root>/<source>/abc 中的文件复制到 <root>/<target>/xyz 中

2. yarn translate -g '*' 将 <root>/<source> 中的所有文件复制到 <root>/<target> 中

- -C, --copy 指定是否将源文件复制到目标目录 false 表示不复制

- 示例

1. /<source>/abc.jpg 复制到 <root>/public/<source>/abc.jpg 中
 <root>/public/<target>/abc.jpg 中不存在该文件，因此不会复制

2. <root>/<source>/abc.mdx 复制到 ./assets/xyz.jpg 中
 <root>/<source>/assets/xyz.jpg 中不存在该文件，因此不会复制
 <root>/<target>/assets/xyz.jpg 中不存在该文件，因此不会复制

3. <root>/<source>/abc.mdx 复制到 ./assets/<source>/xyz.jpg 中
 <root>/<source>/assets/<source>/xyz.jpg 中不存在该文件，因此不会复制
 <root>/<target>/assets/<target>/xyz.jpg 中不存在该文件，因此不会复制
 ./assets/<target>/xyz.jpg 中不存在该文件，因此不会复制

- 📄📄📄📄📄📄
 1. `/<source>/abc.jpg` 📄📄📄 `<root>/public/<target>/abc.jpg` 📄📄📄📄📄📄
📄📄📄📄 `/<target>/abc.jpg` 📄📄📄📄📄📄📄📄📄📄
 2. `<root>/<source>/abc.mdx` 📄📄📄 `./assets/<source>/xyz.jpg` 📄📄📄📄
`<root>/<target>/assets/<target>/xyz.jpg` 📄📄📄📄📄📄📄📄📄📄
`./assets/<target>/xyz.jpg` 📄📄📄📄📄
`../<source>/assets/<target>/xyz.jpg`

WARNING

📄📄📄📄📄 `-g '*'` 📄📄📄📄📄📄📄 `source` 📄 `target` 📄📄📄📄📄
`internalRoutes` 📄📄📄📄📄 `target` 📄📄📄📄📄

TIP

📄📄📄📄📄📄 `AZURE_OPENAI_API_KEY` 📄📄📄📄📄📄📄 `Leader` 📄📄

📄📄📄📄📄📄📄📄📄📄📄📄

```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: '📄📄📄 Connectors 📄📄📄📄📄📄'
  disableAutoTranslation: false
title: DevOps 📄📄
```

📄📄📄📄📄📄📄📄📄

📄📄 **PDF**

WARNING

📄📄📄📄📄📄📄📄 `yarn build` 📄📄📄

```
doom export -h
```

```
# output
```

Usage: doom export [options] [root]

Export the documentation as PDF, ``apis/**`` and ``*/apis/**`` routes will be ign

Arguments:

```
root      Root directory of the documentation
```

Options:

`-H, --host [host]` Serve host name

```
-P, --port [port]  Serve port number (default: "4173")
```

```
-h, --help      display help for command
```

yarn export PDF -b, -p -b, -p

playwright build-harbor.alauda.cn/frontend/playwright-runner:doom

```
PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmirror.com/binaries/playwright"
```

```
doom lint -h
```

```
# output
```

```
Usage: doom lint [options] [root]
```

Lint the documentation

Arguments:

root Root directory of the documentation

Options:

```
-h, --help  display help for command
```

0000000000000000



`doom`

API

`sites.yaml`

“”

Markdown

Callouts

Mermaid

MDX

📄 MDX 📄📄📄📄📄📄📄📄📄📄

rspress 📄

doom 📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄📄

i18n.json

.ts/.tsx

.mdx

API 📄

📄 API

CRD

📄📄📄

📄 openapi 📄

📄📄📄📄📄

props

📄

0000

000000

00

00000000000000000000 ACP 00

00000

00000

000000

00000000

4/4

□ □ □ □

API ☐ ☐ ☐ ☐

□ □ □ □ □ □ □ □

--	--	--	--	--	--

frontmatterMode

□ □ □ □ □ □

□ □ □ □ □

□ □ □ □ □ □ □ □

--	--	--	--	--	--	--	--	--

□ □ □ □ □ □ □ □

sites.yaml

□ □ □ □

--	--	--	--	--	--	--	--	--

□ □ □ □ □ □

--	--	--	--

[illegible]

```
doom.config.yml  rspress  js/ts
```

```
□□□□ .js/.ts/.mjs/.mts/.cjs/.cts □□□□□□□□
```

```
js/ts @alauda/doom/config defineConfig
```

□ □ □ □ □ □ □ □

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```

Options

- `lang` 语言，支持 `en` 和 `zh`，默认为 `en`，如果未指定，则默认为 `en`。
- `title` 标题，默认为 `alauda`。
- `logo` logo 的公共路径，默认为 `public/logo`。
- `logoText` logo 的文本，默认为 `alauda logo`。
- `icon` 图标，默认为 `logo`。
- `base` 基础路径，默认为 `product-docs`。
- `outDir` 输出目录，默认为 `dist/{base}/{version}`。

API

api:

```
# CRD 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

crds:

```
- docs/shared/crds/*.yaml
```

```
# OpenAPI 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

openapis:

```
- docs/shared/openapis/*.json
```

```
# 配置 openapi 文件
```

```
# 配置 https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQ
```

references:

```
  v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.C
```

```
# 配置 API 网关 gateway 文件
```

```
pathPrefix: /apis
```

配置 API 文件

配置 API 文件

```
# 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

permission:**functionresources:**

```
# `kubectl get functionresources`
```

```
- docs/shared/functionresources/*.yaml
```

roletemplates:

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

```
- docs/shared/roletemplates/*.yaml
```

配置 API 文件

配置 API 文件


```

template=fixed&project=DevOps  fixed  queryTemplates 
query  project=DevOps  ejts  fixed  jira  jql 
https://jira.alauda.cn/rest/api/2/search?jql=<jql>  API 
JIRA_USERNAME  JIRA_PASSWORD 

```

--	--	--	--	--

```
sidebar:  
  collapsed: false # oooooooooooooooooooooooooooooo false
```

--	--	--	--	--	--	--	--

```
internalRoutes: # glob docs cli -i, --ignore`
- '*/internal/**'
```

--	--	--	--	--	--	--	--	--

```
onlyIncludeRoutes: # 匹配 glob 匹配 docs 中的 cli 包 忽略 匹配
  - '*/internal/**'
internalRoutes:
  - '*/internal/overview.mdx'
```

--	--	--	--	--	--	--	--

□ □ □ □

translate:

```
# #####js ##### `sourceLang`, `targetLang`, `userPrompt`  `additionalPrompts`  
#   `sourceLang`  `targetLang`  ``  ``  
#     `userPrompt`  
#     `additionalPrompts`   `frontmatter.i18n`   `additionalPrompts`  
#  
  
systemPrompt: |  
##  
  
#####<%= targetLang %>#####<%= sourceLang %>#####<%= terms %>  
  
##  
  
- #####<%= sourceLang %>#####<%= targetLang %>#####  
- ##### MDX ##### MDX ##### jsx ##### <Overview />#####  
- #####  
- MDX #####MDX ##### MDX #####  
  - <Overview />  Overview  
  - <Tab label="value">#####</Tab>label  key #####"value" #####  
  
<%= terms %>  
  
- #####  
- {/* release-notes-for-bugs */}  
- <!-- release-notes-for-bugs -->  
  
- #####  
- {/* reference-start */}  
- {/* reference-end */}  
- <!-- reference-start -->  
- <!-- reference-end -->  
  
- ##### \\  
- ##### Markdown frontmatter, ##### frontmatter.i18n #####  
  
##  
  
#####  
  
1. #####<%= sourceLang %>#####<%= targetLang %>#####  
2. #####  
  - #####<%= targetLang %>#####  
  - #####  
  - #####  
  
3. #####<%= targetLang %>#####  
4. #####<%= targetLang %>#####<%= targetLang %>#####  
  
#####  
  
<%= userPrompt %>
```


<%= additionalPrompts %>

userPrompt: # `systemPrompt` `ejs`

editRepoBaseUrl: [alauda/doom/tree/main/docs](https://github.com/lauda/doom/tree/main/docs) # <https://github.com/>

lint:

cspellOptions: # cspell [https://github.com/streetsidesoftware/csp](https://github.com/streetsidesoftware/cspell)

index

index.md index.mdx

```
├─ index.md
├─ start.mdx
└─ usage
    ├─ index.mdx
    └─ convention.md
```

1. `public` □□□□□□□□□□□□□□□□
2. `public/_remotes` □□□□□□□□□□□□□□□□□□□□□□□□□□□□
`*/public/_remotes` □□ `.gitignore` □□□□□□□□□□
3. `shared` □□□□□□□□□□□□□□□□□□□□□□□□□□□□

🐱🐱

🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

```
---
title: 🐱
description: 🐱
author: 🐱
category: 🐱
---
```

🐱🐱🐱🐱🐱🐱 `MDX` 🐱 `.mdx` 🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱

🐱🐱

🐱 `index.md` 🐱 `index.mdx` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱
`weight` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `weight` 🐱🐱🐱🐱🐱🐱🐱

```
---
weight: 1
---
```

WARNING
🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

🐱🐱

index.mdx Overview

```
#  
  
<Overview />
```

Markdown

[gfm](#) Doom Markdown

Callouts

Mermaid

Callouts

NOTE

- ; , % , # , // , /** */ , -- <!-- -->
- [\\!code callout]
- :::callouts <div class="doom-callouts"> <Callouts>

```
```sh
```

```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \
 + 8 MiB × (number of vCPUs) \
 + 16 MiB × (number of graphics devices) \
 + (additional memory overhead)
```

```
```
```

```
:::callouts
```

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
 - If Trusted Platform Module (TPM) is enabled, add 53 MiB.


```
:::
```

```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
    + 218 MiB \
    + 8 MiB × (number of vCPUs) \
    + 16 MiB × (number of graphics devices) \
    + (additional memory overhead)
```

- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
 - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Mermaid ↗

```
```mermaid
graph TD;
 A-->B;
 A-->C;
 B-->D;
 C-->D;
```
```

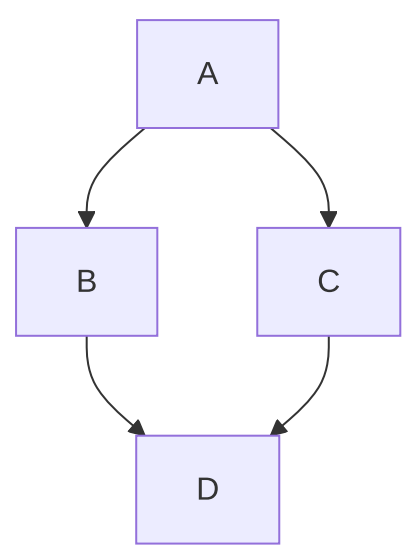

[Markdown Preview Mermaid ↗](#) VSCode

MDX

[MDX](#) [Markdown](#) [Markdown](#) [JSX](#) [rspress MDX](#)

rspress

doom

- Overview
- Directive
- ExternalSite
- ExternalSiteLink
- AcpApisOverview ExternalApisOverview

Term

- props
- TermsTable
- props
- JsonViewer

rspress

rspress [.mdx](#)

- Badge
- Card

- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

在 `@rspress/core/theme` 中

```
import { SourceCode } from '@rspress/core/theme'

<SourceCode href="/" />
```

doom 文档

`doom` 是一个用于生成文档的工具

Overview

文档概述

Directive

在文档中使用 `Directive` 指令

```
- 在 (`doc/en`) 中定义 `doc/zh` 内容

<Directive type="danger" title="警告">
  在 `doc/zh` 中定义内容
</Directive>
```

- 在 `(doc/en)` 中定义 `doc/zh` 内容

11

doc/zh

11

ExternalSite

--	--	--	--	--	--	--	--

```
<ExternalSite name="connectors" />
```

Note

DevOps DevOps

DevOps ☐ ☐ ☐ ☒

ExternalSiteLink

□ □ □ □ □ □ □ □ □ □

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" /
```

[Content ↗](#)

TIP

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```

□ □ □ □ □ □ □ □ □ □

```
<ExternalSiteLink name="connectors" href="link">
  Content {/* □□□□ `p` □□□ */}
</ExternalSiteLink>
```

□□□□□□□□ p □□□□□□□□□□□□□□□□ children □□□□

AcpApisOverview ☒ ExternalApisOverview

□□□□□ API □□□□

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

Note

[ACP APIs](#)
[ACP APIs](#)

Note

[DevOps](#)
[APIs](#)
[DevOps](#)
[APIs](#)
[↗](#)

Term

[illegible]

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
```

□□□ □□□□□□□ ACP

props

- name : □□□□□□□□□□□□□□□□
- textCase : □□□□□□□□□□□□ lower , upper , capitalize

TermsTable

```
<TermsTable />
```

id	name	parent	value	children	label
company	Alauda	-	-		Alauda
product	Alauda Container Platform	-	-		Alauda Container Platform
productShort	ACP	-	-		ACP

props

- terms : NormalizedTermItem[]

JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

```
yaml json
key: value
```

```
import CommonContent from './shared/CommonContent.mdx'
```

```
<CommonContent />
```

runtime ↗ API .jsx/.tsx .mdx

```
// shared/CommonContent.tsx
```

```
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}
```

```
// showcase/content.mdx
```

```
import { CommonContent } from './shared/CommonContent'
; <CommonContent />
```

WARNING

.mdx props issue ↗ props
.jsx/.tsx

📄📄📄

`alauda` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄
📄 `public` 📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄

`i18n.json`

`.ts/.tsx`

`.mdx`

`i18n.json`

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `docs` 📄📄📄 `i18n.json` 📄📄
📄📄📄📄📄 `useI18n` 📄📄📄📄📄📄📄📄

```
{
  "title": {
    "zh": "标题",
    "en": "Title"
  },
  "description": {
    "zh": "描述",
    "en": "description"
  }
}
```

.ts/.tsx

```
import { useI18n } from '@rspress/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

.mdx

```
import { useI18n } from '@rspress/runtime'

# {useI18n()('title')}

{useI18n()('description')}
```

API 文档

本页面提供 API 文档 API 文档 CRD (Custom Resource Definition) 文档

```
├─ apis
│   ├── advanced-apis # 高级 API
│   ├── crds # CRDs
│   └── references # 参考
```

API

- API
 - props
- CRD
 - props
- 文档
 - props
- openapi 文档

API

```
# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ
```

CodeQualityTaskSummary

props

- `path` : OpenAPI schema `paths` 下的路径
- `pathPrefix` : 路径前缀 `api.pathPrefix`
- `openapiPath` : 指向 `openapi` 的路径

CRD

```
# ArtifactCleanupRun
```

```
<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

指向 `ArtifactCleanupRun`

props

- `name` : CRD `metadata.name`
- `crdPath` : 指向 `openapi` 下的 CRD 的路径

指向

```
# CodeQuality
```

```
<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

指向 `CodeQuality`

props

- `schema` : OpenAPI schema `definitions` (v2) or `component/schemas` (v3) 下的 schema

- `openapiPath` : `openapi`

□□ **openapi** □□

```

    OpenAPIPath  OpenAPIRef  openapi  openapiPath
openapi

```

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```

权限管理

```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodules']} />
```

权限

props

权限

props

- functions: string[] - 权限资源 FunctionResource 列表

权限

权限	权限	权限 资源	权限 资源	权限 资源	权限 资源	权限 资源	权限 资源
权限 devops- testplans	权限	✓	✓	✓	✓	✓	✗
	权限	✓	✗	✓	✓	✓	✗
	权限	✓	✗	✓	✓	✓	✗
	权限	✓	✗	✓	✓	✓	✗
权限 devops-	权限	✓	✓	✓	✓	✓	✗

模块	测试	测试用例 通过	测试用例 失败	测试用例 未执行	测试用例 未通过	测试用例 未通过	测试用例 未通过
testmodules	测试	✓	✗	✓	✓	✓	✗
	测试	✓	✗	✓	✓	✓	✗
	测试	✓	✗	✓	✓	✓	✗

reference:

```

- repo: alauda-public/product-doc-guide # 
branch: # [string] 
publicBase: # [string] /images/xx.png do
sources:
  - name: anchor # 
    path: docs/index.mdx# # doom.conf
    ignoreHeading: # [boolean] true
    processors: # 
      - type: ejTemplate
        data: # ej `<%= data.xx %>` 
    frontmatterMode: merge # frontmatter ignore ign

```

frontmatterMode

- **ignore** frontmatter frontmatter
- **merge** frontmatter key
- **replace** frontmatter frontmatter
- **remove** frontmatter

```
doom build # 
doom serve # 
```

doom build dist -v

```
# ===== release-4.0 == 4.0 ==
doom build -v 4.0 # == 4.0 ===== dist/4.0===== {base}/4.0
doom build -v master # == master ===== dist/master===== {base}/master
doom build -v {other} # ===== dist/{other}===== {base}/{other}

# unversioned = unversioned-x.y =====
doom build -v unversioned # ===== dist/unversioned===== {base}
doom build -v unversioned-4.0 # ===== 4.0 ===== dist/unversio
```

□□□□□□

```
|— console-platform
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   └— versions.yaml
|— console-devops-docs
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   └— versions.yaml
|— console-tekton-docs
|   |— 1.0
|   |— 1.1
|   |— index.html
|   |— overrides.yaml
|   └— versions.yaml
```



```
# □□□□□□□□□□□□□□□□□□□□  
  
title:  
  en: Doom - Alauda  
  zh: Doom - 方块  
  
logoText:  
  en: Doom - Alauda  
  zh: Doom - 方块
```