

🐙🐙

🐙🐙

🐙🐙 `doom` 🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙

API 🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

`sites.yaml` 🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

Algolia 🐙🐙🐙🐙

Sitemap 🐙🐙

🐙🐙

🐙🐙“🐙🐙🐙🐙🐙🐙”🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙

🐙🐙

🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

`i18n.json`

`.ts/.tsx`

`.mdx`

🐙🐙🐙🐙🐙🐙

`props`

🐙🐙

Markdown

Callouts

Mermaid

MDX

🐙🐙 MDX 🐙🐙🐙🐙

rspress 🐙🐙

API 🐙🐙

K8S API

🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🌐🌐

🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐

API 🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐

frontmatterMode

🌐🌐🌐🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐

sites.yaml 🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐

Algolia 🌐🌐🌐🌐

Sitemap 🌐🌐

--	--	--	--

`yaml` `doom.config.yaml`

`doom.config.yaml` `rspress` `js/ts`

`.js/.ts/.mjs/.mts/.cjs/.cts`

```

js/ts  @alauda/doom/config  defineConfig

```

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```


- `lang` `en` `null` `undefined`
- `title`
- `logo` `public` `doom` `alauda logo`
- `logoText` `logo`
- `icon` `favicon` `logo`
- `base` `product-docs` `/`
- `outDir` `dist/{base}/{version}` `dist/{outDir}/{version}` `version`

API ☐ ☐ ☐ ☐

api:

```
# CRD 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

crds:

```
- docs/shared/crds/*.yaml
```

```
# OpenAPI 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

openapis:

```
- docs/shared/openapis/*.json
```

```
# 配置 openapi 文件
```

```
# 配置 https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQualitySpec
```

references:

```
  v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.CodeQualityBranch
```

```
# 配置 API 网关 gateway 文件
```

```
pathPrefix: /apis
```

配置 API 文件

配置 API 文件

```
# 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

permission:**functionresources:**

```
# `kubectl get functionresources`
```

```
- docs/shared/functionresources/*.yaml
```

roletemplates:

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

```
- docs/shared/roletemplates/*.yaml
```

配置 API 文件

配置 API 文件

reference:

```
- repo: alauda-public/product-doc-guide # 

```

frontmatterMode

- `ignore` 忽略 frontmatter 部分
- `merge` 将 frontmatter 中的 key 合并到文档中
- `replace` 用 frontmatter 中的内容替换文档中的内容
- `remove` 从文档中移除 frontmatter 部分

📄📄📄📄📄

📄📄📄📄📄

releaseNotes:

queryTemplates:

```
fixed: # 使用 ejs 模板
unfixed:
```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

template=fixed&project=DevOps fixed queryTemplates
query project=DevOps ej ↗ fixed jira jql
↗ https://jira.alauda.cn/rest/api/2/search?jql=<jql> API
JIRA_USERNAME JIRA_PASSWORD



```
sidebar:
  collapsed: false # oooooooooooooooooooooooooooooooooooooo false
```

--	--	--	--	--	--	--	--

```
internalRoutes: # glob docs cli -i, --ignore`
/
- '*/internal/**'
```

```
onlyIncludeRoutes: # 匹配 docs 下的 cli 子目录，忽略
                    / 下的 internalRoutes 子目录
    - '*/internal/**'
internalRoutes:
    - '*/internal/overview.mdx'
```



```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config, https://shiki.style/guide/transformers
```

WARNING

□□□□□□□□□□□□□□□□ **plaintext** □□

plaintext

`sites.yaml` ☐ ☐

sites.yaml □□□
□□□□

[illegible]

--	--	--	--



translate:

```
# =====ejs ===== `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`
# == `sourceLang` == `targetLang` == `` == `` =====
# `userPrompt` =====
# `additionalPrompts` == `frontmatter.i18n` == `additionalPrompts`
=====
# `terms` == `titleTranslationPrompt` ===== AI
=====
# =====
```

systemPrompt: |

You are a professional technical documentation engineer, skilled in writing high-quality technical documentation in <%= targetLang %>. Please accurately translate the following text from <%= sourceLang %> to <%= targetLang %>, maintaining the style consistent with technical documentation in <%= sourceLang %>.

Baseline Requirements

- Sentences should be fluent and conform to the expression habits of the <%= targetLang %> language.
- Input format is MDX; output format must also retain the original MDX format. Do not translate the names of jsx components such as <Overview />, and do not wrap output in unnecessary code blocks.
- ****CRITICAL****: Do not translate or modify ANY link content in the document. This includes:
 - **URLs in markdown links**: [text](URL) - keep URL exactly as is
 - **Reference-style links**: [text][ref] and [ref]: URL - keep both ref and URL unchanged
 - **Inline URLs**: https://example.com - keep completely unchanged
 - **Image links**: ![alt](src) - keep src unchanged, but alt text can be translated
 - **Anchor links**: [text](#anchor) - keep #anchor unchanged
 - Any href attributes in HTML tags - keep unchanged
- **Do not translate professional technical terms and proper nouns, including but not limited to**: Kubernetes, Docker, CLI, API, REST, GraphQL, JSON, YAML, Git, GitHub, GitLab, AWS, Azure, GCP, Linux, Windows, macOS, Node.js, React, Vue, Angular, TypeScript, JavaScript, Python, Java, Go, Rust, etc. Keep these terms in their original form.
- The title field and description field in frontmatter should be translated, other frontmatter fields should retain and do not translate.
- Content within MDX components needs to be translated, whereas MDX component names and parameter keys do not.
- Do not modify or translate any placeholders in the format of __ANCHOR_N

__ (where N is a number). These placeholders must be kept exactly as they appear in the source text.

- Keep original escape characters like backslash, angle brackets, etc. unchanged during translation.

- Do not add any escape characters to special characters like [], (), {}, etc. unless they were explicitly present in the source text. For example:

- If source has "Architecture [Optional]", keep it as "Architecture [Optional]" (not "Architecture \[Optional]")

- If source has "Function (param)", keep it as "Function (param)" (not "Function \ (param)")

- Only add escape characters if they were present in the original text

- Preserve and do not translate the following comments, nor modify their content:

- { /* release-notes-for-bugs */ }

- <!-- release-notes-for-bugs -->

- Remove and do not retain the following comments:

- { /* reference-start */ }

- { /* reference-end */ }

- <!-- reference-start -->

- <!-- reference-end -->

- Ensure the original Markdown format remains intact during translation, such as frontmatter, code blocks, lists, tables, etc.

- Do not translate the content of the code block.

```
<% if (titleTranslationPrompt) { %>
```

```
<%- titleTranslationPrompt %>
```

```
<% } %>
```

```
<% if (terms) { %>
```

```
<%- terms %>
```

```
<% } %>
```

```
<% if (userPrompt || additionalPrompts) { %>
```

```
## Additional Requirements
```

These are additional requirements for the translation. They should be met along with the baseline requirements, and in case of any conflict, the baseline requirements should take precedence.

The text for translation is provided below, within triple quotes:

```
"""
```

```
<% if (userPrompt) { %>
```

```
<%- userPrompt %>
```

```
<% } %>
```

```
<% if (additionalPrompts) { %>
```

```
<%- additionalPrompts %>
```

```
<% } %>
""
<% } %>
```

📄📄📄📄📄📄📄📄

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/ 📄📄📄📄
📄📄📄 -R, --edit-repo` 📄📄📄📄📄📄
```

📄📄📄📄📄📄

```
export:
  - name: Concepts # 📄📄📄📄 pdf 📄📄📄📄📄📄
    scope: '*/concepts' # 📄📄📄📄📄📄📄📄📄📄 glob 📄📄📄📄 docs 📄
```

📄📄📄📄📄📄

```
lint:
  cspellOptions: # 📄📄📄cspell 📄📄📄📄 https://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-eslint-plugin#options
```

Algolia 📄📄📄📄

```
algolia: # 📄📄📄Algolia 📄📄📄📄📄📄 -a, --algolia` 📄📄📄📄📄
appId: # Algolia 📄 ID
apiKey: # Algolia API Key
indexName: # Algolia 📄📄📄
```

📄📄📄 `public/robots.txt` 📄📄 Algolia 📄📄📄📄

📄 `rspress` 📄📄📄📄📄📄 `Algolia` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄
📄`@alauda/doom/theme` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

theme/index.ts

```
export * from '@alauda/doom/theme'
```

Sitemap 📄📄

```
siteUrl: https://docs.alauda.cn # 📄📄📄 URL📄📄📄 sitemap📄📄📄 ` -S, --site  
-url` 📄📄📄📄📄📄
```

11

```
├─ index.md
├─ start.mdx
└─ usage
    ├─ index.mdx
    └─ convention.md
```

1. `public` □□□□□□□□□□□□□□□□
2. `public/_remotes` □□□□□□□□□□□□□□□□□□□□□□□□□□□□
`*/public/_remotes` □□ `.gitignore` □□□□□□□□□□

shared

□ □ □

frontmatter

```

---
title:  ""
description:  ""
author:  ""
category:  ""
---
```

MDX

.mdx

frontmatter

11

index.md

index.mdx

frontmatter

weight

weight

[illegible][illegible]

index.mdx

Overview

#

<Overview />

Markdown

[gfm](#) Doom Markdown

Callouts

Mermaid

Callouts

Note

- ; , % , # , // , /** */ , -- <!-- -->
- [\\!code callout]
- :::callouts <div class="doom-callouts"> <Callouts>

```

```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \ # [!code callout]
 + 8 MiB × (number of vCPUs) \ # [!code callout]
 + 16 MiB × (number of graphics devices) \ # [!code callou
t]
 + (additional memory overhead) # [!code callout]
```

```

:::callouts

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
 - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

:::

```

Memory overhead per virtual machine ≈ (1.002 × requested memory) \
    + 218 MiB \ ①
    + 8 MiB × (number of vCPUs) \ ②
    + 16 MiB × (number of graphics devices) \ ③
    + (additional memory overhead) ④

```


- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.

- If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers ↗

Mermaid ↗

```
mermaid
graph TD;
  A-->B;
  A-->C;
  B-->D;
  C-->D;
```

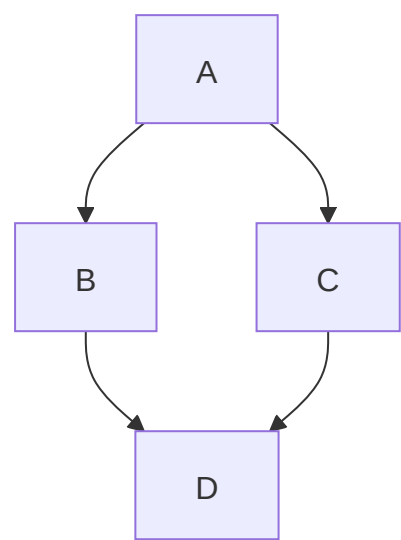

Markdown Preview Mermaid ↗ VSCode

MDX

[MDX](#)   Markdown                                      

- [Badge](#)
- [Card](#)
- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

[rspress/theme](#)

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'  
  
<SourceCode href="/" />
```

doom

[doom](#)

Overview

Directive

[Directive](#)

- 文档(`doc/en`) 文档 `doc/zh` 文档

```
<Directive type="danger" title="危险">
  文档
  `doc/zh` 文档
</Directive>
```

- 文档(doc/en) 文档 doc/zh 文档

文档

文档 doc/zh 文档

文档

ExternalSite

文档

```
<ExternalSite name="connectors" />
```

Note

文档 DevOps 文档 DevOps 文档

[DevOps 文档](#)

ExternalSiteLink

文档

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content](#)

TIP

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```

```
<ExternalSiteLink name="connectors" href="link">
  Content {/*      □□□□  `p`  □□□  */}
</ExternalSiteLink>
```

□□□□□□□□ p □□□□□□□□□□□□□□□□ children □□□□

AcpApisOverview

ExternalApisOverview

□□□□□□ API □□□□

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

Note

[ACP APIs](#)
[ACP APIs](#)

Note

[DevOps](#)
[APIs](#)
[DevOps](#)
[APIs](#)

Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```

ACP [Alauda Cloud](#)

props

- `name`:
- `textCase`: `lower` , `upper` , `capitalize`

TermsTable

```
<TermsTable />
```

company		-	Alauda	-	
product		-	Alauda Container Platform	-	
productShort	ACP	-	ACP	-	

alaudaCloudLink	Alauda Cloud ↗	-	Alauda Cloud ↗	-	-

props

- `terms`: `NormalizedTermItem[]`

JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

yamljson

```
key: value
```

`shared`

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

runtime ↗ API `.jsx/.tsx` `.mdx`

```
// shared/CommonContent.tsx
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
<CommonContent />
```

WARNING

000000 .mdx 000000000 props 000000 issue ^00000000 props 0000000
.jsx/.tsx 0000000

Docs

`alauda` Docs `en / zh` Docs
`public` Docs `en / zh` Docs

Docs

- |
- `i18n.json`
- `.ts/.tsx`
- `.mdx`

`i18n.json`

Docs `docs` Docs `i18n.json` Docs
`useI18n` Docs

docs/i18n.json

```
{
  "title": {
    "zh": "标题",
    "en": "Title"
  },
  "description": {
    "zh": "描述",
    "en": "description"
  }
}
```

.ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

.mdx

```
import { useI18n } from '@rspress/core/runtime'

# {useI18n()('title')}

{useI18n()('description')}
```

API 文档

本文档提供了关于 API 文档的 K8S API, 以及 API 以及 CRD (Custom Resource Definition) 文档的概述。

```
├─ apis
│   ├── advanced_apis # 高级 API
│   ├── crds # CRDs
│   ├── kubernetes_apis # K8S API
│   └─ references # 参考
```

目录

K8S API

props

API 文档

props

CRD (deprecated)

props

文档

props

API 文档 openapi 文档

K8S API

kubernetes_apis/workload/daemonset.mdx

```
# DaemonSet [apps/v1]

<K8sAPI
  name="io.k8s.api.apps.v1.DaemonSet"
  pathPrefix="/kubernetes/{cluster}"
/>
```

00 [DaemonSet](#)0

crds/ArtifactCleanupRun.mdx

```
# ArtifactCleanupRun

<K8sAPI name="artifactcleanupruns.artifacts.katanomi.dev" />
```

00 [ArtifactCleanupRun](#)0

props

- `name`: OpenAPI schema `definitions` (v2) or `components/schemas` (v3) 00000000
CRD `metadata.name`
- `namespaced`: 00000000000000000000 `true` 00 API Endpoints 00000000000000
`namespaces/{namespace}`
- `pathPrefix`: 0000000000000000 `api.pathPrefix`
- `filepath`: 0000 [openapi](#) 000000000000 `openapi` 0 CRD 00
- `apiGroup`: 00000 API 00 `openapi` 0000000000 `x-kubernetes-group-version-kind` 000
- `apiVersion`: 00000 API 0000CRD 000000 `spec.versions` 0000000
- `apiKind`: 00000 API 00000

00 **API**

```
advanced_apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary" />
```

简介 [CodeQualityTaskSummary](#) 简介

props

- `path`: OpenAPI schema `paths` 中的路径
- `pathPrefix`: 路径前缀 `api.pathPrefix`
- `openapiPath`: 指向 `openapi` 的路径

CRD (deprecated)

WARNING

简介 `K8sAPI` 简介 `K8sCrd` 简介 `K8sCrd` 简介

```
crds/ArtifactCleanupRun-K8sCrd.mdx

# ArtifactCleanupRun - K8sCrd

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

简介 [ArtifactCleanupRun-K8sCrd](#) 简介

props

- `name`: CRD `metadata.name`
- `crdPath`: 指向 `openapi` 的路径 `CRD` 简介

□□□□

```
references/CodeQuality.mdx

# CodeQuality

<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

□□ [CodeQuality](#)□

props

- `schema` : OpenAPI schema `definitions` (v2) or `components/schemas` (v3) □□□□□
- `openapiPath` : □□□□ [openapi](#) □□

□□ **openapi** □□

□□ `OpenAPIPath` □ `OpenAPIRef` □□□□□□□□ `openapi` □□□□□□□□□□□□□□□□□□□□
□ `openapi` □□□□□□□ `openapiPath` □□□□□

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```



```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodule  
s']} />
```

props

11

props

- `functions`: `string[]` - `FunctionResource`

	□□	□□ □□ □	□□□ □□□	□□ □□ □	□□□ □□□ □	□□ □□	□□ □□ □
□□□□	□□	✓	✓	✓	✓	✓	✗
devops- testplans	□□	✓	✗	✓	✓	✓	✗

☐ Markdown ☐☐☐☐

```
<!-- reference-end -->
```

☐ MDX ☐☐☐☐☐

```
{/* reference-end */}
```

```
<root>/public/_remotes/<name>
```

```

□□□□□ <!-- reference-start#ref --> □□□□□

```

frontmatterMode



reference:

```

- repo: alauda-public/product-doc-guide # 
  branch: # [string] 
  publicBase: # [string] /images/xx.png 
  docs/public
    sources:
      - name: anchor # 
        path: docs/index.mdx# # doom.c
onfig.* 
  ignoreHeading: # [boolean] true
  processors: # 
    - type: ejsTemplate
      data: # ejs `<%= data.xx %>` 
  frontmatterMode: merge # frontmatter ignore
ignore/merge/replace/remove

```

frontmatterMode

- **ignore** frontmatter frontmatter
- **merge** frontmatter key
- **replace** frontmatter frontmatter
- **remove** frontmatter

□ □ □ □ □ □ □ □

[illegible]

```
doom build # ████████
doom serve # ████████████████
```



```
doom build dist -v
```

```
# ===== release-4.0 == 4.0 ==
doom build -v 4.0 # == 4.0 ===== dist/4.0===== {base}/4.0
doom build -v master # == master ===== dist/master===== {base}/master
doom build -v {other} # ===== dist/{other}===== {base}/{other}

# unversioned = unversioned-x.y =====
doom build -v unversioned # ===== dist/unversioned===== {base}
doom build -v unversioned-4.0 # ===== 4.0 ===== dist/unversioned===== {base}
```

□□□□□□

```
|— console-platform
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   |— versions.yaml
|— console-devops-docs
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   |— versions.yaml
|— console-tekton-docs
|   |— 1.0
|   |— 1.1
|   |— index.html
|   |— overrides.yaml
|   |— versions.yaml
```

index.html

```
<!DOCTYPE html>
<html>
  <head>
    <title>Redirecting...</title>
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
  </head>
  <body>
    <p>Redirecting to <a href="/console-docs/4.1">/console-docs/4.1</a></p>
  </body>
</html>
```

🐛🐛🐛🐛🐛🐛🐛

overrides.yaml

```
# 🐛🐛🐛🐛🐛🐛🐛🐛
title:
  en: Doom - Alauda
  zh: Doom - 🐛🐛
logoText:
  en: Doom - Alauda
  zh: Doom - 🐛🐛
```

versions.yaml

- '4.1'
- '4.0'