

□□□□ >

Doom  [rspress](#)  Alauda                                                                                                                                  

□ □ □ □

- □□□□□□□□□□□□□□□□
- □□□□□□□□
- □□□□□

MDX ██████████ Markdown ████████ Markdown █████  
█████ React ███



0000000000 MDX 00 ↗

0000

0000000000 Doom 00

00

00

0000

000000

00



## Markdown

Callouts

Mermaid

📄📄📄

## MDX

📄 MDX 📄📄📄📄📄📄📄📄📄📄

rspress 📄

doom 📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄📄

i18n.json

.ts/.tsx

.mdx

## API 📄

📄 API

CRD

📄📄📄

📄 openapi 📄

📄📄📄📄📄

props

📄

0000

000000

00

000000000000000000000000 ACP 00

00000

00000

000000

00000000

📄📄

📄📄

📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄

📄📄📄📄📄📄

📄📄📄

📄📄 PDF



📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
mkdir my-docs && cd my-docs
```

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom:`



```
npm install -D @alauda/doom typescript
```

📄📄📄📄📄📄📄📄:

```
# 创建 docs 目录
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 文档' > docs/zh/index.md
```

在 `package.json` 中添加脚本:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

在 `doom.config.yml` 中添加:

```
title: My Docs
```

在 `tsconfig.json` 中添加:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
    "skipLibCheck": true,
    "strict": true,
    "target": "ESNext",
  },
  "mdx": {
    "checkMdx": true,
  },
}
```

global.d.ts

```
/// <reference types="@alauda/doom/runtime" />
```

.mdx doom



```
doom -h
```

```
# output
```

```
Usage: doom [options] [command]
```

```
Doctor Doom making docs.
```

### Options:

|                                |                                               |
|--------------------------------|-----------------------------------------------|
| -V, --version                  | output the version number                     |
| -c, --config <config>          | Specify the path to the config file           |
| -v <version>                   | Specify the version of the documentation, c   |
| -b, --base <base>              | Override the base of the documentation        |
| -p, --prefix <prefix>          | Specify the prefix of the documentation bas   |
| -f, --force [boolean]          | Force to                                      |
|                                | 1. fetch latest reference remotes or scaffo   |
|                                | 2. translate ignore hash equality check and   |
| -i, --ignore [boolean]         | Ignore internal routes (default: false)       |
| -d, --download [boolean]       | Display download pdf link on nav bar (defau   |
| -e, --export [boolean]         | Run or build in exporting PDF mode, `apis/*   |
| -I, --include <language...>    | Include <b>only</b> the specific language(s), |
| -E, --exclude <language...>    | Include all languages except the specific l   |
| -o, --out-dir <path>           | Override the `outDir` defined in the config   |
| -r, --redirect <enum>          | Whether to redirect to the locale closest t   |
| -R, --edit-repo [boolean url]  | Whether to enable or override the `editRepo   |
| -a, --algolia [boolean alauda] | Whether to enable or use the alauda (docs.a   |
| -S, --site-url                 | Whether to enable the siteUrl for sitemap g   |
| -n, --no-open                  | Do not open the browser after starting the    |
| -h, --help                     | display help for command                      |

### Commands:

|                                |                                            |
|--------------------------------|--------------------------------------------|
| dev [options] [root]           | Start the development server               |
| build [root]                   | Build the documentation                    |
| preview serve [options] [root] | Preview the built documentation            |
| new [template]                 | Generate scaffolding from templates        |
| translate [options] [root]     | Translate the documentation                |
| export [options] [root]        | Export the documentation as PDF, `apis/**` |
| lint [root]                    | Lint the documentation                     |
| help [command]                 | display help for command                   |

📄📄📄📄📄

📄 `yarn dev` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
doom dev -h
```

```
# output
```

```
Usage: doom dev [options] [root]
```

```
Start the development server
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -H, --host [host]                  Dev server host name
  -P, --port [port]                  Dev server port number
  -l, --lazy [boolean]                Whether to enable `lazyCompilation` which could i
  --no-lazy                           Do not enable `lazyCompilation`
  -h, --help                          display help for command
```

📄📄📄📄📄

📄 `yarn build` 📄📄📄📄📄📄📄📄📄 `dist` 📄📄📄📄📄

📄📄📄

📄 `yarn serve` 📄📄📄📄📄📄📄📄📄📄 `-b`, `-p` 📄📄📄📄📄📄📄📄 `-b`, `-p` 📄  
📄

📄📄📄📄📄

📄 `yarn new` 📄📄📄📄📄📄📄📄📄📄

📄📄📄

```
doom translate -h
```

```
# output
```

```
Usage: doom translate [options] [root]
```

```
Translate the documentation
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -s, --source <language> Document source language, one of en, zh, ru (default: en)
  -t, --target <language> Document target language, one of en, zh, ru (default: zh)
  -g, --glob <path...>    Glob patterns of source dirs/files to translate
  -C, --copy [boolean]     Whether to copy relative assets to the target directory
  -h, --help               display help for command
```

- `-g, --glob` 指定要翻译的源文件的路径模式 `glob` 模式，支持 `glob` 和 `extglob` 模式。

1. `yarn translate -g abc xyz` 指定 `<root>/<source>/abc` , `<root>/<source>/xyz` 和 `<root>/<target>/abc` , `<root>/<target>/xyz` 。

2. `yarn translate -g '*'` 指定 `<root>/<source>` 。

- `-C, --copy` 指定是否将源文件复制到目标目录，默认为 `false` 。

- 指定目标语言

1. `/<source>/abc.jpg` 指定 `<root>/public/<source>/abc.jpg` 和 `<root>/public/<target>/abc.jpg` 。

2. `<root>/<source>/abc.mdx` 指定 `./assets/xyz.jpg` 和 `<root>/<source>/assets/xyz.jpg` 和 `<root>/<target>/assets/xyz.jpg` 。

3. `<root>/<source>/abc.mdx` 指定 `./assets/<source>/xyz.jpg` 和 `<root>/<source>/assets/<source>/xyz.jpg` 和 `<root>/<target>/assets/<target>/xyz.jpg` 和 `./assets/<target>/xyz.jpg` 。

- 📄📄📄📄📄📄

1. `/<source>/abc.jpg` 📄📄📄📄 `<root>/public/<target>/abc.jpg` 📄📄📄📄📄  
📄📄📄📄📄📄 `/<target>/abc.jpg` 📄📄📄📄📄📄📄📄📄📄
2. `<root>/<source>/abc.mdx` 📄📄📄 `./assets/<source>/xyz.jpg` 📄📄📄📄  
`<root>/<target>/assets/<target>/xyz.jpg` 📄📄📄📄📄📄📄📄📄📄  
`./assets/<target>/xyz.jpg` 📄📄📄📄📄  
`../<source>/assets/<target>/xyz.jpg`

**WARNING**

📄📄📄📄📄📄 `-g '*'` 📄📄📄📄📄📄📄📄 `source` 📄 `target` 📄📄📄📄📄  
`internalRoutes` 📄📄📄📄📄📄 `target` 📄📄📄📄📄📄

**TIP**

📄📄📄📄📄📄📄 `AZURE_OPENAI_API_KEY` 📄📄📄📄📄📄📄📄 `Leader` 📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄

```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: '📄📄📄 Connectors 📄📄📄📄📄📄'
  disableAutoTranslation: false
title: DevOps 📄📄
```

📄📄📄📄📄📄📄📄📄

📄📄 **PDF**

**WARNING**

📄📄📄📄📄📄📄📄 `yarn build` 📄📄📄

```
doom export -h
```

```
# output
```

Usage: doom export [options] [root]

Export the documentation as PDF, ``apis/**`` and ``*/apis/**`` routes will be ign

### Arguments:

```
root      Root directory of the documentation
```

Options:

**-H, --host [host]** Serve host name

```
-P, --port [port]  Serve port number (default: "4173")
```

```
-h, --help      display help for command
```

yarn export PDF -b, -p -b, -p

playwright [build-harbor.alauda.cn/frontend/playwright-runner:doom](https://build-harbor.alauda.cn/frontend/playwright-runner:doom)

`.env.yarn`

```
PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmmirror.com/binaries/playwright"
```

□□□□□□□□ pdf □□□ doom □□□□□□□□ pdf □□□□□□□□□□□□□□□□

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

```
doom lint -h
```

```
# output
```

```
Usage: doom lint [options] [root]
```

```
Lint the documentation
```

```
Arguments:
```

```
  root                Root directory of the documentation
```

```
Options:
```

```
  -g, --glob <path...>  Glob patterns of source dirs/files to lint (default:
  --no-cspell             Disable cspell linting
  -h, --help             display help for command
```

```
doom lint ESLint cspell ESLint
/ CSpell
```

- `eslint.config.mjs` :

```
import doom from '@alauda/doom/eslint'

export default doom(new URL('docs', import.meta.url))
```

- `cspell.config.mjs` :

```
export { default } from '@alauda/doom/cspell'
```

```
CWD .cspell CSpell
.cspell/k8s.txt
```

```
k8s
kubernetes
```



📄

📄 `doom` 📄📄

📄📄

📄📄

API 📄📄

📄📄📄📄📄

📄📄📄

📄📄📄

📄📄📄

📄📄📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄

`sites.yaml` 📄

📄📄

📄📄📄📄📄📄

📄📄📄

📄📄📄

Algolia 📄📄

Sitemap 📄





API 00

00 API

CRD

0000

00 openapi 00

000000

props

00

0000

000000

00

00000000000000000000 ACP 00

00000

00000

000000

00000000

📄📄

📄📄

🔗🔗🔗

🔗🔗🔗

API 🔗🔗🔗

🔗🔗🔗🔗🔗🔗

🔗🔗🔗🔗🔗

frontmatterMode

🔗🔗🔗🔗🔗

🔗🔗🔗🔗

🔗🔗🔗🔗🔗🔗

🔗🔗🔗🔗🔗🔗🔗

🔗🔗🔗🔗🔗🔗

sites.yaml 🔗🔗

🔗🔗🔗🔗

🔗🔗🔗🔗🔗🔗🔗

🔗🔗🔗🔗🔗

🔗🔗🔗🔗🔗

Algolia 🔗🔗🔗🔗

Sitemap 🔗🔗

📄📄📄📄

yaml doom.config.yaml

doom.config.yaml rspress js/ts  
.js/.ts/.mjs/.mts/.cjs/.cts

js/ts @alauda/doom/config defineConfig

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```

- lang en null undefined
- title
- logo logo public doom alauda logo
- logoText logo
- icon favicon logo
- base product-docs /
- outDir dist/{base}/{version} dist/{outDir}/{version} version

API

**api:**

```
# CRD 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

**crds:**

```
- docs/shared/crds/*.yaml
```

```
# OpenAPI 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

**openapis:**

```
- docs/shared/openapis/*.json
```

```
# 配置 openapi 文件
```

```
# 配置 https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQ
```

**references:**

```
v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.C
```

```
# 配置 API 网关 gateway 文件
```

```
pathPrefix: /apis
```

配置 API 文件

配置 API 文件

```
# 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

**permission:****functionresources:**

```
# `kubectl get functionresources`
```

```
- docs/shared/functionresources/*.yaml
```

**roletemplates:**

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

```
- docs/shared/roletemplates/*.yaml
```

配置 API 文件

配置 API 文件

**reference:**

- **repo:** `alauda-public/product-doc-guide` #
- branch:** # [string]
- publicBase:** # [string] /images/xx.png do
- sources:**
  - **name:** `anchor` #
  - path:** `docs/index.mdx#` # doom.conf
  - ignoreHeading:** # [boolean] true
  - processors:** #
  - **type:** `ejsTemplate`
  - data:** # `ejs`<%= data.xx %>``
  - frontmatterMode:** `merge` # frontmatter ignore ign

**frontmatterMode**

- **ignore** frontmatter frontmatter
- **merge** frontmatter key
- **replace** frontmatter frontmatter
- **remove** frontmatter

**releaseNotes:****queryTemplates:**

**fixed:** # `ejs jql`

**unfixed:**

release-notes.md

<!-- release-notes-for-bugs?template=fixed&project=DevOps -->

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

```

template=fixed&project=DevOps  fixed  queryTemplates 
query  project=DevOps  ejc  fixed  jira  jql 
https://jira.alauda.cn/rest/api/2/search?jql=<jql>  API 
JIRA_USERNAME  JIRA_PASSWORD 

```

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

```
sidebar:
  collapsed: false # oooooooooooooooooooooooooooooooooooooo false
```

|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|

```
internalRoutes: # glob docs cli -i, --ignore`
- '*/internal/**'
```

□ □ □ □ □ □ □ □ □

```
onlyIncludeRoutes: # 匹配 glob 匹配 docs 匹配 cli 匹配 -i, --ignore` 匹配
  - '*/internal/**'

internalRoutes:
  - '*/internal/overview.mdx'
```

```
theme: # optional, https://shiki.style/themes
langs: # optional, https://shiki.style/languages
transformers: # optional, only available in js/ts config, https://shiki.sty
```

plaintext

□ □ □ □

translate:

```
# =====ejs ===== `sourceLang`, `targetLang`, `userPrompt`, `additional
#  `sourceLang`  `targetLang`  ` `  ` `
#    `userPrompt`
#    `additionalPrompts`  `frontmatter.i18n`  `additionalPrompts`
#    `terms`  `titleTranslationPrompt`  AI
# =====
```

systemPrompt: |

You are a professional technical documentation engineer, skilled in writing h

## Baseline Requirements

- Sentences should be fluent and conform to the expression habits of the <%=
- Input format is MDX; output format must also retain the original MDX format
- **\*\*CRITICAL\*\***: Do not translate or modify ANY link content in the document.
  - URLs in markdown links: [text](URL) - keep URL exactly as is
  - Reference-style links: [text][ref] and [ref]: URL - keep both ref and URL
  - Inline URLs: https://example.com - keep completely unchanged
  - Image links: ![alt](src) - keep src unchanged, but alt text can be transl
  - Anchor links: [text](#anchor) - keep #anchor unchanged
  - Any href attributes in HTML tags - keep unchanged
- Do not translate professional technical terms and proper nouns, including b
- The title field and description field in frontmatter should be translated,
- Content within MDX components needs to be translated, whereas MDX component
- Do not modify or translate any placeholders in the format of \_\_ANCHOR\_N\_\_ (
- Keep original escape characters like backslash, angle brackets, etc. unchan
- Do not add any escape characters to special characters like [], (), {}, etc
  - If source has "Architecture [Optional]", keep it as "Architecture [Option
  - If source has "Function (param)", keep it as "Function (param)" (not "Fun
  - Only add escape characters if they were present in the original text
- Preserve and do not translate the following comments, nor modify their cont
  - {/\* release-notes-for-bugs \*/}
  - <!-- release-notes-for-bugs -->
- Remove and do not retain the following comments:
  - {/\* reference-start \*/}
  - {/\* reference-end \*/}
  - <!-- reference-start -->
  - <!-- reference-end -->
- Ensure the original Markdown format remains intact during translation, such
- Do not translate the content of the code block.

<% if (titleTranslationPrompt) { %>

<%- titleTranslationPrompt %>

<% } %>

<% if (terms) { %>



```
<%- terms %>
<% } %>

<% if (userPrompt || additionalPrompts) { %>
## Additional Requirements
These are additional requirements for the translation. They should be met also

The text for translation is provided below, within triple quotes:
"""
<% if (userPrompt) { %>
<%- userPrompt %>
<% } %>

<% if (additionalPrompts) { %>
<%- additionalPrompts %>
<% } %>
"""
<% } %>
```

📄📄📄📄📄📄📄📄

**editRepoBaseUrl:** [alauda/doom/tree/main/docs](https://github.com/lauda/doom/tree/main/docs) # [https://github.com/](https://github.com/lauda/doom/tree/main/docs) 📄📄📄📄📄📄📄📄

📄📄📄📄📄📄

```
export:
- name: Concepts # 📄📄📄📄 pdf 📄📄📄📄📄📄
  scope: '*/concepts' # 📄📄📄📄📄📄📄📄📄📄 glob 📄📄📄📄 docs 📄
```

📄📄📄📄📄📄

```
lint:
  cspellOptions: # 📄cspell 📄📄📄 https://github.com/streetsidesoftware/csp
```

## Algolia 📄📄📄

```
algolia: # 📄Algolia 📄📄📄📄📄📄 -a, --algolia` 📄📄📄📄
  appId: # Algolia 📄 ID
  apiKey: # Algolia API Key
  indexName: # Algolia 📄📄
```

📄📄 public/robots.txt 📄 Algolia 📄📄📄

### INFO

📄 [rspress](#) 📄📄📄📄📄 Algolia 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
[@alauda/doom/theme](#) 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

theme/index.ts

```
export * from '@alauda/doom/theme'
```

## Sitemap 📄

```
siteUrl: https://docs.alauda.cn # 📄📄📄 URL📄📄📄 sitemap📄📄📄 -S, --site-url
```

□ □ □ □

111

11

11

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

index

index.md index.mdx

- └─ index.md
- └─ start.mdx
- └─ usage
  - └─ index.mdx
  - └─ convention.md

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

- [illegible]

🐱🐱

🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

```
---
title: 🐱
description: 🐱
author: 🐱
category: 🐱
---
```

🐱🐱🐱🐱🐱🐱 `MDX` 🐱 `.mdx` 🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱

🐱🐱

🐱 `index.md` 🐱 `index.mdx` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱  
`weight` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `weight` 🐱🐱🐱🐱🐱🐱

```
---
weight: 1
---
```

**WARNING**  
🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

🐱🐱

index.mdx Overview

```
#  
  
<Overview />
```

# Markdown

[gfm](#) [Doom](#) [Markdown](#)



## Callouts

Mermaid

□ □ □ □

## Callouts

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

## NOTE

1. `;;, %, #, //, /** */ , -- <!-- -->`
2. `[!\code callout]`
3. `:::callouts <div class="doom-callouts"> <Callouts>`

```
```sh
```

```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
    + 218 MiB \ # [\\!code callout]
    + 8 MiB × (number of vCPUs) \ # [\\!code callout]
    + 16 MiB × (number of graphics devices) \ # [\\!code callout]
    + (additional memory overhead) # [\\!code callout]
```

```
```
```

```
:::callouts
```

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.


```
:::
```

```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
    + 218 MiB \ ❶
    + 8 MiB × (number of vCPUs) \ ❷
    + 16 MiB × (number of graphics devices) \ ❸
    + (additional memory overhead) ❹
```

- ❶ Required for the processes that run in the `virt-launcher` pod.
- ❷ Number of virtual CPUs requested by the virtual machine.
- ❸ Number of virtual graphics cards requested by the virtual machine.
- ❹ Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

# Mermaid ↗

```
```mermaid
graph TD;
  A-->B;
  A-->C;
  B-->D;
  C-->D;
```
```

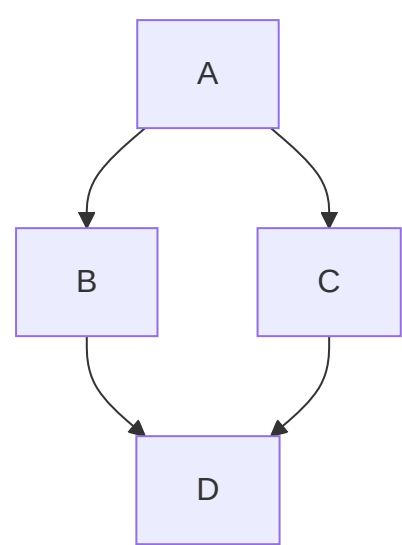

[Markdown Preview Mermaid](#) VSCode

**WARNING**

.md [issue](#)

```
{width="100" height="100"}
```





# MDX

[MDX](#) [Markdown](#) [Markdown](#) [JSX](#) [rspress MDX](#)

rspress

doom

Overview

Directive

ExternalSite

ExternalSiteLink

AcpApisOverview ExternalApisOverview

Term

props

TermsTable

props

JsonViewer

## rspress

rspress [.mdx](#)

- Badge

- [Card](#)
- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

rspress/theme 文档

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'

<SourceCode href="/" />
```

## doom 文档

doom 文档

### Overview

文档

### Directive

文档 [Directive](#) 文档

```
- 文档(`doc/en`) 文档 `doc/zh` 文档

<Directive type="danger" title="危险">
  文档
  `doc/zh` 文档
</Directive>
```

- 在 `( doc/en )` 中指定语言 `doc/zh` 以指定要使用的文档语言。

例如

在 `doc/zh` 中指定要使用的文档语言。

## ExternalSite

在文档中

```
<ExternalSite name="connectors" />
```

### Note

在 `DevOps` 文档中指定要使用的文档语言。 [DevOps 文档](#)

## ExternalSiteLink

在文档中

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content](#)

### TIP

在 `mdx` 中 `<ExternalSiteLink name="connectors" href="link" children="Content" />` 指定要使用的文档语言。

```
<ExternalSiteLink name="connectors" href="link">
  Content {/*   `p`   */}
</ExternalSiteLink>
```

p children

## AcpApisOverview ExternalApisOverview

API

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

### Note

ACP APIs [ACP APIs](#)

### Note

DevOps APIs [DevOps APIs](#)

## Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
```

ACP

props

- `name` :
- `textCase` : `lower` , `upper` , `capitalize`

## TermsTable

```
<TermsTable />
```

| company      |     | - | Alauda                    | - |  |
|--------------|-----|---|---------------------------|---|--|
| product      |     | - | Alauda Container Platform | - |  |
| productShort | ACP | - | ACP                       | - |  |

## props

- `terms` : `NormalizedTermItem[]`

## JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

```
yaml    json
key: value
```

□□□□□□□□

□□□□□□□□□□□□□□□□□□ `shared` □□□□□□□□□□□□□□□□□□

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

□□□□□□□□ `runtime` ↗ □□□ API□□□□□□ `.jsx/.tsx` □□□□□□□□ `.mdx` □□□□□□□□

```
// shared/CommonContent.tsx
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
<CommonContent />
```

## WARNING

□□□□□□ `.mdx` □□□□□□□□□□ `props` □□□□□□ issue ↗ □□□□□□□□ `props` □□□□□□□□  
`.jsx/.tsx` □□□□□□□□

📄📄📄

`alauda` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄  
📄 `public` 📄📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄

- `i18n.json`
- `.ts/.tsx`
- `.mdx`

## `i18n.json`

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `docs` 📄📄📄📄 `i18n.json` 📄📄  
📄📄📄📄📄📄 `useI18n` 📄📄📄📄📄📄📄📄📄

docs/i18n.json

```
{
  "title": {
    "zh": "📄",
    "en": "Title"
  },
  "description": {
    "zh": "📄",
    "en": "description"
  }
}
```



## .ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

## .mdx

```
import { useI18n } from '@rspress/core/runtime'

# {useI18n()('title')}

{useI18n()('description')}
```

# API 文档

API 文档 API 文档 CRD (Custom Resource Definition) 文档

```
├─ apis
│   ├── advanced-apis # API
│   ├── crds # CRDs
│   └── references # 文档
```

文档

API

props

CRD

props

文档

props

openapi 文档

## API

advanced-apis/codeQualityTaskSummary.mdx

```
# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ
```

CodeQualityTaskSummary

props

- path : OpenAPI schema paths
- pathPrefix : api.pathPrefix
- openapiPath : openapi

CRD

crds/ArtifactCleanupRun.mdx

```
# ArtifactCleanupRun

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

ArtifactCleanupRun

props

- name : CRD metadata.name
- crdPath : openapi CRD

references/CodeQuality.mdx

# CodeQuality

```
<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

仕様 [CodeQuality](#) 仕様

## props

- `schema` : OpenAPI schema `definitions` (v2) or `component/schemas` (v3) 参照
- `openapiPath` : 参照 [openapi](#) 仕様

## 仕様 `openapi` 仕様

仕様 `OpenAPIPath` 仕様 `OpenAPIRef` 参照 `openapi` 参照

仕様 `openapi` 参照 `openapiPath` 参照

```
<OpenAPIPath  
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"  
  openapiPath="shared/openapis/katanomi.json"  
>
```

权限管理

```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodules']} />
```

权限

props

权限

props

- functions: string[] - 权限资源 FunctionResource 列表

权限

| 权限                         | 权限 | 权限<br>名称 | 权限<br>名称 | 权限<br>名称 | 权限<br>名称 | 权限<br>名称 | 权限<br>名称 |
|----------------------------|----|----------|----------|----------|----------|----------|----------|
| 权限<br>devops-<br>testplans | 权限 | ✓        | ✓        | ✓        | ✓        | ✓        | ✗        |
|                            | 权限 | ✓        | ✗        | ✓        | ✓        | ✓        | ✗        |
|                            | 权限 | ✓        | ✗        | ✓        | ✓        | ✓        | ✗        |
|                            | 权限 | ✓        | ✗        | ✓        | ✓        | ✓        | ✗        |

| 测试用例                           | 测试用例 | 测试用例         | 测试用例         | 测试用例         | 测试用例         | 测试用例         | 测试用例         |
|--------------------------------|------|--------------|--------------|--------------|--------------|--------------|--------------|
| 测试用例<br>devops-<br>testmodules | 测试用例 | 测试用例<br>测试用例 | 测试用例<br>测试用例 | 测试用例<br>测试用例 | 测试用例<br>测试用例 | 测试用例<br>测试用例 | 测试用例<br>测试用例 |
|                                | 测试用例 | ✓            | ✓            | ✓            | ✓            | ✓            | ✗            |
|                                | 测试用例 | ✓            | ✗            | ✓            | ✓            | ✓            | ✗            |
|                                | 测试用例 | ✓            | ✗            | ✓            | ✓            | ✓            | ✗            |
|                                | 测试用例 | ✓            | ✗            | ✓            | ✓            | ✓            | ✗            |

☐ Markdown ☐☐☐☐

```
<!-- reference-end -->
```

```
{/* reference-end */}
```

```
□□□□□□ <root>/public/_remotes/<name> □□□□
```

```
□□□□□ <!-- reference-start#ref --> □□□□□
```

11

frontmatterMode

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

**reference:**

```

- repo: alauda-public/product-doc-guide # 
branch: # [string] 
publicBase: # [string] /images/xx.png do
sources:
  - name: anchor # 
    path: docs/index.mdx# # doom.conf
    ignoreHeading: # [boolean] true
    processors: # 
      - type: ejTemplate
        data: # ejs `<%= data.xx %>` 
    frontmatterMode: merge # frontmatter ignore ign

```

**frontmatterMode**

- **ignore** frontmatter frontmatter
- **merge** frontmatter key
- **replace** frontmatter frontmatter
- **remove** frontmatter



```
doom build # 
doom serve # 
```

doom build dist -v

```
# ===== release-4.0 == 4.0 ==
doom build -v 4.0 # == 4.0 ===== dist/4.0===== {base}/4.0
doom build -v master # == master ===== dist/master===== {base}/master
doom build -v {other} # ===== dist/{other}===== {base}/{other}

# unversioned = unversioned-x.y =====
doom build -v unversioned # ===== dist/unversioned===== {base}
doom build -v unversioned-4.0 # ===== 4.0 ===== dist/unversio
```

□□□□□□

```
|— console-platform
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   └— versions.yaml
|— console-devops-docs
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   └— versions.yaml
|— console-tekton-docs
|   |— 1.0
|   |— 1.1
|   |— index.html
|   |— overrides.yaml
|   └— versions.yaml
```

index.html

```
<!DOCTYPE html>
<html>
  <head>
    <title>Redirecting...</title>
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
  </head>
  <body>
    <p>Redirecting to <a href="/console-docs/4.1">/console-docs/4.1</a></p>
  </body>
</html>
```

🐞🐞🐞🐞🐞🐞🐞

#### overrides.yaml

```
# 🐞🐞🐞🐞🐞🐞🐞🐞
title:
  en: Doom - Alauda
  zh: Doom - 🐞🐞
logoText:
  en: Doom - Alauda
  zh: Doom - 🐞🐞
```

#### versions.yaml

```
- '4.1'
- '4.0'
```