

🐙🐙

🐙🐙

🐙🐙 `doom` 🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙

API 🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

`sites.yaml` 🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

Algolia 🐙🐙🐙🐙

Sitemap 🐙🐙

🐙🐙

🐙🐙“🐙🐙🐙🐙🐙🐙”🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙

🐙🐙

🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

`i18n.json`

`.ts/.tsx`

`.mdx`

🐙🐙🐙🐙🐙🐙

`props`

🐙🐙

Markdown

Callouts

Mermaid

MDX

🐙🐙 MDX 🐙🐙🐙🐙

rspress 🐙🐙

API 🐙🐙

K8S API

🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

📄📄

📄📄

|

📄📄📄📄	
📄📄📄📄	
API 📄📄📄📄	
📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄	
frontmatterMode	
📄📄📄📄📄📄	
📄📄📄📄📄	
📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄📄📄	
sites.yaml	📄📄
📄📄📄📄	
📄📄📄📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄	
📄📄📄📄📄📄	
Algolia 📄📄📄📄	
Sitemap 📄📄	

--	--	--	--

```

    1  yaml  doom.config.yaml
    2  doom.config.yaml  rspress  js/ts
    3  .js/.ts/.mjs/.mts/.cjs/.cts

```

```

js/ts  @alauda/doom/config  defineConfig

```

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```


- `lang` `en` `null` `undefined`
- `title`
- `logo` `public` `doom` `alauda logo`
- `logoText` `logo`
- `icon` `favicon` `logo`
- `base` `product-docs` `/`
- `outDir` `dist/{base}/{version}` `dist/{outDir}/{version}` `version`

API ☐ ☐ ☐ ☐

api:

```
# CRD 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

crds:

```
- docs/shared/crds/*.yaml
```

```
# OpenAPI 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

openapis:

```
- docs/shared/openapis/*.json
```

```
# 配置 openapi 文件
```

```
# 配置 https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQualitySpec
```

references:

```
  v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.CodeQualityBranch
```

```
# 配置 API 网关 gateway 文件
```

```
pathPrefix: /apis
```

配置 API 文件

配置 API 文件

```
# 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

permission:**functionresources:**

```
# `kubectl get functionresources`
```

```
- docs/shared/functionresources/*.yaml
```

roletemplates:

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

```
- docs/shared/roletemplates/*.yaml
```

配置 API 文件

配置 API 文件

reference:

```

- repo: alauda-public/product-doc-guide # 
  branch: # [string] 
  publicBase: # [string] /images/xx.png 
  docs/public
    sources:
      - name: anchor # 
        path: docs/index.mdx# # doom.c
onfig.*
  ignoreHeading: # [boolean] true
  processors: # 
    - type: ejsTemplate
      data: # ejs `<%= data.xx %>` 
      frontmatterMode: merge # frontmatter ignore
ignore/merge/replace/remove

```

frontmatterMode

- ignore** frontmatter frontmatter
- merge** frontmatter key
- replace** frontmatter frontmatter
- remove** frontmatter

releaseNotes:**queryTemplates:**

```

fixed: # ejs jql 
unfixed:

```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

template=fixed&project=DevOps fixed queryTemplates
query project=DevOps ej^s fixed jira jql
https://jira.alauda.cn/rest/api/2/search?jql=<jql> API
JIRA_USERNAME JIRA_PASSWORD



```
sidebar:
  collapsed: false # oooooooooooooooooooooooooooooooooooooo false
```

--	--	--	--	--	--	--	--

```
internalRoutes: # 00000 glob 00000 docs 0000 cli 00 -i, --ignore` 0000
0000/000000
- '*/internal/**'
```

```
onlyIncludeRoutes: # 匹配 docs 下的 cli 子目录，忽略
  /internalRoutes
  - '*/internal/**'
internalRoutes:
  - '*/internal/overview.mdx'
```



```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config, https://shiki.style/guide/transformers
```

WARNING

plaintext

sites.yaml

sites.yaml □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□

```
- name: connectors # 
base: /devops-connectors # 
version: v1.1 # ExternalSite/ExternalSiteLink 

displayName: #  name
    en: DevOps Connectors
    zh: DevOps 

# 
# 
repo: https://github.com/AlaudaDevops/connectors-operator # 
gitlab slug `alauda/product-docs`
image: devops/connectors-docs # 
```

--	--	--	--



translate:

```
# =====ejs ===== `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`
# == `sourceLang` == `targetLang` == `` == `` =====
# `userPrompt` =====
# `additionalPrompts` == `frontmatter.i18n` == `additionalPrompts`
=====
# `terms` == `titleTranslationPrompt` ===== AI
=====
# =====
```

systemPrompt: |

You are a professional technical documentation engineer, skilled in writing high-quality technical documentation in <%= targetLang %>. Please accurately translate the following text from <%= sourceLang %> to <%= targetLang %>, maintaining the style consistent with technical documentation in <%= sourceLang %>.

Baseline Requirements

- Sentences should be fluent and conform to the expression habits of the <%= targetLang %> language.
- Input format is MDX; output format must also retain the original MDX format. Do not translate the names of jsx components such as <Overview />, and do not wrap output in unnecessary code blocks.
- ****CRITICAL****: Do not translate or modify ANY link content in the document. This includes:
 - **URLs in markdown links**: [text](URL) - keep URL exactly as is
 - **Reference-style links**: [text][ref] and [ref]: URL - keep both ref and URL unchanged
 - **Inline URLs**: https://example.com - keep completely unchanged
 - **Image links**: ![alt](src) - keep src unchanged, but alt text can be translated
 - **Anchor links**: [text](#anchor) - keep #anchor unchanged
 - Any href attributes in HTML tags - keep unchanged
- **Do not translate professional technical terms and proper nouns, including but not limited to**: Kubernetes, Docker, CLI, API, REST, GraphQL, JSON, YAML, Git, GitHub, GitLab, AWS, Azure, GCP, Linux, Windows, macOS, Node.js, React, Vue, Angular, TypeScript, JavaScript, Python, Java, Go, Rust, etc. Keep these terms in their original form.
- The title field and description field in frontmatter should be translated, other frontmatter fields should retain and do not translate.
- Content within MDX components needs to be translated, whereas MDX component names and parameter keys do not.
- Do not modify or translate any placeholders in the format of __ANCHOR_N

__ (where N is a number). These placeholders must be kept exactly as they appear in the source text.

- Keep original escape characters like backslash, angle brackets, etc. unchanged during translation.

- Do not add any escape characters to special characters like [], (), {}, etc. unless they were explicitly present in the source text. For example:

- If source has "Architecture [Optional]", keep it as "Architecture [Optional]" (not "Architecture \[Optional]")

- If source has "Function (param)", keep it as "Function (param)" (not "Function \ (param)")

- Only add escape characters if they were present in the original text

- Preserve and do not translate the following comments, nor modify their content:

- { /* release-notes-for-bugs */ }

- <!-- release-notes-for-bugs -->

- Remove and do not retain the following comments:

- { /* reference-start */ }

- { /* reference-end */ }

- <!-- reference-start -->

- <!-- reference-end -->

- Ensure the original Markdown format remains intact during translation, such as frontmatter, code blocks, lists, tables, etc.

- Do not translate the content of the code block.

```
<% if (titleTranslationPrompt) { %>
```

```
<%- titleTranslationPrompt %>
```

```
<% } %>
```

```
<% if (terms) { %>
```

```
<%- terms %>
```

```
<% } %>
```

```
<% if (userPrompt || additionalPrompts) { %>
```

```
## Additional Requirements
```

These are additional requirements for the translation. They should be met along with the baseline requirements, and in case of any conflict, the baseline requirements should take precedence.

The text for translation is provided below, within triple quotes:

```
"""
```

```
<% if (userPrompt) { %>
```

```
<%- userPrompt %>
```

```
<% } %>
```

```
<% if (additionalPrompts) { %>
```

```
<%- additionalPrompts %>
```

```
<% } %>
""
<% } %>
```

📄📄📄📄📄📄📄📄

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/ 📄📄📄📄
📄📄📄 -R, --edit-repo` 📄📄📄📄📄📄
```

📄📄📄📄📄📄

```
export:
  - name: Concepts # 📄📄📄📄 pdf 📄📄📄📄📄📄
    scope: '*/concepts' # 📄📄📄📄📄📄📄📄📄📄 glob 📄📄📄📄 docs 📄
```

📄📄📄📄📄📄

```
lint:
  cspellOptions: # 📄📄📄cspell 📄📄📄📄 https://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-eslint-plugin#options
```

Algolia 📄📄📄📄

```
algolia: # 📄📄📄Algolia 📄📄📄📄📄📄 -a, --algolia` 📄📄📄📄📄
appId: # Algolia 📄 ID
apiKey: # Algolia API Key
indexName: # Algolia 📄📄📄
```

📄📄📄 `public/robots.txt` 📄📄 Algolia 📄📄📄📄

📄 `rspress` 📄📄📄📄📄📄 `Algolia` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄
📄`@alauda/doom/theme` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

theme/index.ts

```
export * from '@alauda/doom/theme'
```

Sitemap 📄📄

```
siteUrl: https://docs.alauda.cn # 📄📄📄📄📄📄 URL📄📄📄📄📄📄 sitemap📄📄📄📄📄📄 ` -S, --site  
-url` 📄📄📄📄📄📄📄📄📄📄
```

11

```
├─ index.md
├─ start.mdx
└─ usage
    ├── index.mdx
    └─ convention.md
```

1. `public` □□□□□□□□□□□□□□□□
2. `public/_remotes` □□□□□□□□□□□□□□□□□□□□□□□□□□□□
`*/public/_remotes` □□ `.gitignore` □□□□□□□□□□

shared

frontmatter

MDX

frontmatter

index.md

index.mdx

frontmatter

weight

weight

index.mdx

Overview

#

<Overview />

Markdown

[gfm](#) Doom Markdown

Callouts

Mermaid

Callouts

Note

- ; , % , # , // , /** */ , -- <!-- -->
- [\\!code callout]
- :::callouts <div class="doom-callouts"> <Callouts>

```

```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \ # [!code callout]
 + 8 MiB × (number of vCPUs) \ # [!code callout]
 + 16 MiB × (number of graphics devices) \ # [!code callou
t]
 + (additional memory overhead) # [!code callout]
```

```

:::callouts

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IO V) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
 - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

:::

```

Memory overhead per virtual machine ≈ (1.002 × requested memory) \
    + 218 MiB \ ①
    + 8 MiB × (number of vCPUs) \ ②
    + 16 MiB × (number of graphics devices) \ ③
    + (additional memory overhead) ④

```


- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.

- If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers ↗

Mermaid ↗

```
mermaid
graph TD;
    A-->B;
    A-->C;
    B-->D;
    C-->D;
```

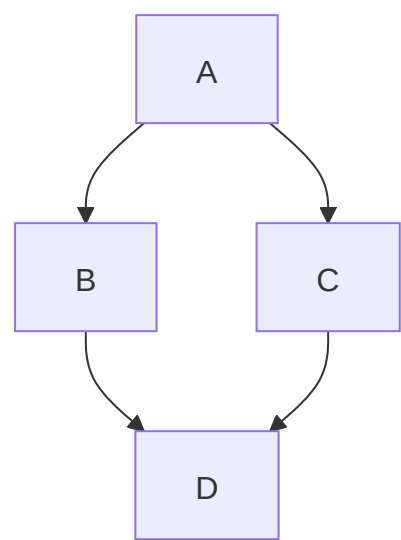

Markdown Preview Mermaid ↗ VSCode

MDX `Markdown` `Markdown` `JSX` `rspress MDX`

[illegible]

- [Badge](#)
- [Card](#)
- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

[rspress/theme](#)

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'  
  
<SourceCode href="/" />
```

doom

[doom](#)

Overview

Directive

[Directive](#)

- 文档(`doc/en`) 文档 `doc/zh`

```
<Directive type="danger" title="危险">
  危险
  `doc/zh`
</Directive>
```

- 文档(doc/en) 文档 doc/zh 文档

危险

文档 doc/zh 文档

ExternalSite

文档

```
<ExternalSite name="connectors" />
```

Note

文档 DevOps 文档 DevOps 文档
[DevOps 文档](#)

ExternalSiteLink

文档

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content](#)

TIP

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```

```
<ExternalSiteLink name="connectors" href="link">
  Content {/*      □□□□  `p`  □□□  */}
</ExternalSiteLink>
```

□ □ □ □ □ □ □ □ □ □ p □ children □ □ □ □

AcpApisOverview ☐ **ExternalApisOverview**

□□□□□□ API □□□□

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

Note

ACP APIs [ACP APIs](#)

Note

[📄 DevOps](#)
[📄 APIs](#)
[📄 DevOps](#)
[📄 APIs](#)
[📄](#)

Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```

ACP [Alauda Cloud](#)

props

- `name`:
- `textCase`: `lower` , `upper` , `capitalize`

TermsTable

```
<TermsTable />
```

company		-	Alauda	-	
product		-	Alauda Container Platform	-	
productShort	ACP	-	ACP	-	

alaudaCloudLink	Alauda Cloud ↗	-	Alauda Cloud ↗	-	-

props

- `terms`: `NormalizedTermItem[]`

JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

yamljson

```
key: value
```

`shared`

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

runtime ↗ API .jsx/.tsx .mdx

```
// shared/CommonContent.tsx
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
<CommonContent />
```

WARNING

When using `.mdx` files, you must pass `props` to the `issue` component. This is because the `props` are not passed to the `.jsx/.tsx` files.

Docs

`alauda` Docs `en / zh` Docs
`public` Docs `en / zh` Docs

Docs

- |
- `i18n.json`
- `.ts/.tsx`
- `.mdx`

`i18n.json`

Docs `docs` Docs `i18n.json` Docs
`useI18n` Docs

docs/i18n.json

```
{
  "title": {
    "zh": "标题",
    "en": "Title"
  },
  "description": {
    "zh": "描述",
    "en": "description"
  }
}
```

.ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

.mdx

```
import { useI18n } from '@rspress/core/runtime'

# {useI18n()('title')}

{useI18n()('description')}
```

API 文档

本文档提供了关于 API 文档的 K8S API, 以及 API 以及 CRD (Custom Resource Definition) 文档的概述。

```
├─ apis
│   ├── advanced_apis # 高级 API
│   ├── crds # CRDs
│   ├── kubernetes_apis # K8S API
│   └─ references # 参考
```

目录

K8S API

props

API 文档

props

CRD (deprecated)

props

文档

props

API 文档 openapi 文档

K8S API

kubernetes_apis/workload/daemonset.mdx

```
# DaemonSet [apps/v1]

<K8sAPI
  name="io.k8s.api.apps.v1.DaemonSet"
  pathPrefix="/kubernetes/{cluster}"
/>
```

🔗 [DaemonSet](#)

crds/ArtifactCleanupRun.mdx

```
# ArtifactCleanupRun

<K8sAPI name="artifactcleanupruns.artifacts.katanomi.dev" />
```

🔗 [ArtifactCleanupRun](#)

props

- `name`: OpenAPI schema `definitions` (v2) or `components/schemas` (v3) 中定义的 CRD `metadata.name`
- `namespaced`: 是否命名空间化 `true` 则 API Endpoints 为 `namespaces/{namespace}`
- `pathPrefix`: 路径前缀 `api.pathPrefix`
- `filepath`: 文件路径 `openapi` 文件 `openapi` 中 CRD 的
- `apiGroup`: API 组 `openapi` 中 `x-kubernetes-group-version-kind` 的
- `apiVersion`: API 版本 `CRD` 的 `spec.versions` 中的
- `apiKind`: API 的

🔗 [API](#)

```
advanced_apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ
```

CodeQualityTaskSummary

props

- path: OpenAPI schema paths
- pathPrefix: api.pathPrefix
- openapiPath: openapi

CRD (deprecated)

WARNING
K8sAPI K8sCrd K8sCrd

```
crds/ArtifactCleanupRun-K8sCrd.mdx

# ArtifactCleanupRun - K8sCrd

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

ArtifactCleanupRun-K8sCrd

props

- name: CRD metadata.name
- crdPath: openapi CRD

□□□□

```
references/CodeQuality.mdx

# CodeQuality

<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

□□ [CodeQuality](#)□

props

- `schema` : OpenAPI schema `definitions` (v2) or `components/schemas` (v3) □□□□□□
- `openapiPath` : □□□□ [openapi](#) □□

□□ **openapi** □□

□□ `OpenAPIPath` □ `OpenAPIRef` □□□□□□□□□□ `openapi` □□□□□□□□□□□□□□□□□□□□
□ `openapi` □□□□□□□□ `openapiPath` □□□□□□

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```


权限管理

```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodule  
s']} />
```

权限

props

权限

props

- functions: string[] - 权限资源 FunctionResource 权限资源

权限

权限	权限	权限 权限	权限 权限	权限 权限	权限 权限	权限 权限	权限 权限
权限	权限	✓	✓	✓	✓	✓	×
devops- testplans	权限	✓	×	✓	✓	✓	×

测试用例	测试用例ID	测试用例名称	测试用例描述	测试用例步骤	测试用例预期结果	测试用例实际结果	测试用例通过/失败
测试用例	001	测试用例001	测试用例001描述	测试用例001步骤	测试用例001预期结果	测试用例001实际结果	测试用例001通过/失败
	002	测试用例002	测试用例002描述	测试用例002步骤	测试用例002预期结果	测试用例002实际结果	测试用例002通过/失败
	003	测试用例003	测试用例003描述	测试用例003步骤	测试用例003预期结果	测试用例003实际结果	测试用例003通过/失败
	004	测试用例004	测试用例004描述	测试用例004步骤	测试用例004预期结果	测试用例004实际结果	测试用例004通过/失败
	005	测试用例005	测试用例005描述	测试用例005步骤	测试用例005预期结果	测试用例005实际结果	测试用例005通过/失败
	006	测试用例006	测试用例006描述	测试用例006步骤	测试用例006预期结果	测试用例006实际结果	测试用例006通过/失败
	007	测试用例007	测试用例007描述	测试用例007步骤	测试用例007预期结果	测试用例007实际结果	测试用例007通过/失败

reference:

```

- repo: alauda-public/product-doc-guide # 
  branch: # [string] 
  publicBase: # [string] /images/xx.png 
  docs/public
    sources:
      - name: anchor # 
        path: docs/index.mdx# # doom.c
onfig.*
  ignoreHeading: # [boolean] true
  processors: # 
    - type: ejsTemplate
      data: # ejs `<%= data.xx %>` 
    frontmatterMode: merge # frontmatter ignore
ignore/merge/replace/remove

```

frontmatterMode

- **ignore** frontmatter frontmatter
- **merge** frontmatter key
- **replace** frontmatter frontmatter
- **remove** frontmatter

[frontmatterMode](#)

```
doom build # 
doom serve # 
```

`doom build` `dist` `-v`

```
# ===== release-4.0 == 4.0 ==
doom build -v 4.0 # == 4.0 ===== dist/4.0===== {base}/4.0
doom build -v master # == master ===== dist/master===== {base}/master
doom build -v {other} # ===== dist/{other}===== {base}/{other}

# unversioned = unversioned-x.y =====
doom build -v unversioned # ===== dist/unversioned===== {base}
doom build -v unversioned-4.0 # ===== 4.0 ===== dist/unversioned===== {base}
```

□□□□□□

```
|— console-platform
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   |— versions.yaml
|— console-devops-docs
|   |— 4.0
|   |— 4.1
|   |— index.html
|   |— overrides.yaml
|   |— versions.yaml
|— console-tekton-docs
|   |— 1.0
|   |— 1.1
|   |— index.html
|   |— overrides.yaml
|   |— versions.yaml
```

index.html

```
<!DOCTYPE html>
<html>
  <head>
    <title>Redirecting...</title>
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
  </head>
  <body>
    <p>Redirecting to <a href="/console-docs/4.1">/console-docs/4.1</a></p>
  </body>
</html>
```

🌑🌑🌑🌑🌑🌑🌑

overrides.yaml

```
# 🌑🌑🌑🌑🌑🌑🌑🌑🌑
title:
  en: Doom - Alauda
  zh: Doom - 🌑🌑
logoText:
  en: Doom - Alauda
  zh: Doom - 🌑🌑
```

versions.yaml

```
- '4.1'
- '4.0'
```