

Doom [rspress](#) Alauda

11

[illegible]



MDX

Doom

Markdown

Callouts

0000

0000

API 0000

000000000

0000000

0000000

000000

000000000

0000000000

000000000

sites.yaml
 00

0000

0000000000

0000000

0000000

Algolia 0000

Sitemap 00

0000

000

00

00

000

0000000000000000

i18n.json

.ts/.tsx

.mdx

0000000

props

00

Mermaid

MDX

00 MDX 0000

rspress 00

API 00

K8S API

0000

0000000

00

00000000000

000000

000000

0000000

000000000

📄📄

📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄

📄📄📄📄📄📄

📄📄📄

📄📄 PDF

📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
mkdir my-docs && cd my-docs
```

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom`:

 npm

 yarn

 pnpm

 bun

 deno

```
npm install -D @alauda/doom typescript
```

创建文档目录:

```
# 创建 docs 目录
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 文档' > docs/zh/index.md
```

在 `package.json` 中添加:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

[Show more](#)

在 `doom.config.yml` 中添加:

```
title: My Docs
```

在 `tsconfig.json` 中添加:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
  }
}
```

[Show more](#)

📄📄📄 `global.d.ts` 📄📄📄📄📄📄

```
/// <reference types="@alauda/doom/runtime" />
```

📄📄📄📄📄 `.mdx` 📄📄📄📄📄📄📄 **doom** 📄📄📄📄📄📄📄

📄📄📄📄📄

```
doom -h

# output
Usage: doom [options] [command]

Doctor Doom making docs.

Options:
```

Show more ▾

📄📄📄📄📄📄📄

📄📄📄📄📄📄

📄 `yarn dev` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
doom dev -h

# output
Usage: doom dev [options] [root]

Start the development server

Arguments:
```

Show more ▾

🔒🔒🔒🔒🔒🔒

🔒🔒 `yarn build` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒 `dist` 🔒🔒🔒🔒🔒🔒

🔒🔒🔒🔒

🔒🔒 `yarn serve` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒 `-b`, `-p` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒 `-b`, `-p`
🔒🔒

🔒🔒🔒🔒🔒🔒🔒

🔒🔒 `yarn new` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒

🔒🔒🔒🔒

```
doom translate -h
```

output

```
Usage: doom translate [options] [root]
```

Translate the documentation

Arguments:

Show more ▾

- `-g, --glob` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒 `glob` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒
🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒
- 1. `yarn translate -g abc xyz` 🔒🔒 `<root>/<source>/abc`, `<root>/<source>/xyz`
🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒 `<root>/<target>/abc`, `<root>/<target>/xyz` 🔒🔒
- 2. `yarn translate -g '*'` 🔒🔒 `<root>/<source>` 🔒🔒🔒🔒🔒🔒
- `-C, --copy` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒 `false` 🔒🔒🔒
🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒
- 🔒🔒🔒🔒🔒

1. `/<source>/abc.jpg` 000000 `<root>/public/<source>/abc.jpg` 0
`<root>/public/<target>/abc.jpg` 0000000000000000 `/<target>/abc.jpg`
2. `<root>/<source>/abc.mdx` 0000 `./assets/xyz.jpg` 000000
`<root>/<source>/assets/xyz.jpg` 0 `<root>/<target>/assets/xyz.jpg` 0000
00000000
3. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000
`<root>/<source>/assets/<source>/xyz.jpg` 0
`<root>/<target>/assets/<target>/xyz.jpg` 0000000000000000
`./assets/<target>/xyz.jpg`

• 0000000000

1. `/<source>/abc.jpg` 00000 `<root>/public/<target>/abc.jpg` 0000000000
00000000 `/<target>/abc.jpg` 000000000000000000
2. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000
`<root>/<target>/assets/<target>/xyz.jpg` 000000000000000000
`./assets/<target>/xyz.jpg` 00000000
`../<source>/assets/<target>/xyz.jpg`

WARNING

0000000000 `-g '*'` 00000000000000 `source` 0 `target` 0000000000 `internalRoutes`
00000000 `target` 0000000000

TIP

000000000000 `AZURE_OPENAI_API_KEY` 00000000000000 `Leader` 00

0000000000000000000000


```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: '🔒🔒🔒 Connectors 🔒🔒🔒🔒🔒🔒'
  disableAutoTranslation: false
title: DevOps 🔒🔒
```

🔒🔒🔒🔒🔒🔒🔒🔒🔒

🔒🔒 PDF

WARNING

🔒🔒🔒🔒🔒🔒🔒🔒🔒 `yarn build` 🔒🔒🔒

```
doom export -h

# output
Usage: doom export [options] [root]

Export the documentation as PDF, `apis/**` and `*/apis/**` routes will be
ignored automatically
```

Show more ▾

🔒 `yarn export` 🔒🔒🔒 PDF 🔒🔒🔒🔒🔒🔒 `-b`, `-p` 🔒🔒🔒🔒🔒🔒🔒🔒 `-b`, `-p` 🔒

🔒🔒🔒🔒 `playwright` ➡ 🔒🔒🔒🔒 `build-harbor.alauda.cn/frontend/playwright-runner:doom` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒

`.env.yarn`

`PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmmirror.com/binaries/playwright"`

--	--	--	--

```
doom lint -h
```

output

```
Usage: doom lint [options] [root]
```

Lint the documentation

Arguments:

Show more ▾

`doom lint` `ESLint` `cspell`

[ESLint](#) / [CSpell](#):

- `eslint.config.mjs` :

```
import doom from '@alauda/doom/eslint'

export default doom(new URL('docs', import.meta.url))
```

- `cspell.config.mjs` :

```
export { default } from '@alauda/doom/cspell'
```

□□□□□□□□□□ CWD □□ .cspell □□□□□□ CSpell □□□□□□□□□□□□
□□□□□□□□□□ .cspell/k8s.txt □

k8s
kubernetes

🐙🐙

🐙🐙

🐙🐙 `doom` 🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙

API 🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

`sites.yaml` 🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

Algolia 🐙🐙🐙🐙

Sitemap 🐙🐙

🐙🐙

🐙🐙“🐙🐙🐙🐙🐙🐙”🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙

🐙🐙

🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

`i18n.json`

`.ts/.tsx`

`.mdx`

🐙🐙🐙🐙🐙🐙

`props`

🐙🐙

Markdown

Callouts

Mermaid

MDX

🐙🐙 MDX 🐙🐙🐙🐙

rspress 🐙🐙

API 🐙🐙

K8S API

🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

📄📄

📄📄

|

📄📄📄📄	
📄📄📄📄	
API 📄📄📄📄	
📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄	
frontmatterMode	
📄📄📄📄📄📄	
📄📄📄📄📄	
📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄📄	
sites.yaml	📄📄
📄📄📄📄	
📄📄📄📄📄📄📄📄📄📄📄	
📄📄📄📄📄📄	
📄📄📄📄📄📄	
Algolia 📄📄📄📄	
Sitemap 📄📄	

--	--	--	--

```
doom.config.yaml |> rspec |> js/ts |>  
| .js/.ts/.mjs/.mts/.cjs/.cts
```

```

js/ts  @alauda/doom/config  defineConfig

```

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```


- `lang` `en` `null` `undefined`
- `title`
- `logo` `public` `doom` `alauda logo`
- `logoText` `logo`
- `icon` `favicon` `logo`
- `base` `product-docs` `/`
- `outDir` `dist/{base}/{version}` `dist/{outDir}/{version}` `version`

API ☐ ☐ ☐ ☐

api:

```
# CRD 0000000000 doom.config.* 00000000 glob 000json/yaml 00
```

crds:

- docs/shared/crds/*.yaml

```
# OpenAPI  doom.config.*  glob  json/yaml  
```

openapis:

- docs/shared/openapis/*.json

```
# openapi
```

Show more ▾

API



```
# doom.config.* glob json/yaml
```

```
permission:
```

functionresources:

```
# `kubectl get functionresources`
```

- docs/shared/functionresources/*.yaml

roletemplates:

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

- docs/shared/roletemplates/*.yaml

--	--	--	--	--	--

reference:

```
- repo: alauda-public/product-doc-guide #   
  
  branch: # [string]   
  publicBase: # [string] /images/xx.png   
  docs/public  
    sources:  
      - name: anchor # 
```

Show more ▾

frontmatterMode

- ignore frontmatter frontmatter
- merge frontmatter key
- replace frontmatter frontmatter
- remove frontmatter

releaseNotes:

queryTemplates:

```
fixed: #  ejs  jql   
unfixed:
```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```


template=fixed&project=DevOps fixed queryTemplates
query project=DevOps ej ↗ fixed jira jql
↗ https://jira.alauda.cn/rest/api/2/search?jql=<jql> API
JIRA_USERNAME JIRA_PASSWORD

```
sidebar:
  collapsed: false # false
```

```
internalRoutes: # glob docs cli -i, --ignore`
  /
  - '*/internal/**'
```

```
onlyIncludeRoutes: # glob docs cli -i, --ignore`
  / `internalRoutes`
  - '*/internal/**'
internalRoutes:
  - '*/internal/overview.mdx'
```

```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config, https://shiki.style/guide/transformers
```

WARNING

□□□□□□□□□□□□□□□□ **plaintext** □□

WARNING

□□□□□□□□□□□□□□□□ `plaintext` □□

sites.yaml

[illegible]

```
- name: connectors # 连接器
  base: /devops-connectors # 连接器
  version: v1.1 # 连接器 ExternalSite/ExternalSiteLink 连接器

  displayName: # 连接器名称
    en: DevOps Connectors
    zh: DevOps 连接器
```

Show more 

--	--	--	--

translate:

```
# =====ejs ===== `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`
#  `sourceLang`  `targetLang`  ``  ``
#    `userPrompt` =====
#    `additionalPrompts`  `frontmatter.i18n`  `additionalPrompts`
=====
#    `terms`  `titleTranslationPrompt` ===== AI
```

Show more ▾

📄📄📄📄📄📄📄📄

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/ =====
=====  `-R, --edit-repo` =====
```

📄📄📄📄📄📄

export:

```
- name: Concepts # ===== pdf =====
  scope: '*/concepts' # ===== glob ===== docs  
```

📄📄📄📄📄📄

lint:

```
cspellOptions: # =====cspell ===== https://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-eslint-plugin#options
```

Algolia 📄📄📄📄

```
algolia: # 📄Algolia 📄📄📄📄📄📄📄 ` -a, --algolia` 📄📄📄📄📄
appId: # Algolia 📄 ID
apiKey: # Algolia API Key
indexName: # Algolia 📄📄📄
```

📄📄 `public/robots.txt` 📄 Algolia 📄📄📄

Info

📄 `rspress` 📄📄📄📄📄 Algolia 📄📄📄📄📄 [📄📄📄📄📄](#) 📄📄📄📄📄📄📄📄📄📄📄📄📄📄
`@alauda/doom/theme` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
theme/index.ts

export * from '@alauda/doom/theme'
```

Sitemap 📄📄

```
siteUrl: https://docs.alauda.cn # 📄📄📄 URL📄📄📄 sitemap📄📄📄 ` -S, --site
-url` 📄📄📄📄📄📄📄
```

11

```
├─ index.md
├─ start.mdx
└─ usage
    ├─ index.mdx
    └─ convention.md
```

--	--	--	--	--	--

1. public
2. public/_remotes
*/public/_remotes .gitignore

shared

frontmatter

MDX

frontmatter

index.md

index.mdx

frontmatter

weight

weight

index.mdx

Overview

□ □

#

<Overview />

Markdown

is [gfm](#) Doom Markdown

Callouts

Mermaid

Callouts

Note

1. ; , % , # , // , /** */ , -- <!-- -->
2. [\\!code callout]
3. :::callouts <div class="doom-callouts"> <Callouts>


```
```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ # [!code callout]
+ 8 MiB × (number of vCPUs) \ # [!code callout]
+ 16 MiB × (number of graphics devices) \ # [!code callou
t]

+ (additional memory overhead) # [!code callout]
```
```

Show more ▾

```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ ①
+ 8 MiB × (number of vCPUs) \ ②
+ 16 MiB × (number of graphics devices) \ ③
+ (additional memory overhead) ④
```


- 1. Required for the processes that run in the `virt-launcher` pod.
- 2. Number of virtual CPUs requested by the virtual machine.
- 3. Number of virtual graphics cards requested by the virtual machine.
- 4. Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
 - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers ↗

Mermaid ↗

```
mermaid
graph TD;
    A-->B;
    A-->C;
    B-->D;
    C-->D;

```

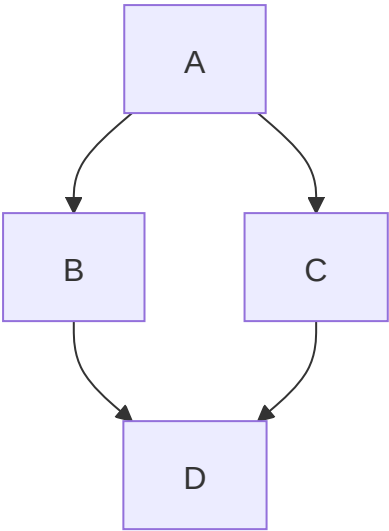

MDX

[MDX](#)   Markdown  Markdown  JSX  [rspress MDX](#)  

[rspress](#)  

doom  

Overview

Directive

ExternalSite

ExternalSiteLink

AcpApisOverview  ExternalApisOverview

Term

props

TermsTable

props

JsonViewer

rspress

[rspress](#)                 [.mdx](#)      

- [Badge](#)
- [Card](#)
- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

[rspress/theme](#)

```
preview.mdx

import { SourceCode } from '@rspress/core/theme'

<SourceCode href="/" />
```

doom

[doom](#)

Overview

Directive

[Directive](#)

- 文档(`doc/en`) 文档 `doc/zh` 文档

```
<Directive type="danger" title="危险">
  文档
  `doc/zh` 文档
</Directive>
```

- 文档(`doc/en`) 文档 `doc/zh` 文档

文档

文档 `doc/zh` 文档

文档

ExternalSite

文档

```
<ExternalSite name="connectors" />
```

Note

文档 DevOps 文档 DevOps 文档

[DevOps 文档](#)

ExternalSiteLink

文档

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content](#)

TIP

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```

```
<ExternalSiteLink name="connectors" href="link">
  Content {/*      `p`      */}
</ExternalSiteLink>
```

□□□□□□□□ p □□□□□□□□□□□□□□ children □□□□

AcpApisOverview ☐ **ExternalApisOverview**

□□□□□□ API □□□□

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

Note

[ACP APIs](#)
[ACP APIs](#)

Note

[📄 DevOps](#)
[📄 APIs](#)
[📄 DevOps](#)
[📄 APIs](#)
[📄](#)

Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```

ACP [Alauda Cloud](#)

props

- `name`:
- `textCase`: `lower` , `upper` , `capitalize`

TermsTable

```
<TermsTable />
```

company		-	Alauda	-	
product		-	Alauda Container Platform	-	
productShort	ACP	-	ACP	-	

alaudaCloudLink	Alauda Cloud ↗	-	Alauda Cloud ↗	-	-

props

- `terms`: `NormalizedTermItem[]`

JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

yamljson

key: value

`shared`

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

runtime ↗ API `.jsx/.tsx` `.mdx`


```
// shared/CommonContent.tsx
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
```

Show more ▾

WARNING

.mdx
 props
 issue ↗
 props
 .jsx/.tsx

alauda 公共领域 en / zh 公共领域
public 公共 en / zh 公共

.mdx

Show more ▾

.ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

.mdx

```
import { useI18n } from '@rspress/core/runtime'

# {useI18n()}('title')}

{useI18n()}('description')}
```

API 文档

本文档提供了关于 API 文档的 K8S API, 以及 API 以及 CRD (Custom Resource Definition) 文档的概述。

```
├─ apis
│   ├── advanced_apis # 高级 API
│   ├── crds # CRDs
│   ├── kubernetes_apis # K8S API
│   └─ references # 参考
```

目录

K8S API

props

API 文档

props

CRD (deprecated)

props

文档

props

openapi 文档

K8S API

kubernetes_apis/workload/daemonset.mdx

```
# DaemonSet [apps/v1]

<K8sAPI
  name="io.k8s.api.apps.v1.DaemonSet"
  pathPrefix="/kubernetes/{cluster}"
/>
```

🔗 [DaemonSet](#)

crds/ArtifactCleanupRun.mdx

```
# ArtifactCleanupRun

<K8sAPI name="artifactcleanupruns.artifacts.katanomi.dev" />
```

🔗 [ArtifactCleanupRun](#)

props

- `name`: OpenAPI schema `definitions` (v2) or `components/schemas` (v3) 中定义的 CRD `metadata.name`
- `namespaced`: 是否命名空间化 `true` 则 API Endpoints 在 `namespaces/{namespace}`
- `pathPrefix`: 路径前缀 `api.pathPrefix`
- `filepath`: 文件路径 `openapi` 文件 `openapi` 中 CRD 的
- `apiGroup`: API 组 `openapi` 中 `x-kubernetes-group-version-kind` 的
- `apiVersion`: API 版本 `CRD` 的 `spec.versions` 中的
- `apiKind`: API 的

🔗 [API](#)

```
advanced_apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ
```

CodeQualityTaskSummary

props

- path: OpenAPI schema paths
- pathPrefix: api.pathPrefix
- openapiPath: openapi

CRD (deprecated)

WARNING
K8sAPI K8sCrd K8sCrd

```
crds/ArtifactCleanupRun-K8sCrd.mdx

# ArtifactCleanupRun - K8sCrd

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

ArtifactCleanupRun-K8sCrd

props

- name: CRD metadata.name
- crdPath: openapi CRD

□□□□

```
references/CodeQuality.mdx

# CodeQuality

<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

□□ [CodeQuality](#)□

props

- `schema` : OpenAPI schema `definitions` (v2) or `components/schemas` (v3) □□□□□
- `openapiPath` : □□□□ [openapi](#) □□

□□ **openapi** □□

□□ `OpenAPIPath` □ `OpenAPIRef` □□□□□□□□ `openapi` □□□□□□□□□□□□□□□□□□□□
□ `openapi` □□□□□□□ `openapiPath` □□□□□

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```



```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodule  
s']] />
```

props

11

props

- `functions`: `string[]` - `FunctionResource`

	□□	□□ □□ □	□□□ □□□	□□ □□ □	□□□ □□□ □	□□ □□	□□ □□ □
□□□□	□□	✓	✓	✓	✓	✓	✗
devops- testplans	□□	✓	✗	✓	✓	✓	✗

☐ Markdown ☐☐☐☐

```
<!-- reference-end -->
```

MDX □□□□

```
{/* reference-end */}
```

□□□□□□□ `<root>/public/_remotes/<name>` □□□□

```
□□□□□ <!-- reference-start#ref --> □□□□□
```

□ □ □ □ □ □

frontmatterMode

--	--	--	--	--	--

reference:

```
- repo: alauda-public/product-doc-guide # 

```

branch: # [string]

publicBase: # [string] /images/xx.png

docs/public

sources:

- name: anchor #

Show more

frontmatterMode

- ignore frontmatter frontmatter
- merge frontmatter key
- replace frontmatter frontmatter
- remove frontmatter

□ □ □ □ □ □ □ □

[illegible]

```
doom build # ████████
doom serve # ████████████████
```



```
doom build dist -v
```

```
# 📄📄📄📄📄📄📄 release-4.0 📄📄 4.0 📄📄  
doom build -v 4.0 # 📄📄 4.0 📄📄📄📄📄📄 dist/4.0📄📄📄📄📄📄 {base}/4.0  
doom build -v master # 📄📄 master 📄📄📄📄📄📄 dist/master📄📄📄📄📄📄 {base}/mast  
er  
doom build -v {other} # 📄📄📄📄📄📄📄 dist/{other}📄📄📄📄📄📄 {base}/{other}  
  
# unversioned 📄 unversioned-x.y 📄📄📄📄📄📄📄📄📄📄  
doom build -v unversioned # 📄📄📄📄📄📄📄 dist/unversioned📄📄📄📄📄📄 {b
```

Show more ▾

📄📄📄📄📄📄📄

```
|— console-platform  
|   |— 4.0  
|   |— 4.1  
|   |— index.html  
|   |— overrides.yaml  
|   |— versions.yaml  
|— console-devops-docs  
|   |— 4.0
```

Show more ▾

index.html

```
<!DOCTYPE html>  
<html>  
  <head>  
    <title>Redirecting...</title>  
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />  
  </head>
```

Show more ▾

📄📄📄📄📄📄📄📄

overrides.yaml

```
# 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
title:  
  en: Doom - Alauda  
  zh: Doom - 📄📄  
logoText:  
  en: Doom - Alauda
```

Show more ▾

versions.yaml

```
- '4.1'  
- '4.0'
```