

Markdown

Callouts

Mermaid

MDX

📄 MDX 📄📄📄📄📄📄📄📄📄📄

rspress 📄

doom 📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄📄

`i18n.json`

`.ts/.tsx`

`.mdx`

API 📄

📄 API

CRD

📄📄📄

📄 openapi 📄

📄📄📄📄

`props`

📄

📄📄

📄📄

📄📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄

📄📄📄📄📄📄

📄📄📄

📄📄 PDF

📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
mkdir my-docs && cd my-docs
```

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom`:

 npm

 yarn

 pnpm

 bun

 deno

```
npm install -D @alauda/doom typescript
```

创建文档目录:

```
# 创建 docs 目录
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 文档' > docs/zh/index.md
```

在 `package.json` 中添加:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

创建配置文件 `doom.config.yml`:

```
title: My Docs
```

创建 `tsconfig.json` 文件

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
    "skipLibCheck": true,
    "strict": true,
    "target": "ESNext",
  },
  "mdx": {
    "checkMdx": true,
  },
}
```

📄📄📄 global.d.ts 📄📄📄📄📄📄

```
/// <reference types="@alauda/doom/runtime" />
```

📄📄📄📄📄 .mdx 📄📄📄📄📄📄📄 doom 📄📄📄📄📄📄📄

📄📄📄📄📄



```
doom -h
```

```
# output
```

```
Usage: doom [options] [command]
```

```
Doctor Doom making docs.
```

```
Options:
```

```
  -V, --version                output the version number
  -c, --config <config>       Specify the path to the config file
  -v <version>                 Specify the version of the document
                                ation, can also be `unversioned` or `unversioned-x.y`
  -b, --base <base>           Override the base of the documentat
                                ion
  -p, --prefix <prefix>       Specify the prefix of the documenta
                                tion base
  -f, --force [boolean]        Force to
                                1. fetch latest reference remotes o
                                r scaffolding templates, otherwise use local cache
                                2. translate ignore hash equality c
                                heck and original text (default: false)
  -i, --ignore [boolean]       Ignore internal routes (default: fa
                                lse)
  -d, --download [boolean]     Display download pdf link on nav ba
                                r (default: false)
  -e, --export [boolean]       Run or build in exporting PDF mode,
                                `apis/**` and `*/apis/**` routes will be ignored automatically (default:
                                false)
  -I, --include <language...> Include **only** the specific langu
                                age(s), `en ru` for example
  -E, --exclude <language...> Include all languages except the sp
                                ecific language(s), `ru` for example
  -o, --out-dir <path>         Override the `outDir` defined in th
                                e config file or the default `dist/{base}/{version}`, the resulting path
                                will be `dist/{outDir}/{version}`
  -r, --redirect <enum>        Whether to redirect to the locale c
                                losest to `navigator.language` when the user visits the site, could be `a
                                uto`, `never` or `only-default-lang` (default: "only-default-lang")
  -R, --edit-repo [boolean|url|lang] Whether to enable or override the `
                                editRepoBaseUrl` config feature, `https://github.com/` prefix could be om
                                itted; if a language code is provided, all other languages will use the s
                                ame repo but with the language code as sub-path (default: false)
  -a, --algolia [boolean|alauda] Whether to enable or use the alauda
```

```
(docs.alauda.io) preset for Algolia search (default: false)
  -S, --site-url                Whether to enable the siteUrl for s
itemap generation (default: false)
  -n, --no-open                Do not open the browser after start
ing the server
  --lang <language>           Specify the language of the documen
tation
  -h, --help                   display help for command
```

Commands:

```
dev [options] [root]          Start the development server
build [root]                  Build the documentation
preview|serve [options] [root] Preview the built documentation
new [template]                Generate scaffolding from templates
translate [options] [root]     Translate the documentation
export [options] [root]       Export the documentation as PDF, `a
pis/**` and `*/apis/**` routes will be ignored automatically
lint [options] [root]         Lint the documentation
help [command]                display help for command
```

yarn dev

```
doom dev -h
```

```
# output
```

```
Usage: doom dev [options] [root]
```

```
Start the development server
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -H, --host [host]                  Dev server host name
  -P, --port [port]                  Dev server port number
  -l, --lazy [boolean]               Whether to enable `lazyCompilation` which could improve the compilation performance (default: true)
  --no-lazy                          Do not enable `lazyCompilation`
  -h, --help                          display help for command
```

📄📄📄📄📄📄

📄 `yarn build` 📄📄📄📄📄📄📄📄📄📄📄📄📄 `dist` 📄📄📄📄📄📄

📄📄📄📄

📄 `yarn serve` 📄📄📄📄📄📄📄📄📄📄📄📄📄 `-b`, `-p` 📄📄📄📄📄📄📄📄📄 `-b`, `-p`

📄📄

📄📄📄📄📄📄📄

📄 `yarn new` 📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄📄📄

```
doom translate -h
```

```
# output
```

```
Usage: doom translate [options] [root]
```

```
Translate the documentation
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -s, --source <language>  Document source language, one of en, zh, ru (default: "en")
```

```
  -t, --target <language>  Document target language, one of en, zh, ru (default: "zh")
```

```
  -g, --glob <path...>     Glob patterns of source dirs/files to translate
```

```
  -C, --copy [boolean]      Whether to copy relative assets to the target directory instead of following links (default: false)
```

```
  -h, --help                display help for command
```

- `-g, --glob` 指定要翻译的源目录/文件的glob模式 `glob` 指定要翻译的目标目录/文件的glob模式

1. `yarn translate -g abc xyz` 将 `<root>/<source>/abc` , `<root>/<source>/xyz` 复制到 `<root>/<target>/abc` , `<root>/<target>/xyz`

2. `yarn translate -g '*'` 将 `<root>/<source>` 复制到 `<root>/<target>`

- `-C, --copy` 是否复制相对资产到目标目录而不是跟随链接 `false` 不复制

- 示例

1. `/<source>/abc.jpg` 复制到 `<root>/public/<source>/abc.jpg` 并

`<root>/public/<target>/abc.jpg` 复制到 `<root>/public/<target>/abc.jpg`

2. `<root>/<source>/abc.mdx` 复制到 `./assets/xyz.jpg` 并

`<root>/<source>/assets/xyz.jpg` 复制到 `<root>/<target>/assets/xyz.jpg`

并

3. `<root>/<source>/abc.mdx` `./assets/<source>/xyz.jpg`
`<root>/<source>/assets/<source>/xyz.jpg`
`<root>/<target>/assets/<target>/xyz.jpg`
`./assets/<target>/xyz.jpg`

•

1. `/<source>/abc.jpg` `<root>/public/<target>/abc.jpg`
`/<target>/abc.jpg`
2. `<root>/<source>/abc.mdx` `./assets/<source>/xyz.jpg`
`<root>/<target>/assets/<target>/xyz.jpg`
`./assets/<target>/xyz.jpg`
`../<source>/assets/<target>/xyz.jpg`

WARNING

`-g '*'` `source` `target` `internalRoutes`
`target`

TIP

`AZURE_OPENAI_API_KEY` Leader

```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: 'Connectors'
  disableAutoTranslation: false
title: DevOps
```

PDF

🌐🌐

🌐

🌐 `doom` 🌐🌐

🌐🌐🌐

🌐🌐🌐

API 🌐🌐🌐

🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐

`sites.yaml` 🌐

🌐🌐🌐

🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐

Algolia 🌐🌐🌐

Sitemap 🌐

📄

📄“📄📄📄📄”📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄📄

📄📄

📄

📄

Markdown

Callouts

Mermaid

MDX

📄 MDX 📄📄📄📄📄📄📄📄📄📄

rspress 📄

doom 📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄📄

[i18n.json](#)

[.ts/.tsx](#)

[.mdx](#)

API 00

00 API

CRD

00000

00 openapi 00

0000000

props

00

00000

0000000

00

000000000000000000000000 ACP 00

000000

000000

0000000

000000000

🐙🐙

🐙🐙

🐙🐙🐙

🐙🐙🐙

API 🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

frontmatterMode

🐙🐙🐙🐙

🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

sites.yaml 🐙

🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙

Algolia 🐙🐙🐙

Sitemap 🐙

api:

```
# CRD 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

crds:

```
- docs/shared/crds/*.yaml
```

```
# OpenAPI 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

openapis:

```
- docs/shared/openapis/*.json
```

```
# 配置 openapi 文件
```

```
# 配置 https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQualitySpec
```

references:

```
  v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.CodeQualityBranch
```

```
# 配置 API 网关
```

```
pathPrefix: /apis
```

配置 API 文件

配置 API 文件

```
# 配置 doom.config.* 文件 glob 模式 json/yaml 文件
```

permission:**functionresources:**

```
# `kubectl get functionresources`
```

```
- docs/shared/functionresources/*.yaml
```

roletemplates:

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

```
- docs/shared/roletemplates/*.yaml
```

配置 API 文件

配置 API 文件

reference:

```
- repo: alauda-public/product-doc-guide # 

```

frontmatterMode

- ignore frontmatter frontmatter
- merge frontmatter key
- replace frontmatter frontmatter
- remove frontmatter

0000000000

00000000

releaseNotes:

queryTemplates:

```
fixed: #  ejl
unfixed:
```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

```

template=fixed&project=DevOps  fixed  queryTemplates 
query  project=DevOps  ejts  fixed  jira  jql
https://jira.alauda.cn/rest/api/2/search?jql=<jql>  API 
JIRA_USERNAME  JIRA_PASSWORD 

```

🌑🌑🌑🌑🌑

```

sidebar:
  collapsed: false # 

```

🌑🌑🌑🌑🌑🌑🌑🌑

```

internalRoutes: #  glob  docs  cli  -i, --ignore` 
/
- '*/internal/**'

```

🌑🌑🌑🌑🌑🌑🌑🌑

```

onlyIncludeRoutes: #  glob  docs  cli  -i, --ignore` 
/` 
- '*/internal/**'
internalRoutes:
- '*/internal/overview.mdx'

```




translate:

```
# =====ejs ===== `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`
# == `sourceLang` == `targetLang` == `` == `` =====
# `userPrompt` =====
# `additionalPrompts` == `frontmatter.i18n` == `additionalPrompts`
=====
# `terms` == `titleTranslationPrompt` ===== AI
=====
# =====
```

systemPrompt: |

You are a professional technical documentation engineer, skilled in writing high-quality technical documentation in <%= targetLang %>. Please accurately translate the following text from <%= sourceLang %> to <%= targetLang %>, maintaining the style consistent with technical documentation in <%= sourceLang %>.

Baseline Requirements

- Sentences should be fluent and conform to the expression habits of the <%= targetLang %> language.
- Input format is MDX; output format must also retain the original MDX format. Do not translate the names of jsx components such as <Overview />, and do not wrap output in unnecessary code blocks.
- ****CRITICAL****: Do not translate or modify ANY link content in the document. This includes:
 - **URLs in markdown links**: [text](URL) - keep URL exactly as is
 - **Reference-style links**: [text][ref] and [ref]: URL - keep both ref and URL unchanged
 - **Inline URLs**: https://example.com - keep completely unchanged
 - **Image links**: ![alt](src) - keep src unchanged, but alt text can be translated
 - **Anchor links**: [text](#anchor) - keep #anchor unchanged
 - Any href attributes in HTML tags - keep unchanged
- **Do not translate professional technical terms and proper nouns, including but not limited to**: Kubernetes, Docker, CLI, API, REST, GraphQL, JSON, YAML, Git, GitHub, GitLab, AWS, Azure, GCP, Linux, Windows, macOS, Node.js, React, Vue, Angular, TypeScript, JavaScript, Python, Java, Go, Rust, etc. Keep these terms in their original form.
- The title field and description field in frontmatter should be translated, other frontmatter fields should retain and do not translate.
- Content within MDX components needs to be translated, whereas MDX component names and parameter keys do not.
- Do not modify or translate any placeholders in the format of __ANCHOR_N

__ (where N is a number). These placeholders must be kept exactly as they appear in the source text.

- Keep original escape characters like backslash, angle brackets, etc. unchanged during translation.

- Do not add any escape characters to special characters like [], (), {}, etc. unless they were explicitly present in the source text. For example:

- If source has "Architecture [Optional]", keep it as "Architecture [Optional]" (not "Architecture \[Optional]")

- If source has "Function (param)", keep it as "Function (param)" (not "Function \ (param)")

- Only add escape characters if they were present in the original text

- Preserve and do not translate the following comments, nor modify their content:

- { /* release-notes-for-bugs */ }

- <!-- release-notes-for-bugs -->

- Remove and do not retain the following comments:

- { /* reference-start */ }

- { /* reference-end */ }

- <!-- reference-start -->

- <!-- reference-end -->

- Ensure the original Markdown format remains intact during translation, such as frontmatter, code blocks, lists, tables, etc.

- Do not translate the content of the code block.

```
<% if (titleTranslationPrompt) { %>
```

```
<%- titleTranslationPrompt %>
```

```
<% } %>
```

```
<% if (terms) { %>
```

```
<%- terms %>
```

```
<% } %>
```

```
<% if (userPrompt || additionalPrompts) { %>
```

```
## Additional Requirements
```

These are additional requirements for the translation. They should be met along with the baseline requirements, and in case of any conflict, the baseline requirements should take precedence.

The text for translation is provided below, within triple quotes:

```
"""
```

```
<% if (userPrompt) { %>
```

```
<%- userPrompt %>
```

```
<% } %>
```

```
<% if (additionalPrompts) { %>
```

```
<%- additionalPrompts %>
```

```
<% } %>
""
<% } %>
```

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/ 
-R, --edit-repo` 
```

```
export:
- name: Concepts # pdf 
  scope: '*/concepts' # glob docs 
```


- 2. `public/_remotes` 📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁
`*/public/_remotes` 📁 `.gitignore` 📁📁📁📁📁📁
- 3. `shared` 📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁

📁📁📁

📁📁📁📁📁📁📁 `frontmatter` 📁📁📁📁📁📁📁📁📁📁📁📁📁📁

```
---
title: 📁
description: 📁
author: 📁
category: 📁
---
```

📁📁📁📁📁📁 `MDX` 📁 `.mdx` 📁📁📁📁📁 `frontmatter` 📁📁📁📁📁📁

📁📁

📁 `index.md` 📁 `index.mdx` 📁📁📁📁📁📁📁📁📁📁📁📁📁📁 `frontmatter` 📁📁
`weight` 📁📁📁📁📁📁📁📁📁📁 `weight` 📁📁📁📁📁📁📁

```
---
weight: 1
---
```

Warning

📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁📁

📁📁

Markdown

[gfm](#) Doom Markdown

Callouts

Mermaid

Callouts

Note

- ; , % , # , // , /** */ , -- <!-- -->
- [\\!code callout]
- :::callouts <div class="doom-callouts"> <Callouts>

```

```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \ # [!code callout]
 + 8 MiB × (number of vCPUs) \ # [!code callout]
 + 16 MiB × (number of graphics devices) \ # [!code callout]
t]
 + (additional memory overhead) # [!code callout]
...

```

:::callouts

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

:::

```

Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \ ①
 + 8 MiB × (number of vCPUs) \ ②
 + 16 MiB × (number of graphics devices) \ ③
 + (additional memory overhead) ④

```

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.




- If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers ↗

## Mermaid ↗

```
mermaid
graph TD;
 A-->B;
 A-->C;
 B-->D;
 C-->D;
```

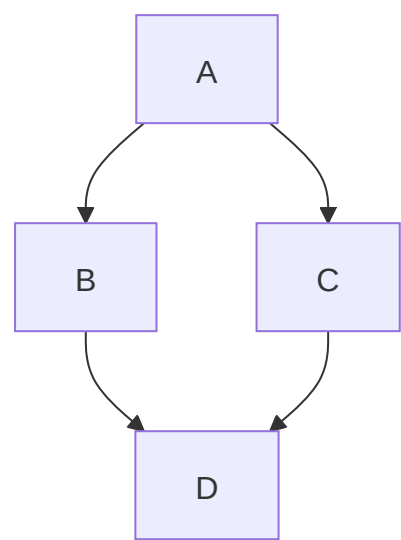

Markdown Preview Mermaid ↗ VSCode

# MDX

[MDX](#)  [Markdown](#) [Markdown](#) [JSX](#) [rspress MDX](#) 

[rspress](#) 

doom 

Overview

Directive

ExternalSite

ExternalSiteLink

AcpApisOverview  ExternalApisOverview

Term

props

TermsTable

props

JsonViewer

rspress  

rspress 跳转 .mdx

- [Badge](#)
- [Card](#)
- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

rspress/theme

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'

<SourceCode href="/" />
```

# doom

doom

## Overview

## Directive

Directive

[illegible]

- ( doc/en ) □□□□□□□□ doc/zh □□□□□□□□□□□□□□□□□□□□□□□□□□□□  
□□□□

11

doc/zh

## ExternalSite



```
<ExternalSite name="connectors" />
```

### Note

DevOps DevOps DevOps

## ExternalSiteLink



```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content ↗](#)

**TIP**

mdx `<ExternalSiteLink name="connectors" href="link" children="Content" />`

```
<ExternalSiteLink name="connectors" href="link">
 Content {/* `p` */}
</ExternalSiteLink>
```

`p` `children`

## AcpApisOverview ExternalApisOverview

API

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

Note

ACP APIs [ACP APIs](#)

Note

DevOps APIs [DevOps APIs](#)

## Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```

ACP [Alauda Cloud](#)

props

- `name` :
- `textCase` : `lower` , `upper` , `capitalize`

## TermsTable

`<TermsTable />`

company		-	Alauda	-	
product		-	Alauda Container Platform	-	
productShort	ACP	-	ACP	-	
alaudaCloudLink	<a href="#">Alauda Cloud ↗</a>	-	<a href="#">Alauda Cloud ↗</a>	-	-

## props

- `terms` : `NormalizedTermItem[]`

## JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

yaml json

```
key: value
```

□□□□□□□□

□□□□□□□□□□□□□□□□ **shared** □□□□□□□□□□□□□□□□□□□□

```
import CommonContent from './shared/CommonContent.mdx'
```

```
<CommonContent />
```

□□□□□□□□ **runtime** ↑ □□□ API□□□□□□ **.jsx/.tsx** □□□□□□□□ **.mdx** □□□□□□□□

```
// shared/CommonContent.tsx
```

```
export const CommonContent = () => {
 const { page } = usePageData()
 return <div>{page.title}</div>
}
```

```
// showcase/content.mdx
```

```
import { CommonContent } from './shared/CommonContent'
<CommonContent />
```

## WARNING

□□□□□□ **.mdx** □□□□□□□□□□ **props** □□□□□□ issue ↑□□□□□□□□□□ **props** □□□□□□□□

**.jsx/.tsx** □□□□□□□□

🌐🌐🌐

[alauda](#) 🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐 [en](#) / [zh](#) 🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐  
🌐 [public](#) 🌐🌐🌐🌐 [en](#) / [zh](#) 🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐

🌐🌐

- | [i18n.json](#)
- [.ts/.tsx](#)
- [.mdx](#)

## [i18n.json](#)

🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐 [docs](#) 🌐🌐🌐🌐 [i18n.json](#) 🌐🌐🌐  
🌐🌐🌐🌐🌐🌐 [useI18n](#) 🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐🌐

docs/i18n.json



```
{
 "title": {
 "zh": "标题",
 "en": "Title"
 },
 "description": {
 "zh": "描述",
 "en": "description"
 }
}
```

## .ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
 const t = useI18n()
 return <h1>{t('title')}</h1>
}
```

## .mdx

```
import { useI18n } from '@rspress/core/runtime'

{useI18n()('title')}

{useI18n()('description')}
```

# API 文档

本文档提供了 API 文档 API 的 CRD (Custom Resource Definition) 文档。文档详细描述了 API 文档 API 的 CRD 文档。

```
├─ apis
│ └─ advanced-apis # 高级 API
│ └─ crds # CRDs
│ └─ references # 参考
```

文档

API

props

CRD

props

文档

props

API openapi 文档

API

advanced-apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ

CodeQualityTaskSummary

props

- path: OpenAPI schema paths
- pathPrefix: api.pathPrefix
- openapiPath: openapi

CRD

crds/ArtifactCleanupRun.mdx

# ArtifactCleanupRun

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />

ArtifactCleanupRun

props

- name: CRD metadata.name
- crdPath: openapi CRD

```
CodeQuality

<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

CodeQuality

props

- schema: OpenAPI schema definitions (v2) or component/schemas (v3)
- openapiPath: openapi

openapi

OpenAPIPath OpenAPIRef openapi

openapi openapiPath

```
<OpenAPIPath
 path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
 openapiPath="shared/openapis/katanomi.json"
/>
```

权限管理

```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodules']} />
```

文档

props

文档

props

- functions: string[] - 权限管理 FunctionResource 权限管理

文档

文档	文档	权限管理 文档	权限管理 文档	权限管理 文档	权限管理 文档	权限管理 文档	权限管理 文档
权限管理	文档	✓	✓	✓	✓	✓	✗
devops-testplans	文档	✓	✗	✓	✓	✓	✗

测试用例	测试用例ID	测试用例名称	测试用例描述	测试用例步骤	测试用例预期结果	测试用例实际结果	测试用例状态
测试用例	001	测试用例001	测试用例001描述	测试用例001步骤	测试用例001预期结果	测试用例001实际结果	测试用例001状态
	002	测试用例002	测试用例002描述	测试用例002步骤	测试用例002预期结果	测试用例002实际结果	测试用例002状态
	003	测试用例003	测试用例003描述	测试用例003步骤	测试用例003预期结果	测试用例003实际结果	测试用例003状态
	004	测试用例004	测试用例004描述	测试用例004步骤	测试用例004预期结果	测试用例004实际结果	测试用例004状态
	005	测试用例005	测试用例005描述	测试用例005步骤	测试用例005预期结果	测试用例005实际结果	测试用例005状态
	006	测试用例006	测试用例006描述	测试用例006步骤	测试用例006预期结果	测试用例006实际结果	测试用例006状态
	007	测试用例007	测试用例007描述	测试用例007步骤	测试用例007预期结果	测试用例007实际结果	测试用例007状态

--	--	--	--

☐ Markdown ☐☐☐☐

```
<!-- reference-start#name -->
```

```
<!-- reference-end -->
```

☐ MDX ☐☐☐☐☐

```
{/* reference-start#name */}
```

```
{/* reference-end */}
```

name

□□□□□□□ `<root>/public/_remotes/<name>` □□□□

```

□□□□□ <!-- reference-start#ref --> □□□□□

```

□ □ □ □ □ □

frontmatterMode

ignore/merge/replace/remove



□ □ □ □ □

--	--	--	--	--

--	--	--	--	--	--

□ □ □ □ □ □ □ □

[illegible]

doom build # 000000

**doom** serve # □□□□□□□□□□



```
doom build dist -v
```

```
===== release-4.0 == 4.0 ==
doom build -v 4.0 # == 4.0 ===== dist/4.0===== {base}/4.0
doom build -v master # == master ===== dist/master===== {base}/master
doom build -v {other} # ===== dist/{other}===== {base}/{other}

unversioned = unversioned-x.y =====
doom build -v unversioned # ===== dist/unversioned===== {base}
doom build -v unversioned-4.0 # ===== 4.0 ===== dist/unversioned===== {base}
```

□□□□□□

```
|— console-platform
| |— 4.0
| |— 4.1
| |— index.html
| |— overrides.yaml
| |— versions.yaml
|— console-devops-docs
| |— 4.0
| |— 4.1
| |— index.html
| |— overrides.yaml
| |— versions.yaml
|— console-tekton-docs
| |— 1.0
| |— 1.1
| |— index.html
| |— overrides.yaml
| |— versions.yaml
```

index.html

```
<!DOCTYPE html>
<html>
 <head>
 <title>Redirecting...</title>
 <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
 </head>
 <body>
 <p>Redirecting to /console-docs/4.1</p>
 </body>
</html>
```

📄📄📄📄📄📄📄

#### overrides.yaml

```
📄📄📄📄📄📄📄📄
title:
 en: Doom - Alauda
 zh: Doom - 📄📄
logoText:
 en: Doom - Alauda
 zh: Doom - 📄📄
```

#### versions.yaml

```
- '4.1'
- '4.0'
```