

Introduction

Doom is a documentation development tool designed for internal use at Alauda, built on top of [rspress](#) [↗]. It provides users with a rich set of built-in plugins for an out-of-the-box experience.

TOC

[Core Capabilities](#)

Based on Markdown and its extension MDX

Get Started

Getting Started

Usage

APIs

Core Capabilities

- Automatically generates a configurable weight (order) left sidebar
- Full-text static document search
- Multilingual support

Based on Markdown and its extension MDX

MDX is a powerful content development approach. You can write Markdown files as you normally would while also using React components within the Markdown content:

A code editor window with a dark background and three colored window control buttons (red, yellow, green) in the top left corner. The code inside is as follows:

```
// docs/index.mdx
import { CustomComponent } from './custom';

# Hello World

<CustomComponent />
```

For more details, you can refer to the [“Using MDX” documentation](#).

Get Started

Let's [get started quickly](#) with Doom!

Getting Started

Getting Started

Creating a Project

CLI Tool

Usage

Configuration

Configure the `doom` documentation tool

Configuration File

Basic Configuration

API Documentation Configuration

Permission Documentation Configuration

Reference Documentation Configuration

Release Notes Configuration

Sidebar Configuration

Internal Document Routes Configuration

Only Include Document Routes Configuration

Syntax Highlighting Plugin Configuration

`sites.yaml` Configuration

Translation Configuration

Editing Documentation in Code Repository

Documentation Export Configuration

Documentation Lint Configuration

Algolia Search Configuration

Sitemap Configuration

Convention

Based on the principle of "convention over configuration" to automatically generate the layout

Directory Structure

Metadata

Sorting

Preview

Markdown

Callouts

Callout

Mermaid

MDX

Using MDX enable

reactpress Component

doom Component

Custom Component

Internationalization

Using Internationalized Text in Reusable Components

`i18n.json`

`.ts/.tsx`

`.mdx`

API Documentation

K8S API

Advanced API

Common Reference

Specifying operation

Permission Description Document

`props`

Example

Referencing

Document Reference

Deployment

After the documentation project development is completed, we can deploy to the target platform

Build and Preview

Multi-version Build

Merged Directory Structure

Dynamic Mount Configuration File

APIs

[Advanced APIs](#)

[CRDs](#)

[Kubernetes](#)

[Common References](#)

[Doom - Alauda](#) > Getting Started

Getting Started

TOC

[Creating a Project](#)

CLI Tool

Start the Development Server

Production Build

Local Preview

Use Scaffold Templates

Translate Documentation

Export PDF

Documentation Linting

Creating a Project

First, you can create a new directory with the following command:

```
mkdir my-docs && cd my-docs
```

Run `npm init -y` to initialize a project. You can use npm, yarn, or pnpm to install doom:

 npm yarn pnpm bun deno

```
npm install -D @alauda/doom typescript
```

Then create the files with the following commands:

```
# Create the docs directory, bilingual support for Chinese and English is
enabled by default
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 你好世界' > docs/zh/index.md
```

Add the following scripts to `package.json` :

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

Then initialize a configuration file `doom.config.yml` :

```
title: My Docs
```

At the same time, create a new `tsconfig.json` with the following content:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
    "skipLibCheck": true,
    "strict": true,
    "target": "ESNext",
  },
  "mdx": {
    "checkMdx": true,
  },
}
```

Finally, create a `global.d.ts` file with the following content:

```
/// <reference types="@alauda/doom/runtime" />
```

This way, you can use the global components provided by doom in `.mdx` files with type safety.

CLI Tool


```
doom -h
```

```
# output
```

```
Usage: doom [options] [command]
```

```
Doctor Doom making docs.
```

```
Options:
```

```
  -V, --version                output the version number
  -c, --config <config>       Specify the path to the config file
  -v <version>                 Specify the version of the document
                                ation, can also be `unversioned` or `unversioned-x.y`
  -b, --base <base>           Override the base of the documentat
                                ion
  -p, --prefix <prefix>       Specify the prefix of the documenta
                                tion base
  -f, --force [boolean]        Force to
                                1. fetch latest reference remotes o
                                r scaffolding templates, otherwise use local cache
                                2. translate ignore hash equality c
                                heck and original text (default: false)
  -i, --ignore [boolean]       Ignore internal routes (default: fa
                                lse)
  -d, --download [boolean]     Display download pdf link on nav ba
                                r (default: false)
  -e, --export [boolean]       Run or build in exporting PDF mode,
                                `apis/**` and `*/apis/**` routes will be ignored automatically (default:
                                false)
  -I, --include <language...> Include **only** the specific langu
                                age(s), `en ru` for example
  -E, --exclude <language...> Include all languages except the sp
                                ecific language(s), `ru` for example
  -o, --out-dir <path>         Override the `outDir` defined in th
                                e config file or the default `dist/{base}/{version}`, the resulting path
                                will be `dist/{outDir}/{version}`
  -r, --redirect <enum>        Whether to redirect to the locale c
                                losest to `navigator.language` when the user visits the site, could be `a
                                uto`, `never` or `only-default-lang` (default: "only-default-lang")
  -R, --edit-repo [boolean|url|lang] Whether to enable or override the `
                                editRepoBaseUrl` config feature, `https://github.com/` prefix could be om
                                itted; if a language code is provided, all other languages will use the s
                                ame repo but with the language code as sub-path (default: false)
  -a, --algolia [boolean|alauda] Whether to enable or use the alauda
```

```
(docs.alauda.io) preset for Algolia search (default: false)
  -S, --site-url Whether to enable the siteUrl for s
itemap generation (default: false)
  -n, --no-open Do not open the browser after start
ing the server
  --lang <language> Specify the language of the documen
tation
  -h, --help display help for command

Commands:
  dev [options] [root] Start the development server
  build [root] Build the documentation
  preview|serve [options] [root] Preview the built documentation
  new [template] Generate scaffolding from templates
  translate [options] [root] Translate the documentation
  export [options] [root] Export the documentation as PDF, `a
pis/**` and `*/apis/**` routes will be ignored automatically
  lint [options] [root] Lint the documentation
  help [command] display help for command
```

For more configuration, see [Configuration](#)

Start the Development Server

Run `yarn dev` to start the development server, and the browser will automatically open the documentation home page

```
doom dev -h
```

```
# output
```

```
Usage: doom dev [options] [root]
```

```
Start the development server
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -H, --host [host]                  Dev server host name
  -P, --port [port]                  Dev server port number
  -l, --lazy [boolean]                Whether to enable `lazyCompilation` which could improve the compilation performance (default: true)
  --no-lazy                          Do not enable `lazyCompilation`
  -h, --help                          display help for command
```

Production Build

Run `yarn build` to build the production code. After the build is complete, static files will be generated in the `dist` directory.

Local Preview

Run `yarn serve` to preview the built static files. Note that if you built with the `-b`, `-p` parameters, you also need to use the `-b`, `-p` parameters when previewing.

Use Scaffold Templates

Run `yarn new` to generate a project, module, or documentation using scaffold templates.

Translate Documentation

```
doom translate -h
```

```
# output
```

```
Usage: doom translate [options] [root]
```

```
Translate the documentation
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -s, --source <language> Document source language, one of en, zh, ru (default: "en")
```

```
  -t, --target <language> Document target language, one of en, zh, ru (default: "zh")
```

```
  -g, --glob <path...>      Glob patterns of source dirs/files to translate
```

```
  -C, --copy [boolean]      Whether to copy relative assets to the target directory instead of following links (default: false)
```

```
  -h, --help                display help for command
```

- The `-g, --glob` parameter is required. You can specify the file directories or paths to translate. It supports `glob` syntax. Note that the parameter value must be enclosed in quotes, otherwise it will be parsed by the command line and may cause unexpected behavior. Examples:
 1. `yarn translate -g abc xyz` will translate all documentation under the `<root>/<source>/abc` and `<root>/<source>/xyz` directories to `<root>/<target>/abc` and `<root>/<target>/xyz`
 2. `yarn translate -g '*'` will translate all documentation files under `<root>/<source>`
- The `-C, --copy` parameter is optional. It controls whether local asset files are copied to the target directory when the target file does not exist. The default is `false`, which means the reference path of the asset file is changed to point to the source path. Examples:
 - When this parameter is enabled:
 1. Translating `/<source>/abc.jpg` will copy `<root>/public/<source>/abc.jpg` to `<root>/public/<target>/abc.jpg`, and update the reference path in the

document to `/<target>/abc.jpg`

2. Translating `./assets/xyz.jpg` in `<root>/<source>/abc.mdx` will copy `<root>/<source>/assets/xyz.jpg` to `<root>/<target>/assets/xyz.jpg`, and the image reference path remains unchanged
3. Translating `./assets/<source>/xyz.jpg` in `<root>/<source>/abc.mdx` will copy `<root>/<source>/assets/<source>/xyz.jpg` to `<root>/<target>/assets/<target>/xyz.jpg`, and update the reference path in the document to `./assets/<target>/xyz.jpg`

- When this parameter is not enabled:

1. When translating `/<source>/abc.jpg`, if `<root>/public/<target>/abc.jpg` already exists, the reference path in the document will be changed to `/<target>/abc.jpg`; otherwise, the image reference path remains unchanged
2. When translating `./assets/<source>/xyz.jpg` in `<root>/<source>/abc.mdx`, if `<root>/<target>/assets/<target>/xyz.jpg` already exists, the reference path in the document will be changed to `./assets/<target>/xyz.jpg`; otherwise, it will be changed to `../<source>/assets/<target>/xyz.jpg`

WARNING

In particular, if you use `-g '*'` for a full translation, the file lists in the `source` and `target` directories will be compared. Any mismatched `target` files except for `internalRoutes` will be deleted automatically.

TIP

The translation feature requires the `ALAUDA_OPENAI_BASE_URL` and `ALAUDA_OPENAI_API_KEY` environment variables to be configured locally. Please contact your team Leader to obtain them.

You can use metadata in the documentation to control translation behavior:

```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: '此文中的 Connectors 是专有名词，不要翻译'
  disableAutoTranslation: false
title: DevOps 连接器
```

For more configuration, see [Translation Configuration](#)

Export PDF

WARNING

Please run `yarn build` before performing the export operation.

```
doom export -h
```

```
# output
```

```
Usage: doom export [options] [root]
```

Export the documentation as PDF, ``apis/**`` and ``*/apis/**`` routes will be ignored automatically

Arguments:

root Root directory of the documentation

Options:

-H, --host [host] Serve host name
 -P, --port [port] Serve port number (default: "4173")
 -h, --help display help for command

Run `yarn export` to export the documentation as a PDF file. Note that if you built with the `-b`, `-p` parameters, you also need to use the `-b`, `-p` parameters when exporting.

The export feature depends on [playwright](#) [↗]. In pipelines, use `build-harbor.alauda.cn/frontend/playwright-runner:doom` as the base image for dependency

installation and documentation builds. For local development, you can set the following environment variable to speed up downloads:

```
.env.yarn
```

```
PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmmirror.com/binaries/playwright"
```

In addition to exporting a complete PDF document for the entire site, `doom` also supports exporting a single PDF file from a specified entry point. For more configuration, see [Documentation Export Configuration](#)

Documentation Linting

```
doom lint -h
```

```
# output
```

```
Usage: doom lint [options] [root]
```

```
Lint the documentation
```

```
Arguments:
```

```
  root                Root directory of the documentation
```

```
Options:
```

```
  -g, --glob <path...>  Glob patterns of source dirs/files to lint (default: "**/*.{js,jsx,ts,tsx,md,mdx}")
```

```
  --no-cspell            Disable cspell linting
```

```
  -h, --help            display help for command
```

`doom lint` is based on [ESLint](#) and [cspell](#). If you want a better experience in your editor, you can install the corresponding plugins [ESLint](#) / [CSpell](#), and then create the corresponding configuration files:

- `eslint.config.mjs`:

```
import doom from '@alauda/doom/eslint'

export default doom(new URL('docs', import.meta.url))
```

- `cspell.config.mjs` :

```
export { default } from '@alauda/doom/cspell'
```

At the same time, we agree that the `.cspell` folder under the current working directory (`CWD`) is used to store CSpell dictionary files. For example, you can create

`.cspell/k8s.txt` :

```
k8s
kubernetes
```

For more configuration, see [Documentation Linting Configuration](#)

Usage

Configuration

- Configure the `doom` documentation tool
- Configuration File
- Basic Configuration
- API Documentation Configuration
- Permission Documentation Configuration
- Reference Documentation Configuration
- Release Notes Configuration
- Sidebar Configuration
- Internal Document Routes Configuration
- Only Include Document Routes Configuration
- Syntax Highlighting Plugin Configuration
- `sites.yaml` Configuration
- Translation Configuration
- Editing Documentation in Code Repository
- Documentation Export Configuration
- Documentation Lint Configuration
- Algolia Search Configuration
- Sitemap Configuration

Convention

- Based on the principle of "convention over configuration" to automatically generate the layout
- Directory Structure
- Metadata
- Sorting
- Preview

Markdown

- Callouts
- Callout
- Mermaid

MDX

- Using MDX enable
- reactpress Component
- doom Component
- Custom Component

Internationalization

- Using Internationalized Text in Reusable Components

`i18n.json`

`.ts/.tsx`

`.mdx`

API Document

- K8S API
- Advanced API
- Common Reference
- Specifying operation

Permission Description Document

`props`

Example

Referencing

Deployment

After the documentation project development is completed, we can deploy the project to the platform

Build and Preview

Multi-version Build

Merged Directory Structure

Dynamic Mount Configuration File

[Doom - Alauda](#) > [Usage](#) > Configuration

Configuration

TOC

[Configuration File](#)

Basic Configuration

API Documentation Configuration

Permission Documentation Configuration

Reference Documentation Configuration

`frontmatterMode`

Release Notes Configuration

Sidebar Configuration

Internal Document Routes Configuration

Only Include Document Routes Configuration

Syntax Highlighting Plugin Configuration

`sites.yaml` Configuration

Translation Configuration

Editing Documentation in Code Repository

Documentation Export Configuration

Documentation Lint Configuration

Algolia Search Configuration

Sitemap Configuration

Configuration File

In most cases, we only need to use a static `yaml` configuration file, supporting `doom.config.yaml` or `doom.config.yml`. For complex scenarios, such as requiring dynamic configuration or custom `rspress` plugins, `js/ts` configuration files can be used, supporting multiple file formats including `.js/.ts/.mjs/.mts/.cjs/.cts`.

For `js/ts` configuration files, we need to export the configuration, which can be combined with the `defineConfig` function exported from `@alauda/doom/config` to provide type assistance:

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```

Basic Configuration

- `lang`: Default document language. To accommodate most projects, we support both Chinese and English documents by default. The default language is `en`. If the current documentation project does not require multilingual support, this can be set to `null` or `undefined`.
- `title`: Document title, displayed on the browser tab.
- `logo`: Logo at the top left of the document, supports image URLs or file paths. Absolute paths refer to files under the `public` directory, relative paths refer to files relative to the current tool directory. Defaults to the Alauda logo built into the `doom` package.
- `logoText`: Document title, displayed at the logo position in the top left.
- `icon`: Document favicon, defaults to the same as `logo`.
- `base`: Base path of the document, used when deploying to a non-root path, e.g., `product-docs`. Defaults to `/`.
- `outDir`: Build output directory, defaults to `dist/{base}/{version}`. If specified, it changes to `dist/{outDir}/{version}`, where `version` is optional. Refer to [Multi-version Build](#).

API Documentation Configuration

```

api:
  # CRD definition file paths, relative to the directory where doom.config.* is located, supports glob matching, json/yaml files
  crds:
    - docs/shared/crds/*.yaml
  # OpenAPI definition file paths, relative to the directory where doom.config.* is located, supports glob matching, json/yaml files
  openapis:
    - docs/shared/openapis/*.json
  # When rendering OpenAPI related resource definitions, they are inlined by default. To extract related resource definitions into separate files, configure the following options
  # Reference https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQualitySpec
  references:
    v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.CodeQualityBranch
  # Optional, API documentation path prefix. If the current business uses gateway or other proxy services, this can be configured
  pathPrefix: /apis
  # Optional, which version of a multi-version CRD a page renders when it passes no `apiVersion` prop
  # `preferred` (default): the version `kubectl` resolves to – the highest-priority `served` version
  # `storage`: the etcd storage version (`storage: true`)
  # `first`: legacy behavior – `spec.versions[0]`, even when it is not served
  crdVersion: preferred

```

Refer to [API Documentation](#) for writing documentation.

Permission Documentation Configuration

```
# The following resource file paths are relative to the directory where d
oom.config.* is located, supports glob matching, json/yaml files
permission:
  functionresources:
    # `kubectl get functionresources`
    - docs/shared/functionresources/*.yaml
  roletemplates:
    # `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=t
rue`
    - docs/shared/roletemplates/*.yaml
```

Refer to [Permission Documentation](#) for writing documentation.

Reference Documentation Configuration

reference:

- **repo:** `alauda-public/product-doc-guide` # Optional, referenced documentation repository address. If not filled, the current documentation repository address is used by default

branch: # [string] Optional, branch of the referenced documentation repository

publicBase: # [string] Optional, when using a remote repository, the absolute path `/images/xx.png` corresponds to the directory of static resources, defaults to `docs/public`

sources:

- **name:** `anchor` # Name of the referenced document, used for referencing in documentation, globally unique

path: `docs/index.mdx#介绍` # Path of the referenced document, supports anchor positioning. For remote repositories, relative to the repository root; for local, relative to the directory where `doom.config.*` is located

ignoreHeading: # [boolean] Optional, whether to ignore the title. If true, the anchor title will not be displayed in the referenced document

processors: # Optional, processors for referenced document content

- **type:** `ejsTemplate`

data: # ejs template parameters, accessed using `<%= data.xx %>`

frontmatterMode: `merge` # Optional, mode for handling frontmatter of referenced documents, defaults to `ignore`. Options: `ignore/merge/replace/remove`

frontmatterMode

- **ignore** : Ignore the frontmatter of the referenced document, keep the frontmatter of the current document.
- **merge** : Merge the frontmatter of the referenced document. If keys overlap, the referenced document's values override the current document's.
- **replace** : Replace the current document's frontmatter with that of the referenced document.
- **remove** : Remove the current document's frontmatter.

Refer to [Reference Documentation](#) for writing documentation.

Release Notes Configuration

```
releaseNotes:
  queryTemplates:
    fixed: # JQL statements that may contain ejs templates
    unfixed:
```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

Taking `template=fixed&project=DevOps` as an example, `fixed` is the template name defined in `queryTemplates`. The remaining `query` parameter `project=DevOps` is passed as `ejs` [↗](#) template parameters to the `fixed` template, which is then processed to form a jira `jql` [↗](#) request to `https://jira.alauda.cn/rest/api/2/search?jql=<jql>`. This API requires authentication, and the environment variables `JIRA_USERNAME` and `JIRA_PASSWORD` must be provided to preview the effect.

Sidebar Configuration

```
sidebar:
  collapsed: false # Optional, whether the sidebar is collapsed by default. Defaults to collapsed. If the document content is small, consider setting to false.
```

Internal Document Routes Configuration


```
internalRoutes: # Optional, supports glob matching, relative to the docs
directory. Routes/files matched when the CLI option -i, --ignore is ena
bled will be ignored.
- '*/internal/**'
```

Only Include Document Routes Configuration

```
onlyIncludeRoutes: # Optional, supports glob matching, relative to the do
cs directory. When the CLI option -i, --ignore is enabled, only routes/
files under this configuration will be enabled. Can be combined with int
ernalRoutes to further exclude some routes.
- '*/internal/**'
internalRoutes:
- '*/internal/overview.mdx'
```

Syntax Highlighting Plugin Configuration

```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config, https://shik
i.style/guide/transformers
```

WARNING

Unconfigured languages will trigger warnings in the command line and fall back to `plaintext` rendering.

`sites.yaml` Configuration

The `sites.yaml` configuration file is used to configure subsite information associated with the current documentation site. It is used by [External Site Components](#) and when building single-version documentation.

```
- name: connectors # Globally unique name
  base: /devops-connectors # Base path for site access
  version: v1.1 # Version used for ExternalSite/ExternalSiteLink redirects
  # when building multi-version sites

  displayName: # Site display name. If not filled or language not matched,
  # defaults to name
  en: DevOps Connectors
  zh: DevOps 连接器

  # The following attributes are used to pull images when building the entire
  # site. If not filled, this will be ignored during final full site packaging.
  # Usually required for subsite references, not required for parent site
  # references.
  repo: https://github.com/AlaudaDevops/connectors-operator # Site repository
  # address. For internal GitLab repositories, related slugs like `alauda/
  # product-docs` can be used directly.
  image: devops/connectors-docs # Site build image, used to pull images when
  # building the entire site.
```

Translation Configuration

translate:

System prompt, ejs template. Parameters passed in include `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`.

Among them, `sourceLang` and `targetLang` are the strings `中文` and `英文`,

`userPrompt` is the global user configuration below, which may be empty.

`additionalPrompts` is the `additionalPrompts` configuration in document `frontmatter.i18n`, which may be empty.

`terms` and `titleTranslationPrompt` are prompts dynamically generated based on terminology and title tables contained in the document content, used to guide AI to translate according to terminology and title mappings, which may be empty.

The default system prompt is as follows and can be modified according to actual needs.

systemPrompt: |

You are a professional technical documentation engineer, skilled in writing high-quality technical documentation in <%= targetLang %>. Please accurately translate the following text from <%= sourceLang %> to <%= targetLang %>, maintaining the style consistent with technical documentation in <%= sourceLang %>.

Baseline Requirements

- Sentences should be fluent and conform to the expression habits of the <%= targetLang %> language.
- Input format is MDX; output format must also retain the original MDX format. Do not translate the names of jsx components such as <Overview />, and do not wrap output in unnecessary code blocks.
- ****CRITICAL****: Do not translate or modify ANY link content in the document. This includes:
 - **URLs in markdown links**: [text](URL) - keep URL exactly as is
 - **Reference-style links**: [text][ref] and [ref]: URL - keep both ref and URL unchanged
 - **Inline URLs**: https://example.com - keep completely unchanged
 - **Image links**: ![alt](src) - keep src unchanged, but alt text can be translated
 - **Anchor links**: [text](#anchor) - keep #anchor unchanged
 - Any href attributes in HTML tags - keep unchanged
- **Do not translate professional technical terms and proper nouns, including but not limited to**: Kubernetes, Docker, CLI, API, REST, GraphQL, JSON, YAML, Git, GitHub, GitLab, AWS, Azure, GCP, Linux, Windows, macOS, Node.js, React, Vue, Angular, TypeScript, JavaScript, Python, Java, Go, Rust, e

tc. Keep these terms in their original form.

- The title field and description field in frontmatter should be translated, other frontmatter fields should retain and do not translate.

- Content within MDX components needs to be translated, whereas MDX component names and parameter keys do not.

- Do not modify or translate any placeholders in the format of `__ANCHOR_N__` (where N is a number). These placeholders must be kept exactly as they appear in the source text.

- Keep original escape characters like backslash, angle brackets, etc. unchanged during translation.

- Do not add any escape characters to special characters like `[]`, `()`, `{}`, etc. unless they were explicitly present in the source text. For example:

- If source has "Architecture [Optional]", keep it as "Architecture [Optional]" (not "Architecture \[Optional]")

- If source has "Function (param)", keep it as "Function (param)" (not "Function \ (param)")

- Only add escape characters if they were present in the original text

- Preserve and do not translate the following comments, nor modify their content:

- `{/* release-notes-for-bugs */}`

- `<!-- release-notes-for-bugs -->`

- Remove and do not retain the following comments:

- `{/* reference-start */}`

- `{/* reference-end */}`

- `<!-- reference-start -->`

- `<!-- reference-end -->`

- Ensure the original Markdown format remains intact during translation, such as frontmatter, code blocks, lists, tables, etc.

- Do not translate the content of the code block.

```
<% if (titleTranslationPrompt) { %>
```

```
<%- titleTranslationPrompt %>
```

```
<% } %>
```

```
<% if (terms) { %>
```

```
<%- terms %>
```

```
<% } %>
```

```
<% if (userPrompt || additionalPrompts) { %>
```

```
## Additional Requirements
```

These are additional requirements for the translation. They should be met along with the baseline requirements, and in case of any conflict, the baseline requirements should take precedence.

The text for translation is provided below, within triple quotes:

```
"""
```

```

<% if (userPrompt) { %>
<%- userPrompt %>
<% } %>

<% if (additionalPrompts) { %>
<%- additionalPrompts %>
<% } %>
""
<% } %>

```

Editing Documentation in Code Repository

```

editRepoBaseUrl: alauda/doom/tree/main/docs # The https://github.com/ pre
fix can be omitted. Effective only when the CLI flag `-R, --edit-repo` is
enabled.

```

Documentation Export Configuration

```

export:
  - name: Concepts # Optional, globally unique PDF name, defaults to the
document title
    scope: '*/concepts' # Required, string or array, document scope, supp
orts glob matching, relative to docs directory

```

Documentation Lint Configuration

```

lint:
  cspellOptions: # Optional, cspell configuration options, refer to http
s://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-eslint
-plugin#options

```

Algolia Search Configuration

```
algolia: # Optional, Algolia search configuration, effective only when the CLI flag `-a, --algolia` is enabled
  appId: # Algolia Application ID
  apiKey: # Algolia API Key
  indexName: # Algolia index name
```

Please use `public/robots.txt` for Algolia crawler verification.

INFO

Due to current architectural limitations of `rspress`, Algolia search functionality must be implemented via [custom themes](#). To unify the use of related theme features, we provide the `@alauda/doom/theme` theme entry. Please add the following theme configuration file to enable it:

```
theme/index.ts
```

```
export * from '@alauda/doom/theme'
```

Sitemap Configuration

```
siteUrl: https://docs.alauda.cn # Optional, site URL used for generating sitemap, effective only when the CLI flag `-S, --site-url` is enabled
```

Convention

TOC

[Directory Structure](#)[Metadata](#)[Sorting](#)[Preview](#)

Directory Structure

The left sidebar is automatically generated based on the file directory structure, where the `index` file in the first-level directory acts as the document's homepage and will display as the first item in the left navigation. Subfolders can use `index.md` or `index.mdx` and define the first-level title to set the grouping title for the left sidebar. Other sub-documents will be automatically merged into the current group, and nested subfolders will follow the same rules.

```
├─ index.md
├─ start.mdx
├─ usage
│   └─ index.mdx
│   └─ convention.md
```

We also agree that:

1. The `public` directory is used to store static resources such as images, videos, etc.
2. The `public/_remotes` directory is used to store static resources associated with [remote reference documents](#). Please do not directly rely on resources from this directory; you may add `*/public/_remotes` to `.gitignore` to prevent these from being committed to the code repository.
3. The `shared` directory is for storing common components, reusable documents, etc., and will not automatically generate document data.

Metadata

At the beginning of the document, you can define the document's metadata such as title, description, author, category, etc., through the `frontmatter`.

```
---  
title: Title  
description: Description  
author: Author  
category: Category  
---
```

In the body of the document, when using `.mdx` files, you can access these metadata through `frontmatter` as described in [MDX](#).

Sorting

Other documents, except for `index.md` or `index.mdx`, will be sorted by default according to their file names. You can customize the `weight` value in the `frontmatter` to adjust the order of documents in the left sidebar (the smaller the `weight` value, the higher the priority in sorting).

```
---  
weight: 1  
---
```

Warning

Note: Currently, changes to the left navigation configuration require a service restart to take effect, and it is usually not necessary to pay too much attention during development.

Preview

Sometimes, we do not need to display special content on the group homepage. In this case, you can use `index.mdx` file and the `Overview` component to display the list of documents in the current group. This will showcase the titles, descriptions, and secondary title information of the grouped list file.

Usage

```
<Overview />
```

You can refer to [Usage](#) for the effect.

[Doom - Alauda](#) > [Usage](#) > Markdown

Markdown

In addition to the standard [gfm](#) [↗] syntax, Doom has built-in some additional Markdown extension features.

TOC

[Callouts](#)[Callout](#)[Mermaid](#)

Callouts

Source code annotation component

Note

1. Please use inline code comments according to the actual language, such as `;`, `%`, `#`, `//`, `/** */`, `--`, and `<!-- -->`, etc.
2. If you want to treat them as code comments, please escape them with `[!code callout]`.
3. Sometimes, `:::callouts` may display abnormally due to nested indentation; you can use `<div class="doom-callouts">` or the `<Callouts>` component instead.

```

```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \ # [!code callout]
 + 8 MiB × (number of vCPUs) \ # [!code callout]
 + 16 MiB × (number of graphics devices) \ # [!code callou
t]
 + (additional memory overhead) # [!code callout]
...

```

:::callouts

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

:::

```

Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \ ①
 + 8 MiB × (number of vCPUs) \ ②
 + 16 MiB × (number of graphics devices) \ ③
 + (additional memory overhead) ④

```

- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.

- If Trusted Platform Module (TPM) is enabled, add 53 MiB.

For more source code transformation features, please refer to [Shiki Transformers ↗](#).

# Callout

Similar to the `Callouts` component, but used independently outside of code blocks.

```
:callout[1]:callout[A]

| Header X:callout[x] | Header Y:callout[y] |
| ----- | ----- |
| x | y |

- :callout[x] details of x
- :callout[y] details of y
```

● [1] ● [A]


Header X ● [x]	Header Y ● [y]
x	y

- ● [x] details of x
- ● [y] details of y

# Mermaid ↗

Chart drawing tool

```
```mermaid
graph TD;
  A-->B;
  A-->C;
  B-->D;
  C-->D;
```
```

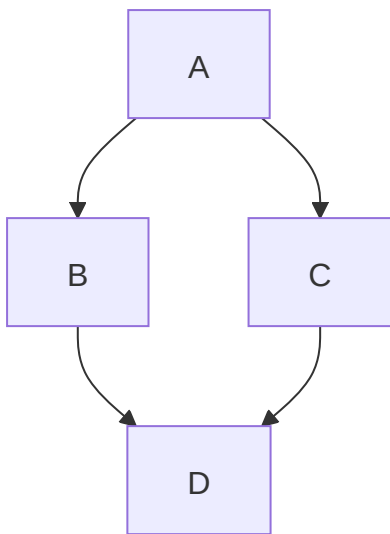

With [Markdown Preview Mermaid](#) ↗, you can preview in real time in VSCode.

---

[Doom - Alauda](#) > [Usage](#) > MDX

---

# MDX

[MDX ↗](#) is an extension syntax of Markdown that allows the use of JSX syntax within Markdown. For usage, refer to [rspress MDX ↗](#).

---

## TOC

### [rspress Components](#)

#### doom Components

[Overview](#)[Callouts](#)[Callout](#)[Directive](#)[ExternalSite](#)[ExternalSiteLink](#)[AcpApisOverview](#) and [ExternalApisOverview](#)

#### Term

[props](#)[TermsTable](#)[props](#)[JsonViewer](#)

#### Custom Component Reuse

---

# rspress Components

Most of the [built-in components](#) provided by the `rspress` theme have been adjusted to global components, which can be used directly in `.mdx` files without importing, including:

- `Badge`
- `PackageManagerTabs`
- `Steps`
- `Tab/Tabs`
- `Toc`

Other less commonly used components can be imported from `rspress/theme`, for example:

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'
```

```
<SourceCode href="/" />
```

# doom Components

`doom` provides some global components to assist in documentation writing, which can be used directly without importing. Currently, these include:

## Overview

Document overview component used to display the document directory

## Callouts

Same as the [Callouts](#) Markdown extension feature, source code annotation component



```

```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
    + 218 MiB \ # [!code callout]
    + 8 MiB × (number of vCPUs) \ # [!code callout]
    + 16 MiB × (number of graphics devices) \ # [!code callou
t]
    + (additional memory overhead) # [!code callout]
```

```

#### <Callouts>

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

#### </Callouts>

```

Memory overhead per virtual machine ≈ (1.002 × requested memory) \
 + 218 MiB \ ①
 + 8 MiB × (number of vCPUs) \ ②
 + 16 MiB × (number of graphics devices) \ ③
 + (additional memory overhead) ④

```

- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.

- If Trusted Platform Module (TPM) is enabled, add 53 MiB.

## Callout

Same as the [Callout](#) Markdown extension feature, standalone annotation component outside code blocks

```
<Callout>1</Callout>
<Callout>A</Callout>
```

| Header X<Callout>x</Callout> | Header Y<Callout>y</Callout> |
|------------------------------|------------------------------|
| -----                        | -----                        |
| x                            | y                            |

- <Callout>x</Callout> details of x
- <Callout>y</Callout> details of y

1 A

Header X **x**

Header Y **y**

x

y

- **x** details of x
- **y** details of y

## Directive

Sometimes, due to nested indentation, the [custom container](#) syntax may fail; you can use the `Directive` component instead

- The directory structure of multilingual documents (``doc/en``) needs to be exactly the same as that under the ``doc/zh`` directory to ensure that links in multilingual documents are identical except for the language identifier.

```
<Directive type="danger" title="Note">
```

If you are using automated translation tools, you do not need to worry about

this issue, as the automated translation tool will automatically generate

the target language document directory structure based on ``doc/zh``.

```
</Directive>
```

- The directory structure of multilingual documents ( `doc/en` ) needs to be exactly the same as that under the `doc/zh` directory to ensure that links in multilingual documents are identical except for the language identifier.

### Note

If you are using automated translation tools, you do not need to worry about this issue, as the automated translation tool will automatically generate the target language document directory structure based on `doc/zh`.

## ExternalSite

External site reference component

```
<ExternalSite name="connectors" />
```

### Note

Because DevOps Connectors releases on a different cadence from Alauda Container Platform, the DevOps Connectors documentation is now available as a separate documentation set at [DevOps Connectors](#).

## ExternalSiteLink

External site link reference component

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content ↗](#)

### TIP

In mdx, `<ExternalSiteLink name="connectors" href="link" children="Content" />` differs in meaning from the following content

```
<ExternalSiteLink name="connectors" href="link">
 Content { /* will be rendered inside a `p` element */ }
</ExternalSiteLink>
```

If you do not want the text to be rendered inside a `p` element, you can pass it via the `children` prop as shown in the example above.

## AcpApisOverview and ExternalApisOverview

External site API overview components

```
<AcpApisOverview />
{ /* same as following */ }
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

### Note

For the introduction to the usage methods of ACP APIs, please refer to [ACP APIs Guide ↗](#).

Note

For the introduction to the usage methods of DevOps Connectors APIs, please refer to [DevOps Connectors APIs Guide](#).

Term

Terminology component, plain text, dynamically mounted and injected

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```

Alauda alauda container platform ACP [Alauda Cloud](#)

props

- `name` : built-in term name, refer to [dynamic mount configuration file](#)
- `textCase` : text case transformation, optional values are `lower` , `upper` , `capitalize`

TermsTable

Built-in terminology list display component

```
<TermsTable />
```

Name	Chinese	Chinese Bad Cases	English	English Bad Cases
company	灵雀云	-	Alauda	-

Name	Chinese	Chinese Bad Cases	English	English Bad Cases
product	灵雀云容器平台	-	Alauda Container Platform	-
productShort	ACP	-	ACP	-
alaudaCloudLink	<a href="#">Alauda Cloud ↗</a>	-	<a href="#">Alauda Cloud ↗</a>	-

props

- `terms`: `NormalizedTermItem[]`, optional, custom terminology list for convenient reuse when rendering custom terms in internal documents

JsonViewer

`<JsonViewer value={{ key: 'value' }} />`

yamljson

`key: value`

# Custom Component Reuse

According to the [convention](#), we can extract reusable content into the `shared` directory, then import it where needed, for example:

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

If you need to use more [runtime](#) related APIs, you can implement components using `.jsx/.tsx` and then import and use them in `.mdx` files.

```
// shared/CommonContent.tsx
export const CommonContent = () => {
 const { page } = usePageData()
 return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
;<CommonContent />
```

## WARNING

Note: Currently, components exported from `.mdx` do not support passing `props`. Refer to [this issue](#). Therefore, for scenarios requiring `props` passing, please develop using `.jsx/.tsx` components.

# Internationalization

Most of the internal documentation of `alauda` is bilingual in Chinese and English. Therefore, we by default support using `en` / `zh` subfolders to store documents in different languages. It is recommended to also store static resources under `en` / `zh` subfolders in the `public` directory, which facilitates the management of both documentation content and static resources.

## TOC

[i18n.json](#)[.ts/.tsx](#)[.mdx](#)

### `i18n.json`

For reusable components, if you need to support both Chinese and English within the same component, you first need to create an `i18n.json` file under the `docs` directory. Then, in the component, use `useI18n` to get the text for the current language, for example:

```
docs/i18n.json
```



```
{
 "title": {
 "zh": "标题",
 "en": "Title"
 },
 "description": {
 "zh": "描述",
 "en": "description"
 }
}
```

## .ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
 const t = useI18n()
 return <h1>{t('title')}</h1>
}
```

## .mdx

```
import { useI18n } from '@rspress/core/runtime'

{useI18n()('title')}

{useI18n()('description')}
```

# API Documentation

According to actual business needs, we generally divide APIs into three types: standard K8S API, advanced API, and CRD (Custom Resource Definition). Therefore, the directory structure is usually organized as follows:

```
├─ apis
│ ├── advanced_api # Advanced APIs
│ ├── crds # CRDs
│ ├── kubernetes_api # K8S APIs
│ └─ references # Common references
```

## TOC

### K8S API

Standard K8S API

CRD

props

Advanced API

props

Common References

props

Specifying openapi Path

# K8S API

## Standard K8S API

```
kubernetes_apis/workload/daemonset.mdx
```

```
DaemonSet [apps/v1]
```

```
<K8sAPI
```

```
 name="io.k8s.api.apps.v1.DaemonSet"
```

```
 pathPrefix="/kubernetes/{cluster}"
```

```
/>
```

Refer to [DaemonSet](#).

## CRD

```
crds/ArtifactCleanupRun.mdx
```

```
ArtifactCleanupRun
```

```
<K8sAPI name="artifactcleanupruns.artifacts.katanomi.dev" />
```

Refer to [ArtifactCleanupRun](#).

### props

- `name`: Reference name under OpenAPI schema `definitions` (v2) or `components/schemas` (v3), or CRD `metadata.name`
- `namespaced`: Indicates whether the resource is namespace-scoped, i.e. whether the API Endpoints include the namespace path parameter `namespaces/{namespace}`. A CRD's `spec.scope` decides it when this is unset; OpenAPI sources do not carry a scope and default to `true`
- `pathPrefix`: Can be used to override the global configuration `api.pathPrefix`

- `filepath` : Similar to [specifying openapi path](#), used to specify a particular openapi or CRD file
- `apiGroup` : Optional, specifies the API group; openapi will try to read the referenced `x-kubernetes-group-version-kind`, same below
- `apiVersion` : Optional, specifies the API version; a CRD defaults to the version `kubect1` resolves to — the highest-priority `served` version — which `api.crdVersion` can change
- `apiKind` : Optional, specifies the API resource kind
- `plural` : Optional, the resource's plural name used in the endpoint paths. A CRD's `spec.names.plural` is read automatically; set this for OpenAPI sources whose plural is irregular, otherwise it is derived from the kind
- `hasStatus` : Optional, whether the API server exposes a `status` subresource. A CRD's `subresources.status` decides it; for an OpenAPI source the routes listed in the document decide it. This prop overrides both

An OpenAPI document that carries no `x-kubernetes-group-version-kind` — aggregation-layer documents routinely omit it — must have `apiVersion` and `apiKind` declared here, plus `apiGroup` outside the core group. Otherwise the group, version and kind cannot be derived: the API Endpoints section is omitted rather than built from empty path segments, and `doom lint` reports the page.

## Advanced API

```
advanced_apis/codeQualityTaskSummary.mdx
```

```
CodeQualityTaskSummary
```

```
<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary" />
```

Refer to [CodeQualityTaskSummary](#).

**props**

- `path` : Path under OpenAPI schema `paths`
- `pathPrefix` : Can be used to override the global configuration `api.pathPrefix`
- `openapiPath` : See [specifying openapi path](#)

## Common References

references/CodeQuality.mdx

# CodeQuality

```
<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

Refer to [CodeQuality](#).

### props

- `schema` : Reference name under OpenAPI schema `definitions` (v2) or `components/schemas` (v3)
- `openapiPath` : See [specifying openapi path](#)

## Specifying openapi Path

For `OpenAPIPath` and `OpenAPIRef` components, by default, the system searches through all openapi definition files until a match is found. If you need to specify a particular openapi file, you can use the `openapiPath` property:

```
<OpenAPIPath
 path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
 openapiPath="shared/openapis/katanomi.json"
/>
```

# Permission Description Document

```
<K8sPermissionTable functions={['acp-app', 'acp-alertsquery']} />
```

## TOC

[props](#)[Example](#)

### props

- `functions`: `string[]` - Required. An array of `FunctionResource` resource names to be displayed.

## Example

Function	Action	Platform Administrator	Platform auditors	Project Manager	N A
app <code>acp-app</code>	View	✓	✓	✓	
	Create	✓	×	✓	

Function	Action	Platform Administrator	Platform auditors	Project Manager	N A
	Update	✓	×	✓	
	Delete	✓	×	✓	
alertsquery acp- alertsquery	View	✓	✓	✓	
	Create	✓	×	×	
	Update	✓	×	×	
	Delete	✓	×	×	

---

[Doom - Alauda](#) > [Usage](#) > Referencing Documents

---

# Referencing Documents

In Markdown files:

```
<!-- reference-start#name -->

<!-- reference-end -->
```

In MDX files:

```
{/* reference-start#name */}

{/* reference-end */}
```

The `name` above refers to the name of the referenced document. For more information, please refer to [Document Reference Configuration](#). If the referenced document content uses static resources from a remote repository, the related static resources will be automatically stored locally in the `<root>/public/_remotes/<name>` directory.

Here is an example using `<!-- reference-start#ref -->`:

---

## TOC

Document Reference Configuration

`frontmatterMode`

---



# Document Reference Configuration

## reference:

- **repo:** `alauda-public/product-doc-guide` # Optional, repository address for the referenced document. If not provided, the current document repository address will be used by default.

- **branch:** # [string] Optional, branch of the referenced document repository.

- **publicBase:** # [string] Optional, the directory where static resources for remote repository located, corresponding to absolute paths like `/images/xx.png`. Default is `docs/public`.

## sources:

- **name:** `anchor` # Name of the referenced document, used to reference within the document and must be globally unique.

- **path:** `docs/index.mdx#introduction` # Path to the referenced document, supports anchor targeting; for remote repositories, relative to the repository root directory, and for local, relative to the directory of `doom.config.*`.

- **ignoreHeading:** # [boolean] Optional, whether to ignore headings. If true, the anchor's title will not be displayed in the referenced document.

- **processors:** # Optional, processors for handling the content of the referenced document.

- **type:** `ejsTemplate`

- **data:** # EJS template parameters, accessed via `<%= data.xx %>`.

- **frontmatterMode:** `merge` # Optional, mode for handling the frontmatter of the referenced document. Default is `ignore`. Possible values are `ignore/merge/replace/remove`.

## frontmatterMode

- **ignore** : Ignores the frontmatter of the referenced document and retains the frontmatter of the current document.
- **merge** : Merges the frontmatter of the referenced document. If there are the same keys, the values from the referenced document will overwrite those in the current document.
- **replace** : Replaces the frontmatter of the current document with that of the referenced document.

- `remove` : Removes the frontmatter of the current document.

For writing documentation, refer to [Document Reference](#).

---

[Doom - Alauda](#) > [Usage](#) > Deployment

---

# Deployment

---

## TOC

### [Build and Preview](#)

Multi-version Build

Merged Directory Structure

Dynamic Mount Configuration File

---

## Build and Preview

Before deployment, we need to build the project for production and preview it locally to ensure the project runs correctly:

```
doom build # Build static assets
doom serve # Preview the build assets in production mode
```

## Multi-version Build

By default, `doom build` outputs the build artifacts to the `dist` directory. If you need to build multiple versions of the documentation, you can specify the version number with the `-v` parameter, for example:

```
Usually determined by branch name, e.g., release-4.0 corresponds to version 4.0
doom build -v 4.0 # Build version 4.0, output to dist/4.0, documentation access path is {base}/4.0
doom build -v master # Build master version, output to dist/master, documentation access path is {base}/master
doom build -v {other} # Build other versions, output to dist/{other}, documentation access path is {base}/{other}

unversioned and unversioned-x.y are special version numbers used to build documentation without version prefix
doom build -v unversioned # Build documentation without version prefix, output to dist/unversioned, documentation access path is {base}
doom build -v unversioned-4.0 # Build documentation without version prefix but showing version 4.0 in the navbar, output to dist/unversioned, documentation access path is {base}
```

## Merged Directory Structure

```
|— console-platform
| |— 4.0
| |— 4.1
| |— index.html
| |— overrides.yaml
| └— versions.yaml
|— console-devops-docs
| |— 4.0
| |— 4.1
| |— index.html
| |— overrides.yaml
| └— versions.yaml
|— console-tekton-docs
| |— 1.0
| |— 1.1
| |— index.html
| |— overrides.yaml
| └— versions.yaml
```

index.html

```
<!DOCTYPE html>
<html>
 <head>
 <title>Redirecting...</title>
 <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
 </head>
 <body>
 <p>Redirecting to /console-docs/4.1</p>
 </body>
</html>
```

## Dynamic Mount Configuration File

overrides.yaml

```
Documentation information, each document can mount to override default
configuration
title:
 en: Doom - Alauda
 zh: Doom - 灵雀云
logoText:
 en: Doom - Alauda
 zh: Doom - 灵雀云
```

versions.yaml

```
- '4.1'
- '4.0'
```